



Residential window and door systems

KlassicView™ transforms modern homes with beautiful design and sustainable performance.



SLIDING WINDOW | AWNING WINDOW | FIXED FRAME | HINGE DOOR
DOUBLE HUNG WINDOW | LOUVRE WINDOW | SLIDING DOOR | SLIDING STACKING DOOR



Contents

About ClassicView	3
Energy Efficiency.....	5
Sliding Window 53mm & 76mm.....	7
Double Hung Window 53mm & 76mm	11
Awning Window 53mm & 76mm	15
Fixed Frame 53mm & 76mm	19
Sliding Door 101.6mm & Sliding-Stacking Door 165mm	23
Hinged Door	27
Louvre Window 101.6mm	31
Acoustic Ratings	35
BAL40 Bushfire Rated	37
Australian Standard AS2047	39



About ClassicView


ClassicView windows and doors combine refined design with dependable performance, delivering effortless operation, enhanced energy efficiency, and versatile style to elevate everyday living in modern Australian homes.

Perfect for residential dwellings and semi-commercial buildings, the ClassicView range can be incorporated into a variety of louvre, awning, double hung and sliding configurations.

The ClassicView range consists of:

- Sliding Window 53mm & 76mm
- Awning Window 53mm & 76mm
- Double Hung Window 53mm & 76mm
- Fixed Frame 53mm & 76mm
- Louvre Window 101.6mm
- Sliding Door 101.6mm & Sliding Stacking Door 165mm
- Hinged Door
- A variety of adaptors to create a range of window and door combinations



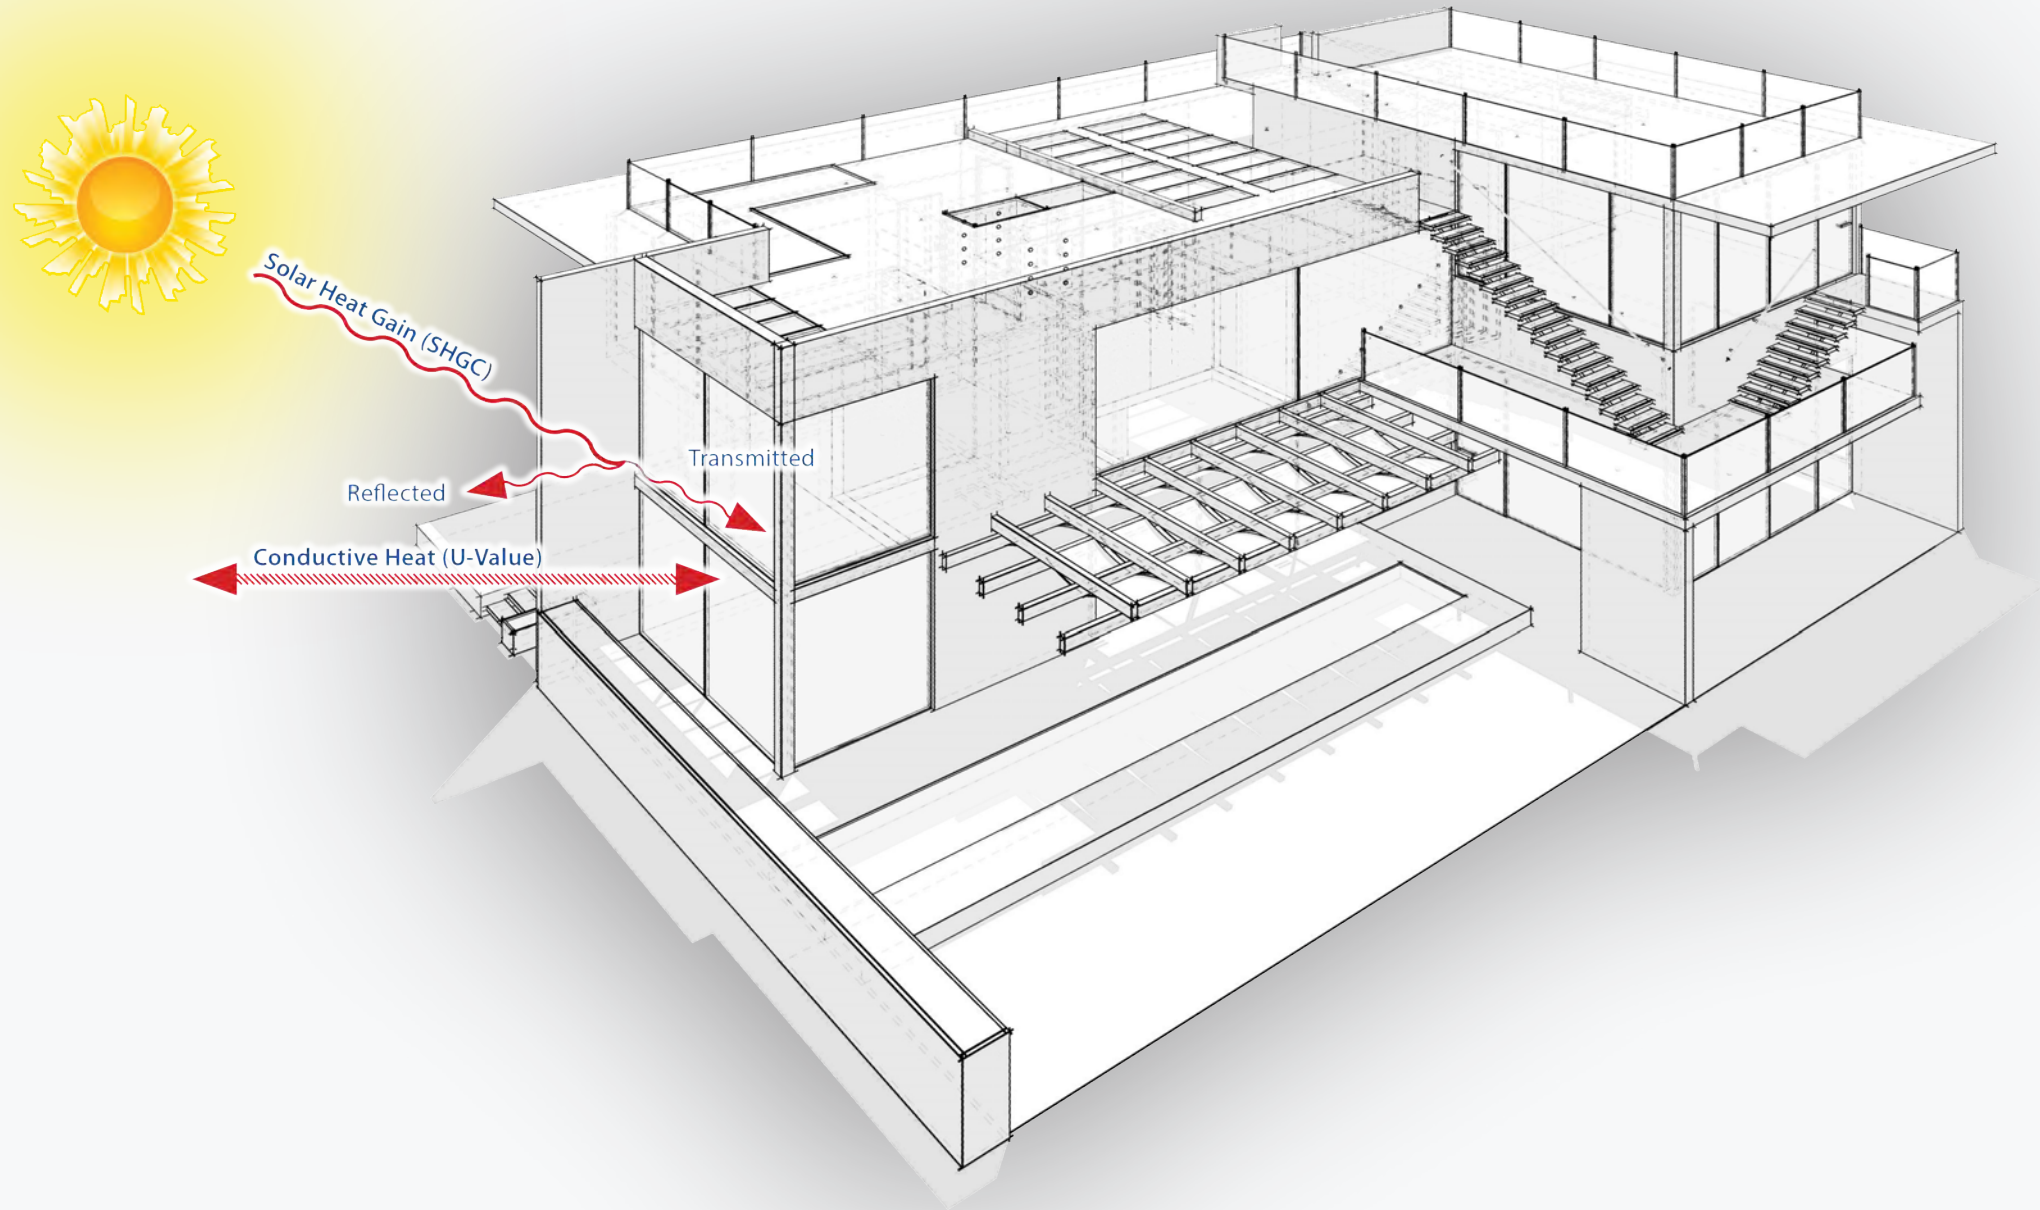

Energy Efficiency

WERS

The Window Energy Rating Scheme (WERS) is accredited by the Australian Fenestration Rating Council (AFRC) and is compliant with the National Construction Code (NCC). Reports are prescribed both for the total window performance U-value (U_w) and total window Solar Heat Gain Coefficient (SHGC). WERS ratings allow direct comparison between different window and door systems, helping customers select products that best suit their climate zone and building design requirements.

U_w

U_w measures heat conductivity, calculating the rate of non-solar heat loss or gain through the total window system (glass, framing, seals). The U_w helps indicate how well a window or door rejects heat during summer and retains heat during winter. A lower number indicates better performance. Improving U_w performance can be achieved through design choices such as double glazing, thermal breaks in aluminium frames, and high-performance seals.

SHGC

SHGC measures the total window systems ability to block heat transfer through direct sunlight. A lower number indicates better blocking performance; however a high number might be appropriate in cooler climates or with specific building orientations. Optimising SHGC based on window orientation can significantly reduce reliance on artificial heating and cooling throughout the year.



Sliding Window 53mm & 76mm

Enjoy effortless airflow with KlassicView sliding windows, combining space-saving design, smooth operation, ventilation and maximum natural light.

53mm Sliding Window

The 53mm sliding window combines functionality and premium quality with a modern slimline design. With a wide range of interlocks available, the 53mm sliding window also allows for the installation of a fly screen. Like all other KlassicView systems, it features an inbuilt weather flap that reduces air and water penetration.


76mm Sliding Window

Designed to deliver high-performance and strength the 76mm sliding window is ideal for residential and architectural applications, and accepts a glass thickness of 4mm to 20mm and a sash weight of up to 80kg. The 76mm sliding window has a wide variety of interlock options for different wind loads and comes with a drain flap for protection against weather and air interference. Compatible with other KlassicView systems, it features a continuous jamb for seamless highlights and lowlights.

Designed and engineered in Australia, the KlassicView 53mm and 76mm sliding window system has been tested and exceeds Australian Standard AS2047.

Sliding Window 53mm & 76mm

Standard Configurations

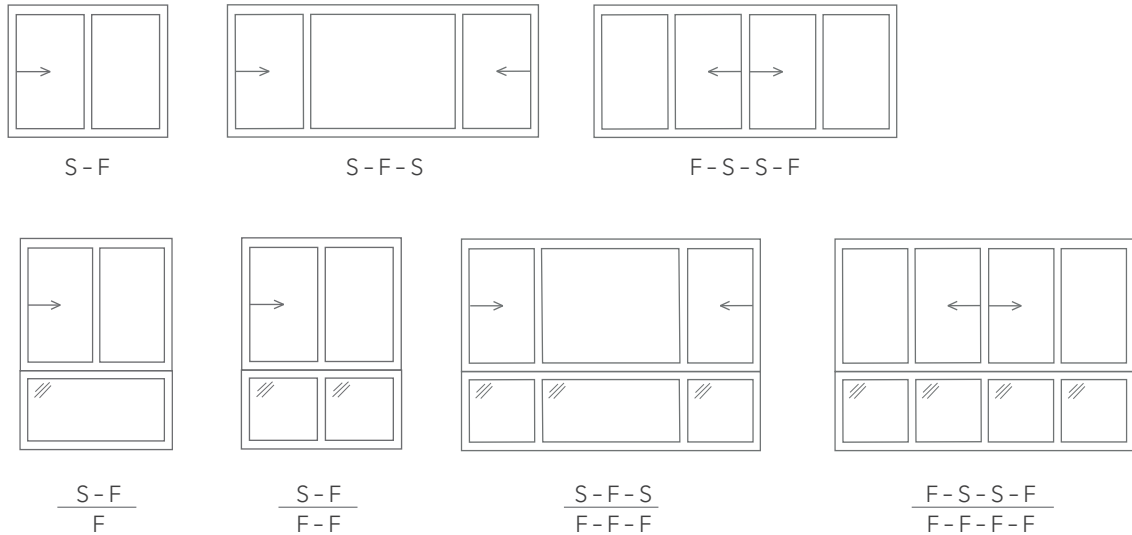

Type	Water Rating PA	Structural PA	Ultimate PA
53mm Sliding Window*	250	1,200	2,100
76mm Sliding Window*	300	2,000	4,000
76mm Sliding Window*	Rating		
BAL fire rating	BAL40		
Acoustic	Rw 37 with 4/8/8.5 Hush		
Fall prevention	Pass – Restricted opening		

*Performance ratings reflect a specific size and configuration. Test report data may not cover all configurations and sizes.

Sliding Window 53mm & 76mm

Technical Specifications

Design Features	53mm	76mm
Frame	53mm	76mm
Flyscreen available	Yes	Yes
Maximum weight per panel	40kg	80kg
Maximum height	1,500mm	2,100mm
Maximum sash width	1,200mm	1,200mm
Mullion centre locking system	Yes	Yes
Acoustic performance	n/a	Rw 37 with 4/8/8.5 Hush
U-Value	4.5-6.4	3-6.5
BAL fire rating	n/a	BAL40
Fall prevention	Pass – Restricted opening	Pass – Restricted opening

*See strength charts available in technical manual.

Options	53mm	76mm
Frame	53mm	76mm
☐ Accepts timber reveals	Yes	Yes
☐ A range of interlocks available for high performance	Yes	Yes
☐ Can be coupled to other KlassicView systems	Yes	Yes
☐ Accepts glass thickness up to 10.38mm single glazed	Yes	Yes
☐ Accepts glass thickness up to 20mm double glazed	n/a	Yes
☐ Wide range of slide-fixed design combinations available including configurations with lowlights	Yes	Yes



Double Hung Window 53mm & 76mm

KlassicView double hung windows give you flexible airflow control with top and bottom openings to suit both classic and modern homes.

53mm Double Hung Window

Perfect choice for modern, contemporary residential homes, the double hung window design allows both the top and bottom sashes to open, enabling improved airflow and natural ventilation by releasing warm air from the top while drawing in cooler air from below. With its slimline design complementing the latest architectural design trends, the KlassicView double hung window offers a premium level of quality and performance available in a range of standard configurations.


76mm Double Hung Window

Incorporating the functionality of the KlassicView 53mm double hung window into a high performance version. With its slimline and modern design, this double hung window can be coupled with a fixed window system for lowlights, highlights and sidelights. It accepts a glass thickness of 4mm to 20mm and comes with a slide in flyscreen.

Designed and engineered in Australia, the KlassicView 53mm and 76mm double hung window system has been tested and exceeds Australian Standard AS2047.

Double Hung Window 53mm & 76mm

Standard Configurations

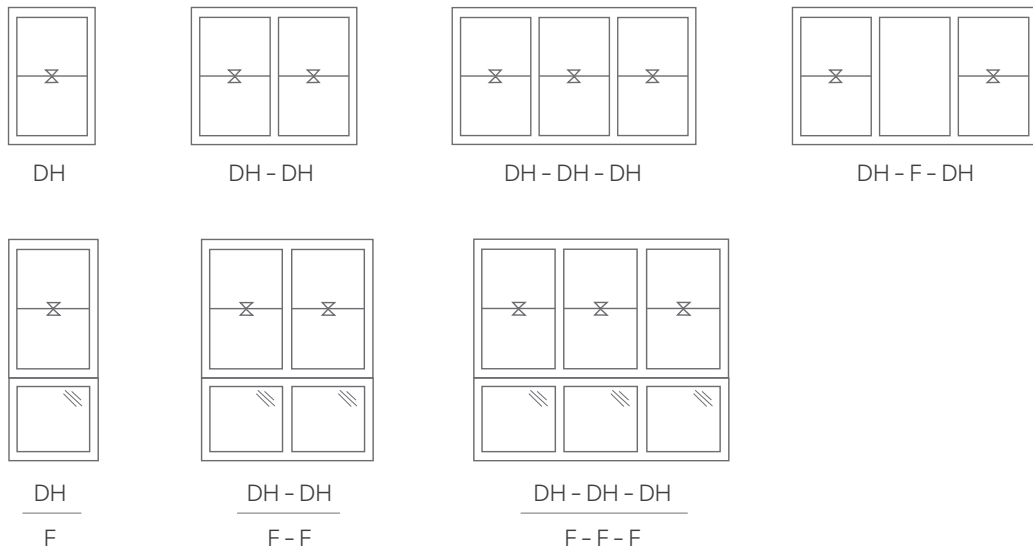

Type	Water Rating PA	Structural PA	Ultimate PA
53mm Double Hung Window*	200	1,000	2,700
76mm Double Hung Window*	250	1,200	2,800
76mm Double Hung Window*	Rating		
Fall prevention	Restricted opening		

*Performance ratings reflect a specific size and configuration. Test report data may not cover all configurations and sizes.

Double Hung Window 53mm & 76mm

Technical Specifications

Design Features

Frame	53mm	76mm
Flyscreen available	Yes	Yes
Maximum weight per panel	16kg	16kg
Maximum height	1,500mm	1,650mm
Maximum width	900mm	900mm
Finger slotted rail	Yes	Yes
Lock fitted to the interlocks without the use of a keeper	Yes	Yes
U-Value	4.3-6.2	3-6.5
Fall prevention	Pass - Restricted Opening	Pass - Restricted Opening

*See strength charts available in technical manual.

Options

Frame	53mm	76mm
☐ Accepts timber reveals	Yes	Yes
☐ Can be coupled to other KlassicView systems	Yes	Yes
☐ Accepts glass thickness up to 10.38mm single glazed	Yes	Yes
☐ Accepts glass thickness up to 20mm double glazed	n/a	Yes



Awning Window 53mm & 76mm

Let fresh air in, rain or shine, with KlassicView top-hinged windows that provide continuous ventilation while keeping the elements out.

53mm Awning Window

Popular choice with builders and homeowners, and is an ideal choice for when you are looking for unobstructed views and ventilation. Compatible with other KlassicView window and door systems. The 53mm awning window system features continuous jamb options.


76mm Awning Window

Offering high performance and a modern streamlined appearance. Perfect for a variety of applications, it is easy to assemble and install and features a continuous jamb for seamless highlights and lowlights. The 76mm awning window system accepts a glass thickness of 4mm to 20mm.

Designed and engineered in Australia, the KlassicView 53mm and 76mm awning window system has been tested and exceeds Australian Standard AS2047.

Awning Window 53mm & 76mm

Standard Configurations

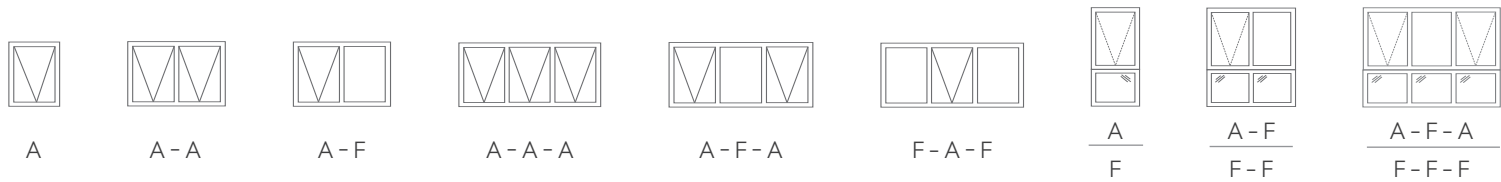

Type	Water Rating PA	Structural PA	Ultimate PA
53mm Awning Window*	300	600	1,500
76mm Awning Window*	250	600	2,200
76mm Awning Window*	Rating		
BAL fire rating	BAL40		
Acoustic	Rw 35 with 10.5 Hush		
Fall prevention	Pass - Chainwinder 900 Wide		

*Performance ratings reflect a specific size and configuration. Test report data may not cover all configurations and sizes.

Awning Window 53mm & 76mm

Technical Specifications

Design Features

Frame	53mm	76mm
Flyscreen available with simple clip system	Yes	Yes
Maximum weight per panel	27kg	27kg
Maximum height standard	1,500mm	1,500mm
Maximum height with additional latches	1,800mm	1,800mm
Maximum width	1,800mm	1,800mm
Continuous jamb possibilities	yes	Yes
Acoustic performance	n/a	Rw 35 with 10.5 Hush
U-Value	4.7-6.6	3.3-6.6
BAL fire rating	n/a	BAL40
Fall prevention	Pass	Pass

*See strength charts available in technical manual.

Options

Frame	53mm	76mm
☐ Accepts timber reveals	Yes	Yes
☐ Can be coupled to other ClassicView systems	Yes	Yes
☐ Accepts glass thickness up to 10.38mm single glazed	Yes	Yes
☐ Accepts glass thickness up to 20mm double glazed	n/a	Yes
☐ Wide range of awning combinations available including configurations with sidelights, lowlights and highlights	Yes	Yes



Fixed Frame 53mm & 76mm

Maximise natural light and uninterrupted views with sleek, low-maintenance KlassicView fixed frame windows designed for performance and visual impact.

53mm Fixed Frame

The ideal solution to many residential or low end commercial requirements. The system works seamlessly within the 53mm suite and can also be combined with other Darley Aluminium systems such as the 76mm suite and commercial suites. Featuring continuous jamb possibilities, the system can achieve a seamless highlight or lowlight for the ultimate outside view.


76mm Fixed Frame

Offers high performance and a modern, streamlined appearance. Perfect for a variety of applications, the system accepts a glass thickness of 4mm to 20mm and works seamlessly within the 76mm suite. It can also be combined with other Darley Aluminium systems such as the 53mm suite and commercial suites. A wide variety of joining options are available for different wind loads.

Easily assembled, all of the KlassicView 53mm and 76mm range can be purchased in standard lengths. Designed and engineered for Australian climatic conditions, the 53mm and 76mm fixed frame systems have been tested and exceed Australian Standard AS2047.

Fixed Frame 53mm & 76mm

Standard Configurations

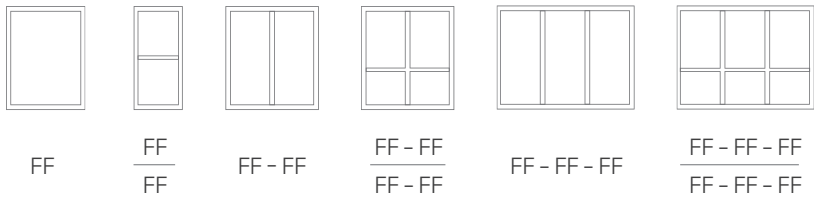

Type	Water Rating PA	Structural PA	Ultimate PA
53mm Fixed Frame*	300	1,700	3,000
76mm Fixed Frame*	800	1,500	4,000
76mm Fixed Frame*	Rating		
BAL fire rating	BAL40		
Acoustic	Rw 35 with 10.5 VLam Hush		

*Performance ratings reflect a specific size and configuration. Test report data may not cover all configurations and sizes.

Fixed Frame 53mm & 76mm

Technical Specifications

Design Features	53mm	76mm
Frame	53mm	76mm
Maximum height	1,200mm	2,040mm
Maximum width	900mm	1,200mm
Continuous jamb possibilities	yes	Yes
Configurations include a variety of highlight, lowlight and sidelight options	yes	Yes
Compatible with other KlassicView and commercial systems with the use of adapters	yes	Yes
U-Value	3.9-6	2.1-6.2
BAL fire rating	n/a	BAL40

*See strength charts available in technical manual.

Options	53mm	76mm
Frame	53mm	76mm
☐ Accepts timber reveals	Yes	Yes
☐ Heavy duty joiners available for high performance	Yes	Yes
☐ Accepts glass thickness from 4mm to 10.38mm	Yes	Yes
☐ Accepts glass thickness from 4mm to 20mm	n/a	Yes



Sliding Door 101.6mm & Sliding-Stacking Door 165mm


Open up your space with KlassicView sliding and stacker doors creating seamless indoor-outdoor living with expansive openings that invite light, improve access, and enhance entertaining spaces.

A high-performance door and a perfect addition to any residential home. The KlassicView sliding door system accepts a glass thickness of 5mm to 20mm and has an outer frame that incorporates a fly door track. It also has a range of heavy duty interlocks available for high-performance and is compatible with other KlassicView window and door system.

Designed and engineered in Australia, the KlassicView sliding door 101.6mm & sliding-stacking door 165mm has been tested and exceeds Australian Standard AS2047.

Sliding 101.6mm & Sliding-Stacking Door 165mm

Standard Configurations

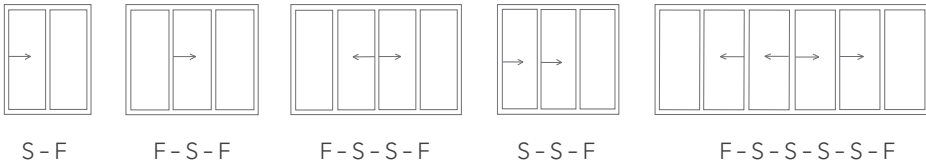

Type	Water Rating PA	Structural PA	Ultimate PA
Sliding Door*	200	1,350	2,000
Sliding-Stacking Door*	250	850	1,330
Rating			
BAL fire rating	BAL40		
Acoustic	Rw 37 with 10.5 Hush		

*Performance ratings reflect a specific size and configuration. Test report data may not cover all configurations and sizes.

Sliding 101.6mm & Sliding-Stacking Door 165mm

Technical Specifications

Design Features

Frame	101.6mm Sliding Door	165mm Stacking Door
Flyscreen track built into the frame system	Yes	Yes
Maximum weight per panel	120kg	120kg
Maximum height	2,700mm	2,700mm
Maximum panel width	1,500mm	1,500mm
Self-draining sill	Yes	Yes
U-Value	2.5-6.2	2.5-6.2
BAL fire rating	BAL40	BAL40
Acoustic performance	Rw 37 with 10.5 Hush	Rw 37 with 10.5 Hush

*Maximum height dependant on site conditions, theoretical strength charts and panel widths.

Options

Frame	101.6mm Sliding Door	165mm Stacking Door
☐ Accepts timber reveals	Yes	Yes
☐ Can be coupled to other KlassicView systems	Yes	Yes
☐ Accepts glass thickness 5mm - 10.38mm single glazed	Yes	Yes
☐ Accepts glass thickness up to 20mm double glazed	Yes	Yes
☐ Double track available for a variety of door combinations	Yes	n/a
☐ Triple track available for a variety of door combinations	n/a	Yes
☐ Wide range of slide-fixed design combinations available including configurations with lowlights	Yes	Yes



Hinged Door

Make a lasting impression with KlassicView hinged doors, offering security, style, and smooth performance.


This french door system is the perfect balance of superior functionality and style. Available in a single panel french door configuration and double panel french door configuration, it also comes with a built-in fly screen groove.

Compatible with other KlassicView window and door systems via the use of adapters, the KlassicView hinged door has an industry leading water rating of 250Pa.

Designed and engineered in Australia, the KlassicView hinged door has been tested and exceeds Australian Standard AS2047.

Hinged Door

Standard Configurations

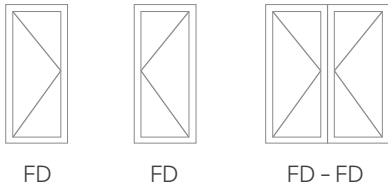


Type	Water Rating PA	Structural PA	Ultimate PA
Hinged Door Single Outward	200	1,800	3,000
Hinged Door Single Inward	250	1,800	3,000
Hinged Door Double Inward	250	900	1,300
Hinged Door Double Outward	200	800	1,500
Rating			
BAL fire rating	BAL40		
*Performance ratings reflect a specific size and configuration. Test report data may not cover all configurations and sizes.			
*Refer to Technical Manual for further details.			

Hinged Door

Technical Specifications

Design Features	
Frame	132mm
Available in single or french door combinations	Yes
Inward or outward opening doors	Yes
Single and double glazing available with glass sizes 4mm – 10.3mm single glazed and up to 20mm double glazed	Yes
Adjustable hinges	Yes
Maximum height of 2,100mm and width of 900mm panels	Yes
U-Value	2.8-5.8
BAL fire rating	BAL40
*See strength charts available in technical manual.	

Options	
Frame	132mm
☐ Accepts timber reveals	Yes
☐ Can be coupled to the full KlassicView range of windows and doors with the use of a variety of adaptors	Yes
☐ Inward and outward opening sills	Yes
☐ Single and double doors	Yes

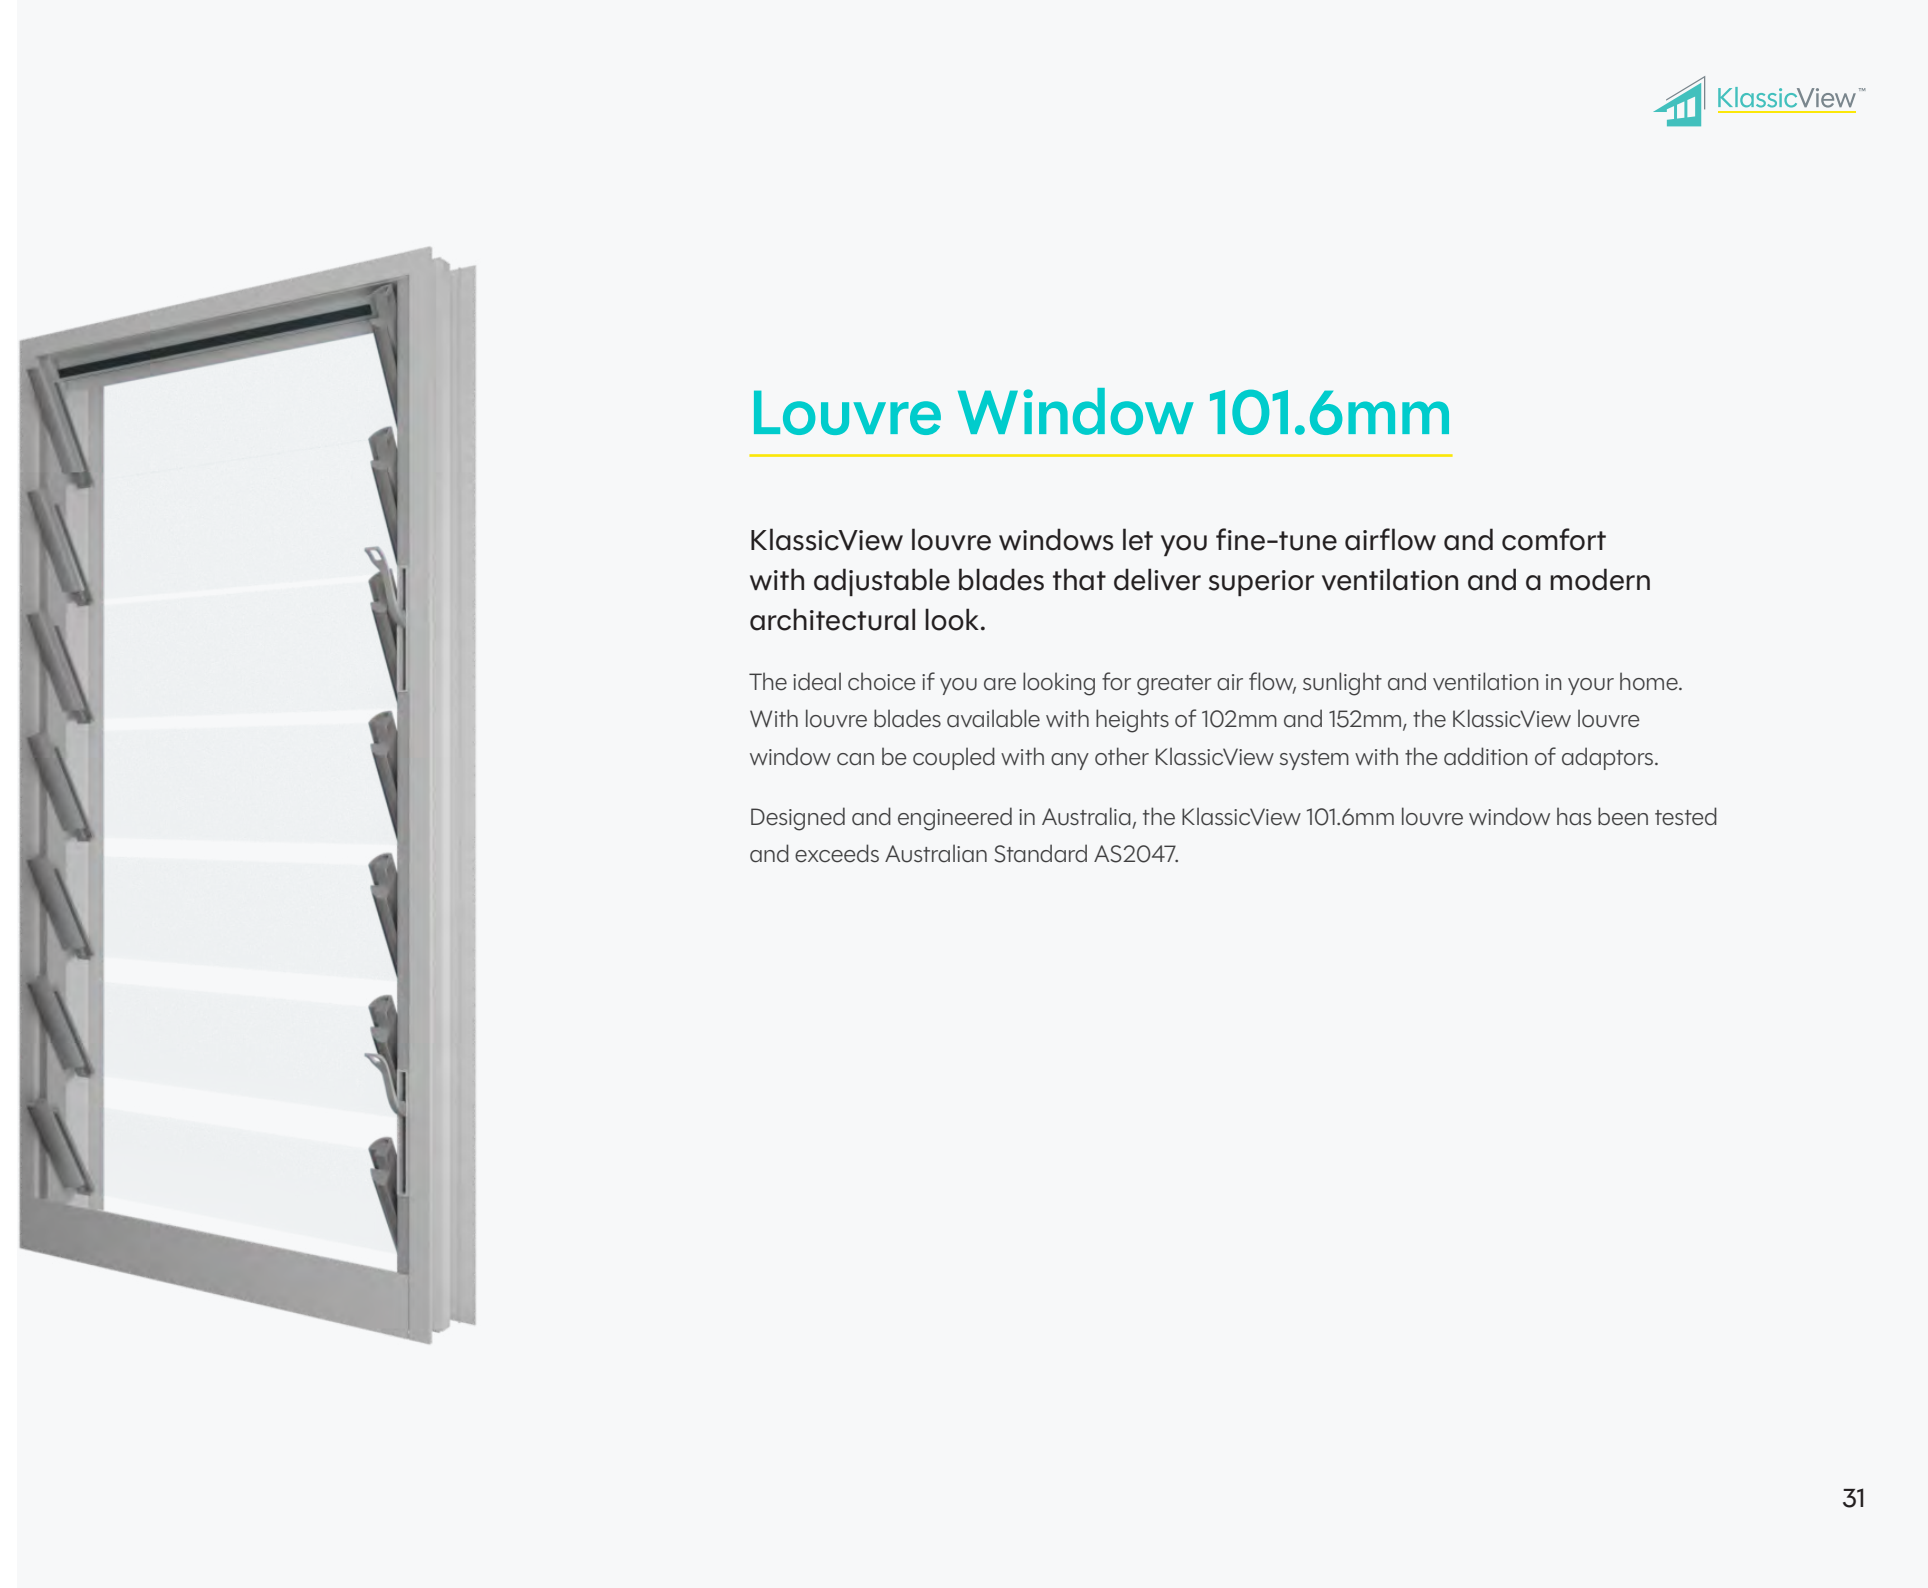

Louvre Window 101.6mm


KlassicView louvre windows let you fine-tune airflow and comfort with adjustable blades that deliver superior ventilation and a modern architectural look.

The ideal choice if you are looking for greater air flow, sunlight and ventilation in your home. With louvre blades available with heights of 102mm and 152mm, the KlassicView louvre window can be coupled with any other KlassicView system with the addition of adaptors.

Designed and engineered in Australia, the KlassicView 101.6mm louvre window has been tested and exceeds Australian Standard AS2047.

Louvre Window 101.6mm

Standard Configurations

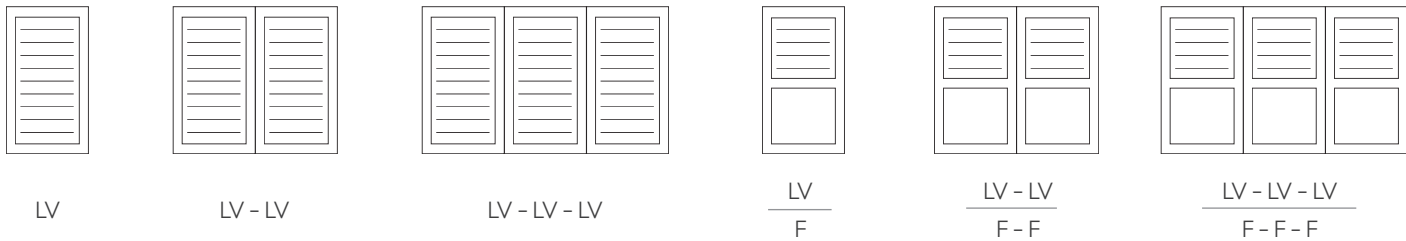

Louvre Window 101.6mm

Technical Specifications

Design Features	
Frame	101.6mm
Flyscreen available	Yes
Maximum width	900mm
Maximum height	2,600mm
Suitable for 6mm toughened glass and 6mm aluminium blades	Yes
Frame accepts flyscreen without the use of clip	Yes
U-Value	4.9-6.2

*See strength charts available in technical manual.


Options	
Frame	101.6mm
☐ Accepts timber reveals	Yes
☐ Can be coupled to other KlassicView systems	Yes
☐ Left or right-sided controls available	Yes
☐ Locking available for the louvre blades	Yes
☐ Automated gallery option available	Yes

Acoustic Ratings

KlassicView Window & Door Systems: Rw Ratings

System	Glass Type	Rw Rating	C	Ctr
76mm Sliding Window	10.5 hush	36	-1	-2
	4/8/8.5 hush	37	-1	-3
76mm Awning Window	10.5 hush	35	-1	-1
	4/8/8.5 hush	33	-2	-2
76mm Fixed Frame	10.5 hush	35	-1	-1
	4/8/8.5 hush	33	-2	-2
101.6mm Sliding Door	10.5 hush	37	-1	-3
	4/8/8.5 hush	37	-1	-3
Hinged Door	6.38 lam	31	-1	-1

*Performance ratings reflect a specific size and configuration. Test report data may not cover all configurations and sizes.

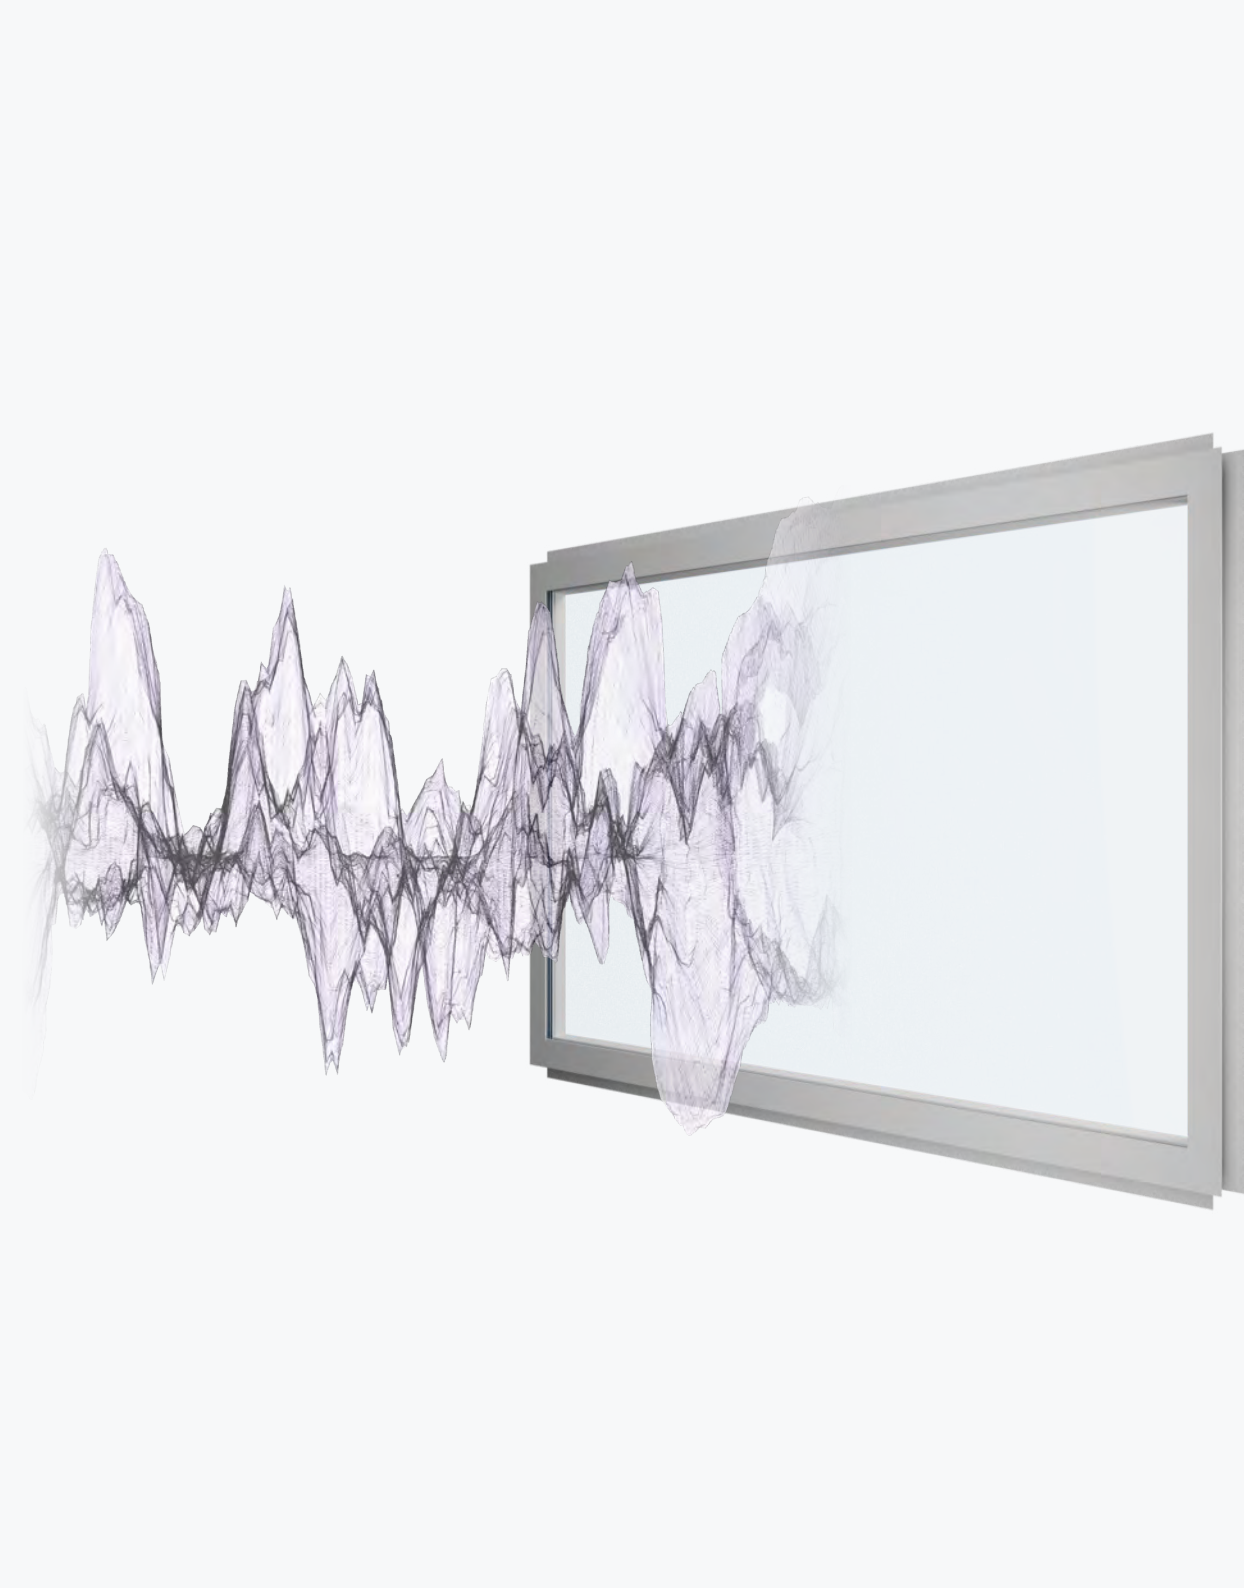

Acoustic Ratings

Rw Ratings Explained

With increased population density and further development of high-rise buildings, acoustic qualities in windows and doors are becoming far more important.

Glass properties and aluminium system designs can help reduce unwanted noise where required. As sound is experienced across a range of frequencies, standard acoustic calculations must take these variations into account.

To address this, AS/NZS ISO 717.1:2004 establishes the parameters for the Weighted Sound Reduction Index (Rw). Acoustic performance testing is conducted by the NATA-accredited laboratory, CSIRO, ensuring reliable and independently verified results.

Sound reduction performance of an aluminium system is measured in Rw, where a higher Rw rating indicates better sound insulation and reduced noise transmission, while a lower Rw rating means more external sound can pass through the window or door system. The process of determining this figure also produces two additional parameters C and Ctr. These adaptation terms are used to modify the Rw number to better represent the sound reduction of glass for different types of noise.



BAL40 Bushfire Rated

A BAL rating is a Bushfire Attack Level (BAL) used to determine the potential for bushfire on a property. BAL40 is the highest rating before the direct exposure to flames level and specifically refers to an increase in radiant heat from burning debris ignited by windborne embers.

A BAL40 test was recently performed on the following KlassicView systems:

- 76mm Sliding Window
- 76mm Awning Window
- 76mm Fixed Frame
- Sliding Stacking Door
- Hinged Door
- 101.6mm Louvre Window

Jensen Hughes and the CSIRO conducted the BAL40 test, in accordance with the requirements outlined in AS1530.8.1. The above systems exceeded testing requirements and were able to withstand temperatures of up to 40 kW/m² without compromising the frame and glazing system.

These systems are rated for BAL40 and can provide protection against ember attacks, burning debris, and exposure to flames.



Australian Standard AS2047

Under the Building Code of Australia, we are required to produce windows and doors that meet mandatory minimum specifications under Australian Standard AS2047 – including AS1288.



AS4420.5 Water Penetration Resistance Tests – verify that no uncontrolled water leaks through the window into the building.



AS4420.3 Operating Force Tests – verify that an opening sash is capable of opening and closing without undue effort.



AS4420.4 Air Infiltration Tests – the air leakage of a window is tested to ensure energy and acoustic efficiency.



AS4420.2 Deflection Tests – positive & negative wind pressures are applied to the face of the window to test the maximum deflection under wind load.



AS4420.6 Ultimate Strength Tests – negative and positive wind pressures are applied to the window to at least 1.5 times the design wind pressure to ensure it does not fail in unusual wind conditions.

Darley Aluminium delivers complete, high-performance aluminium window, door and framing solutions for residential, commercial or architectural projects – combining Australian design, reliable supply, and expert support to make every project easier.

Window, Door and Framing



High-performance commercial window, door and framing systems designed for flexibility, durability, and seamless integration into modern architectural projects.



Modern, versatile window and door systems that bring style, flexibility, and reliable performance to any home.



Premium multi-fold door systems that deliver expansive openings, smooth operation, and architectural sophistication for high-end spaces.



Energy-efficient window and door systems designed to keep interiors comfortable while reducing heat transfer.

What sets Darley Aluminium apart?

- **Complete Solutions** – Everything you need from system to support that simplifies specification, fabrication, and installation.
- **Australian Designed** – Built for local conditions and standards, delivering lasting quality and compliance.
- **Proven Reliability** – Trusted for over 30 years with a national distribution network delivering consistent supply and dependable service.

Security



Advanced heavy-duty security screens that provide maximum protection without compromising visibility, airflow, or style.



Durable, corrosion-resistant aluminium screening that combines security, strength, and design versatility for any application.

Outdoor Screening and Enclosure



Durable, all-weather enclosures that let you enjoy open-air living with protection from insects and the elements.



A sleek, easy-to-install screening solution that enhances privacy and style across any space.

Darley Aluminium understands how important it is to receive trusted solutions, quality products, and reliable supply. That's why we are committed to delivering high standards and friendly, dependable service you can rely on.

Contact your local Darley Aluminium distributor or fabricator today.

New South Wales Head Office

8 Tyrone Place, Erskine Park NSW 2759
Tel (02) 8887 2888 | Fax (02) 9834 3244
salesnsw@darleyaluminium.com.au

Victoria and South Australia

10 Bridge Road, Keysborough VIC 3173
Tel (03) 9238 3888 | Fax (03) 9768 7288
salesvic@darleyaluminium.com.au


Queensland

29 Access Avenue, Yatala QLD 4207
Tel (07) 3287 1888 | Fax (07) 3287 2088
salesqld@darleyaluminium.com.au

Western Australia

36 Armstrong Road, Hope Valley WA 6165
Tel (08) 9437 2999 | Fax (08) 9437 1024
saleswa@darleyaluminium.com.au

Your local fabricator

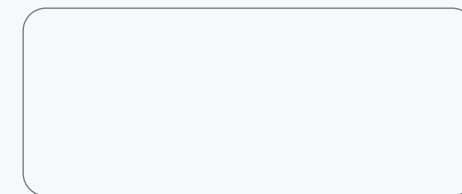

Proud members of

