





# LEGOLAS Syringe Holder Assembly Instructions



**1**

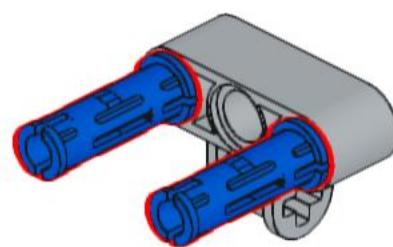



**2**




**3**

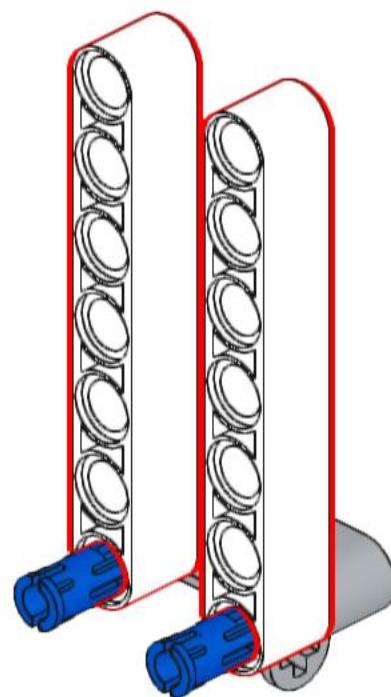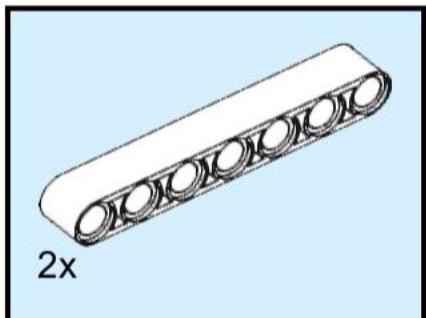


**4**

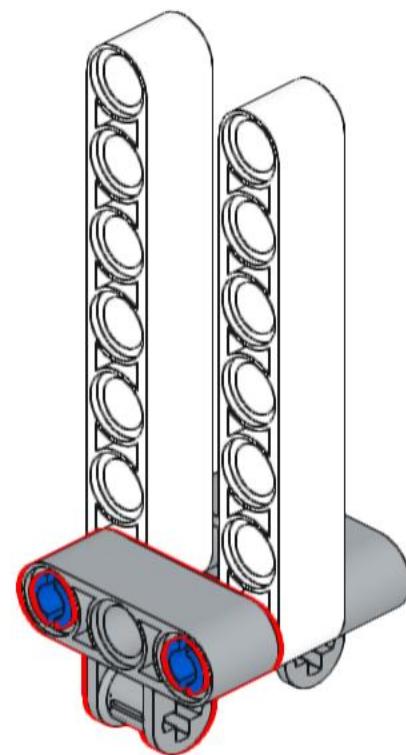


**5**

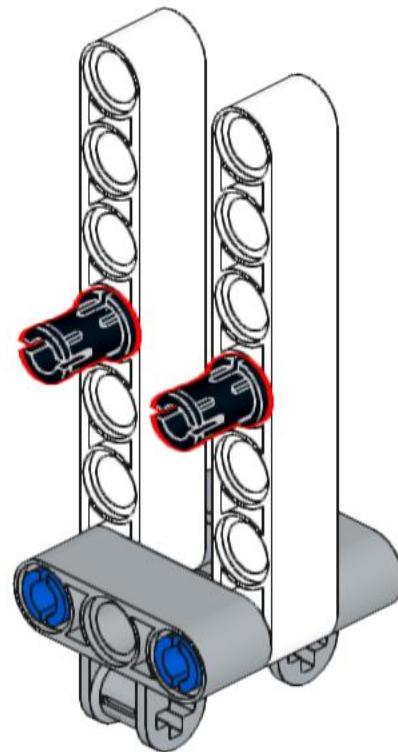



**6**

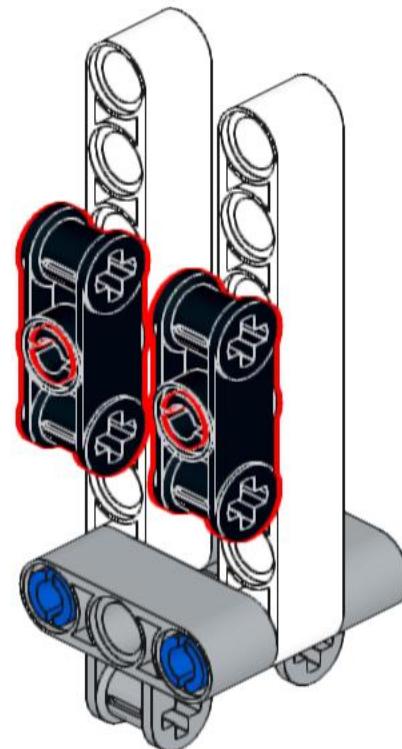



7

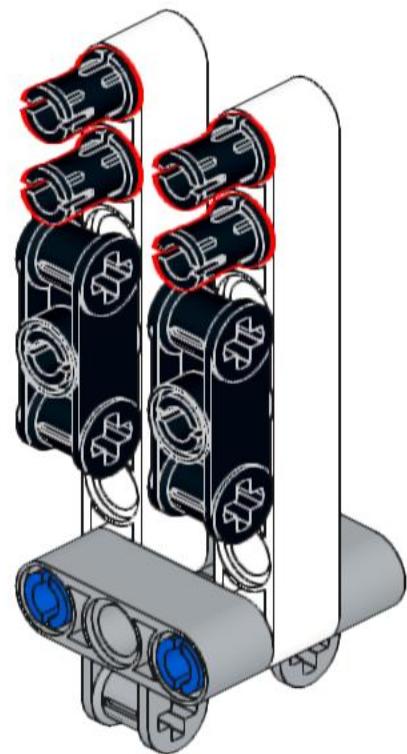



**8**

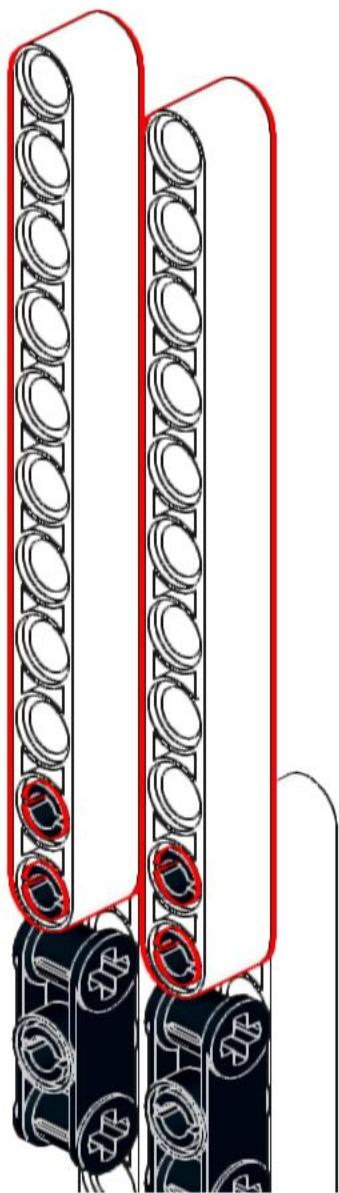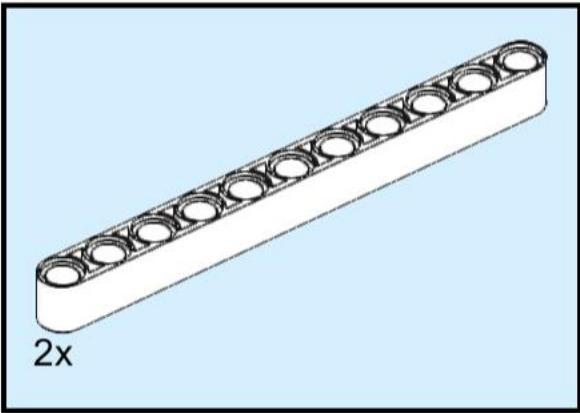


**9**

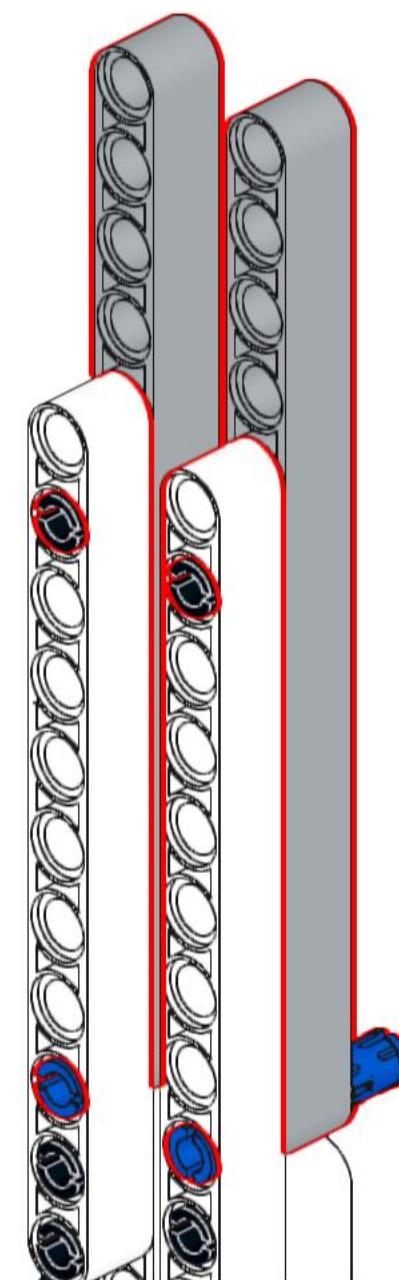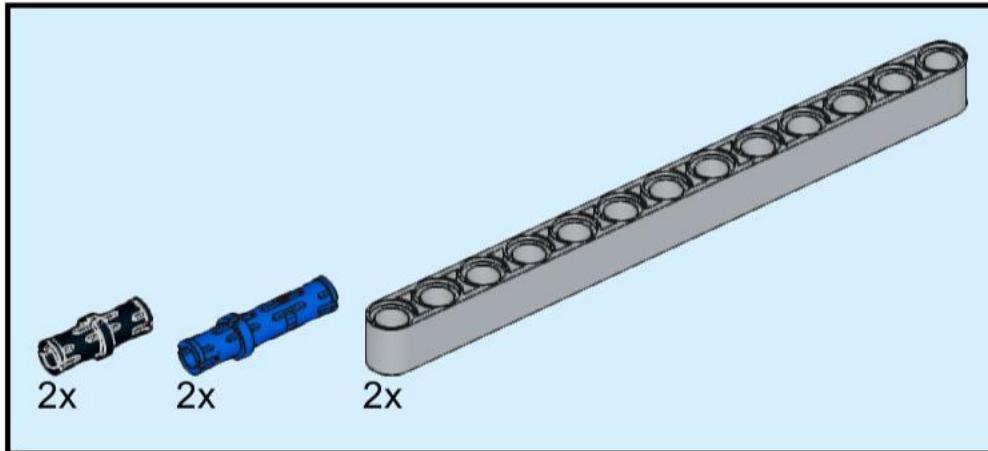



**10**

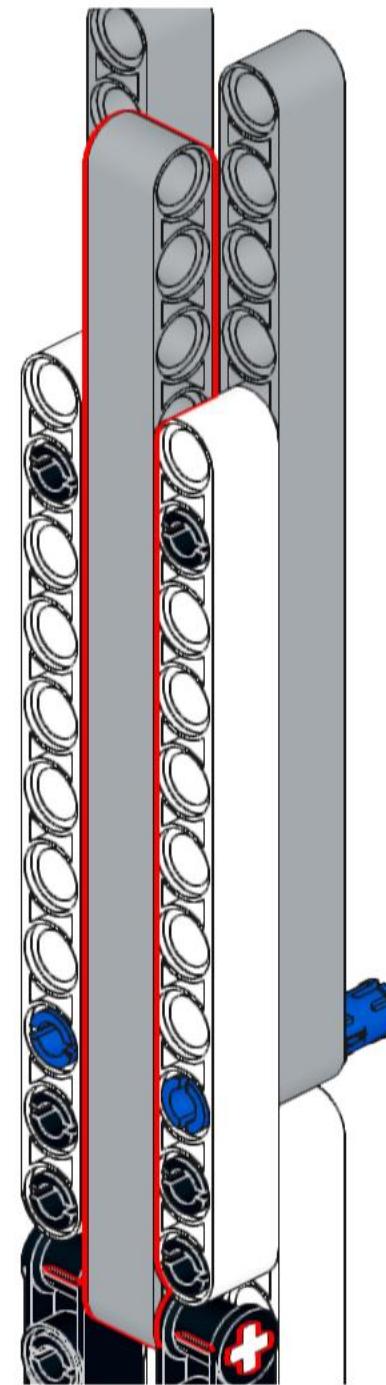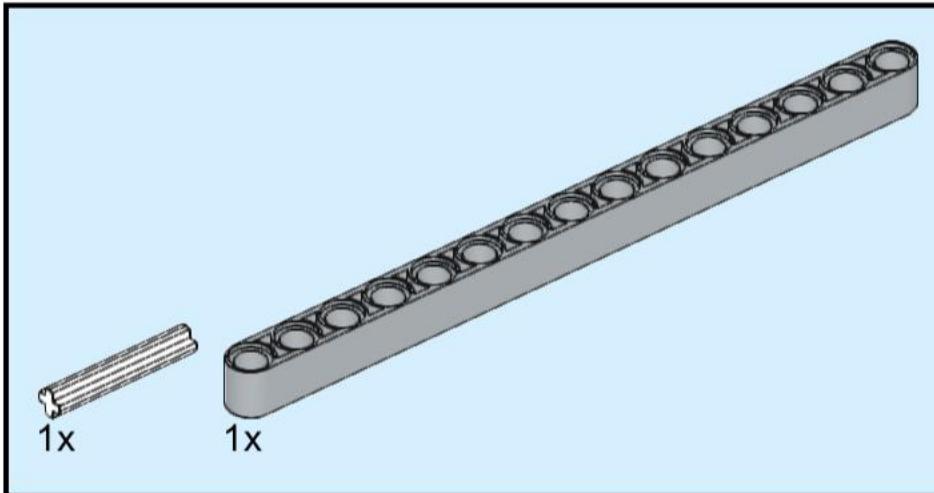


**11**

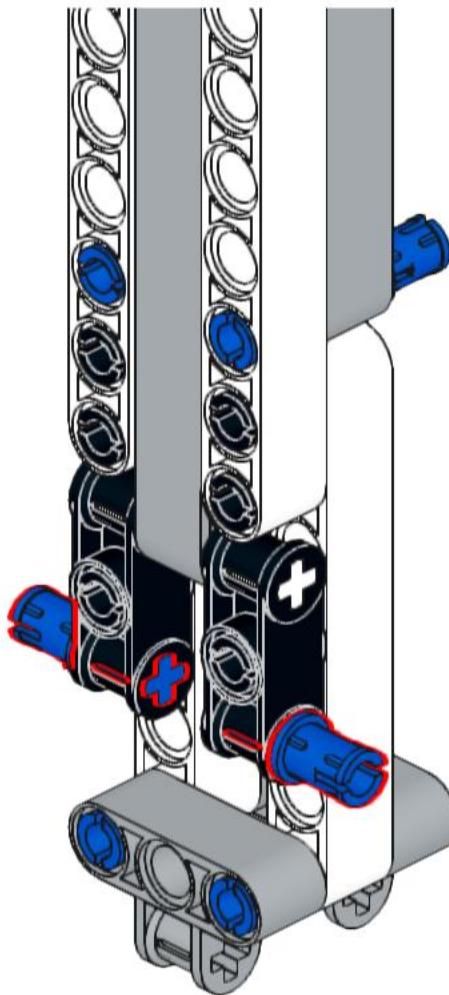



**12**

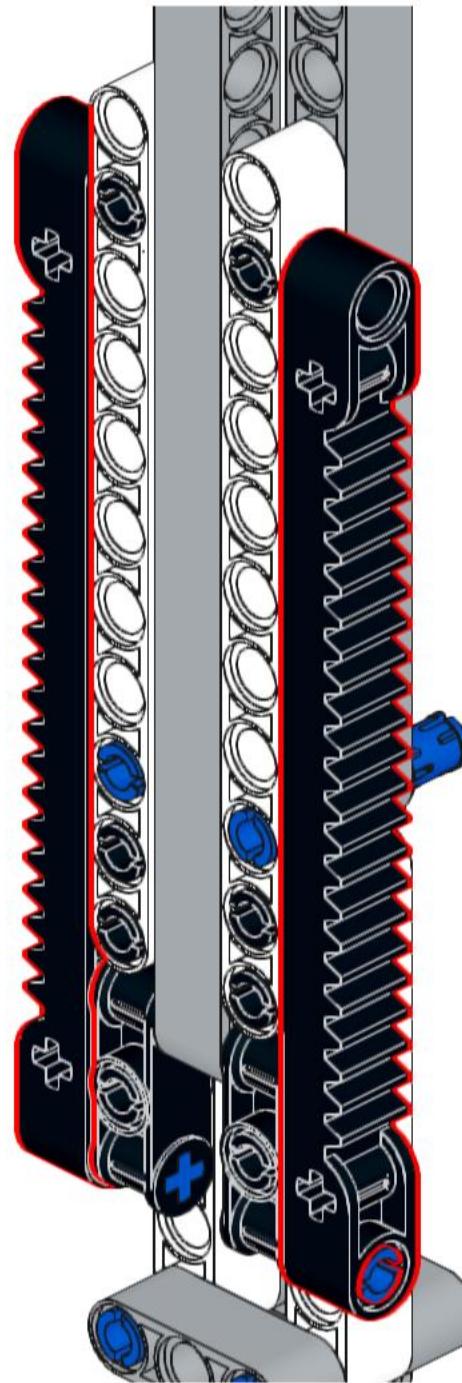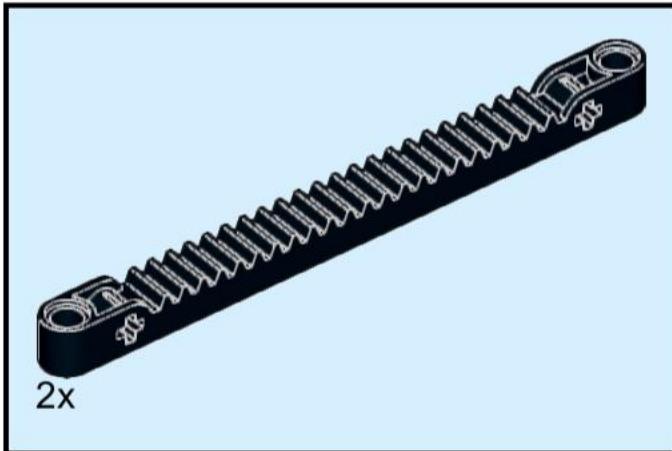


**13**

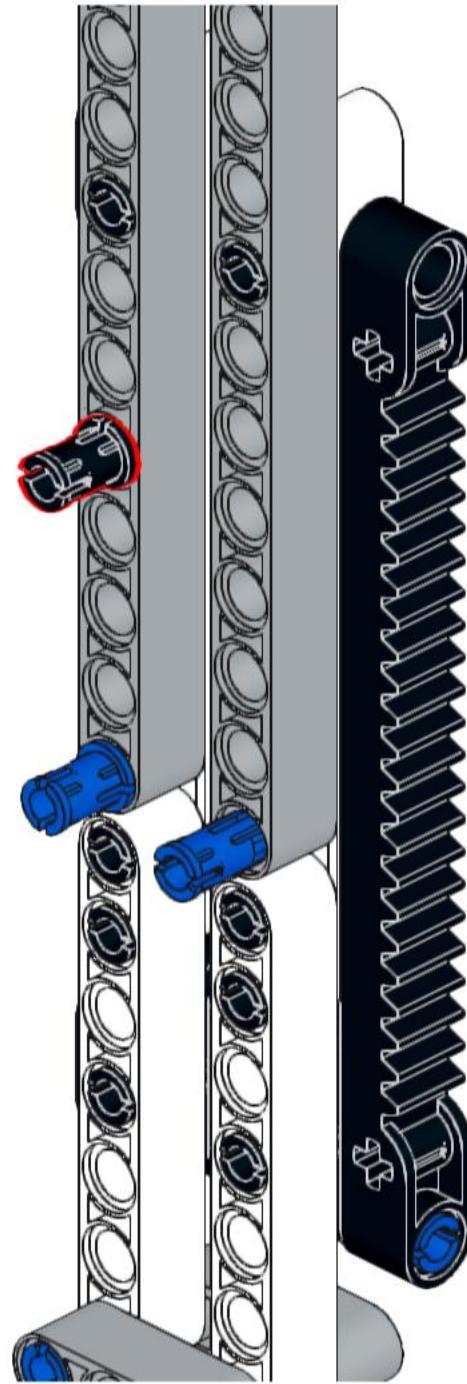



**14**

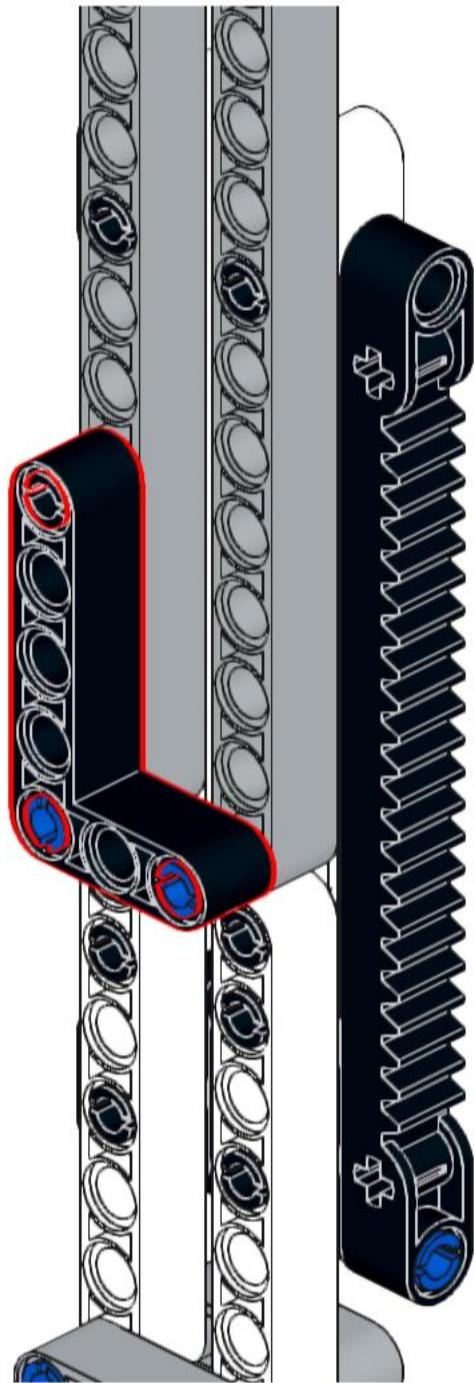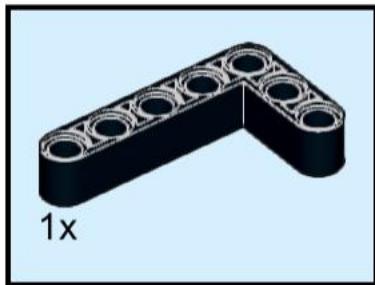



**15**

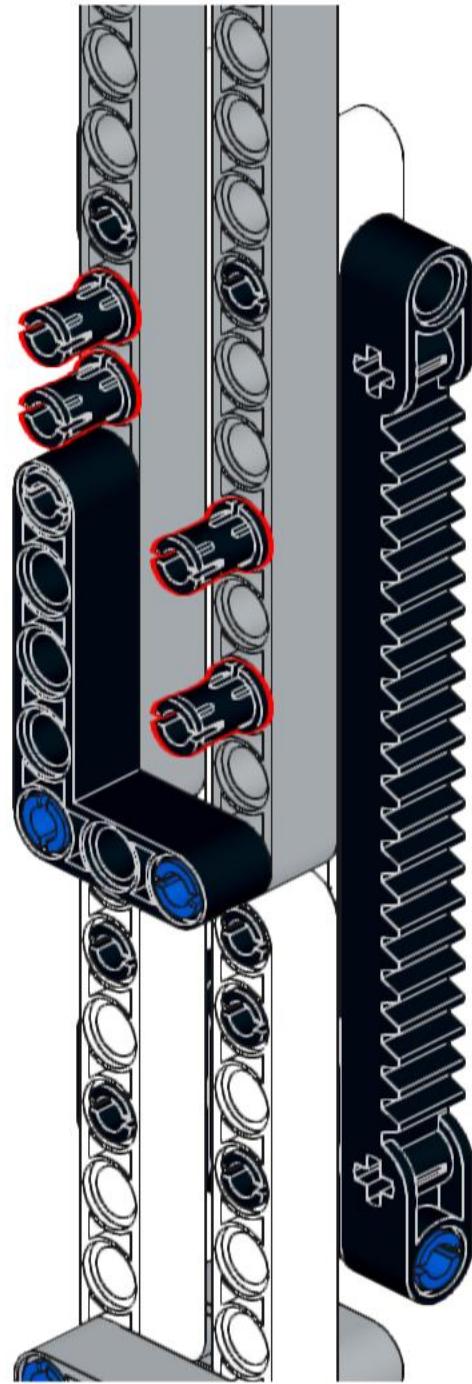


**16**

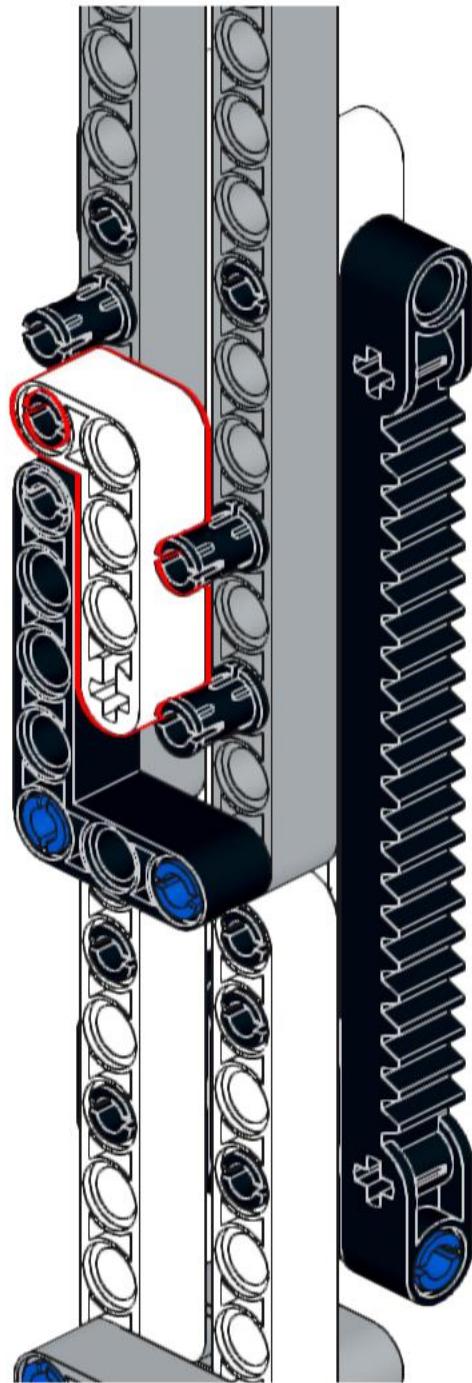



17

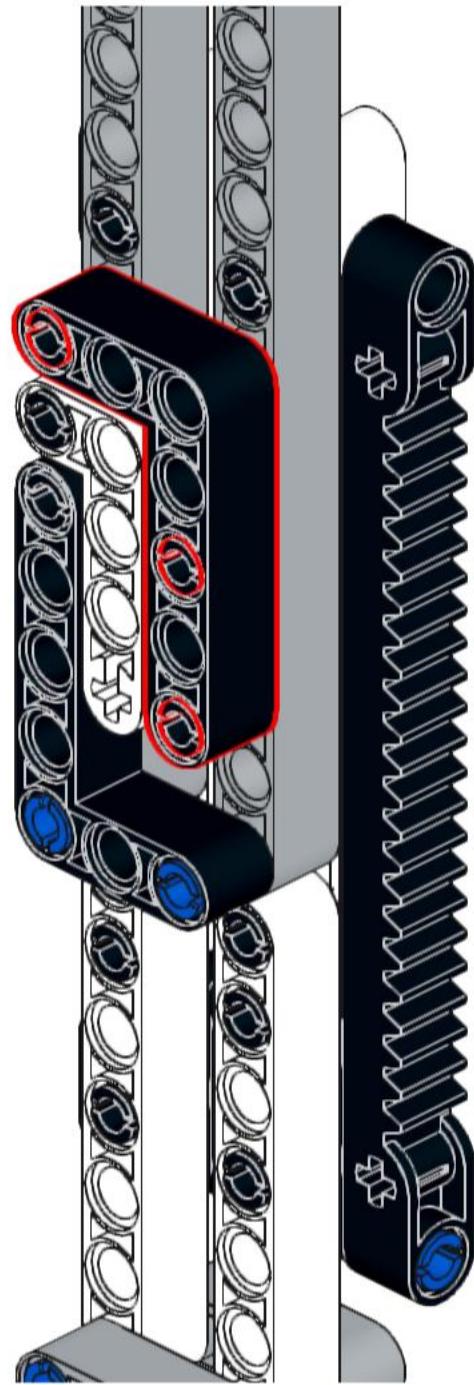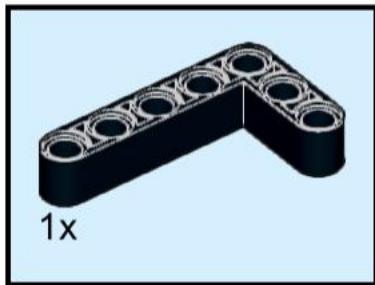


**18**

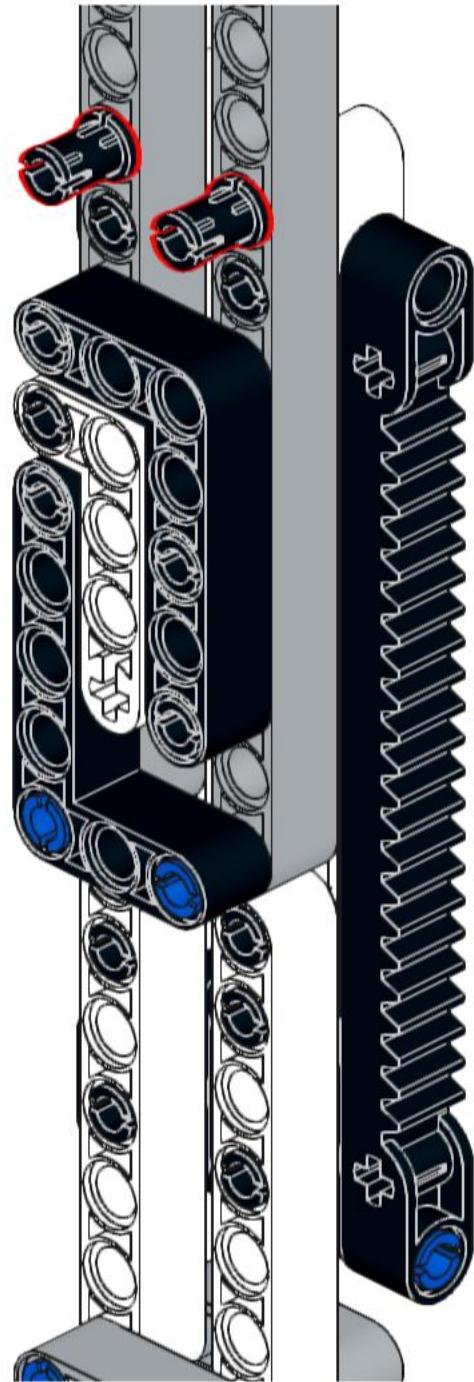

**19**

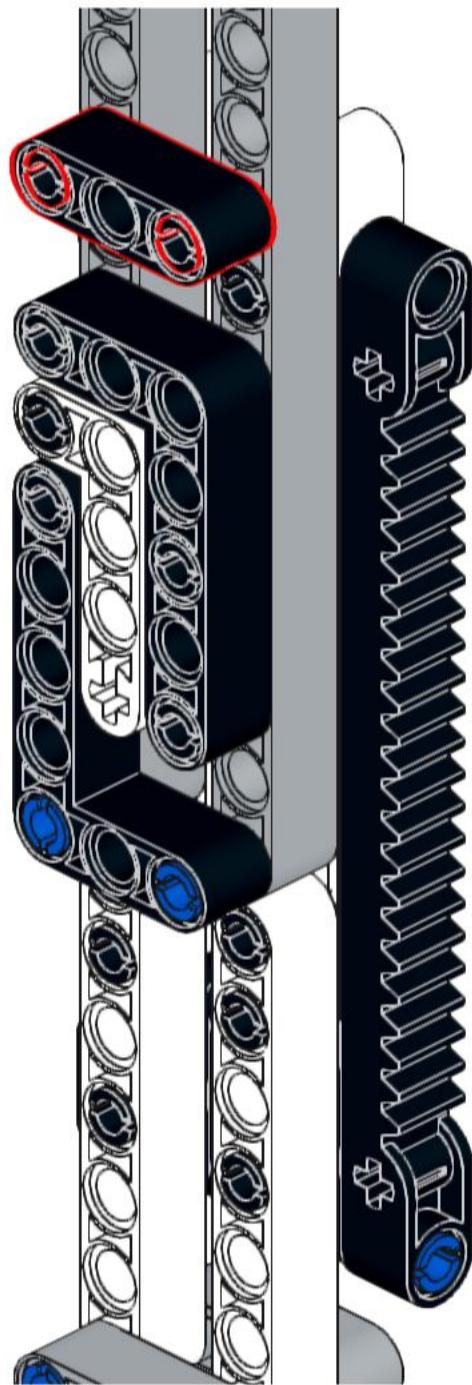


**20**

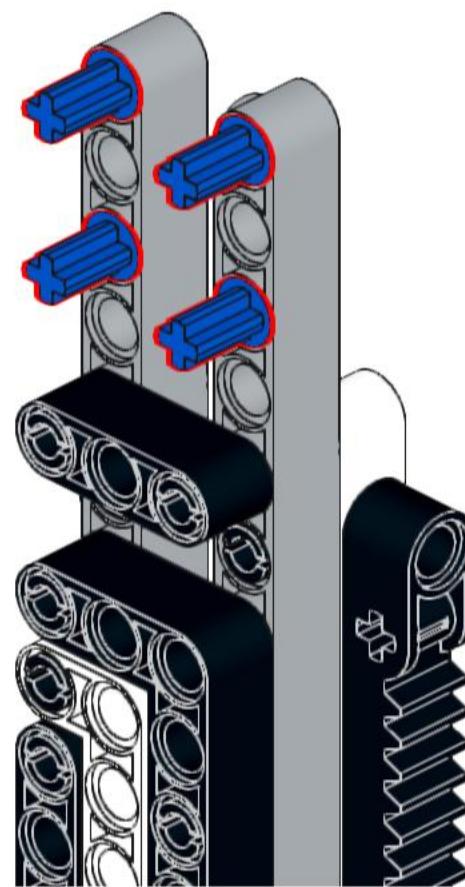


21




2x

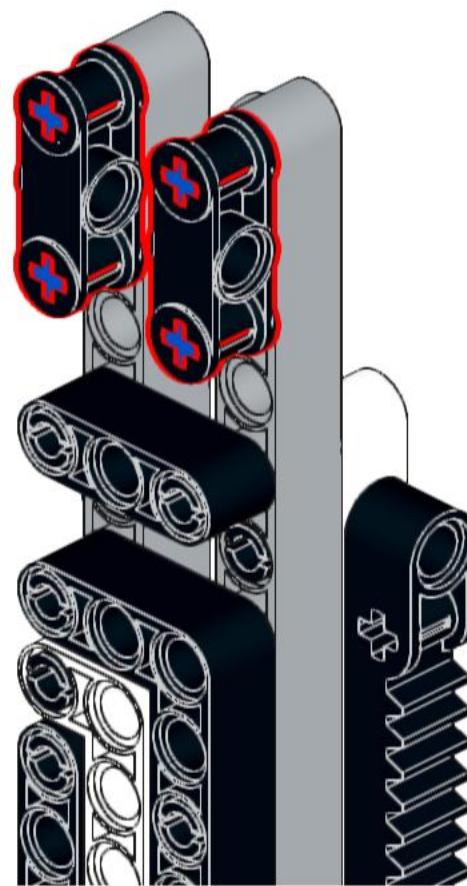


**22**

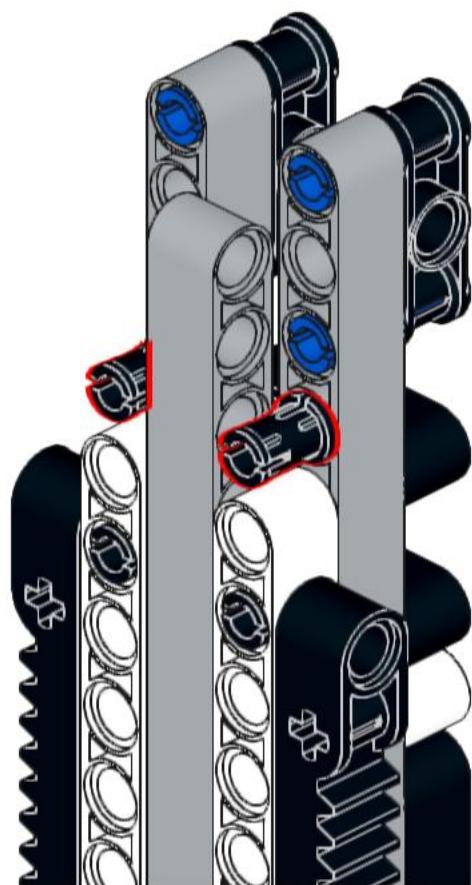



**23**





2x

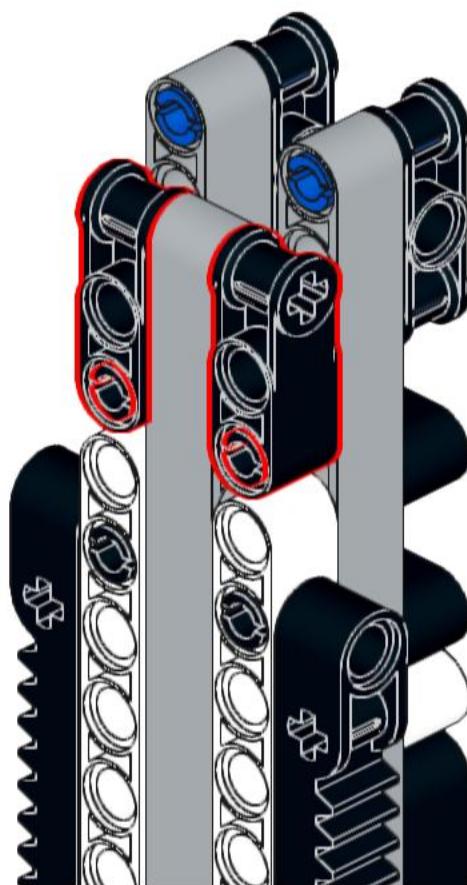



**24**

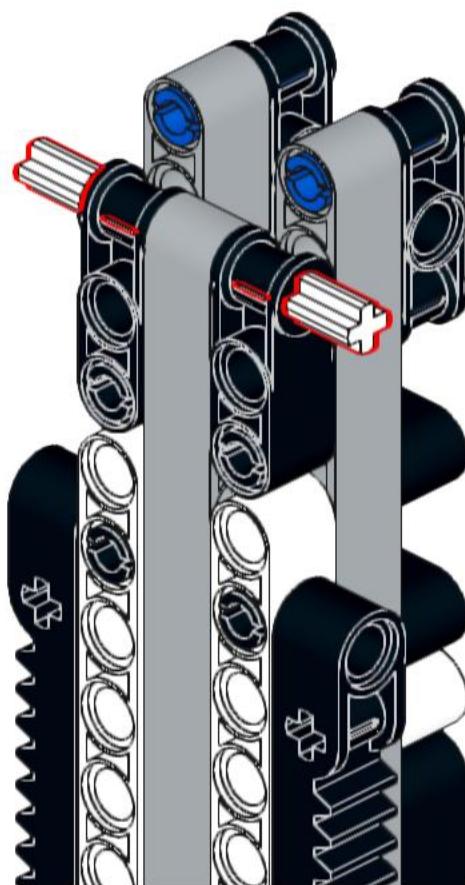



**25**

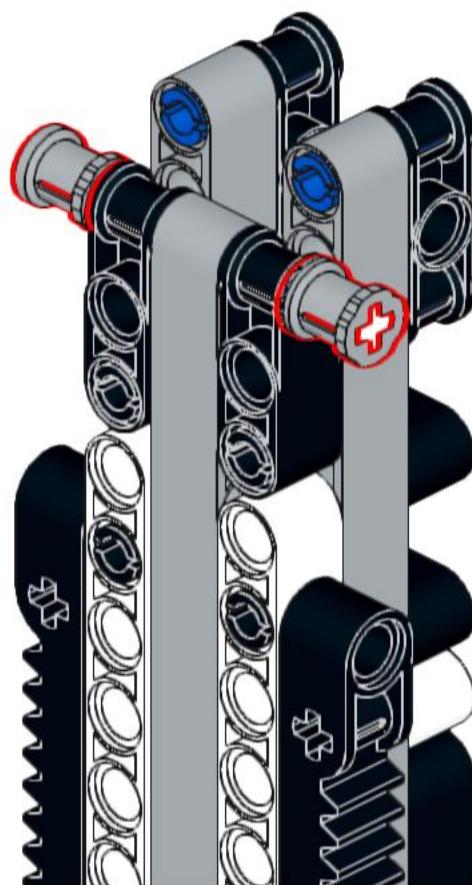


**26**

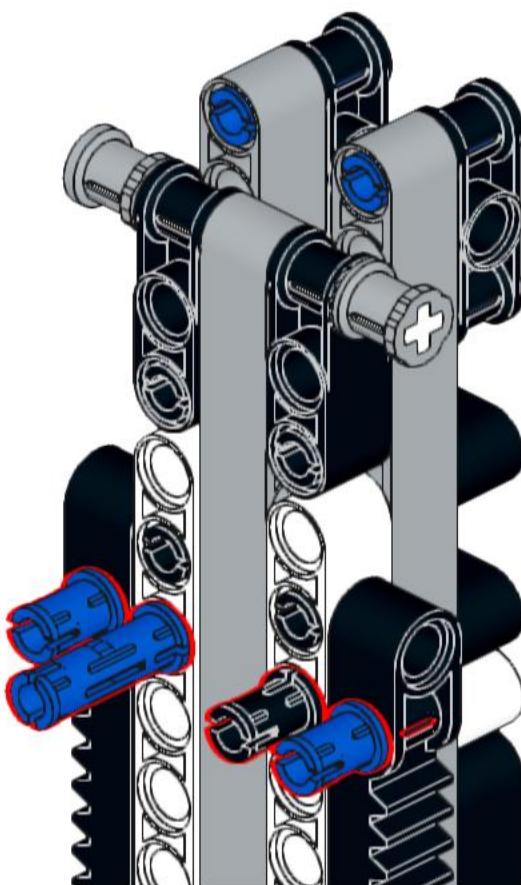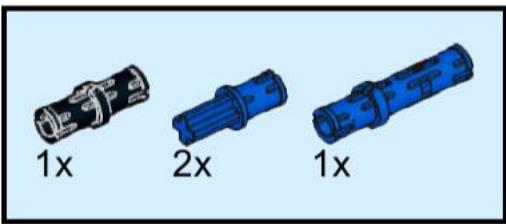



**27**

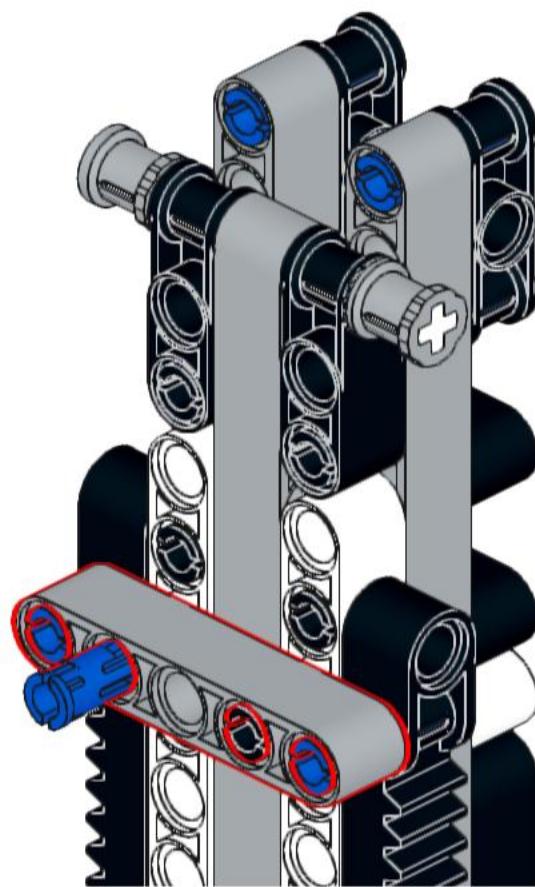


**28**

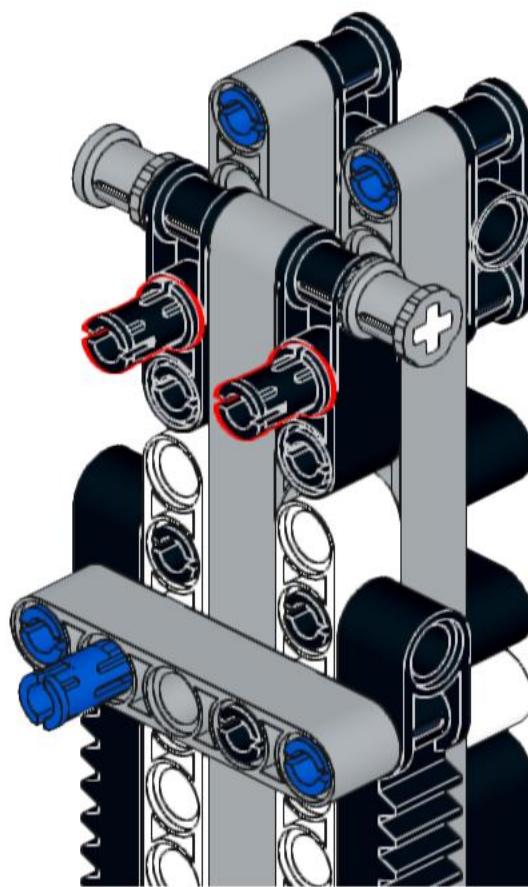



**29**

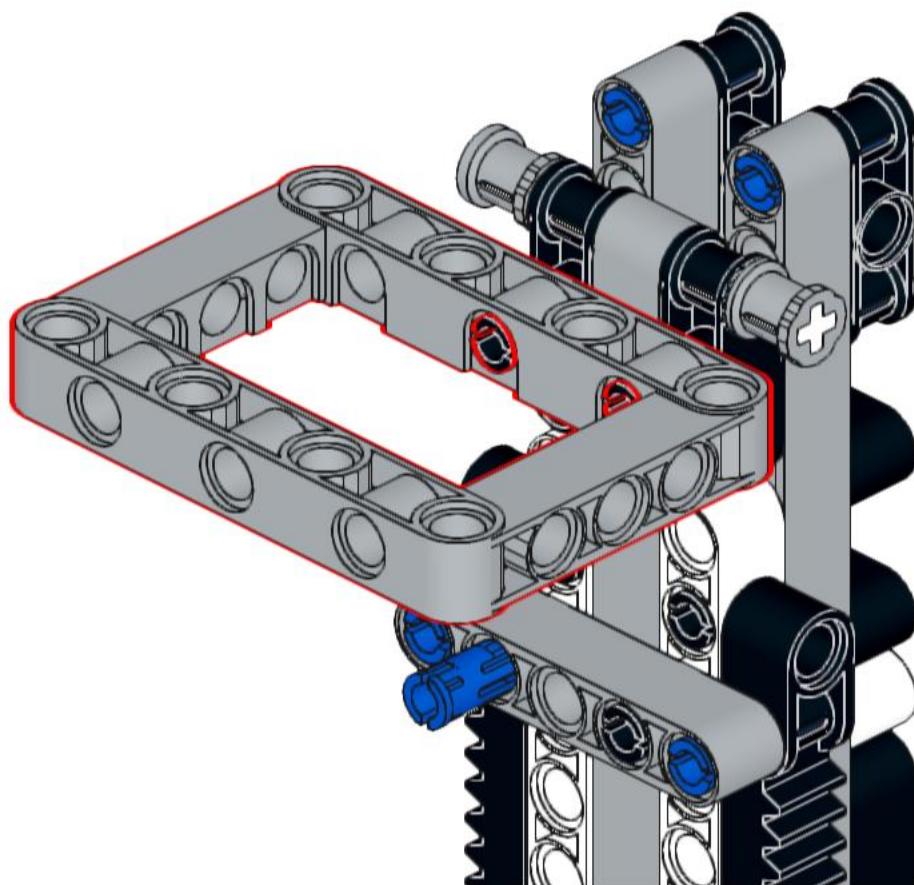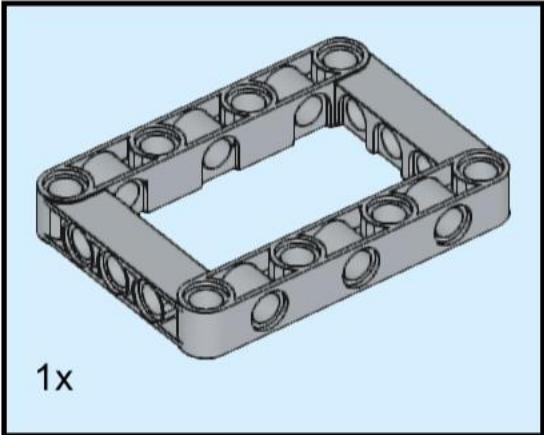



**30**

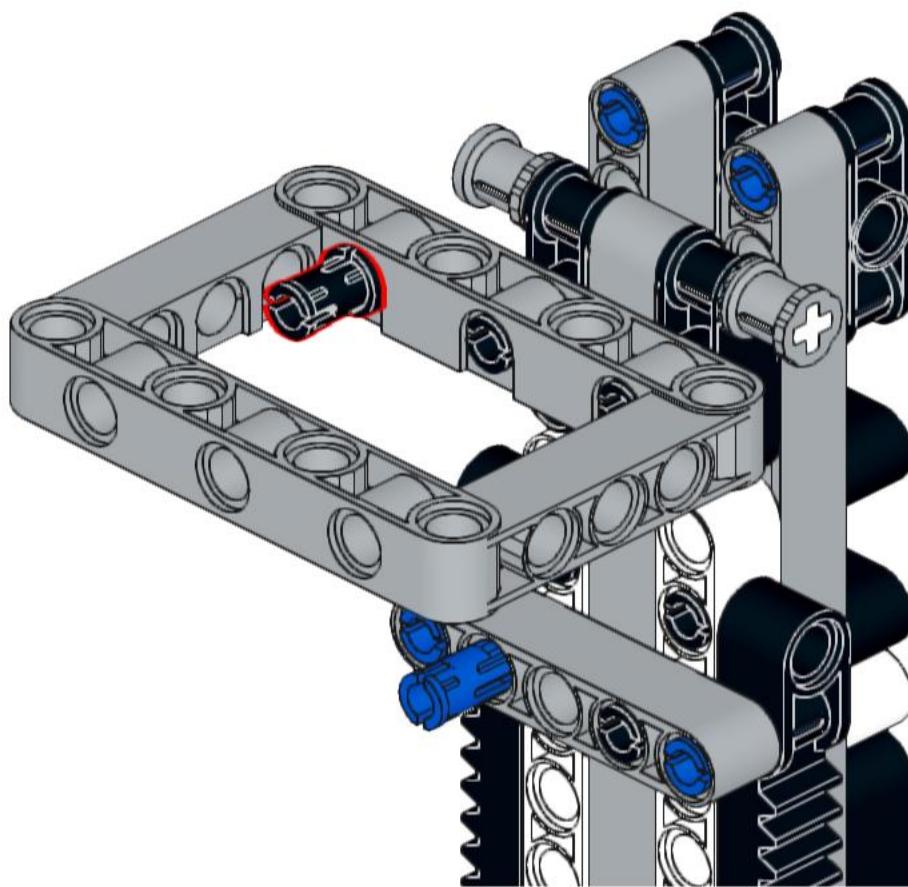



**31**

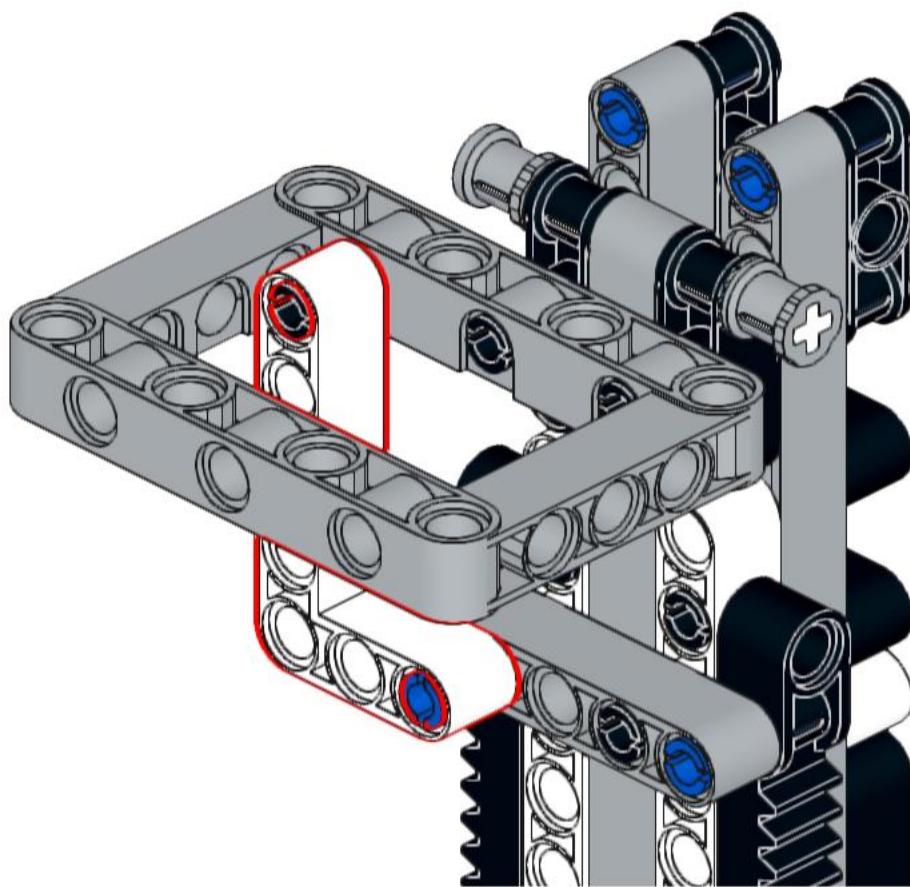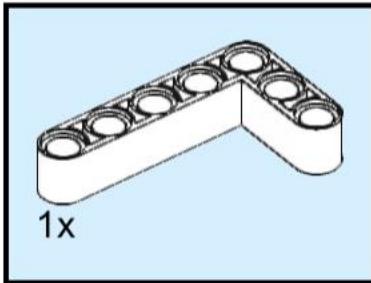




# 32

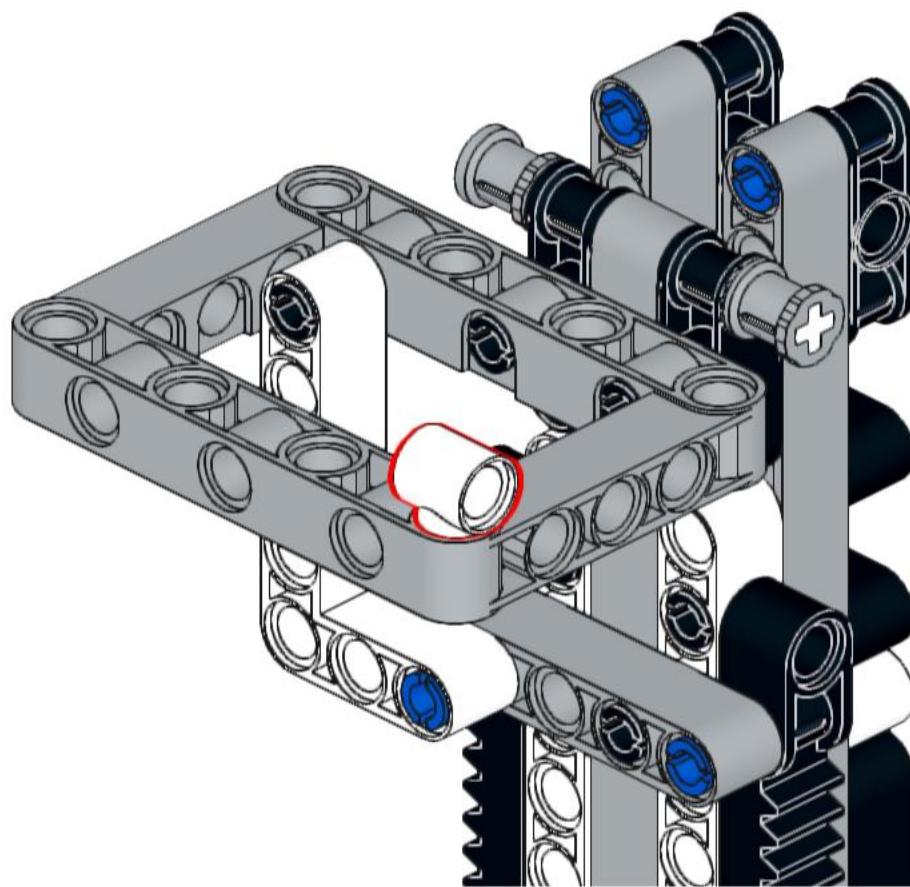



**33**

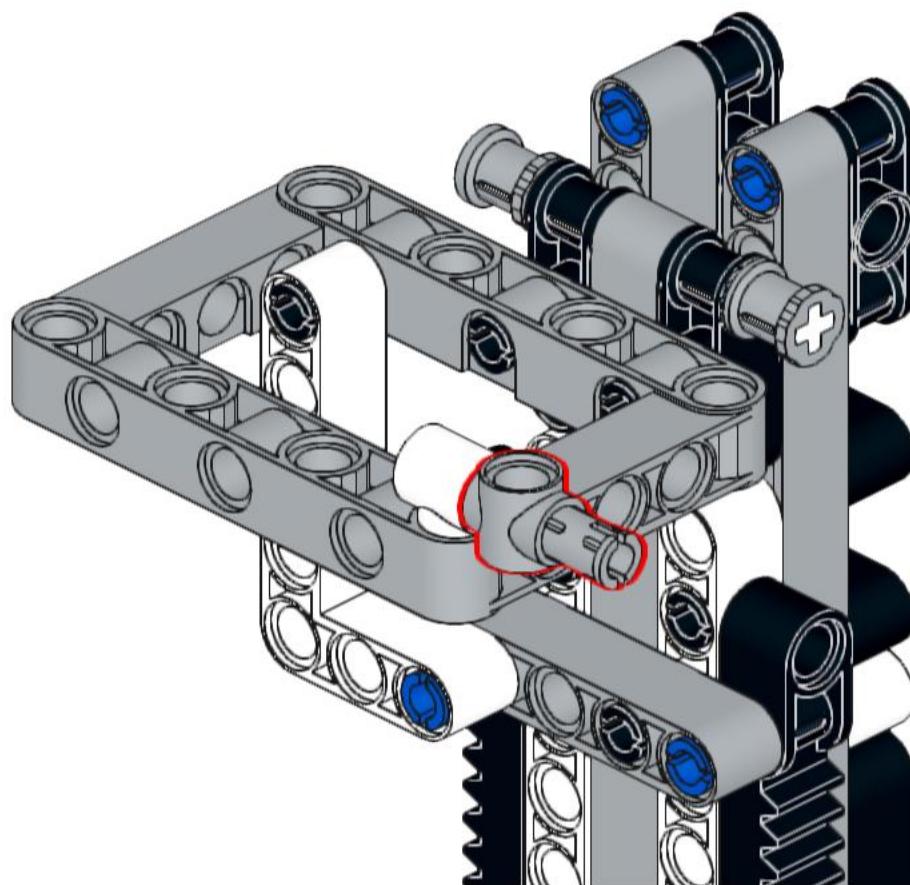



**34**

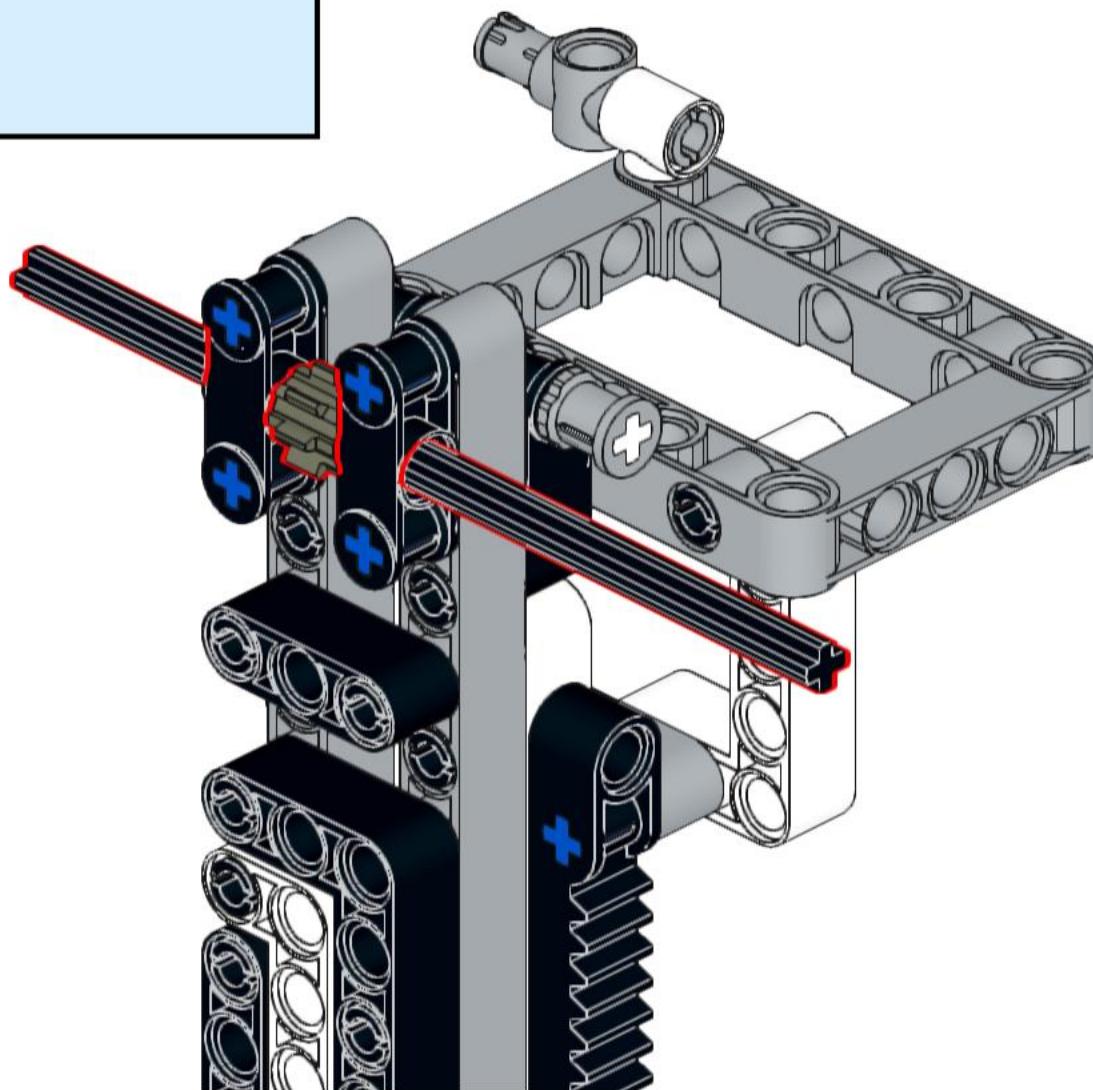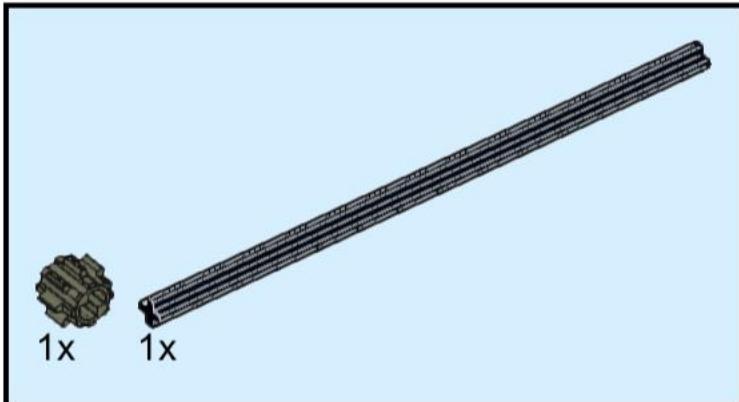

**35**

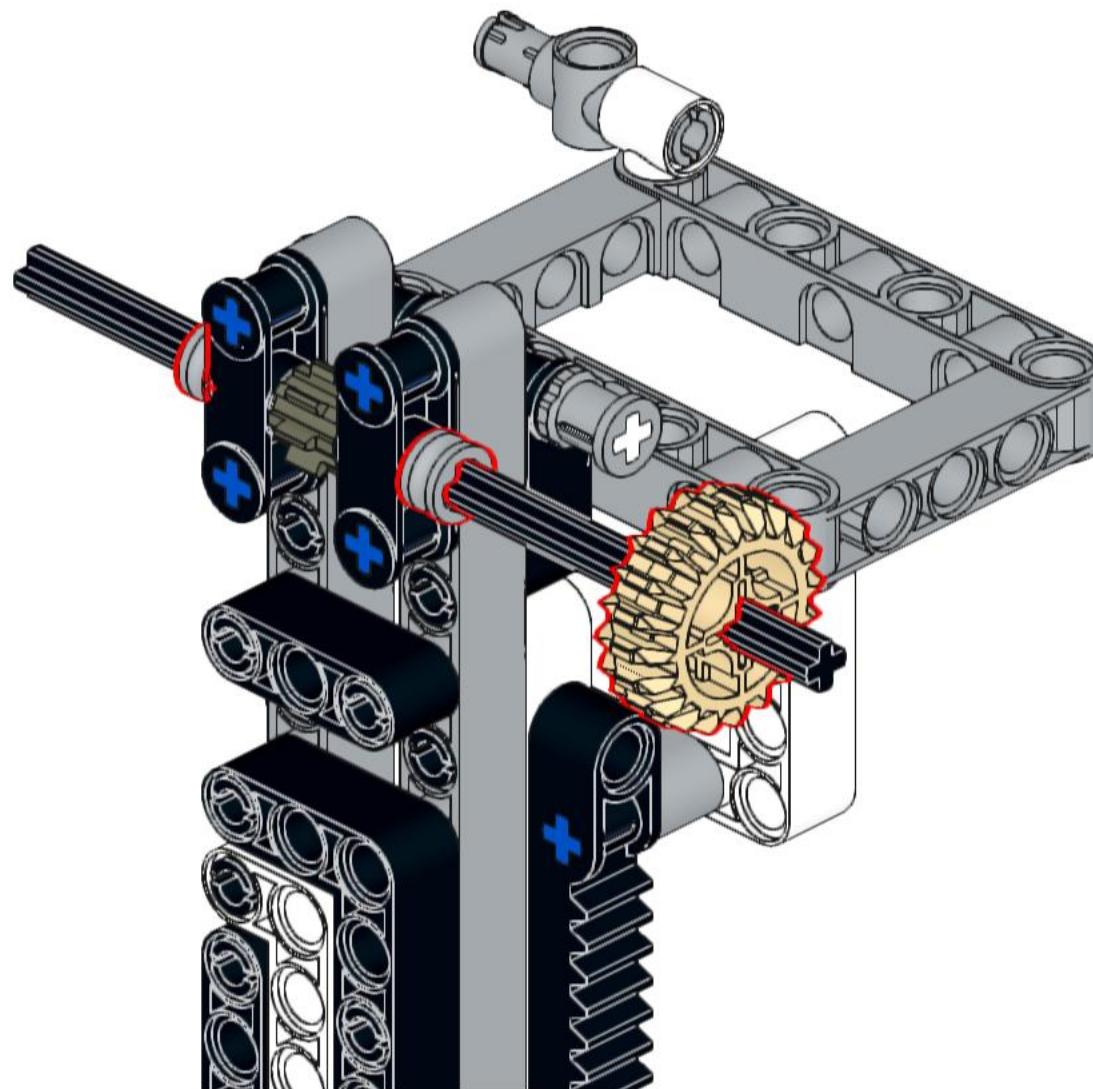



# 36

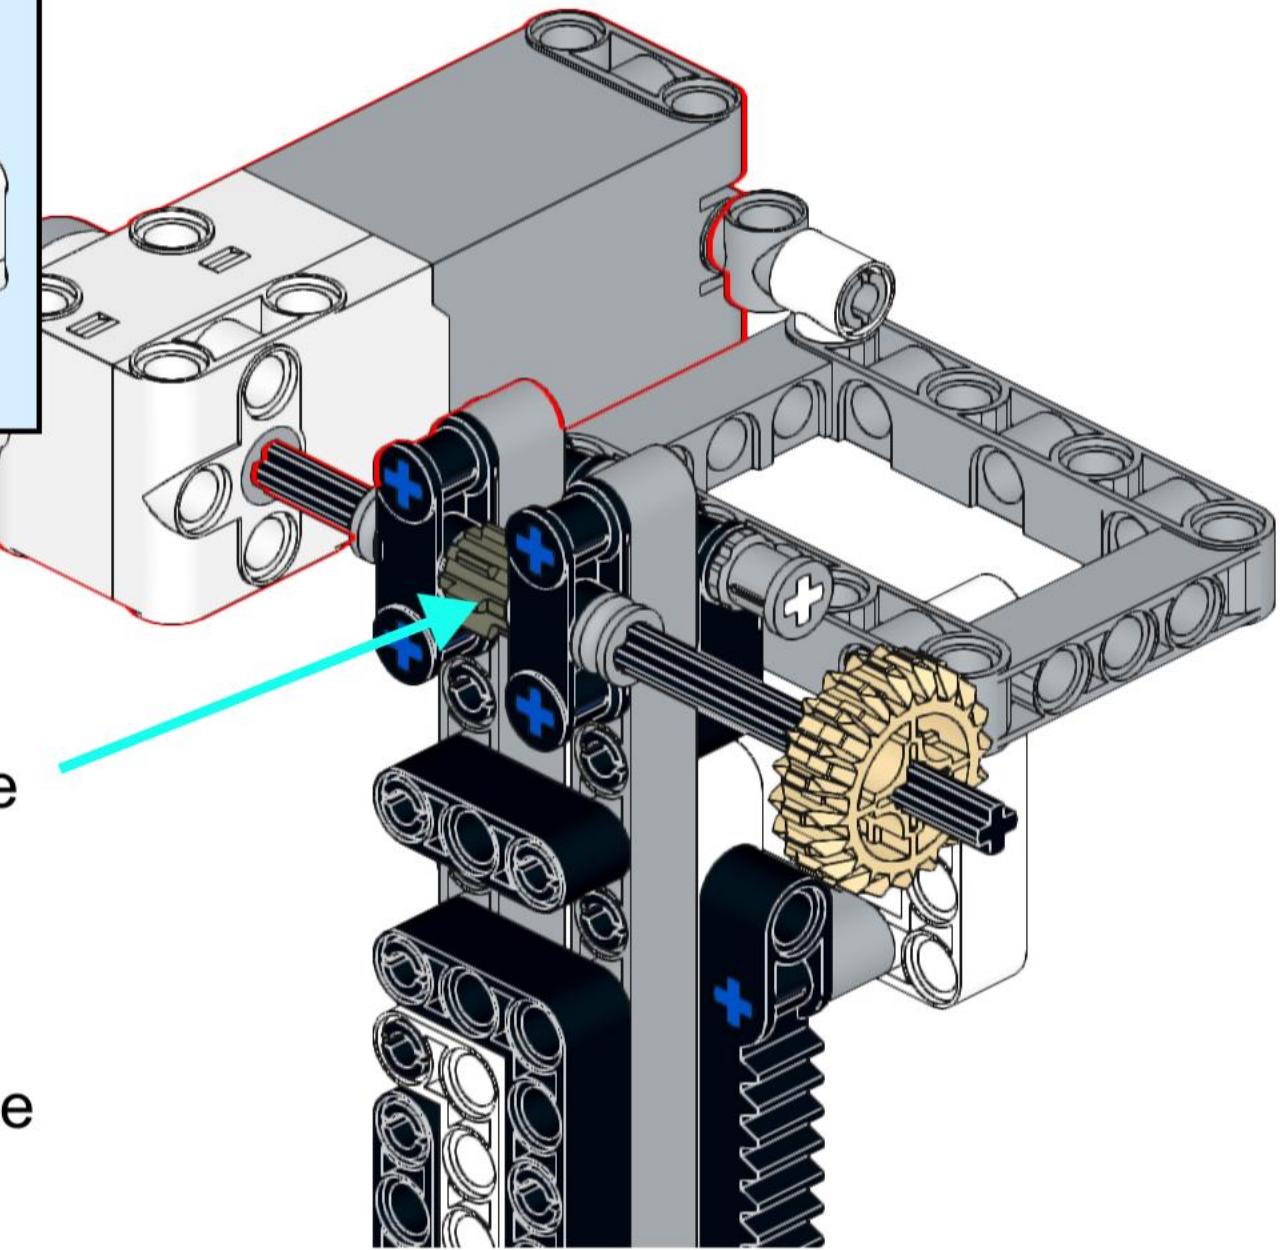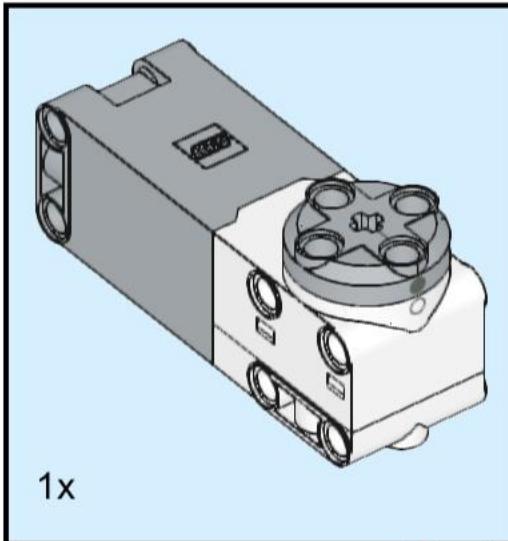


The motor will turn this gear to raise and lower the syringe plunger assembly. The gear and axle may need to be removed to allow insertion of the plunger assembly, and re-installed so the teeth of the gear mesh with the rack (images shown at the end of the manual)

**37**




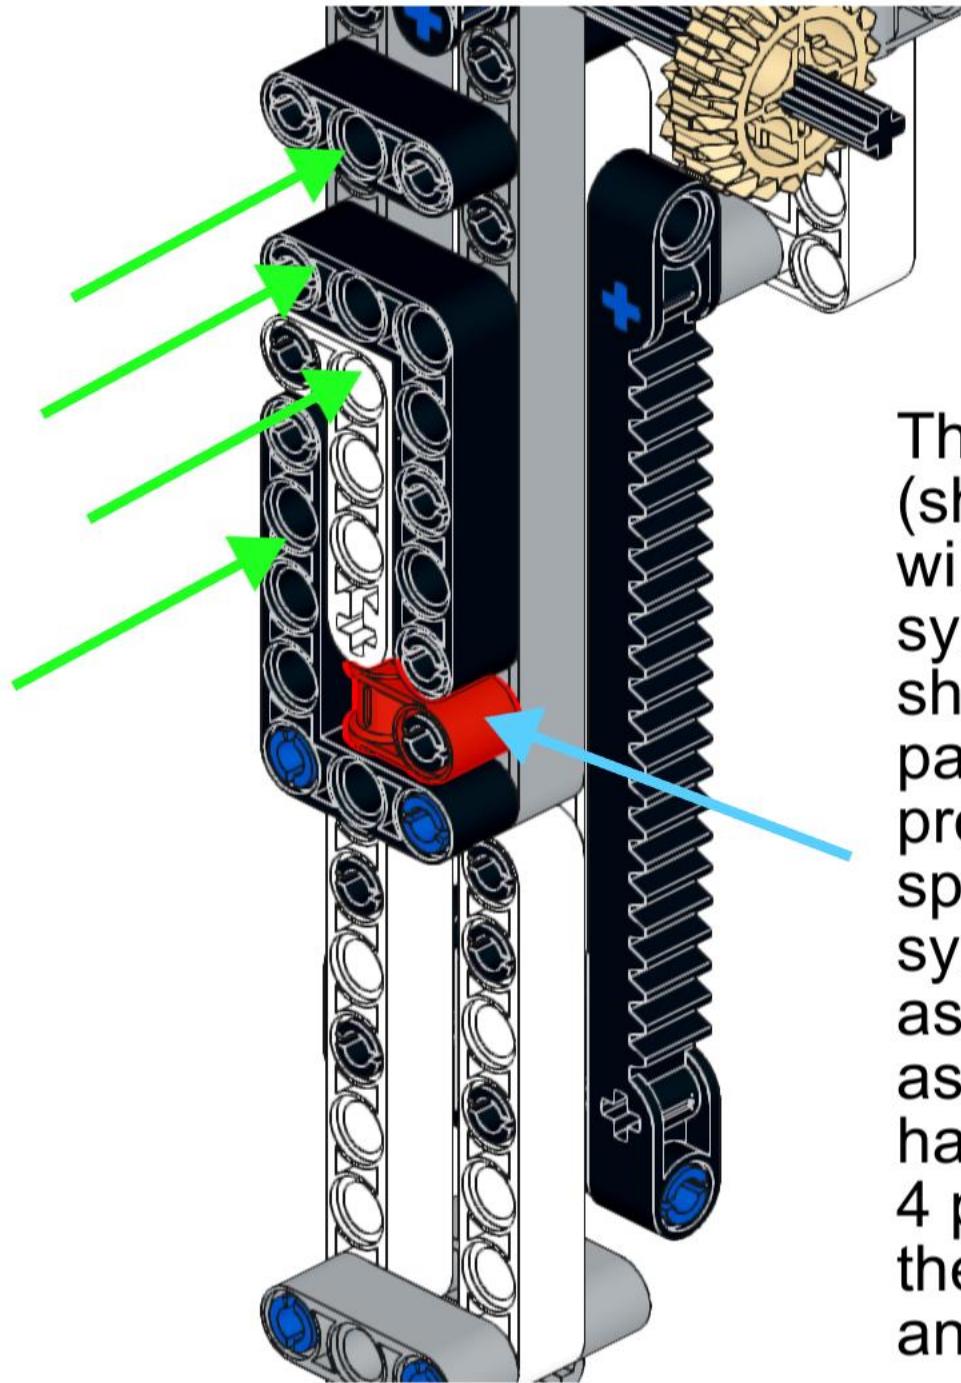




This last piece (shown here in red) will hold down the syringe collar, as shown on the next page. In order to provide enough space for the syringe & associated plunger assembly, you may have to remove the 4 pieces (shown by the green arrows) and re-install once completed

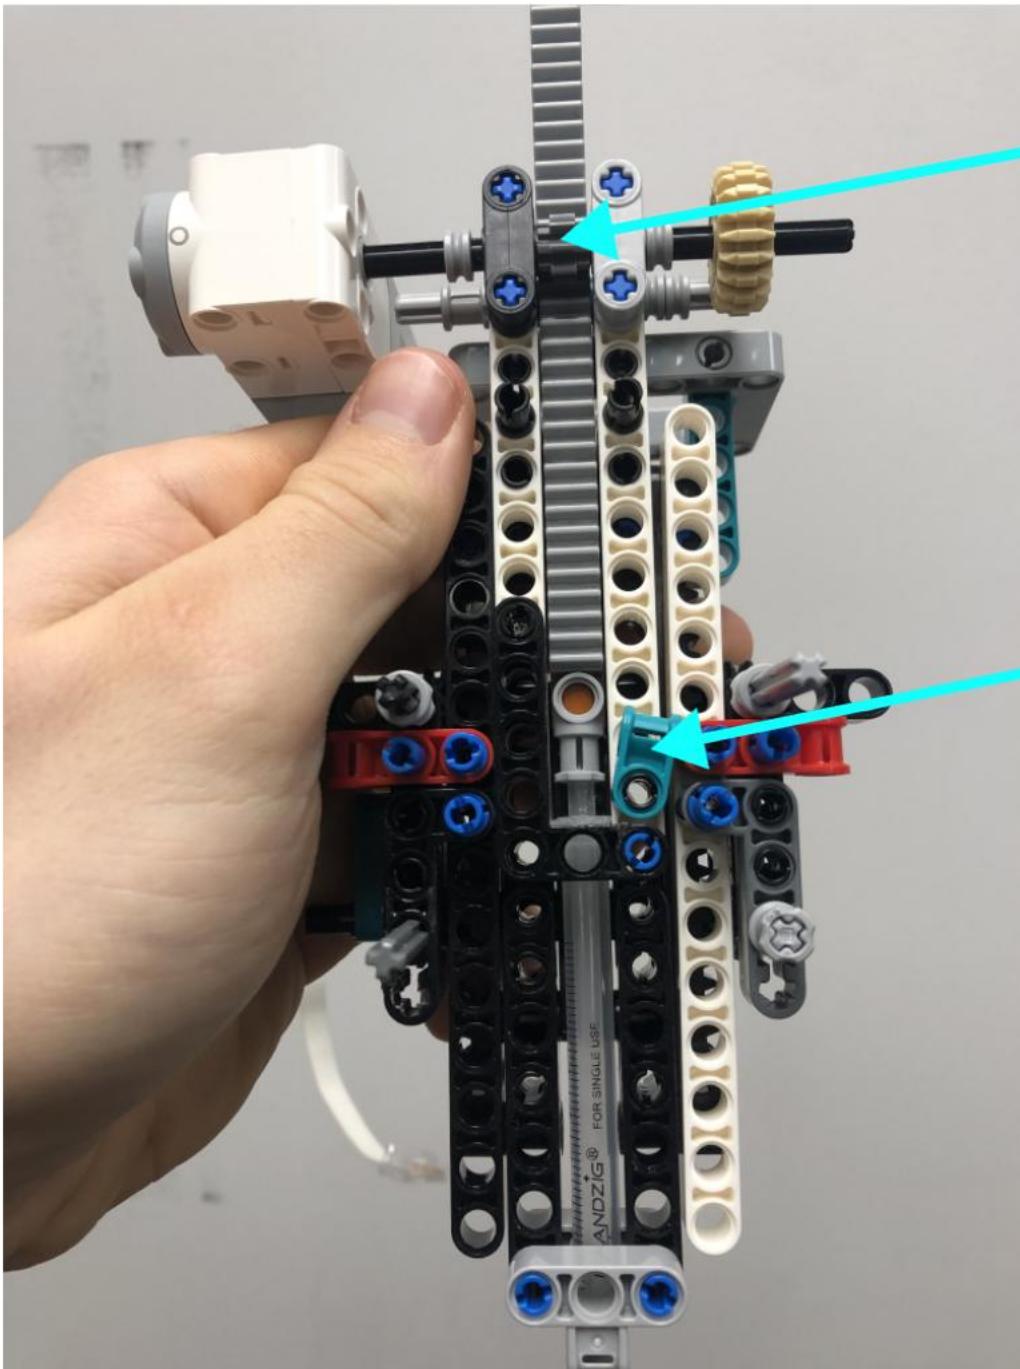

Syringe Plunger Assembly has been installed and teeth of the gear are meshed with the rack pieces

Additional pieces have been temporarily removed to allow plunger assembly inside, and this piece (shown by arrow) has been tilted back to allow the syringe collar to lay flat

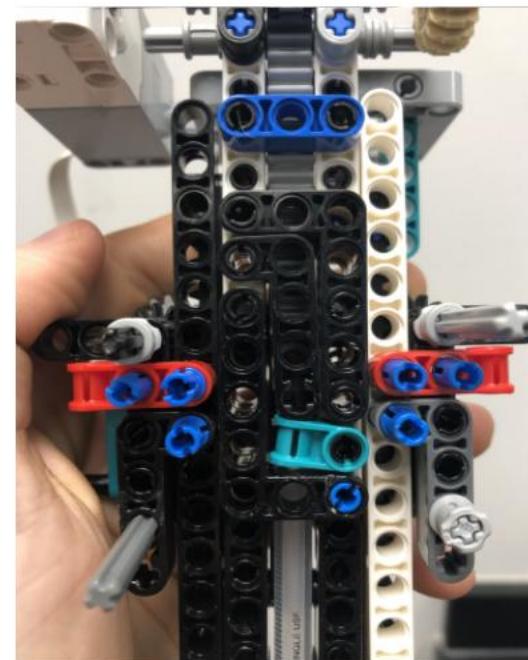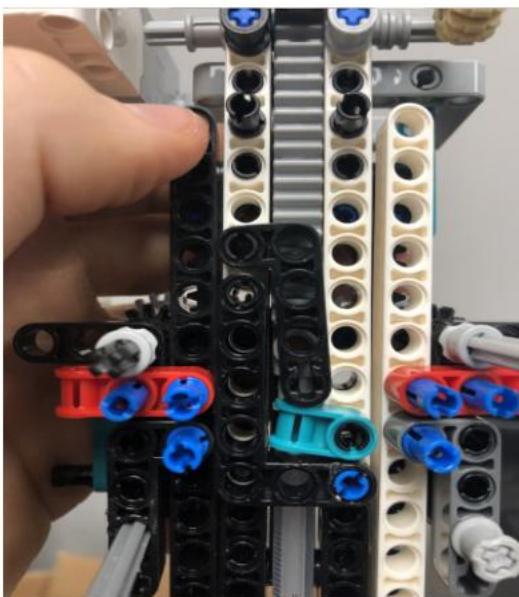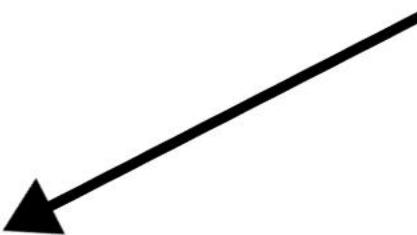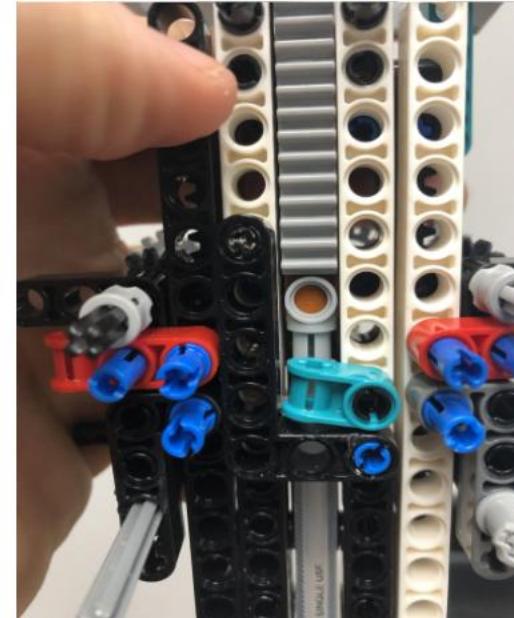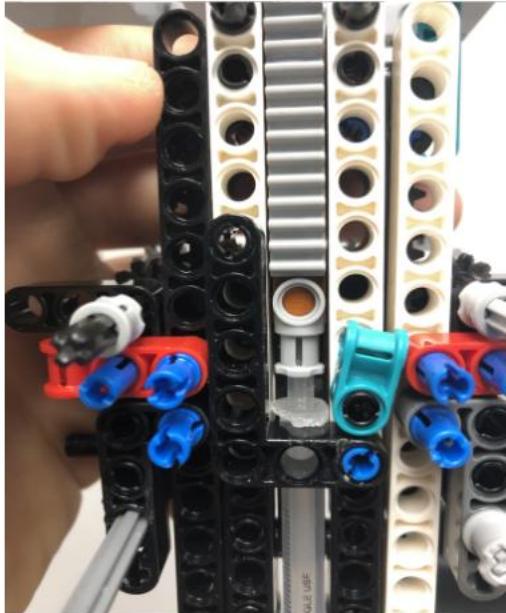

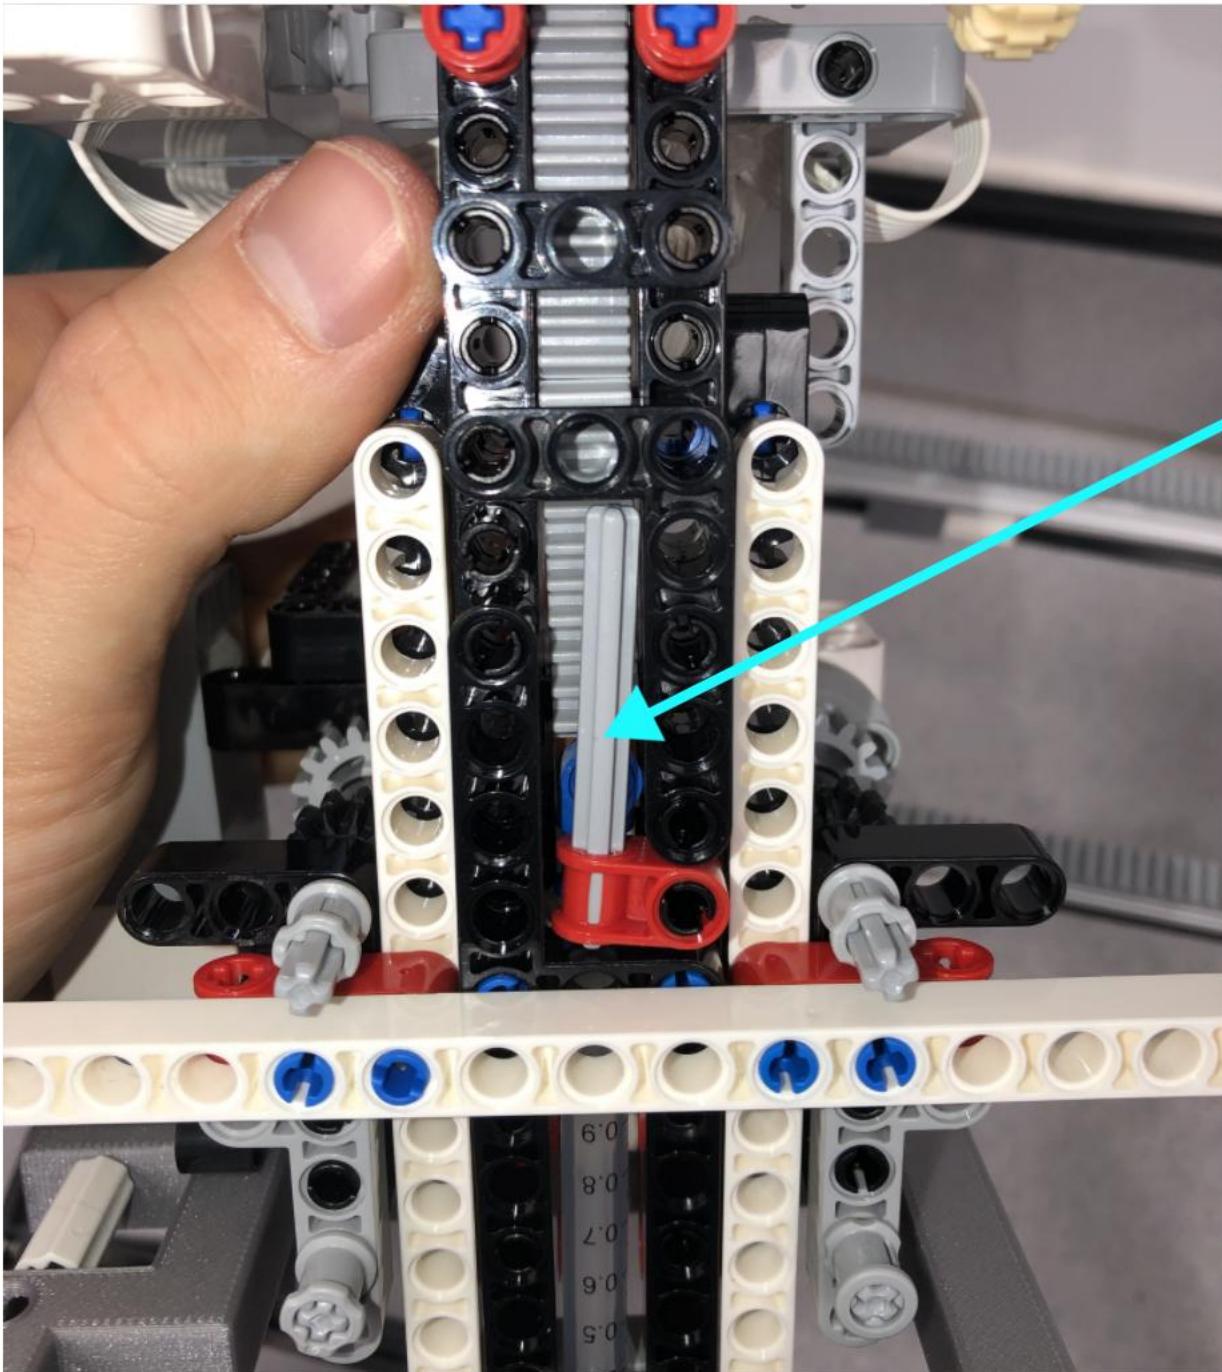

**Trouble Shooting Tip:**  
If you are unable to lower the syringe due to any mechanical hinderances, the problem can often be solved by replacing the liftarm piece with a short axle. Both pieces just work to keep the syringe collar fixed in one spot so that it doesn't move when you utilize the syringe plunger.