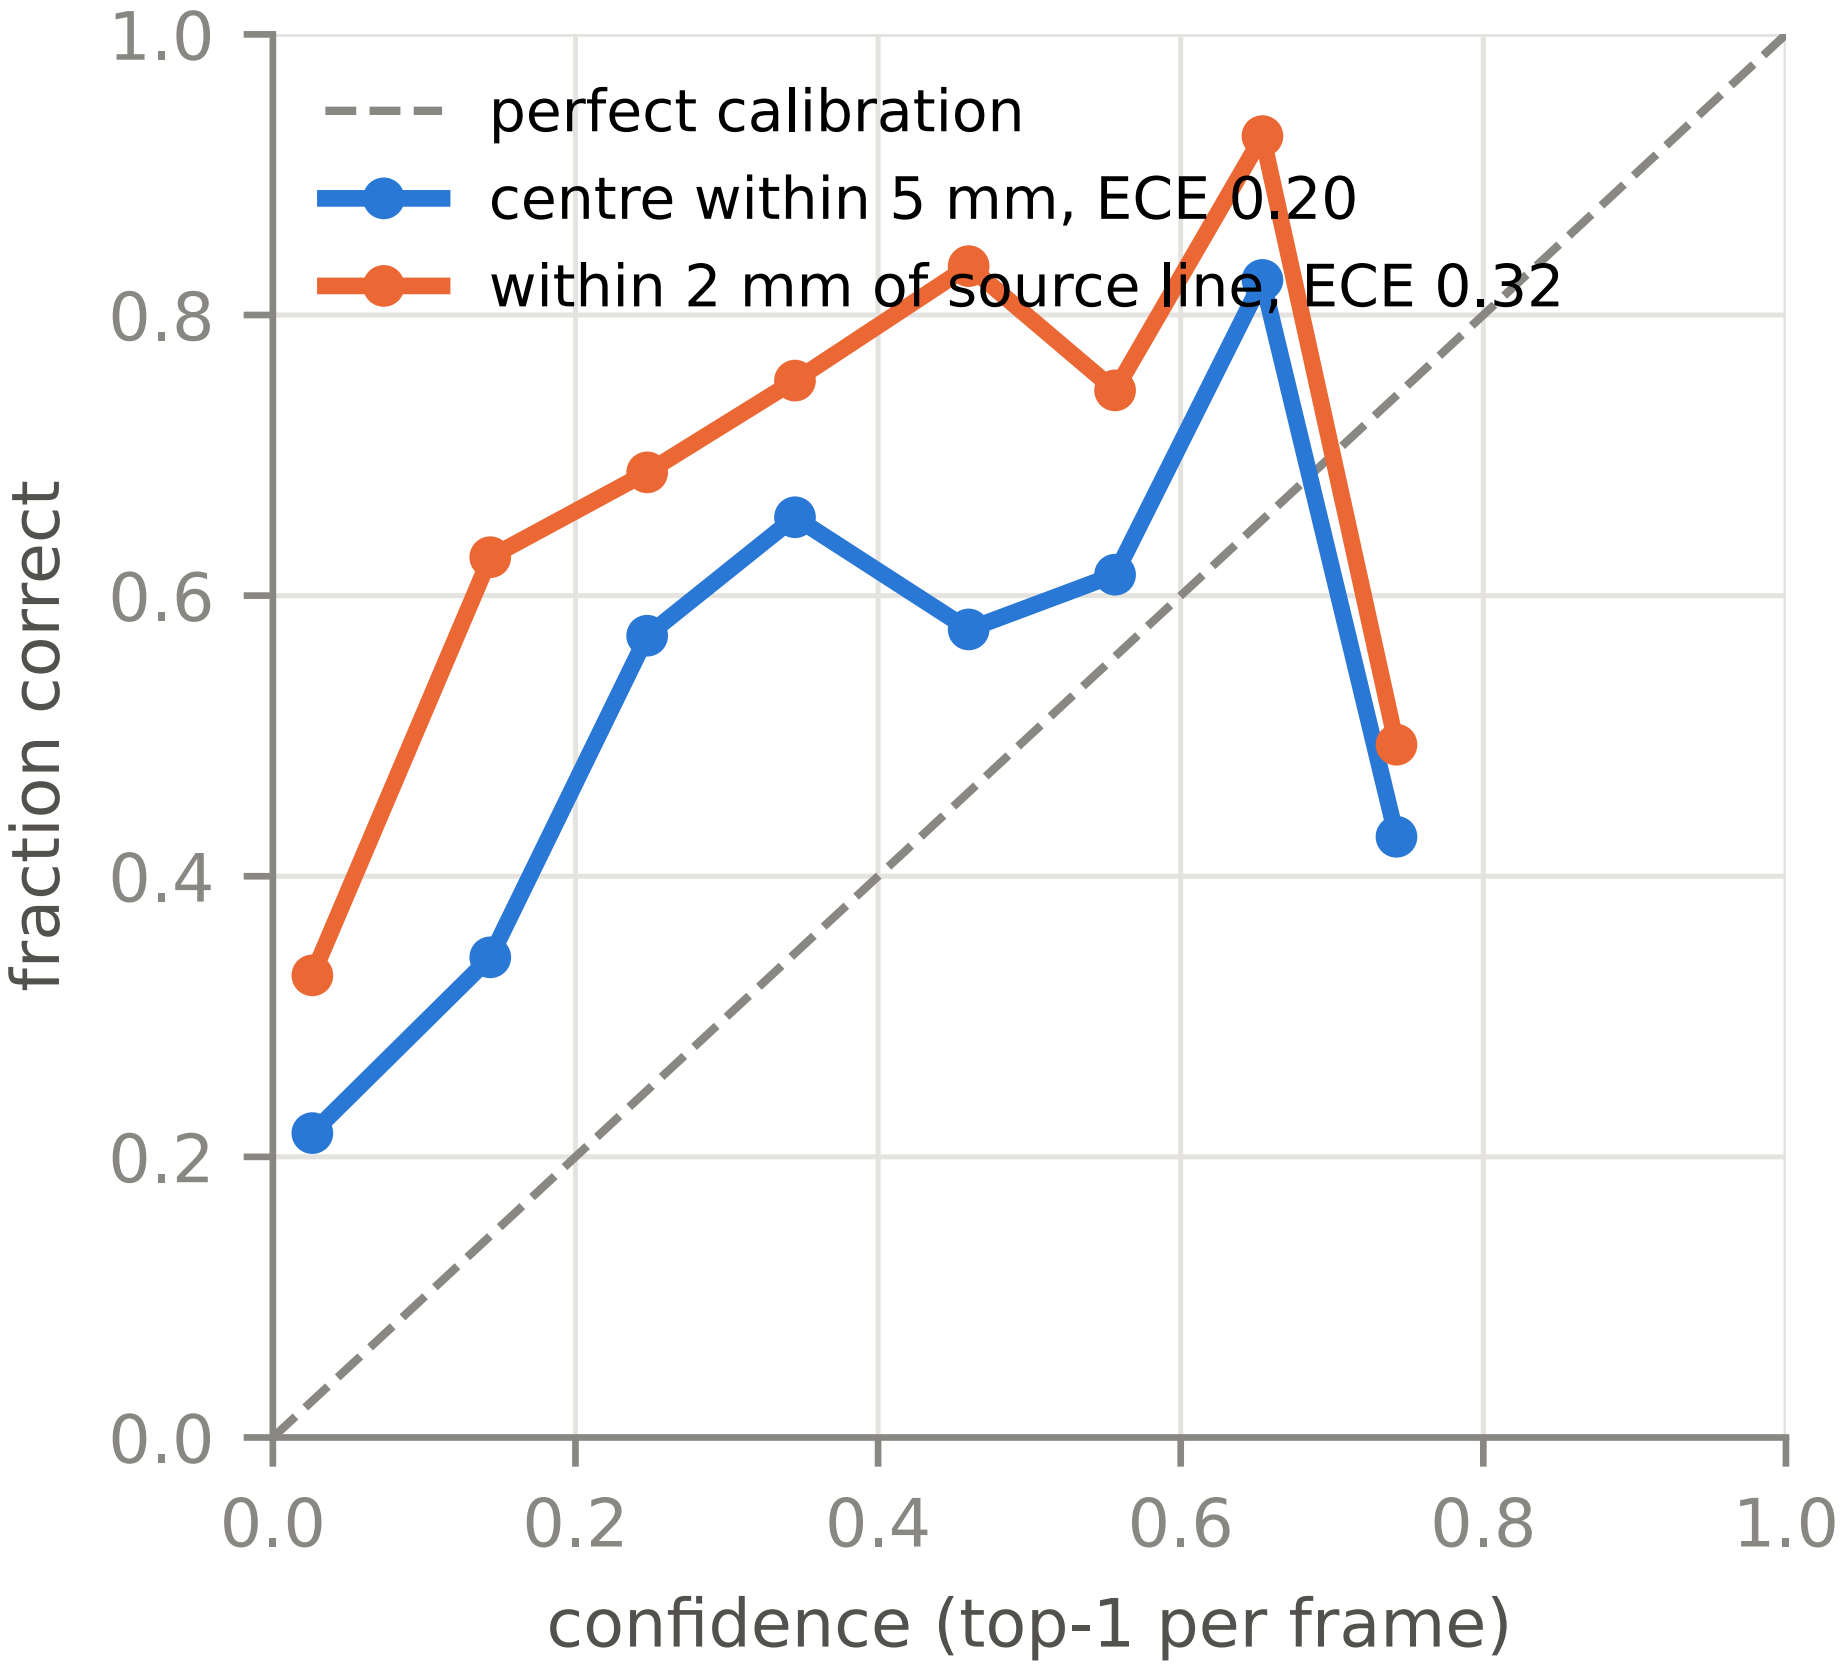
perfect calibration
centre within 5 mm, ECE 0.20
within 2 mm of source line, ECE 0.32
fraction correct
confidence (top-1 per frame)
0.0
0.2
0.4
0.6
0.8
1.0