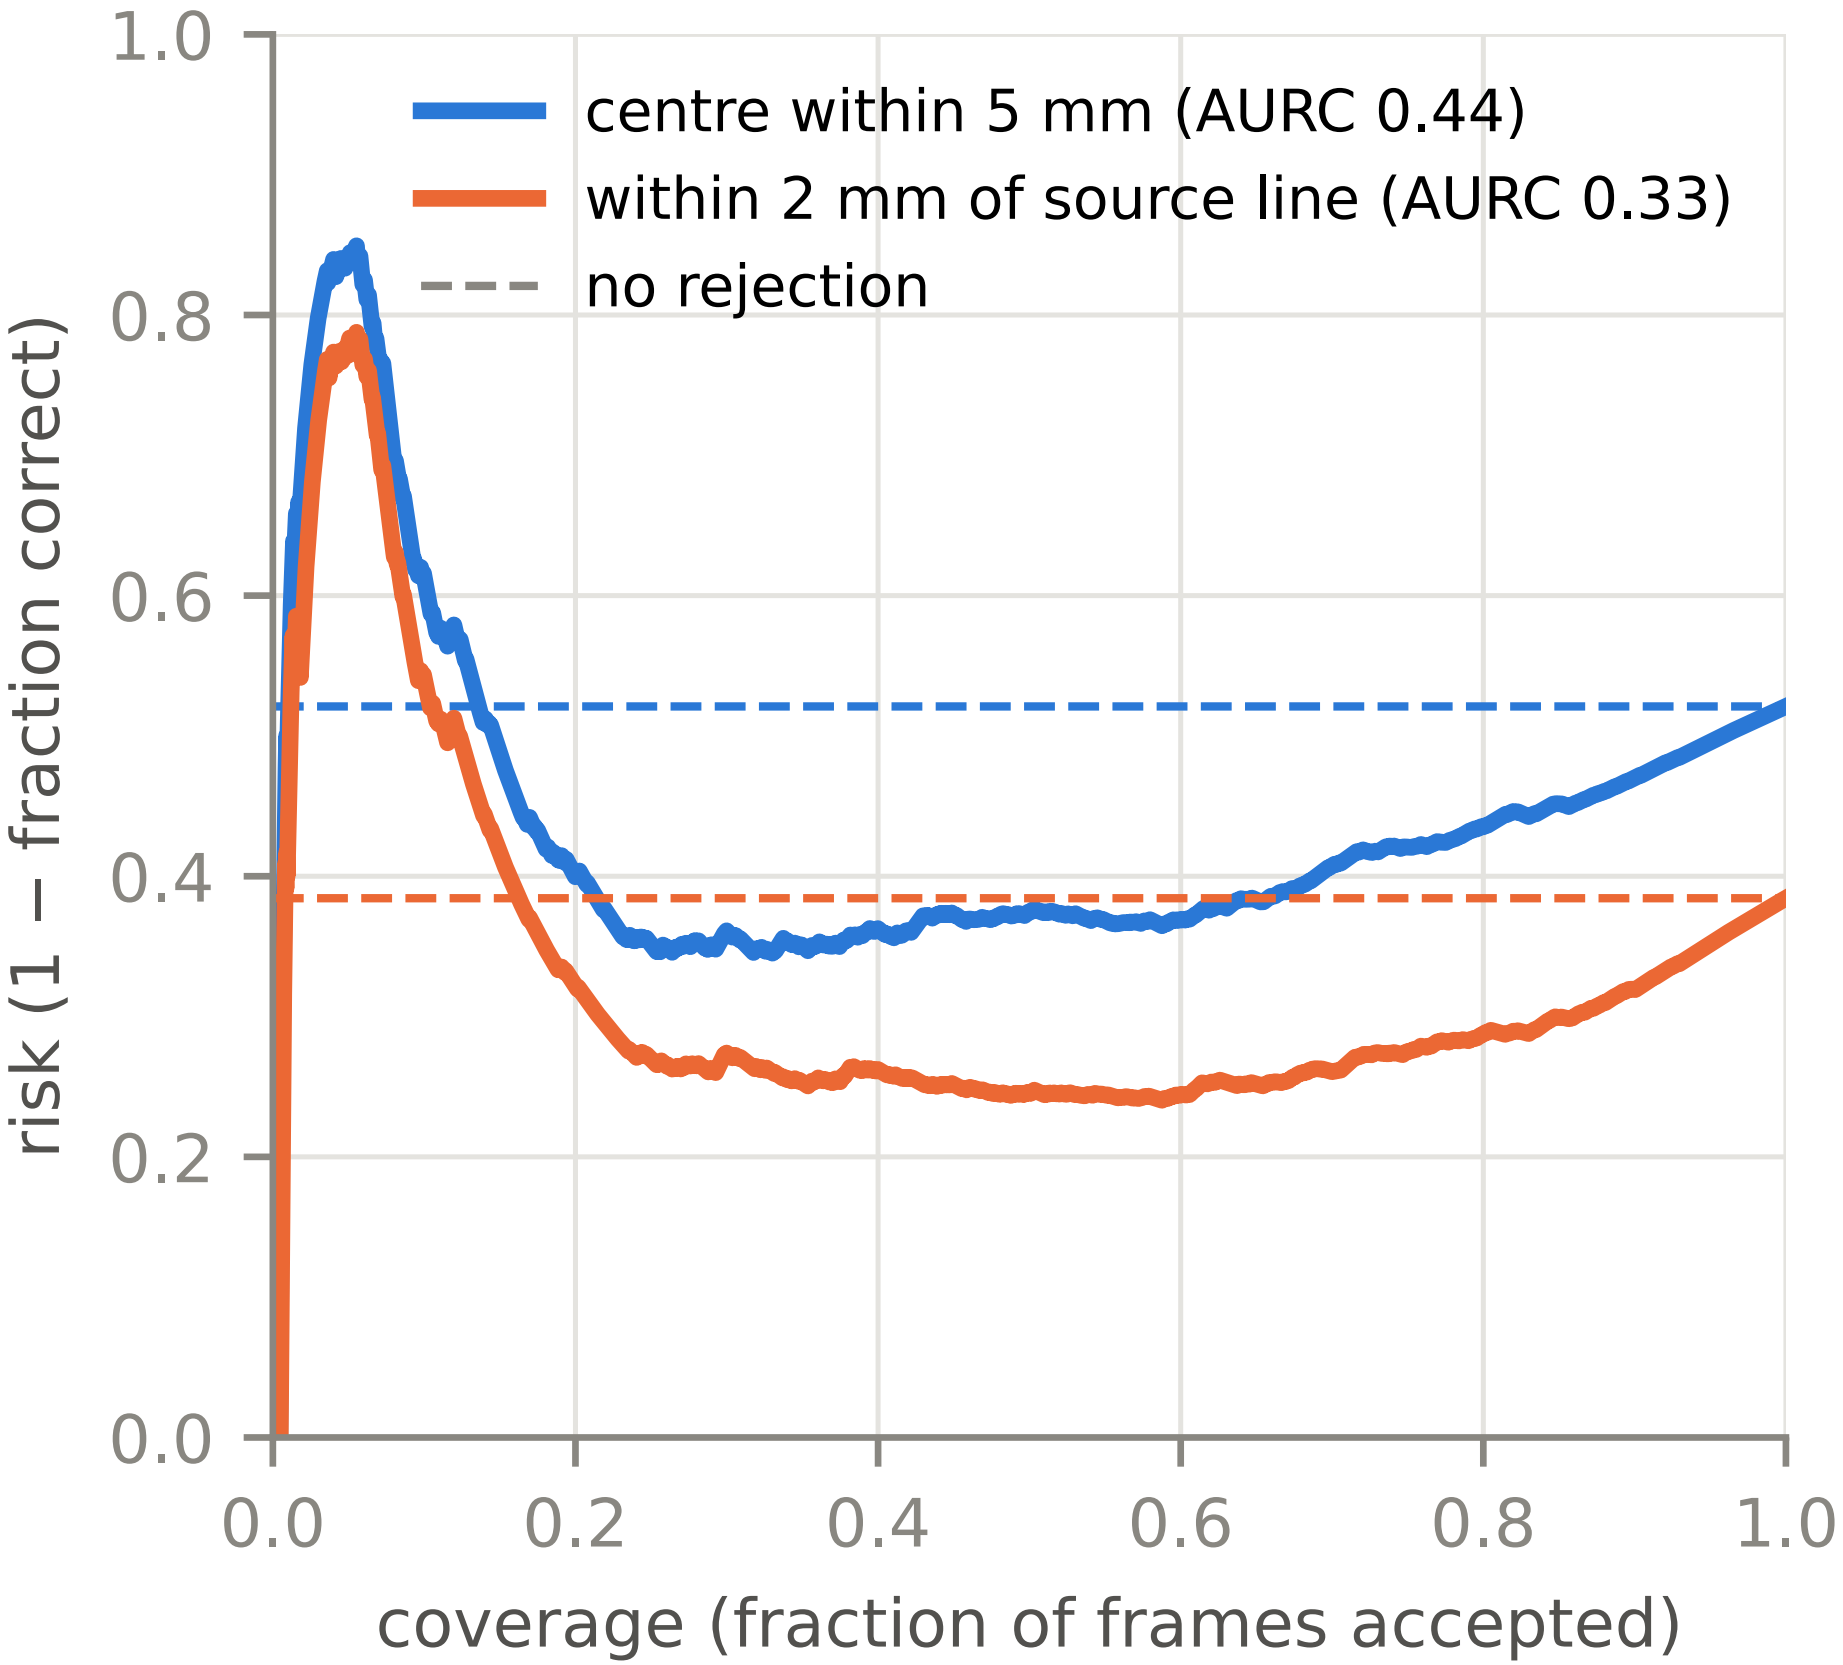
centre within 5 mm (AURC 0.44)
within 2 mm of source line (AURC 0.33)
no rejection
risk (1 − fraction correct)
coverage (fraction of frames accepted)
0.0
0.2
0.4
0.6
0.8
1.0