

# Dynamics of a self-propelled Camphoric Acid boat at the air-water interface

V. S. Akella,<sup>†</sup> D. K. Singh,<sup>†</sup> S. Mandre,<sup>‡</sup> and M. M. Bandi<sup>\*,†</sup>

<sup>†</sup>*Collective Interactions Unit, OIST Graduate University, Okinawa, Japan 904-0495*

<sup>‡</sup>*School of Engineering, Brown University, 182 Hope Street, Providence, RI 02906, USA*

E-mail: bandi@oist.jp

## Abstract

In the present work, we report the dynamics of a *cboat* at the air-water interface. A *cboat* is a disc-shaped agarose gel tablet with all the water in the agarose gel replaced by Camphoric Acid (CA). When a *cboat* is placed at the air-water interface, it is spontaneously set in motion by the solutal Marangoni forces. Moreover, we observe three different modes of motion, namely harmonic, continuous and periodic when the air-water interfacial tension is modified. We explain these modes in terms of a dimensionless parameter defined as  $\xi = \frac{a}{l_M}$ , where  $l_M$  is defined as the Marangoni characteristic length and  $a$  is the diameter of the *cboat*. From our experiments, we estimated a critical value  $\xi_c \simeq 5625$  for which the *cboat* moves with terminal velocity. The harmonic, continuous and periodic motions are observed when  $\xi > \xi_c$ ,  $\xi \simeq \xi_c$  and  $\xi < \xi_c$  respectively. Experimentally, the parameter  $\xi$  is varied by changing the interfacial tension of the air-water interface using Sodium Dodecyl Sulfate (SDS).

## Introduction

The scientific interest in the motion of objects governed by the interfacial tension gradients started with Alessandro Volta who was studying the motion of camphor fragments on the surface of water. Since then many researchers have been studying motion of objects driven by the interfacial tension gradients. Few ex-

amples are motion of liquid droplets on a solid surface with surface energy gradient,<sup>1</sup> motion of ethanol driven gel tablets on the air-water interface,<sup>2</sup> propulsion of Belousov-Zhabotinsky drops in flourinated oil,<sup>3</sup> motion of camphor boats at the air-water interface.<sup>4</sup> In the same spirit, the current work is concerned with the motion of camphoric acid boats at the air-water interface however, we present our understanding from a fluid mechanics perspective.

## Experimental Section

Hot agarose solution (5% weight-to-volume) in de-ionized (DI) water (Milli-Q Integral Water Purification System with resistivity,  $\rho = 18.2 \text{ M}\Omega \cdot \text{cm}$  at  $25^\circ\text{C}$ ) was placed between two glass plates, set 1 mm apart, to obtain gel sheets of uniform thickness 1 mm, upon cooling. Gel tablets of 3 mm diameter were cut out from the sheet with a punch (3 mm diameter Biopunch, Ted Pella Inc.) and kept in camphoric acid (CA) saturated methanol solution for more than 2 hours. Prior to experiments, gel tablets were rinsed in DI water to precipitate CA in the gel matrix; henceforth these gel tablets are referred to as *cboats*.

The basic experimental setup consisted of a 25 cm diameter glass petri dish filled to a height of 4 cm ( $\approx 2$  liters) with DI water and placed atop an LED light tablet. A *cboat* was gently placed at the air-water interface and its motion was recorded from above using a Nikon D800E camera at 30 frames per second. The

cboat positions and velocities were calculated using image analysis programs written inhouse. We used Sodium Dodecyl Sulfate (Wako Pure Chemical Industries, Ltd., Cat. No. 196-08675) to modify the air-water interfacial tension when necessary. The surface tension was measured using the pendant drop method (OneAttention Theta tensiometer) at 25°C.

## Results and Discussion

### Mechanism of self-propulsion

CA is an organic substance which is mildly surface active and decreases the air-water interfacial tension when dissolved in water. When a cboat is placed at the air-water interface, interfacial forces cause CA molecules to spread over the surface. This spreading *cannot* continue indefinitely due to dissolution of CA in water and sets up radially symmetric CA concentration gradients (surface tension gradients) around the cboat. Ambient fluctuations spontaneously break this symmetry and sharpen the gradients leading to a net force acting on the cboat. The cboat motion ensures this asymmetry is maintained thereby permitting its continued motion. Owing to constant CA dissolution, cboat motion occurs until it exhausts CA. Although CA dissolution globally reduces the ambient fluid's surface tension, a single cboat never contains sufficient CA ( $\simeq 7$  mg) to achieve this; surface tension of CA saturated water ( $\simeq 8$  g/l) is  $\simeq 60$  dy/cm. Over the course of an experiment, water replaces CA removed from the cboat starting at the periphery and progressively proceeding radially inwards into the boat. Consequently, CA concentration at the cboat edge constantly decreases resulting in weaker interfacial tension gradients which decrease the cboat speed as time progresses (see figure 1); this bears upon results to follow and will be discussed later. The cboat speed as a function of time is fitted to an exponential decay with the decay constant,  $\tau \simeq 35$  min representing the cboat life time. Whereas a cboat could also lose CA via evaporation/sublimation, it is negligible relative to

dissolution.

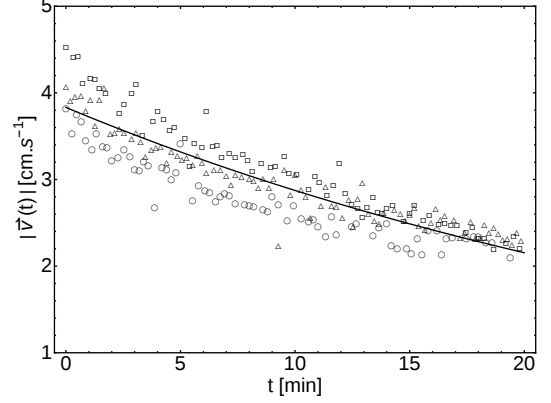


Figure 1: Lifetime of the cboat.

### Oscillatory Motion of the cboat

Besides the continuous decrease in speed, the cboat also exhibits oscillatory dynamics on a shorter time scale (few seconds) compared to the life time (approximately an hour) of the cboat. Figure 2 shows the time traces of the cboat speed at different intervals during the course of experiment. The average speed at different intervals decreases due to the dissolution of CA in water as mentioned in previous section. The oscillations arise due to the competition between the Marangoni forces and the viscous forces. The Marangoni forces accelerate the cboat to a larger speed  $u_B$ , however the viscous forces, which scale as  $u_B^2$ , decelerate the cboat. As the cboat slows down, the Marangoni forces again accelerate the cboat. This driving and damping cycle leads to oscillations in cboat speed. When there is a balance between the driving and damping forces the cboat moves with terminal velocity, as shown in figure 2c. The amplitude of oscillations decreases and the period of oscillations increases (shown in figure 4) due to the dissolution of CA. In following section, we derived a dimensionless parameter  $\xi$  in order to qualitatively describe the oscillatory dynamics of cboat. Furthermore, the value of  $\xi$  was experimentally varied by changing the air-water interfacial tension using SDS.

The equation of motion for a cboat at the air-

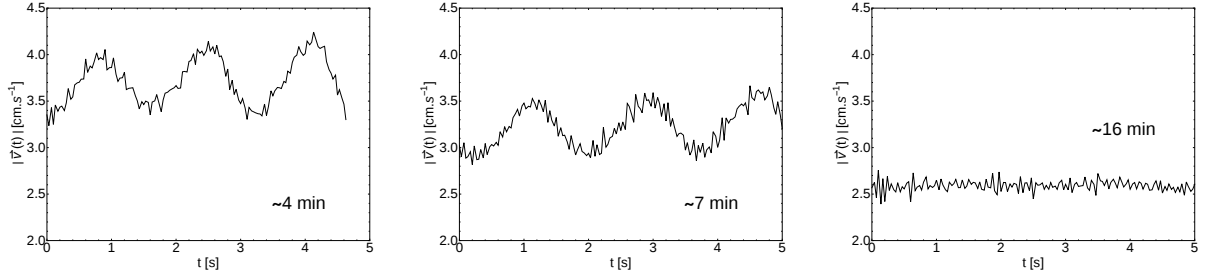


Figure 2:  $\xi > \xi_c$ ,  $\xi > \xi_c$  and  $\xi \simeq \xi_c$

water interface is given by,

$$m \frac{d\mathbf{u}_B}{dt} = -\mathbf{F}_D + \oint_C \sigma \hat{\mathbf{n}} d\mathbf{l} \quad (1)$$

$$\mathbf{F}_D \sim \rho a^2 |\mathbf{u}_B|^2 \hat{\mathbf{u}}_B$$

where,  $\mathbf{F}_D$  is the viscous drag acting on the cboat and  $a$  is the diameter of cboat. The contour integral apperaing in equation 1 is evaluated along a circular contour of radius  $R$ , whose center is at the center of the cboat, and the resultant is the force acting on the cboat due to the interfacial tenion gradients. Obviously, the value of the integral is zero when surface tension gradients are symmetric.

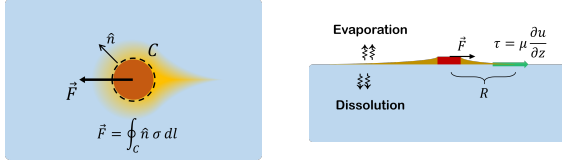


Figure 3: Schematic of cboat in motion (a) top view (b) side view obtained along a horizontal line bisecting the cboat and along the direction of motion. Viscous drag *not* shown in schematic. In case of CA, evaporation/sublimation is negligible in comparison to dissolution.

### Estimation of cboat velocity scale

For brevity, let us assume that the cboat exhibits rectilinear motion then the set of equations 1 simplifies to

$$m \frac{du_B}{dt} \simeq -\rho a^2 u_B^2 + \Delta\sigma a \quad (2)$$

where,  $\Delta\sigma$  is the interfacial tension difference in forward (or CA poor region) and backward

(or CA rich region) directions of the cboat. We can obtain a scaling for the average speed,  $U_B$  of the cboat as,

$$0 \simeq -\rho a^2 U_B^2 + \Delta\sigma a$$

$$\Rightarrow U_B \simeq \sqrt{\frac{\Delta\sigma}{\rho a}} \quad (3)$$

Note that, the cboat velocity does not depend on the viscosity of the fluid because for the cboat system the Reynolds number is  $\simeq 100$ .

### Marangoni and Reynolds numbers for the fluid flow

At the air-water interface, the shear stress caused by the interfacial tension gradients shear the air-water interface causing the underlying fluid flow. The shear stress is balanced by the viscous stress (figure 3b).

$$\tau = \mu \frac{\partial u_M}{\partial z} \Rightarrow \frac{\partial \sigma}{\partial x} = \mu \frac{\partial u_M}{\partial z}$$

where,  $u_M$  is the fluid velocity at the air-water interface. The Marangoni number,  $\text{Ma}$  which is defined as the ratio of interfacial tension forces and viscous forces, is given by

$$\text{Ma} = \frac{\Delta\sigma \delta}{U_M \mu L} \quad (4)$$

where,  $\frac{\Delta\sigma}{L}$  is the interfacial tension gradient shearing the interface over the length,  $L$  of the interface,  $U_M$  is the characteristic flow velocity,  $\delta$  is the boundary layer thickness and  $\mu$  is the dynamic viscosity of the fluid. The Reynolds number,  $\text{Re}$  corresponding to the fluid flow is

given by,

$$\text{Re} = \frac{\rho U_M L}{\mu} \quad (5)$$

Obtaining a scaling expression for the flow velocity,  $U_M$  is cumbersome; instead one can eliminate  $U_M$  by multiplying  $\text{Ma}$  and  $\text{Re}$ , which yields,

$$\text{Ma} \cdot \text{Re} = \frac{\Delta\sigma}{\mu^2} \rho \delta = \frac{\delta}{l_M} \quad (6)$$

where,  $l_M = \frac{\mu^2}{\Delta\sigma \rho}$  is defined as the Marangoni characteristic length scale. In order to achieve Marangoni flow,  $\text{Ma} \sim 1$  and the flow to be laminar  $\text{Re} < 1$ , which implies the boundary layer thickness,  $\delta < l_M$  the Marangoni characteristic length scale.

### Dimensionless parameter, $\xi$

We can define a dimensionless parameter using the natural length scales in the system Marangoni characteristic length,  $l_M$  and the diameter of the cboat,  $a$

$$\xi = \frac{a}{l_M} = \frac{\Delta\sigma \rho a}{\mu^2} \quad (7)$$

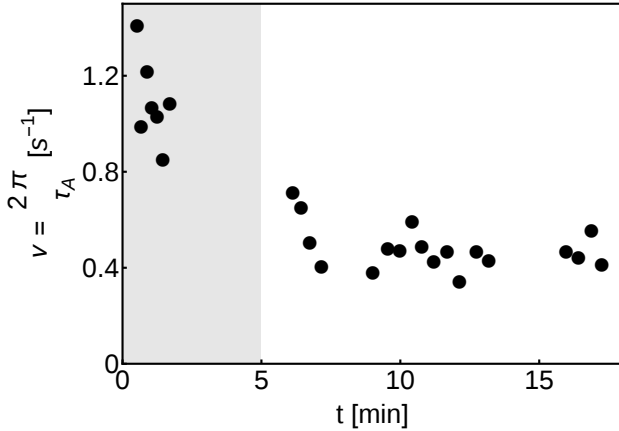


Figure 5: Frequency of oscillation vs. time. Grayed out area is the transient phase during which excess CA present on the surface of the cboat.

We define a critical value  $\xi_c$  for the parameter  $\xi$  at which the cboat moves with terminal velocity. The critical value  $\xi_c \simeq 5625$  is estimated from the experimental data in figure 2c.

Naturally, the dimensionless parameter,  $\xi$  constantly decreases during the experiment due to the dissolution of CA in water. However, we varied  $\xi$  by modifying the air-water interfacial tension using SDS. Figure 4 shows the speed traces of a cboat at different intervals of time when the air-water interfacial tension is decreased to 65 dy/cm. We observe that, the average speed of the cboat at different intervals decreases and the period of the oscillations increases. Another subtle observation is the distance travelled by the cboat, given by the area under the speed vs. time curves, between oscillations is approximately equal to the distance,  $R$  out to which CA molecules are spread by the Marangoni flow and beyond  $R$ , CA concentration is zero due to dissolution. During the course of experiment  $R$  constantly decreases due to dissolution of CA in water. The period of oscillation is governed by the advection time scale,  $\tau_A \sim \frac{R}{U_M}$ , which is the time taken by a CA molecule to get advected from the periphery of the cboat to a distance  $R$  and  $U_M$  is the Marangoni flow velocity. Figure 5 shows the frequency of oscillation  $\nu = \frac{2\pi}{\tau_A}$  during the course of the experiment performed at  $\sigma = 65$  dy/cm. The grayed out region is the transient phase which is a result of quick dissolution of CA particles which are loosely adhered to the surface of cboat i.e. which are not embedded in the gel matrix. Past the transient phase, frequency of oscillation constantly decreases due to dissolution of CA in water. Since the cboat is mostly not moving (figure 4) during the course of the experiment the dissolution rate is solely limited by diffusion of CA molecules in water considerably increasing the life time of cboat in comparison to a constantly moving cboat (figure 2). As a result we don't observe considerable change in the frequency during the course of the experiment. When the air-water interfacial tension is decreased to such an extent beyond which dissolution of CA in water has *no* effect on the air-water interfacial results in *no* motion of cboat. Figure 6 shows the plots of cboat speed versus time at different air-water interfacial tensions. As shown in figure 6c, when  $\sigma = 59$  dy/cm, cboat's motion ceases; note that the observed non-zero speed is due to the drift of cboat be-

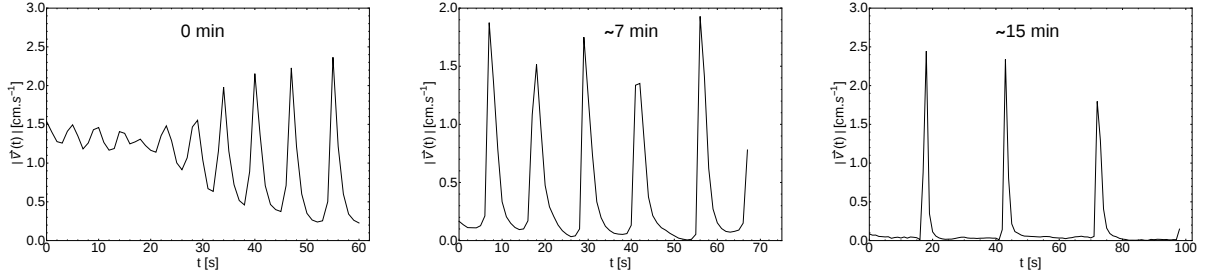


Figure 4:  $\xi \simeq \xi_c$ ,  $\xi < \xi_c$  and  $\xi \ll \xi_c$

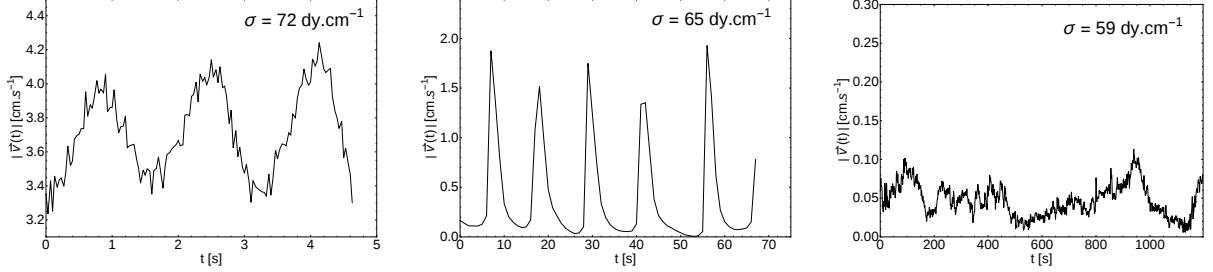


Figure 6:  $\xi > \xi_c$ ,  $\xi \simeq \xi_c$  and  $\xi < \xi_c$

cause ambient fluctuations.

## Summary

We presented a simple system of self-propelling cboat at the air-water interface. A cboat, when placed at the air-water interface, is spontaneously set in motion by the interfacial tension gradients. The interfacial tension gradients are set up by the CA molecules which decrease the surface tension of water. The cboat speed continuously decreases with time due to the dissolution of CA in water. We fitted the cboat to an exponential decay in time to obtain the life time of the cboat  $\tau \sim 35$  min. Furthermore, we observed oscillations in the cboat speed at shorter time scales than the life time of the cboat. These oscillations occur as a result of competition between the driving (interfacial tension) forces and damping (viscous drag) forces. We described the oscillations using a dimensionless parameter  $\xi$  which quantifies the relative strengths of the driving and damping forces. We experimentally found a critical value,  $\xi_c \simeq 5625$  at which the cboat moves with terminal velocity. We varied  $\xi$  by changing the air-water interfacial tension using SDS. The oscillation frequency is governed by the advection time scale  $\tau_A \sim \frac{R}{U_M}$ , which is the

time required for a CA molecule to be advected by the Marangoni flow to a distance  $R$ .

**Acknowledgement** VSA, DKS, and MMB were supported by the OIST Graduate University with subsidy funding from the Cabinet Office, Government of Japan. MMB acknowledges L. Mahadevan for introducing the camphor boat system and subsequent scientific discussions, and D. Vu Anh for help with preliminary experiments.

## References

- (1) Chaudhury, M. K.; Whitesides, G. M. *Science* **1992**, *256*, 1539–1541.
- (2) Sharma, R.; Chang, S. T.; Veleev, O. D. *Langmuir* **2012**, *28*, 10128–10135.
- (3) Thutupalli, S.; Seemann, R.; Herminghaus, S. *New Journal of Physics* **2011**, *13*.
- (4) Kohira, M. I.; Hayashima, Y.; Nagayama, M.; Nakata, S. *Langmuir* **2001**, *17*, 7124–7129.