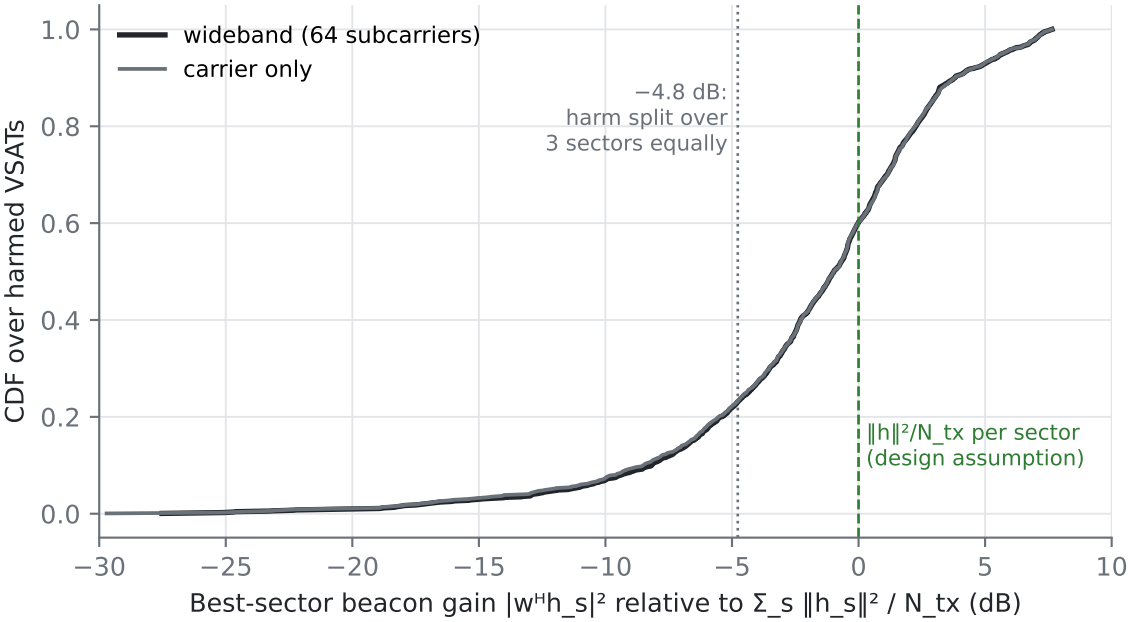
wideband (64 subcarriers)
carrier only
−4.8 dB:
harm split over
3 sectors equally
‖h‖²/N_tx per sector
(design assumption)
CDF over harmed VSATs
1.0
0.8
0.6
0.4
0.2
0.0
−30
−25
−20
−15
−10
−5
0
5
10
Best-sector beacon gain |wᴴh_s|² relative to Σ_s ‖h_s‖² / N_tx (dB)