BAB 2. TCP/IP Model

2.1 Tujuan

- Mahasiswa mampu melakukan identifikasi transmisi data menggunakan model TCP/IP
- Mahasiswa mampu melakukan identifikasi layer dari model TCP/IP - Mahasiswa mampu menggunakan aplikasi untuk mengidentifikasi data dari model TCP/IP

2.2 Dasar Teori

2.2.1 OSI Layer

OSI adalah referensi komunikasi dari Open System Interconnection. OSI model digunakan sebagai referensi untuk membahas spesifikasi protokol. OSI model terdiri dari 7 layer seperti pada tabel 1.

Layer #	Nama	Unit Enkapsulasi	Deskripsi/Fungsi
7	Application	Data	Mendefinisikan pelayanan (services) komunikasi pada suatu aplikasi
6	Presentation	Data	Mendefinisikan format data
5	Session	Data	Mendefinisikan memulai, pengontrolan dan mengakhiri komunikasi
4	Transport	Segment	Mendefinisikan jenis pengiriman
3	Network	Paket	Mendefinisikan pengiriman dari titik ke titik.
2	Data Link	Frame	Mendefinisikan cara pengaturan pengiriman data
1	Physical	bit	Mendifinisikan bentuk interface dari sebuah media transmisi

Tabel 1. OSI Layer


Dimana setiap layer memiliki fungsi dan contoh masing-masing.

2.2.2 TCP/IP Model

TCP/IP (singkatan dari Transmission Control Protocol/Internet Protocol), adalah gabungan dari protokol TCP dan IP sebagai sekelompok protokol yang mengatur komunikasi data dalam proses tukar-menukar data dari satu komputer ke komputer lain di dalam jaringan Internet yang akan memastikan pengiriman data sampai ke alamat yang dituju. Protokol ini tidaklah dapat berdiri sendiri, karena memang protokol ini berupa kumpulan protokol (Protocol Suite).

Arsitektur TCP/IP tidaklah berbasis OSI Layer, tetapi menggunakan model referensi DARPA. Seperti pada gambar 11., TCP/IP mengimplementasikan arsitektur berlapis yang terdiri atas empat lapis. Empat lapis ini, dapat dipetakan terhadap model OSI

layer. Empat lapis ini, disebut juga DARPA Model atau DOD Model.

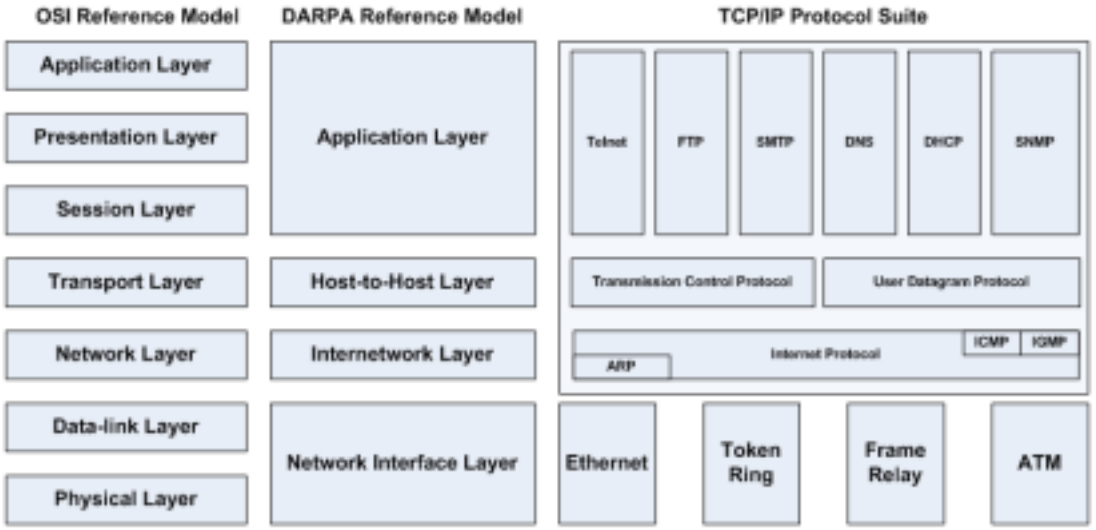

Gambar 11. OSI Layer vs TCP/IP Protocol Suite.

2.3 Pengenalan Aplikasi

2.3.1 Wireshark

Wireshark adalah aplikasi penganalisa paket jaringan (Network Packet Analyzer). Sebuah software penganalisa paket jaringan yang bekerja dengan cara menangkap paket jaringan dan mencoba untuk menampilkan data paket yang tertangkap dengan detail.

Wireshark bersifat open source.

Contoh penggunaan wireshark:
- Administrator jaringan menggunakan untuk melakukan penangan masalah jaringan - Network security engineer menggunakan untuk memeriksa keamanan jaringan - Developer menggunakan untuk melakukan debug pada implementasi protokol - Umum digunakan untuk mempelajari internal protokol jaringan

Wireshark memiliki fitur:
- Tersedia untuk UNIX dan Windows.
- Menangkap paket data langsung dari network interface.
- Tampilan paket dengan informasi protokol yang sangat rinci.
- Open dan Save data paket yang dicapture.
- Import dan Eksport paket data dari dank e banyak program capture lainnya. - Menyaring paket data dengan berbagai macam kriteria.
- Warnai layar paket berdasarkan filter.

2.3.2 Cara penggunaan Wireshark

Langkah-langkah menggunakan wireshark


1. Klik ikon…




2. Kemudian akan tampil aplikasi wireshark dengan diawali spash screen.




3. Tampilan awal program Wireshark.

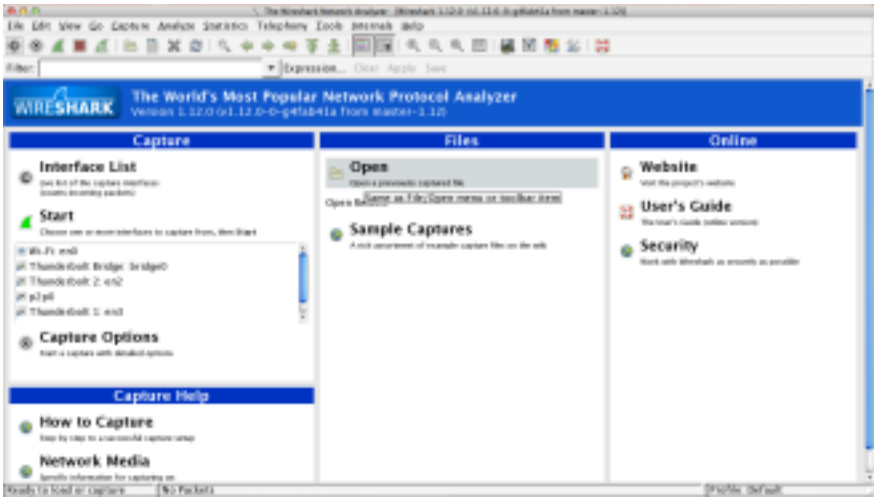


4. Keterangan menu wireshark.

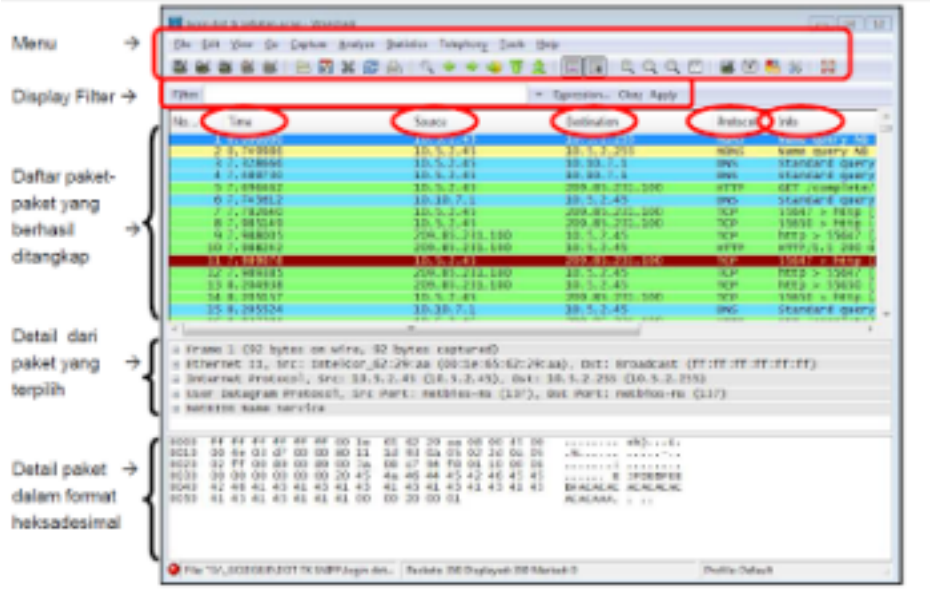


5. Melakukan CAPTURE data menggunakan wireshark. Pilih menu INTERFACE.

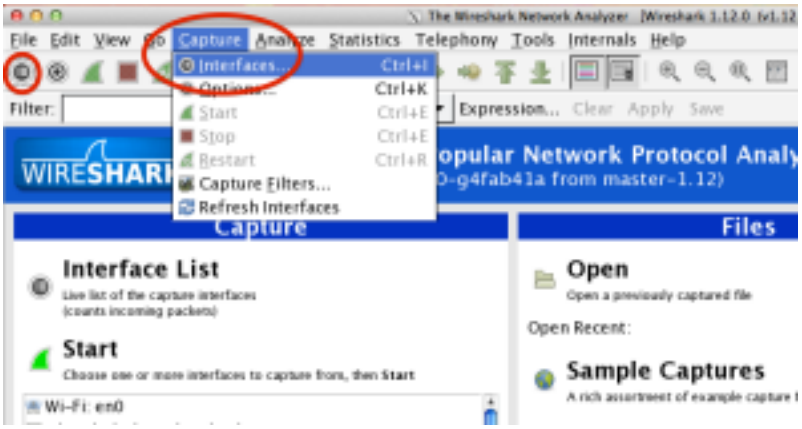

6. Pilih interface yang kita gunakan, kemudian klik start.

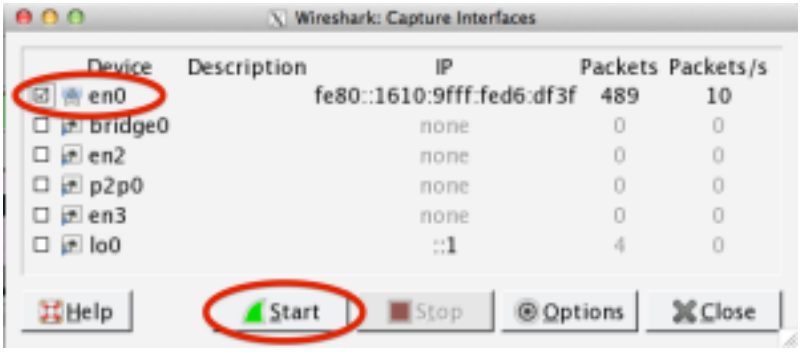

7. Setelah mengaktifkan interfaces, Wireshark akan beraksi membaca semua data yang berada di jaringan.

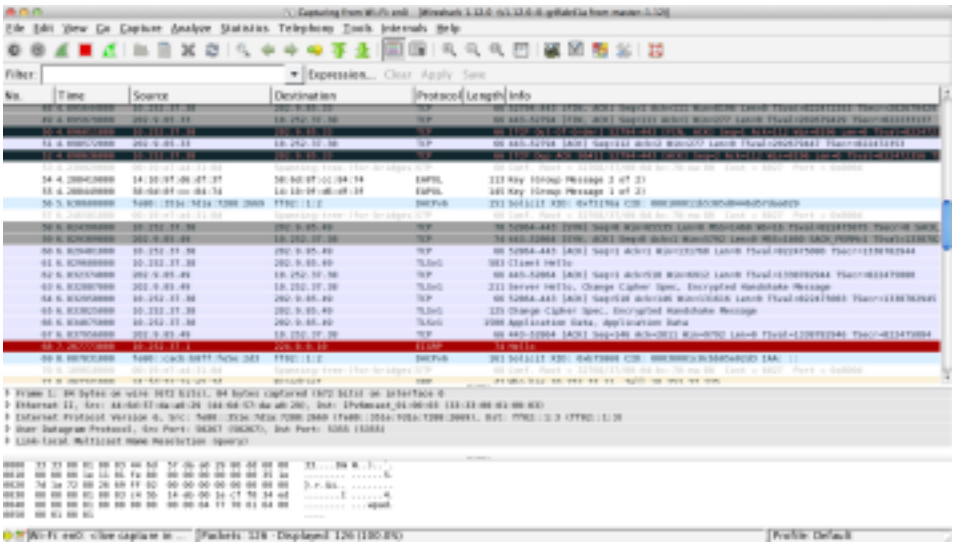


Terlihat banyak data yang dapat dicapture.

Keterangan:


Source Alamat IP pengirim
Destination Alamat IP tujuan
Protocol Jenis protokol yang digunakan, seperti TCP, DHCP, dll
Length Panjang data yang dikirimkan

Info Informasi isi data yang dikirimkan

8. Ketikkan ICMP pada filter box untuk melakukan penyaringan data yang akan ditampilkan sehingga hanya data PING yang akan ditampilkan.

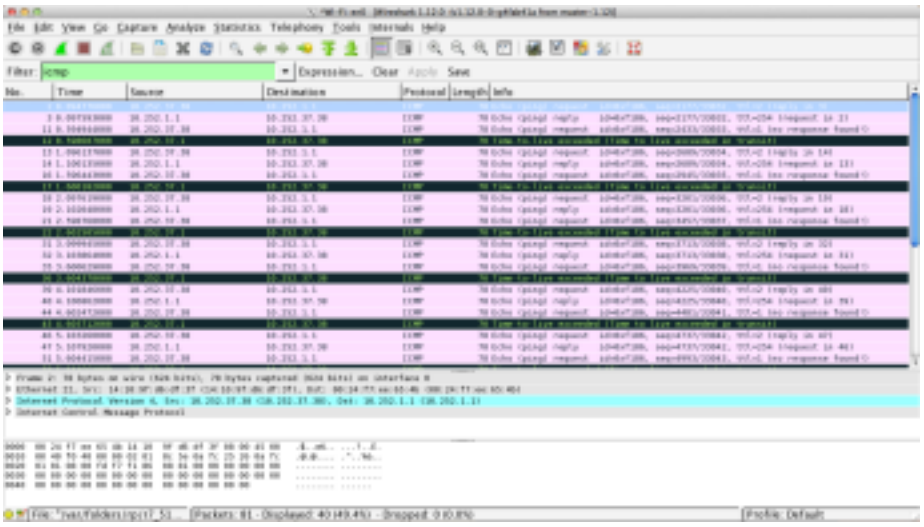

9. Penjelasan data

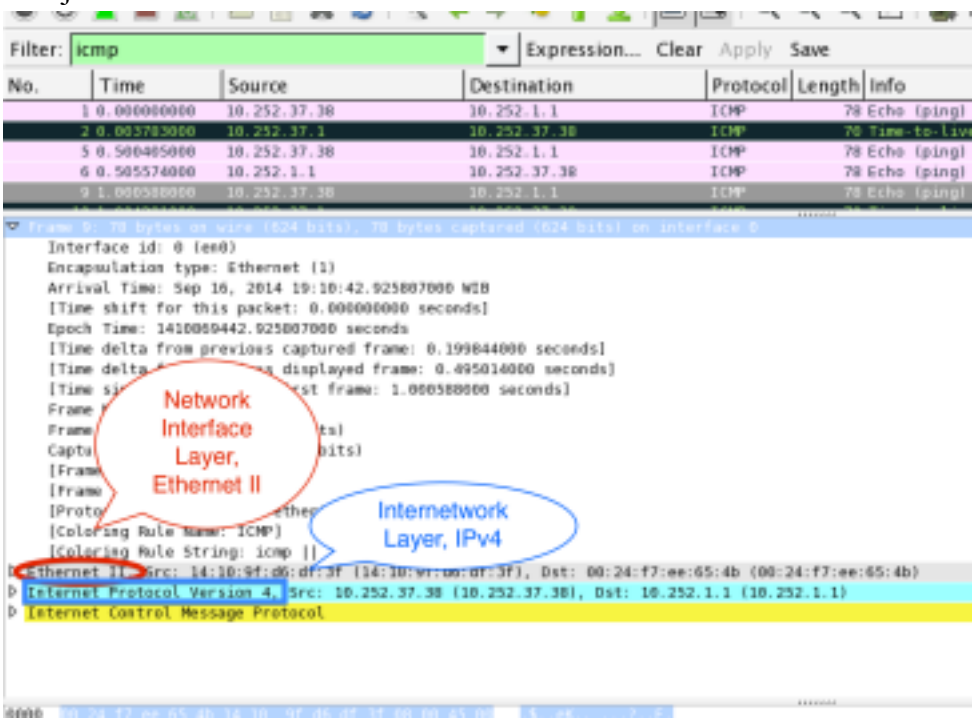

2.4 Persiapan Praktikum

1. Modul praktikum
2. PC yang dilengkapi dengan aplikasi Wireshark
3. Jaringan aktif
4. Lembar Laporan Praktikum (Lampiran)
5. Koneksi LAN dan Internet

2.5 Langkah-langkah Praktikum

2.5.1 Menjalankan aplikasi wireshark

1. Mahasiswa melakukan pengecekan apakah pada PC yang dipakai sudah terinstall aplikasi wireshark ?!!

2. Apabila belum terinstall, mahasiswa harus melakukan installasi di PC yang digunakan !!!

   Untuk OS Linux Debian/Ubuntu:

   dhoto@mypc $ su
   root@mypc # apt-get install wireshark

   Untuk OSX:
   - Download wireshark dan XQuartz
   - Lakukan konfigurasi XQuartz pada wireshark

   Untuk Windows:
   - Download wireshark
   - Klik 2x pada installer wireshark

3. Klik ikon Wireshark !!!
4. Klik pada menu CAPTURE dan memilih INTERFACES.
5. Pilih interface yang akan digunakan untuk mengrekam data.
6. Klik Start.
7. Pada OS linux, jalankan aplikasi TERMINAL dan ketik perintah PING yang digunakan untuk melakukan pengecekan jaringan (tanpa tanda $): $ ping 10.252.1.1
8. Kembali ke aplikasi wireshark, hentikan rekam data dengan cara klik tombol merah pada wireshark. Ambil data untuk jenis tipe: icmp dengan cara memfilter di aplikasi wireshark dan lakukan screen shot pada tampilan wireshark yang kalian gunakan.

2.5.2 Melakukan rekam data untuk jenis protokol tertentu

1. Lakukan praktikum seperti kegiatan 2.5.1 dari nomer 4 s/d 8.
2. Ganti kegiatan pada no 7, dengan kegiatan berikut:

   a. Jalankan aplikasi terminal dan ketik perintah NSLOOKUP yang digunakan untuk mengetahui IP dari suatu tujuan (tanpa tanda $):

   $ nslookup www.pens.ac.id

   Ambil data untuk jenis tipe: dns

   b. Jalankan aplikasi web browser dan arahkan ke alamat:

   ftp://newfs.pens.ac.id

   Download salah satu data yang ada di alamat tersebut !!!

   Ambil data untuk jenis tipe: ftp

   c. Jalankan aplikasi web browser dan arahkan ke alamat:


   http://www.pens.ac.id

   Ambil data untuk jenis tipe: http

3. Untuk masing-masing kegiatan diatas, laporkan data yang telah direkam sesuai dengan layer pada TCP/IP model. Gunakan lembar **Laporan praktikum 2. TCP/IP Model**. (Lampiran)

2.6 Lampiran

Laporan praktikum 2. TCP/IP Model
Kegiatan : Analisa ICMP
Nama : Zakiyyarahma Putri Herdiansah
NRP : 5325600041

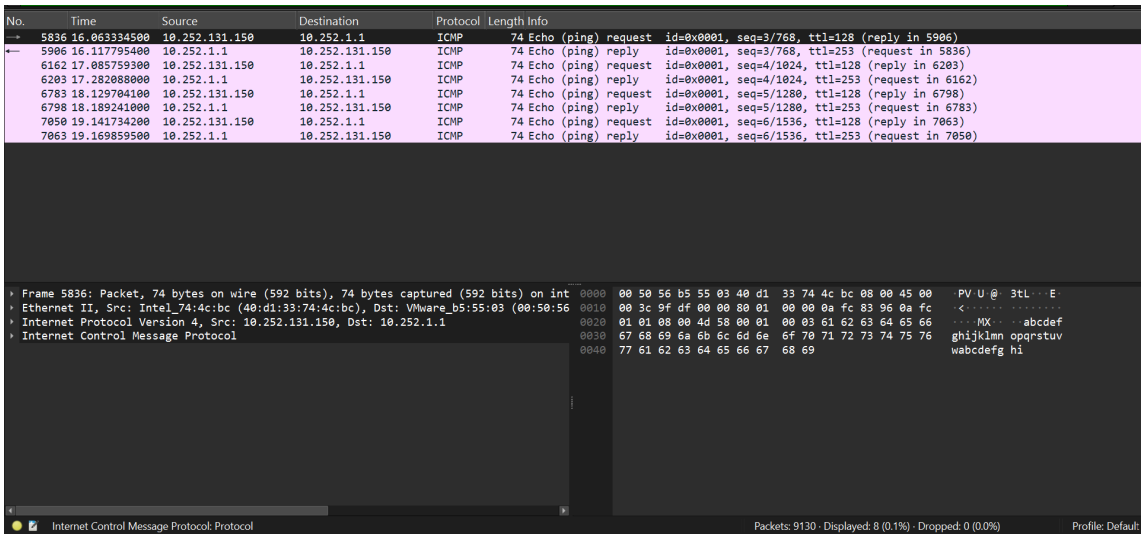

Data layer
Application layer

Tidak ada protokol aplikasi.

Host-to-host layer

Tidak ada protokol TCP/UDP.

Internetwork layer

Internet Protocol Version 4, Src: 10.252.131.150, Dst: 10.252.1.1 0100 .... = Version: 4 .... 0101 = Header Length: 20 bytes (5) Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT) 0000 00.. = Differentiated Services Codepoint: Default (0) .... ..00 = Explicit Congestion Notification: Not ECN-Capable Transport (0) Total Length: 60 Identification: 0x9fe0 (40928) 000. .... = Flags: 0x0 0... .... = Reserved bit: Not set


```
      .0.. .... = Don't fragment: Not set
      ..0. .... = More fragments: Not set
   ...0 0000 0000 0000 = Fragment Offset: 0
   Time to Live: 128
   Protocol: ICMP (1)
   Header Checksum: 0x0000 [validation disabled]
   [Header checksum status: Unverified]
   Source Address: 10.252.131.150
   Destination Address: 10.252.1.1
   [Stream index: 400]
Internet Control Message Protocol
   Type: Echo (ping) request (8)
   Code: 0
   Checksum: 0x4d57 [correct]
   [Checksum Status: Good]
   Identifier (BE): 1 (0x0001)
   Identifier (LE): 256 (0x0100)
   Sequence Number (BE): 4 (0x0004)
   Sequence Number (LE): 1024 (0x0400)
   [Response frame: 6203]
   Data (32 bytes)
      Data:
6162636465666768696a6b6c6d6e6f707172737475767761626364656667686 9
      [Length: 32]
```

Network Interface layer

```
Ethernet II, Src: Intel_74:4c:bc (40:d1:33:74:4c:bc), Dst: VMware_b5:55:03
(00:50:56:b5:55:03)
   Destination: VMware_b5:55:03 (00:50:56:b5:55:03)
      .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
      .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
   Source: Intel_74:4c:bc (40:d1:33:74:4c:bc)
      .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
      .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
   Type: IPv4 (0x0800)
   [Stream index: 622]
```

2.6 Lampiran

Laporan praktikum 2. TCP/IP Model
Kegiatan : Analisa DNS
Nama : Zakiyyarahma Putri Herdiansah
NRP : 5325600041

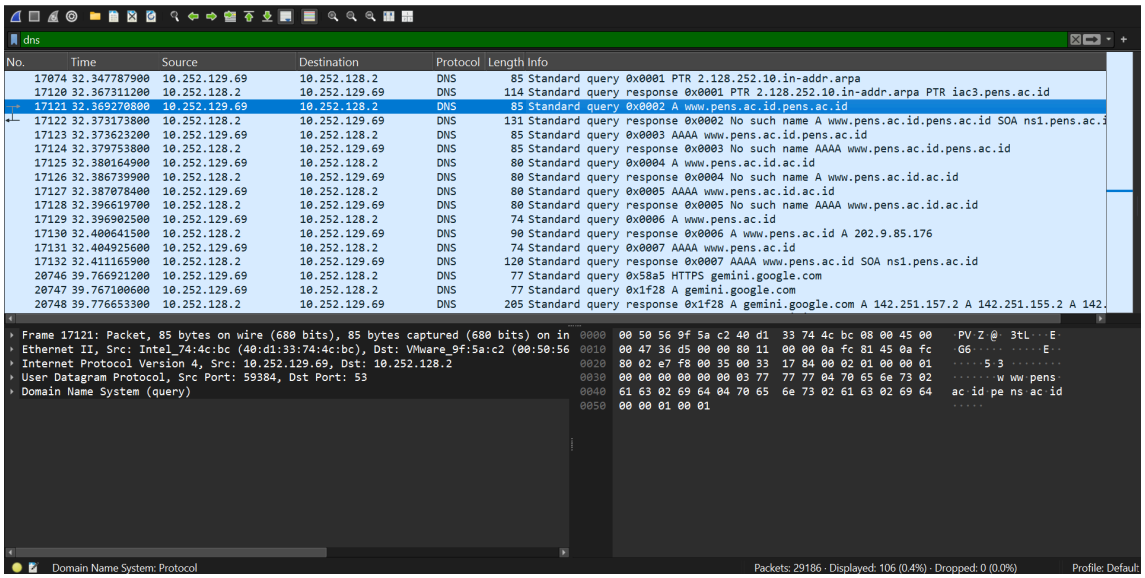

Data layer
Application layer

Domain Name System (response)
Transaction ID: 0x0007
Flags: 0x8580 Standard query response, No error
1... .... = Response: Message is a response
.000 0... .... = Opcode: Standard query (0)
.... .1.. .... = Authoritative: Server is an authority for domain
.... ..0. .... = Truncated: Message is not truncated
....1 .... = Recursion desired: Do query recursively
.... 1... .... = Recursion available: Server can do recursive queries
.... .0.. .... = Z: reserved (0)
....0. .... = Answer authenticated: Answer/authority portion was not authenticated by the server
....0 .... = Non-authenticated data: Unacceptable
.... 0000 = Reply code: No error (0)
Questions: 1
Answer RRs: 0
Authority RRs: 1
Additional RRs: 0
Queries
www.pens.ac.id: type AAAA, class IN
Name: www.pens.ac.id

```
        [Name Length: 14]
        [Label Count: 4]
        Type: AAAA (28) (IP6 Address)
        Class: IN (0x0001)
    Authoritative nameservers
      pens.ac.id: type SOA, class IN, mname ns1.pens.ac.id
        Name: pens.ac.id
        Type: SOA (6) (Start Of a zone of Authority)
        Class: IN (0x0001)
        Time to live: 300 (5 minutes)
        Data length: 34
        Primary name server: ns1.pens.ac.id
        Responsible authority's mailbox: admin.pens.ac.id
        [Responsible authority's mailbox name: admin@pens.ac.id]
        Serial Number: 2026092803
        Refresh Interval: 10800 (3 hours)
        Retry Interval: 3600 (1 hour)
        Expire limit: 604800 (7 days)
        Minimum TTL: 86400 (1 day)
    [Request In: 17131]
    [Time: 6.240300 milliseconds]
```

Host-to-host layer

```
User Datagram Protocol, Src Port: 53, Dst Port: 59389
    Source Port: 53
    Destination Port: 59389
    Length: 86
    Checksum: 0xd917 [unverified]
    [Checksum Status: Unverified]
    [Stream index: 1181]
    [Stream Packet Number: 2]
    [Timestamps]
      [Time since first frame: 6.240300 milliseconds]
      [Time since previous frame: 6.240300 milliseconds]
    UDP payload (78 bytes)
```

Internetwork layer

```
Internet Protocol Version 4, Src: 10.252.128.2, Dst: 10.252.129.69
    0100 .... = Version: 4
    .... 0101 = Header Length: 20 bytes (5)
    Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
      0000 00.. = Differentiated Services Codepoint: Default (0)
```

```
    .... ..00 = Explicit Congestion Notification: Not ECN-Capable Transport (0)
  Total Length: 106
  Identification: 0x09eb (2539)
  000. .... = Flags: 0x0
    0... .... = Reserved bit: Not set
    .0.. .... = Don't fragment: Not set
    ..0. .... = More fragments: Not set
  ...0 0000 0000 0000 = Fragment Offset: 0
  Time to Live: 64
  Protocol: UDP (17)
  Header Checksum: 0x5959 [validation disabled]
  [Header checksum status: Unverified]
  Source Address: 10.252.128.2
  Destination Address: 10.252.129.69
  [Stream index: 327]
```

Network Interface layer


```
Ethernet II, Src: VMware_b5:55:03 (00:50:56:b5:55:03), Dst: Intel_74:4c:bc
(40:d1:33:74:4c:bc)
  Destination: Intel_74:4c:bc (40:d1:33:74:4c:bc)
    .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
    .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
  Source: VMware_b5:55:03 (00:50:56:b5:55:03)
    .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
    .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
  Type: IPv4 (0x0800)
  [Stream index: 355]
```

Laporan praktikum 2. TCP/IP Model

Kegiatan : Analisa FTP

Nama : Zakiyyarahma Putri Herdiansah

NRP : 5325600041

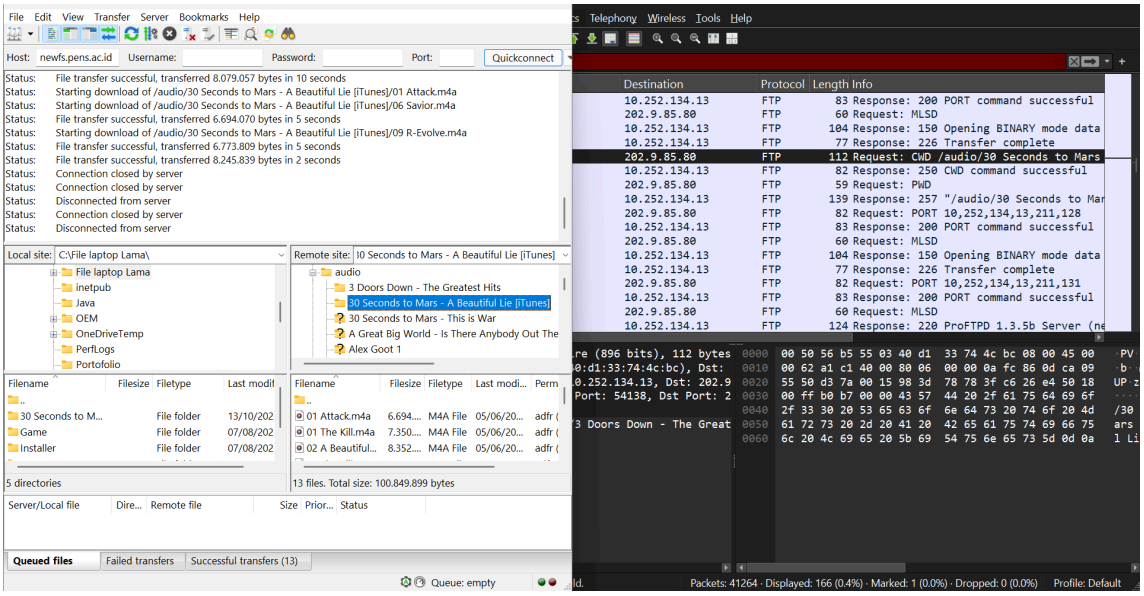

Data layer

Application layer

File Transfer Protocol (FTP)

CWD /audio/30 Seconds to Mars - A Beautiful Lie [iTunes]\r\n

Request command: CWD

Request arg: /audio/30 Seconds to Mars - A Beautiful Lie [iTunes]

[Current working directory: /audio/3 Doors Down - The Greatest Hits]

Host-to-host layer

Transmission Control Protocol, Src Port: 54138, Dst Port: 21, Seq: 326, Ack: 1381, Len: 58

Source Port: 54138

Destination Port: 21

[Stream index: 8]

[Stream Packet Number: 67]

[Conversation completeness: Complete, WITH_DATA (31)]

..0. .... = RST: Absent

...1 .... = FIN: Present

.... 1... = Data: Present

.... .1.. = ACK: Present

.... ..1. = SYN-ACK: Present

....1 = SYN: Present

[Completeness Flags: ·FDASS]

```
[TCP Segment Len: 58]
Sequence Number: 326    (relative sequence number)
Sequence Number (raw): 2554165368
[Next Sequence Number: 384    (relative sequence number)]
Acknowledgment Number: 1381    (relative ack number)
Acknowledgment number (raw): 1069950692
0101 .... = Header Length: 20 bytes (5)
Flags: 0x018 (PSH, ACK)
    000. .... .... = Reserved: Not set
    ...0 .... .... = Accurate ECN: Not set
    .... 0... .... = Congestion Window Reduced: Not set
    .... .0.. .... = ECN-Echo: Not set
    .... ..0. .... = Urgent: Not set
    .... ...1 .... = Acknowledgment: Set
    .... .... 1... = Push: Set
    .... .... .0.. = Reset: Not set
    .... .... ..0. = Syn: Not set
    .... .... ...0 = Fin: Not set
    [TCP Flags: ·····AP···]
Window: 255
[Calculated window size: 65280]
[Window size scaling factor: 256]
Checksum: 0xb0b7 [unverified]
[Checksum Status: Unverified]
Urgent Pointer: 0
[Timestamps]
    [Time since first frame in this TCP stream: 11.154338700 seconds]
    [Time since previous frame in this TCP stream: 1.094071200 seconds]
[SEQ/ACK analysis]
    [iRTT: 22.985400 milliseconds]
    [Bytes in flight: 58]
    [Bytes sent since last PSH flag: 58]
[Client Contiguous Streams: 1]
[Server Contiguous Streams: 1]
TCP payload (58 bytes)
```

Internetwork layer

```
Internet Protocol Version 4, Src: 10.252.134.13, Dst: 202.9.85.80
    0100 .... = Version: 4
    .... 0101 = Header Length: 20 bytes (5)
    Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
        0000 00.. = Differentiated Services Codepoint: Default (0)
```

```
    .... ..00 = Explicit Congestion Notification: Not ECN-Capable Transport (0)
  Total Length: 98
  Identification: 0xa1c1 (41409)
  010. .... = Flags: 0x2, Don't fragment
    0... .... = Reserved bit: Not set
    .1.. .... = Don't fragment: Set
    ..0. .... = More fragments: Not set
  ...0 0000 0000 0000 = Fragment Offset: 0
  Time to Live: 128
  Protocol: TCP (6)
  Header Checksum: 0x0000 [validation disabled]
  [Header checksum status: Unverified]
  Source Address: 10.252.134.13
  Destination Address: 202.9.85.80
  [Stream index: 260]
```

Network Interface layer


```
Ethernet II, Src: Intel_74:4c:bc (40:d1:33:74:4c:bc), Dst: VMware_b5:55:03
(00:50:56:b5:55:03)
  Destination: VMware_b5:55:03 (00:50:56:b5:55:03)
    .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
    .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
  Source: Intel_74:4c:bc (40:d1:33:74:4c:bc)
    .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
    .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
  Type: IPv4 (0x0800)
  [Stream index: 380]
```

Laporan praktikum 2. TCP/IP Model

Kegiatan : Analisa HTTP

Nama : Zakiyyarahma Putri Herdiansah

NRP : 5325600041

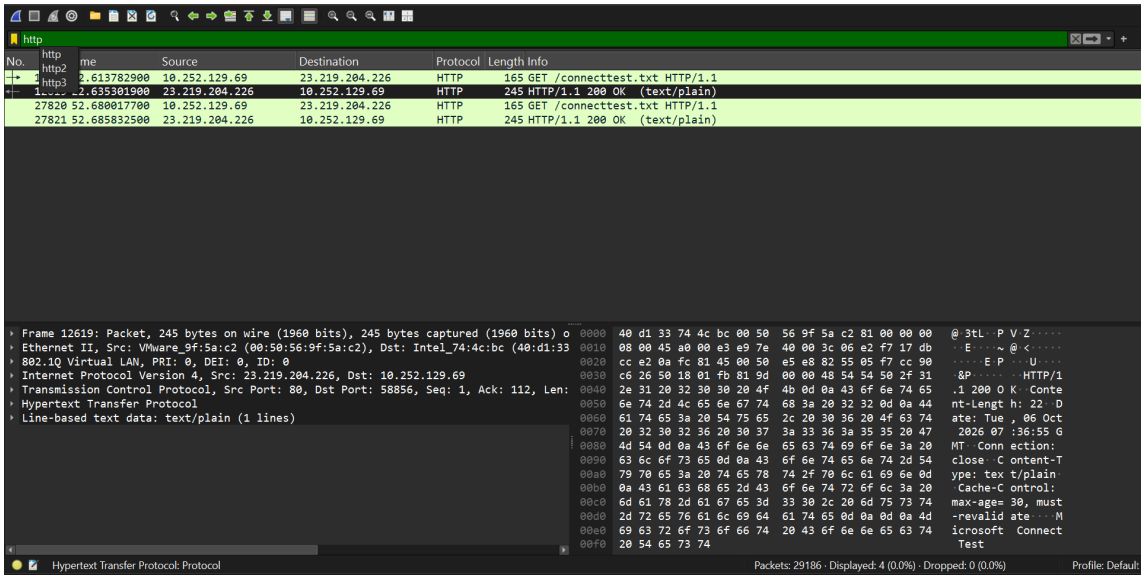

Data layer

Application layer

Hypertext Transfer Protocol
- HTTP/1.1 301 Moved Permanently\r\n
  - Response Version: HTTP/1.1
  - Status Code: 301
  - [Status Code Description: Moved Permanently]
  - Response Phrase: Moved Permanently
- Server: nginx\r\n
- Date: Tue, 13 Oct 2026 09:51:53 GMT\r\n
- Content-Type: text/html\r\n
- Content-Length: 162\r\n
  - [Content length: 162]
- Connection: keep-alive\r\n
- Location: https://www.pens.ac.id/\r\n
- \r\n
- [Request in frame: 2156]
- [Time since request: 75.000000 milliseconds]
- [Request URI: /]
- [Full request URI: http://www.pens.ac.id/]
- File Data: 162 bytes

Line-based text data: text/html (7 lines)
- <html>\r\n

```
<head><title>301 Moved Permanently</title></head>\r\n
<body>\r\n
<center><h1>301 Moved Permanently</h1></center>\r\n
<hr><center>nginx</center>\r\n
</body>\r\n
</html>\r\n
```

Host-to-host layer

```
Transmission Control Protocol, Src Port: 80, Dst Port: 53655, Seq: 1, Ack: 79, Len: 353
    Source Port: 80
    Destination Port: 53655
    [Stream index: 2]
    [Stream Packet Number: 6]
    [Conversation completeness: Complete, WITH_DATA (31)]
        ..0. .... = RST: Absent
        ...1 .... = FIN: Present
        .... 1... = Data: Present
        .... .1.. = ACK: Present
        .... ..1. = SYN-ACK: Present
        .... ...1 = SYN: Present
        [Completeness Flags: ·FDASS]
    [TCP Segment Len: 353]
    Sequence Number: 1    (relative sequence number)
    Sequence Number (raw): 2347236985
    [Next Sequence Number: 354    (relative sequence number)]
    Acknowledgment Number: 79    (relative ack number)
    Acknowledgment number (raw): 2942376992
    0101 .... = Header Length: 20 bytes (5)
    Flags: 0x018 (PSH, ACK)
        000. .... .... = Reserved: Not set
        ...0 .... .... = Accurate ECN: Not set
        .... 0... .... = Congestion Window Reduced: Not set
        .... .0.. .... = ECN-Echo: Not set
        .... ..0. .... = Urgent: Not set
        .... ...1 .... = Acknowledgment: Set
        .... .... 1... = Push: Set
        .... .... .0.. = Reset: Not set
        .... .... ..0. = Syn: Not set
        .... .... ...0 = Fin: Not set
        [TCP Flags: ·····AP···]
    Window: 502
```

```
[Calculated window size: 64256]
[Window size scaling factor: 128]
Checksum: 0x1f02 [unverified]
[Checksum Status: Unverified]
Urgent Pointer: 0
[Timestamps]
   [Time since first frame in this TCP stream: 135.979400 milliseconds]
   [Time since previous frame in this TCP stream: 3.200 microseconds]
[SEQ/ACK analysis]
   [iRTT: 49.502000 milliseconds]
   [Bytes in flight: 353]
   [Bytes sent since last PSH flag: 353]
[Client Contiguous Streams: 1]
[Server Contiguous Streams: 1]
TCP payload (353 bytes)
```

Internetwork layer

```
Internet Protocol Version 4, Src: 202.9.85.176, Dst: 10.252.134.13
   0100 .... = Version: 4
   .... 0101 = Header Length: 20 bytes (5)
   Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
      0000 00.. = Differentiated Services Codepoint: Default (0)
      .... ..00 = Explicit Congestion Notification: Not ECN-Capable Transport (0)
   Total Length: 393
   Identification: 0xc0df (49375)
   010. .... = Flags: 0x2, Don't fragment
      0... .... = Reserved bit: Not set
      .1.. .... = Don't fragment: Set
      ..0. .... = More fragments: Not set
   ...0 0000 0000 0000 = Fragment Offset: 0
   Time to Live: 63
   Protocol: TCP (6)
   Header Checksum: 0xc8cc [validation disabled]
   [Header checksum status: Unverified]
   Source Address: 202.9.85.176
   Destination Address: 10.252.134.13
   [Stream index: 226]
```

Network Interface layer

```
Ethernet II, Src: VMware_b5:55:03 (00:50:56:b5:55:03), Dst: Intel_74:4c:bc
(40:d1:33:74:4c:bc)
    Destination: Intel_74:4c:bc (40:d1:33:74:4c:bc)
        .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
        .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
    Source: VMware_b5:55:03 (00:50:56:b5:55:03)
        .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
        .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
    Type: IPv4 (0x0800)
    [Stream index: 355]
```