


Paper Cups (270 ml / 9 oz) — Print Specification

Master crest artwork, recommended placement and supplier-dependent dimensions

RECOMMENDED GENERAL PREPRESS SPECIFICATION — FINAL VALUES TO BE CONFIRMED WITH SUPPLIER

NO MANUFACTURER DIELINE HAS BEEN SUPPLIED. The flat development below is an illustration computed from ESTIMATED cup dimensions. It is not a manufacturer template and must not be used for production. FINAL DIELINE, PRINTABLE AREA, SCALE, BLEED AND SAFE AREA MUST BE CONFIRMED AGAINST THE MANUFACTURER'S TEMPLATE BEFORE PRODUCTION.

Recommended placement (illustrative)

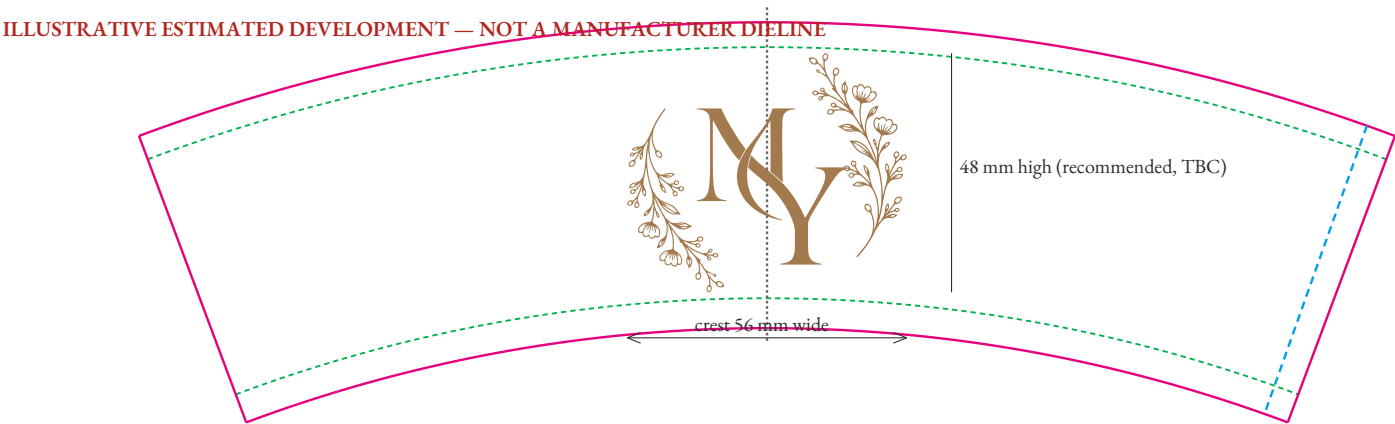

- Estimated blank outline (computed from assumed dimensions)
- Assumed no-print bands: rim curl 5 mm (top), base fold 6 mm (bottom)
- Assumed side-seam overlap 6 mm
- Front centre line
- FOIL_GOLD crest — recommended placement

What is known vs. what must be confirmed

Item	Value	Status
Cup type / capacity	Paper cup / bowl, 270 ml / 9 oz (from the pack label in the reference)	CONFIRMED
Top rim Ø	82 mm — estimated from the reference photo proportions (height $0.74 \times$ top Ø, base $0.82 \times$ top Ø) solved for 270 ml	ESTIMATE — TBC
Base Ø	68 mm	ESTIMATE — TBC
Wall height	61 mm (slant 61.4 mm)	ESTIMATE — TBC
Development geometry	Outer radius 359.6 mm, inner 298.2 mm, sector angle 41.0° (illustrative only)	ESTIMATE — TBC
Printable area	Unknown. Depends on the manufacturer's blank, rim curl, bottom fold and seam	TBC
Rim curl / base fold / seam	5 mm / 6 mm / 6 mm — placeholders for the illustration	ASSUMED — TBC
Bleed	Supplier-defined (usually specified on the dieline). The crest does not bleed, so bleed only matters if a background colour is added	TBC
Artwork	Crest = monogram + two botanical sprigs (same master as the invitation crest)	CONFIRMED
Recommended crest size	48 mm high $\times$ 56.1 mm wide on the flat. The reference shows the crest spanning roughly 90 % of the visible wall height; 48 mm leaves room for the assumed curl/fold bands	RECOMMENDED — TBC
Number of placements	The reference shows one crest facing the viewer on each cup; whether there is a second crest on the back is not visible. Default: 1 $\times$ front centre, opposite the seam	TBC
Conical distortion	Artwork on a tapered cup must be arc-warped to the dieline so it appears upright. This is done by the supplier/prepress on the final template. The files here are UNWARPED masters	TBC
Foil on cups	Many cup makers print flexo/offset with metallic ink rather than hot/cold foil. Confirm the process. If metallic ink, FOIL_GOLD becomes the metallic-ink plate (rename per supplier)	TBC
Food contact	Inks/foils on the outer wall must meet the supplier's food-contact compliance; confirm no print within the lip/rim contact zone	TBC

Reference observation

*In the cup photo the sprigs appear spaced a little wider from the monogram and wrap further around the cup than on the invitation. Perspective and curvature make an exact measurement impossible, so the flat, measurable invitation crest is used as the single master for both items. The spacing has **not** been changed. If the cup crest must match the cup photo more literally, confirm on a physical proof.*

Fine detail at 48 mm crest height

Element	Measured	vs general foil minimum
Sprig hairlines	0.25 mm typical	TBC
Monogram interlace gaps	0.13 mm	FLAG
Smallest counters	0.18 mm	FLAG

Adapting to the manufacturer dieline (no redesign)

- Place Cup_Crest_Artwork.svg (or the PDF) on the supplier's template, centred on the front centre line.
- Scale uniformly to suit the confirmed printable height. Keep the crest's aspect ratio and internal spacing.
- Let the supplier apply the conical arc-warp to their template, then approve their proof.
- Keep FOIL_GOLD as a separate spot plate (or rename to the supplier's metallic/foil naming).

Files

File	Spot colours	Raster images	Live fonts	RGB/Gray ops	Result
Cup_CMYK.pdf	— (CMYK only)	0	0	0	PASS
Cup_FOIL_GOLD.pdf	FOIL_GOLD	0	0	0	PASS

Cup_Master.svg = the illustrative development with placement, guides on a locked non-printing layer. Cup_Crest_Artwork.svg / Cup_.pdf = the crest artwork alone at the recommended size, for placement on the real dieline.*