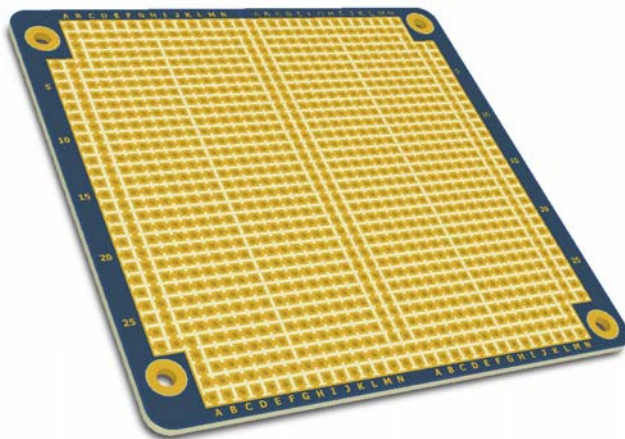## FEATURES

- PC104 form factor, stackable with all other aMG Breadboards.

- Dual column proto-board style layout.

- Special design adaptable with both thru-hole and surface mount components, as small size as 0603 (1608 metric).

- Double-sided with plated-thru holes allows soldering to either side of the board.

- 2.54mm hole spacing for DIP integrated circuits and headers.

- Separate Power and Ground rails around the board.

SPECIFICATIONS

- High-quality FR4 glass-epoxy PCB.

- 1094 square (1.9×1.9 mm) pads with 1.1 mm holes size.

- PCB size 90.17×95.89×1.6mm.

- RoHS compliant.

aMG Breadboard-B

Adaptable with both thru-hole and SMT components
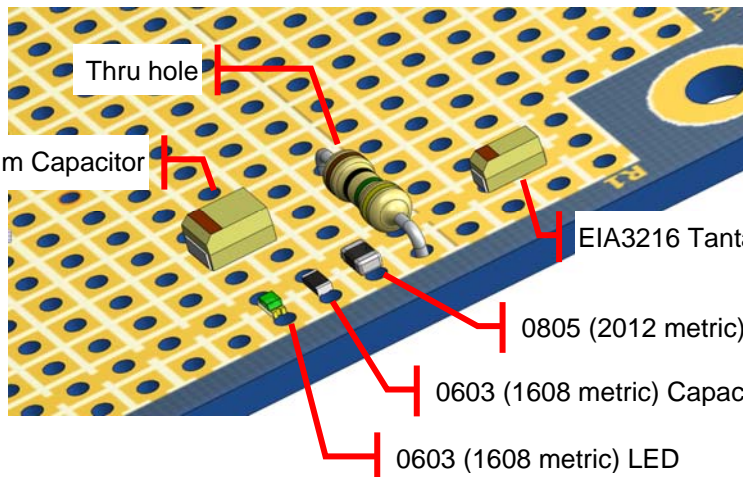
Thru hole

EIA 3528 Tantalum Capacitor

EIA3216 Tantalum Capacitor

0805 (2012 metric) Resistor

0603 (1608 metric) Capacitor

0603 (1608 metric) LED

ENGINEERING DRAWINGS (Units: mm)

Rev. 1.0 (17-Feb-11) DocID: 530004 **A**imagin