

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
			Chapter 00
			Page 1



SAFETY AND EMERGENCY PROCEDURES MANUAL

EDITION 04 - REVISION 03

17th July 2026
EFFECTIVE 31th July 2026

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	INTRODUCTION	Chapter 00
		Page 2

CHAPTER 00

INTRODUCTION

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	INTRODUCTION		Chapter 00
			Page 3

CAASL Approval letter



ශ්‍රී ලංකා සිවිල් ගුවන් සේවා අධිකාරිය
இலங்கை சிவில் விமானப் போக்குவரத்து அதிகாரசபை
Civil Aviation Authority of Sri Lanka

"සැමදි සුරැකි සහ කාර්යක්ෂම අඟහස්"
"அனைவருக்கும் ஆபத்தற்ற திறன்மிக்க ஆகாயம்"
"Safe and Efficient Skies for All"

තැ.පෙ. 56
த.பெ.இல 56
P.O. Box 56

අංක. 152/1, මිනුවන්ගොඩ පාර, කටුනායක, ශ්‍රී ලංකාව.
இல. 152/1, மினுவாங்கொடை வீதி, கட்டுநாயக்க, இலங்கை.
No. 152/1, Minuwangoda Road, Katunayake, Sri Lanka.

මගේ අංකය : OP/02/01/02 (CA/26/965)
எனது இல. :
My Ref No :

දිනය : 21st July 2026
திகதி :
Date :

Capt. Patrick Fernando
Accountable Manager
SriLankan Airlines Limited
Airline Centre, BIA,
Katunayake.

Dear Capt. Fernando,

APPROVAL OF SAFETY AND EMERGENCY PROCEDURE MANUAL – 4TH EDITION REVISION 03.

Reference to your letter OPS/CSTR/TRNG/26/217 dated 12th June 2026.

I wish to inform you that the 04th Edition Revision 03 of the Safety & Emergency Procedure (SEP) Manual for the use of Cabin Crew Members of SriLankan Airlines Limited, is hereby approved.

The contents of this manual shall not be amended without explicit approval from this office. Civil Aviation Authority of Sri Lanka may at any stage suggest amendment or addition to any of its contents, if deemed necessary.

SriLankan Airlines Limited, shall ensure all Cabin Crew Members are in possession of a current SEP Manual while on duty. Furthermore, SriLankan Airlines shall furnish copies of this manual and any amendments or revisions thereto personnel who may require the Manual for reference in the performance of their duties and to such other persons as Civil Aviation Authority of Sri Lanka deem necessary.

A copy of this letter shall form a part of the Manual.

Yours faithfully,



Captain Daminda Rambukwella
Director General of Civil Aviation &
Chief Executive Officer

ප්‍රධාන කාර්යාලය / பிரதான அலுவலகம் / Head Office :
දුරකථනය / தொலைபேசி / Tele : +94 - 11 - 2358800 ෆැක්ස් / தொலைநகல் / Fax : 94-11-2253038 ඊ-මේල් / மின்னஞ்சல் / e-mail : info@caa.lk
වෙබ් / இணையம் / web : www.caa.lk

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	INTRODUCTION	Chapter 00
		Page 4

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	INTRODUCTION	Chapter 00
		Page 5

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	INTRODUCTION		Chapter 00
			Page 6

Message from the Chief Technical Officer

SriLankan Airlines has upheld the highest safety standards since its inception and takes great pride in fostering a strong safety culture across all areas of operation. The Cabin Safety function plays a vital role in the prevention of incidents and accidents, ensuring the protection of aircraft occupants through proactive safety management practices and effective hazard identification.

The Safety and Emergency Procedures Manual is published in compliance with the requirements of the Civil Aviation Authority of Sri Lanka (CAASL), providing comprehensive guidance, regulatory direction, and operational support to cabin crew members. This manual is continuously reviewed and updated to incorporate industry best practices, ensuring alignment with evolving safety standards and operational excellence.

At the international level, the International Civil Aviation Organization (ICAO) harmonizes safety and emergency procedures through the respective National Regulatory Bodies of its Member States to maintain global consistency in aviation safety. Cabin crew training programs are developed in accordance with ICAO Doc 10002 (Doc 10002-AN/502, SLCAP 4305), which promotes a competency-based training and assessment approach. This framework ensures that cabin crew members are systematically trained, assessed, and continuously evaluated to maintain the highest level of proficiency in performing their safety and emergency responsibilities.

The CCM SEP manual conforms to the standards and recommended practices stipulated in SLCAP 4300. The ultimate objective of this manual is to ensure that safety remains the highest priority at all times, without compromise.

Signed by:

 B595A9AC296849A...

Chief Technical Officer
 15 June 2026

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	INTRODUCTION		Chapter 00
			Page 7

INTENTIONALLY LEFT BLANK

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	INTRODUCTION		Chapter 00
			Page 8

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	INTRODUCTION	Chapter 00
		Page 9

CHAPTER 00	-	INTRODUCTION
CHAPTER 01	-	ADMINISTRATION AND CONTROL OF THE MANUAL
CHAPTER 02	-	GENERAL PROCEDURES
CHAPTER 03	-	SAFETY EQUIPMENT
CHAPTER 04	-	EMERGENCY PROCEDURES
CHAPTER 05	-	AIRCRAFT SPECIFIC
CHAPTER 06	-	A320
ANNEX "A"	-	CHAPTER 6A - A321
CHAPTER 07	-	PROVISIONAL ISSUES
CHAPTER 08	-	SECURITY
CHAPTER 09	-	FIRST AID
CHAPTER 10	-	DANGEROUS GOODS REGULATIONS

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	INTRODUCTION	Chapter 00
		Page 10

Contents

2. Preamble	11
3 The Manual Structure	12
4. User Guide to the Manual.....	13
4.1 Pagination.....	13
4.2 The footer of each page contains:	13
4.3 Change Indicator (Vertical Bar).....	13
4.4 Words	13
4.5 Intentionally Blank Page	14
4.6 Record of Revisions.....	14
4.7 Manual holder	14
4.8 CCM SEP e-Manual on the Aircraft.....	14
4.9 Record of Revisions.....	14
4.10 Abbreviations	15
4.11 Definitions	17
4.12 List of Effective Pages.....	23

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	INTRODUCTION		Chapter 00
			Page 11

2. Preamble

SriLankan Airlines Safety and Emergency Procedures Manual

(4th Edition / Revision 03 – 2026)

This manual has been compiled in accordance with the requirements stipulated in SLCAP 4300.

It is structured into ten chapters, providing a systematic approach to aircraft systems, equipment, and procedures. Fleet-specific variations from the base aircraft are highlighted, with emphasis placed on operational differences. Flight and ground emergencies, as well as land and water survival procedures, are included as reference material for training purposes.

This document serves as the current operational Safety & Emergency Procedures Manual for Cabin Crew. All revisions must receive prior approval from the Director General of Civil Aviation (DGCA) before implementation. It is mandatory that every Cabin Crew Member (CCM) maintains possession of the latest updated manual.

An Administration Guide to Cabin Safety is provided separately in the Cabin Safety Training Work Procedures Manual.

The manual was compiled in collaboration with the Cabin Safety Inspectors of the Civil Aviation Authority of Sri Lanka (CAASL) and the Cabin Safety Instructors (Training & Standards) of SriLankan Airlines.

Cabin Safety remains committed to continuously enhancing safety standards.
Think smart, act safe — prevent incidents and accidents.

Any clarifications regarding procedures or statements in this manual must be directed to the Cabin Safety Training Manager.



Cabin Safety Training Manager
15 July 2026

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	INTRODUCTION		Chapter 00
			Page 12

3 The Manual Structure

The manual consists of ten chapters. The relevant chapters are organized in a detailed and methodical manner for easy reference. It guides you through regulations, policies, procedures and requirements. The end of each chapter is summarized for quick reference.

Amendments that need immediate attention, pending approval will be in chapter 7 as Provisional Issues in yellow colour pages. Cabin Safety Training Section shall upload the updated manual and inform the Crew via e-mail. Crew shall down load the updated manual from AeroDocs and retain on a device for reference and audit purposes.

CHAPTER 1 - Administration and Control of Safety and Emergency Procedures

This chapter contains the administration and control of the Safety and Emergency Procedures Manual.

CHAPTER 2 - General Procedures

This chapter is an introduction to the regulatory body, “CAASL” and covers requirements and responsibilities of Cabin Crewmembers. The chapter also consists of Flight Crew responsibilities and a detailed explanation of cabin crew duties at different phases of flight in sequence.

CHAPTER 3 - Safety Equipment

This chapter consists of all safety equipment available on board. It includes preflight / serviceability checks, operation, precautions and limitations. Diagrams of locations are included for easy reference.

CHAPTER 4 - Emergency Procedures

This chapter describes emergency procedures and duties to be performed in an emergency evacuation. The information comprises of emergency communication, evacuation procedures and post-crash survival.

CHAPTER 5 - Aircraft Specific

This chapter consist details of specific aircraft structures and systems. It includes description of cabin, passenger seats, aircraft doors slides/cabin crew seats/lavatories/galleys/emergency lighting and operation of secure flight deck door/oxygen system/seats etc.

CHAPTER 6– Single Aisle Aircraft

This chapter consist details of relevant safety equipment, systems and emergency procedures.

CHAPTER 7 - Provisional Issues

The pages of this chapter are issued in yellow. It consists of amendments that need immediate implementation. Provisional issues are not considered as revision until approved by the DGCA. Once approved, amendments shall be introduced as revisions to the relevant chapters.

CHAPTER 8 – Security

This chapter consists of aviation security and explains procedures to be followed and guidelines to be adopted with incidents on board.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	INTRODUCTION		Chapter 00
			Page 13

CHAPTER 9– First Aid

This chapter consists of procedures to be followed as a first aider in the absence of a medical practitioner. Details of the medication carried on board are included (Emergency Medical Kit (A10)/First Aid Kits).

CHAPTER 10– Transportation of Dangerous Goods by Air

This chapter consists of identifying, handling, limitations and precautions of dangerous goods. It also describes procedures in handling spillages/leakages, PED fires on board.

4. User Guide to the Manual

4.1 Pagination

The header of each page contains:

The name of the manual: **SAFETY AND EMERGENCY PROCEDURES MANUAL**

‘THE CHAPTER’

Reference to the manual

Chapter number

Edition/Issue date

Page number

4.2 The footer of each page contains:

Revision number

Revision date

Prepared by

Approved by

4.3 Change Indicator (Vertical Bar)

Located in the right outside margin, are used to highlight the location of revised or deleted information on a newly published page. With the next revision to the page, previous change indicators are deleted. Change indicators will be used on contents pages to indicate the addition of a new title or procedure, or to indicate a renamed procedure. Change indicators will not be used to indicate format or page number changes or opposite the new date on a revised page.

4.4 Words

Whenever the word “shall” is used in a sentence, there would be a process that must be followed as a requirement.

Whenever the word “should” is used in a sentence, it is a recommendation that may be followed.

“May” means that the application of a procedure or provision is optional.

For conciseness, the pronoun “he” is used throughout the text. Where appropriate, “she” should be added or substituted for “he”.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	INTRODUCTION		Chapter 00
			Page 14

4.5 Intentionally Blank Page

INTENTIONALLY LEFT BLANK will be printed on any page that contains no text or graphics.

4.6 Record of Revisions

The purpose of a revision is to make additions, deletions or corrections to the manual.

The manual may be revised periodically to provide current procedures and information not previously furnished. Each revision shall be approved by DGCA prior to implementation.

Revision is by replacement of a whole page bearing the applicable revision number and the date. The affected text will be marked by a vertical bar on the outer margin of the page.

The revised manual shall be uploaded to AeroDocs by the cabin Safety Training section. The crew shall download the revised manual and conformity shall be monitored by the Cabin Safety Training Section. The CCMs shall download the revised manual within the stipulated 14 days.

4.7 Manual holder

Shall download the updated version within the specified time Shall be conversant with the revisions

4.8 CCM SEP e-Manual on the Aircraft

The CCM SEP e-manual shall be uploaded to the electronic flight bag located in the flight deck.

The operating Purser shall ensure that an updated CCM SEP e-manual is available for immediate reference on an electronic device.

4.9 Record of Revisions

Instructions, Following details are updated and issued with each revised manual. Entry of revision date as displayed on bottom of the revised page

Chapter	Page No	Rev No	Date		Chapter	Page No	Rev No	Date

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	INTRODUCTION		Chapter 00
			Page 15

4.10 Abbreviations

The following abbreviations may be found throughout the manual. Abbreviations having very limited usage are explained in the chapter where they are used.

ABBREVIATIONS	DETAILS
AAP	Additional Attendant Panel
ABP	Able Bodied Passenger
AED	Automated External Defibrillator
AC	Aircraft
ACP	Area Call Panel
AGSR	Air/Ground Safety Report
AST/C	Assist Crew
ACARS	Airborne Communication And Reporting System
AFT	The direction towards the rear (tail) part of the aircraft
AIP	Attendant Indicator Panel
ALL/STN	All Stations
Ambu Bag	Air-Shields Manual Breathing Unit/Resuscitator
APU	Auxiliary Power Unit
ATC	Air Traffic Control
BC	Business Class
CAASL	Civil Aviation Authority of Sri Lanka
CB	Circuit Breaker
CCRF	Cabin Crew Rest Facility
CCM	Cabin Crewmember
CIC	Cabin Crew-In-Charge
CIDS	Cabin Intercommunication Data System
CMT	Cabin Management Terminal
CRF	Crew Rest Facility
CS	Cabin Supervisor
CSI	Cabin Safety Instructions
CSN	Cabin Safety Notice
CSR	Cabin Safety Report
DEU	Decoder/Encoder Unit
EASA	European Aviation Safety Agency
ECAM	Electronically Centralized Aircraft Monitoring
EMER	Emergency
EPSU	Emergency Power Supply Unit
FAP	Forward Attendant Panel
FA Kit	First Aid Kit

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	INTRODUCTION	Chapter 00
		Page 16

F/D	Flight Deck
FCOM	Flight Crew Operating Manual
FDP	Flight Duty Period
F/O	First Officer
FMGC	Flight Management Guidance Computer
F/S	Flight Steward
F/SS	Flight Stewardess
FWD	When reference is to the forward
G/S	Galley Steward
IATA	International Air Transport Association
ICAO	International Civil Aviation Organization
IFE	In-flight Entertainment
INOP	Inoperative
INT	Interphone
LCD	Liquid Crystal Display
LED	Light Emitting Diode
LHS, L/H	Left Side also referred to as Port Side
LSU	Lavatory Service Unit
LRBL	Least Risk Bomb Location
MCDU	Multipurpose Control and Display Unit
MEL	Minimum Equipment List (Developed by the operator in consultation with CAASL)
MMEL	Master Minimum Equipment List (Provided by the Manufacturer for the type)
PED	Portable Electronic Devices
PES	Passenger Entertainment System
PIM	Programming and Indication Module
PSSCL	Pre-Departure Safety and Security Check List
PSI	Pounds per Square Inch
PSIU	Passenger Service Information Unit
PSU	Passenger Service Unit
PRAM	Pre-Recorded Announcement Module
PWD	Passenger with Disability
PTT	Push To Talk
PTV	Passenger Transport Vehicle
PUR	Purser
QRC	Quick Reference Cards
RHS, R/H	Right Hand Side also referred to as starboard side
RFF	Rescue and Fire Fighting

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	INTRODUCTION		Chapter 00
			Page 17

SAR	Search And Rescue
SARP	Standard And Recommended Practices
SE:CSI(T/S)	Senior Executive: Cabin Safety Instructor (Training and Standards)
SEP	Safety Emergency Procedures
SLCAP	Sri Lanka Civil Aviation Publication
SNY	Supernumerary
STS	Silent Thirty Seconds Review
STCR	Stretcher Case
UTC	Universal Coordinated Time

4.11 Definitions

The following is a description of commonly used terms in this manual. The intent of this list is to clarify terms, and avoid miscommunication.

Able Bodied Passenger (ABP)

A person delegated to assist Cabin Crew and take over duties in case of incapacitation.

Arming

The action required to place the door slide system to the “ARMED” mode. This would ensure that the slide system will automatically deploy when the door is opened.

Authority

Authority means the Civil Aviation Authority of Sri Lanka and should be referred to as the CAASL.

Bassinet Row

This refers to the seat row in which the bassinet(s) is installed.

Bracing Position

A position adopted, when seated by all crew and passengers during an emergency landing to prevent injury resulting from forced body movement (Impact).

Buddy

Person delegated to assist fellow passengers in an emergency.

Bulkhead

Any transverse upright partition which divided the compartments in an aircraft

Cabin

Unless otherwise specified, this refers to the passenger compartment and includes the galleys and lavatories. It does not include the crew rest facility (if installed).

Revision No	01	Revision Date	01 April 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	INTRODUCTION		Chapter 00
			Page 18

Cabin Crew member

Referred to as a CCM. A trained/approved and designated person carried on a flight for the purpose of performing duties assigned by Sri Lankan Airlines or the Pilot In-Command of the aircraft, in the interest of the safety of passengers, but who shall not act as a member of the Flight Crew

Cabin Safety Instructions

Refers to cabin safety instructions which shall be issued by Cabin Safety Training Manager for all regulatory training and procedural changes pertaining to Cabin Safety and cabin crew operations

Cabin Safety Notice

Refers to Cabin Safety Notices issued by Cooperate Safety Section with regards to regulatory and procedural changes

Cabin Supervisor

Referred to as CS. A trained/approved and designated person carried on a flight for the purpose of performing duties, supervising a part of the cabin and shall be responsible to the Purser or Nominated Purser.

Code Red

Is a secret code used to enter the flight deck through the high security door. Purser shall use the Code Red in case there is no response from the flight deck.

Cross-Checking

A procedure in which a CCM counter checks a procedure carried out by another CCM
E.g. during arming and disarming of slides.

Critical Phases of Flight

Are as follows:

- Take-off run / Take-off flight path
- Final approach
- Landing, including the landing roll until leaving the active runway

Ditching - A term for an aircraft making an emergency landing on water

Direct Access - Where passengers can proceed directly to an exit without entering an aisle or passing around an obstruction.

Disarming - The action required to place the door slide system to DISARMED mode.

Dead heading Crew/Positioning Crew

Dead heading crew - A CCM positioning after concluding a flight duty turn.

Door - A hinged part of the aircraft which could be opened and closed as required.

Downwind - The direction in which the prevailing wind is blowing away from an object or person

Revision No	01	Revision Date	01 April 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	INTRODUCTION		Chapter 00
			Page 19

Exit

A secured opening in the aircraft which could be used as an escape route.

Exit Seat Row

A row of seats having direct access to an exit/s.

Flight Crew member

A licensed crew member charged with duties essential to the operation of an aircraft during flight time.

Hijack Alert

Code given by the PIC for denied entry to the Flight Deck.

Hypoxia

A condition which could develop during a decompression due to lack of oxygen.

ICAO

A specialized agency of the United Nations, ICAO was created in 1944 to promote the safety and orderly development of international civil aviation throughout the world. It sets standards and regulations necessary for aviation safety, security, efficiency and regularity, as well as for aviation environmental protection. The Organization serves as the forum for cooperation in all fields of civil aviation among its contracting states.

Line Indoctrination

Familiarization Flights Following successful completion of Initial training

Manning the Door

To position at, to defend or operate a door or exit.

MEDA Case

Refers to a person who requires medical attention.

MEDA Form

Medical Information Form. Referred to as incapacitated passenger handling advice (INCAD part 1 and part 11). Provides confidential information enabling the Group Medical Officer to assess the ability of the passenger to travel.

Oral and nasal

The nose and mouth.

Positioning Crew

A CCM been positioned to operate a sector or part of a flight.

Pilot in Command

The Pilot responsible for the operation and safety of the aircraft during the flight. The pilot designated by the operator, or in the case of general aviation, the owner, as being in command and charged with the safe conduct of the flight

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	INTRODUCTION		Chapter 00
			Page 20

Purser

A Senior CCM designated by SriLankan Airlines to be in-charge of CCMs for the flight and to be responsible for ensuring that all safety provisions are met as per the CCM SEP Manual and Standard Operating Procedures.

Quick Reference Chart (QRC)

A list of the safety equipment which is relevant to each CCM station for guidance of the crew.

Relay Briefing

A briefing carried out by the Purser / Nominated Purser in order to pass down vital information to CCMs. The method of communication may vary depending on the restrictions.

Senior Cabin Crew member

A Cabin Crew member who is certified by the DGCA to operate a said type of aircraft and has completed one year of flight duties.

Senior Executive-Cabin Safety Instructor

A Cabin Safety Instructor Certified by the DGCA to carry out regulatory training/assessments / on-Line assessments on CCMs to maintaining high standards of cabin safety.

Serious injury

1. An injury which is sustained by a person in an accident and which requires hospitalization for more than 48 hours, commencing within seven days from the date the injury was received; or
2. Results in a fracture of any bone (except simple fractures of fingers, toes or nose); or
3. Involves lacerations which cause severe haemorrhage, nerve, muscle, or tendon damage; or
4. Involves injury to any internal organ; or
5. Involves second- or third-degree burns, or any burns affecting more than 5 per cent of the body surface; or
6. Involves verified exposure to infectious substances or injurious radiation.

Silent Thirty Second Review (STS)

When seated for take-off or landing, a period of time where a Cabin Crew member reviews the responsibilities to be carried out in an emergency to evacuate passengers, which comprises of, Bracing for impact, Door operation, Evacuation commands, Evacuation route, Passenger control.

Supernumerary Cabin Crew

An Additional Cabin Crew: Travelling either for or after duty has been concluded or as an observer. Their duties, take-off and landing stations will be allocated by the Purser on a sector-by-sector basis

Supernumerary Flight Crew

Additional Flight Crew: Traveling either for or after duty has been concluded.

Supplementary Information

Additional information provided to assist the manual user.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	INTRODUCTION		Chapter 00
			Page 21

Taxi

Movement of an airplane under its own power on ground excluding the take-off and the landing.

Training Cycles

Defines the type of training and the processes in place for each individual situation of a Cabin Crew member.

Warnings, Cautions and Notes

The following levels of written advisories are used throughout the manual. An operating procedure, technique, which may result in personal injury or loss of life, if not followed. All warnings are in bold lettering and placed within a red box.

WARNINGS

Example:

WARNING: WHEN RESPIRATION RESISTANCE INCREASES, CORRECT THE FITTING OF THE MASK, CHECK THE FUNCTION OF THE EQUIPMENT BY TAKING A FEW DEEP BREATHS.

CAUTION

An operating procedure/technique, which may result in damage to equipment if not followed. All cautions are in bold lettering and placed within a amber box.

Example:

CAUTION: IT IS RECOMMENDED THAT CCMS INSPECT THE LAVATORY SMOKE DETECTOR FOR TAMPERING PRIOR TO EVERY TAKE OFF.

NOTE

An operating procedure, technique, etc., Considered essential to follow. Information contained in notes may also be safety related are in bold lettering and placed within a Gray box..

Example:

Note: A330-300 aircraft are equipped with 8 main doors which are “TYPE A” doors.

Emergency Announcements

Announcements relating to emergency are printed in bold red lettering.

Example:

“LADIES AND GENTLEMEN, YOUR ATTENTION PLEASE, THIS IS YOUR CAPTAIN,

WE PLAN TO MAKE AN EMERGENCY LANDING ON WATER IN.....MINUTES. PLEASE PAY ATTENTION TO THE CABIN CREW MEMBER’S INSTRUCTIONS AND FOLLOW THEM AT ALL TIMES.

***YOUR CO-OPERATION IS ESSENTIAL.
THANK YOU”.***

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	INTRODUCTION		Chapter 00
			Page 22

Informatory Announcements

Announcements relating to information are printed in bold black lettering.

“LADIES AND GENTLEMEN,

AS THE CAPTAIN HAS SWITCHED THE SEAT BELT SIGN, PLEASE REMAIN SEATED AND FASTEN YOUR SEAT BELTS, PLEASE REFRAIN FROM USING THE TOILETS DURING THIS PERIOD, THANK YOU”.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

4.12 List of Effective Pages

Chapter	Page No	Rev No	Date		Chapter	Page No	Rev No	Date
Chapter 00	01	03	Jul 2026		Chapter 00	40	00	Jun 2023
Chapter 00	02	00	Jun 2023					
Chapter 00	03	00	Jun 2023					
Chapter 00	04	00	Jun 2023					
Chapter 00	05	00	Jun 2023					
Chapter 00	06	03	Jul 2026					
Chapter 00	07	03	Jul 2026					
Chapter 00	08	00	Jun 2023					
Chapter 00	09	00	Jun 2023					
Chapter 00	10	03	Jul 2026					
Chapter 00	11	00	Jun 2023					
Chapter 00	12	03	Jul 2026					
Chapter 00	13	03	Jul 2026					
Chapter 00	14	03	Jul 2026					
Chapter 00	15	00	Jun 2023					
Chapter 00	16	00	Jun 2023					
Chapter 00	17	00	Jun 2023					
Chapter 00	18	01	April 2024					
Chapter 00	19	00	Jun 2023					
Chapter 00	20	00	Jun 2023					
Chapter 00	21	00	Jun 2023					
Chapter 00	22	03	Jul 2026					
Chapter 00	23	03	Jul 2026					
Chapter 00	24	03	Jul 2026					
Chapter 00	25	03	Jul 2026					
Chapter 00	26	03	Jul 2026					
Chapter 00	27	00	Jun 2023					
Chapter 00	28	00	Jul 2026					
Chapter 00	29	03	Jul 2026					
Chapter 00	30	03	Jul 2026					
Chapter 00	31	03	Jul 2026					
Chapter 00	32	03	Jul 2026					
Chapter 00	33	03	Jul 2026					
Chapter 00	34	03	Jul 2026					
Chapter 00	35	03	Jul 2026					
Chapter 00	36	00	Jun 2023					
Chapter 00	37	00	Jun 2023					
Chapter 00	38	03	Jul 2026					
Chapter 00	39	03	Jul 2026					

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

Chapter	Page No	Rev No	Date		Chapter	Page No	Rev No	Date
Chapter 02	01	00	Jun 2023		Chapter 02	40	03	Jul 2026
Chapter 02	02	00	Jun 2023		Chapter 02	41	03	Jul 2026
Chapter 02	03	03	Jul 2026		Chapter 02	42	03	Jul 2026
Chapter 02	04	03	Jul 2026		Chapter 02	43	03	Jul 2026
Chapter 02	05	03	Jul 2026		Chapter 02	44	03	Jul 2026
Chapter 02	06	03	Jul 2026		Chapter 02	45	03	Jul 2026
Chapter 02	07	03	Jul 2026		Chapter 02	46	03	Jul 2026
Chapter 02	08	03	Jul 2026		Chapter 02	47	01	April 2024
Chapter 02	09	03	Jul 2026		Chapter 02	48	03	Jul 2026
Chapter 02	10	03	Jul 2026		Chapter 02	49	03	Jul 2026
Chapter 02	11	03	Jul 2026		Chapter 02	50	01	April 2024
Chapter 02	12	03	Jul 2026		Chapter 02	51	03	Jul 2026
Chapter 02	13	00	Jun 2023		Chapter 02	52	00	Jun 2023
Chapter 02	14	00	Jun 2023		Chapter 02	53	01	April 2024
Chapter 02	15	00	Jun 2023		Chapter 02	54	00	Jun 2023
Chapter 02	16	00	Jun 2023		Chapter 02	55	03	Jul 2026
Chapter 02	17	03	Jul 2026		Chapter 02	56	03	Jul 2026
Chapter 02	18	03	Jul 2026		Chapter 02	57	03	Jul 2026
Chapter 02	19	03	Jul 2026		Chapter 02	58	03	Jul 2026
Chapter 02	20	03	Jul 2026		Chapter 02	59	01	April 2024
Chapter 02	21	03	Jul 2026		Chapter 02	60	02	Aug 2024
Chapter 02	22	03	Jul 2026		Chapter 02	61	00	Jun 2023
Chapter 02	23	03	Jul 2026		Chapter 02	62	03	Jul 2026
Chapter 02	24	03	Jul 2026		Chapter 02	63	00	Jun 2023
Chapter 02	25	03	Jul 2026		Chapter 02	64	03	Jul 2026
Chapter 02	26	03	Jul 2026		Chapter 02	65	03	Jul 2026
Chapter 02	27	03	Jul 2026		Chapter 02	66	03	Jul 2026
Chapter 02	28	03	Jul 2026		Chapter 02	67	03	Jul 2026
Chapter 02	29	03	Jul 2026		Chapter 02	68	03	Jul 2026
Chapter 02	30	03	Jul 2026		Chapter 02	69	03	Jul 2026
Chapter 02	31	00	Jun 2023		Chapter 02	70	02	Aug 2024
Chapter 02	32	00	Jun 2023		Chapter 02	71	01	April 2024
Chapter 02	33	00	Jun 2023		Chapter 02	72	03	Jul 2026
Chapter 02	34	03	Jul 2026		Chapter 02	73	01	Jul 2026
Chapter 02	35	00	Jun 2023		Chapter 02	74	03	Jul 2026
Chapter 02	36	00	Jun 2023		Chapter 02	75	00	Jun 2023
Chapter 02	37	03	Jul 2026		Chapter 02	76	00	Jun 2023
Chapter 02	38	03	Jul 2026		Chapter 02	77	03	Jul 2026
Chapter 02	39	03	Jul 2026		Chapter 02	78	03	Jul 2026

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

Chapter	Page No	Rev No	Date		Chapter	Page No	Rev No	Date
Chapter 02	79	01	April 2024		Chapter 02	118	00	Jun 2023
Chapter 02	80	00	Jun 2023		Chapter 02	119	00	Jun 2023
Chapter 02	81	03	Jul 2026		Chapter 02	120	00	Jun 2023
Chapter 02	82	00	Jun 2023		Chapter 02	121	03	Jul 2026
Chapter 02	83	00	Jun 2023		Chapter 02	122	03	Jul 2026
Chapter 02	84	03	Jul 2026		Chapter 02	123	00	Jun 2023
Chapter 02	85	03	Jul 2026		Chapter 02	124	00	Jun 2023
Chapter 02	86	00	Jun 2023		Chapter 02	125	00	Jun 2023
Chapter 02	87	00	Jun 2023		Chapter 02	126	00	Jun 2023
Chapter 02	88	00	Jun 2023		Chapter 02	127	03	Jul 2026
Chapter 02	89	03	Jul 2026		Chapter 02	128	03	Jul 2026
Chapter 02	90	03	Jul 2026		Chapter 02	129	03	Jul 2026
Chapter 02	91	03	Jul 2026		Chapter 02	130	03	Jul 2026
Chapter 02	92	03	Jul 2026		Chapter 02	131	03	Jul 2026
Chapter 02	93	00	Jun 2023		Chapter 02	132	03	Jul 2026
Chapter 02	94	03	Jul 2026		Chapter 02	133	03	Jul 2026
Chapter 02	95	00	Jun 2023		Chapter 02	134	03	Jul 2026
Chapter 02	96	00	Jun 2023		Chapter 02	135	00	Jul 2026
Chapter 02	97	03	Jul 2026		Chapter 02	136	00	Jul 2026
Chapter 02	98	03	Jul 2026		Chapter 02	137	00	Jul 2026
Chapter 02	99	03	Jul 2026		Chapter 02	138	00	Jul 2026
Chapter 02	100	00	Jun 2023		Chapter 02	139	00	Jul 2026
Chapter 02	101	03	Jul 2026		Chapter 02	140	00	Jul 2026
Chapter 02	102	03	Jul 2026		Chapter 02	141	00	Jul 2026
Chapter 02	103	03	Jul 2026		Chapter 02	142	00	Jul 2026
Chapter 02	104	03	Jul 2026		Chapter 02	143	03	Jul 2026
Chapter 02	105	03	Jul 2026		Chapter 02	144	03	Jul 2026
Chapter 02	106	03	Jul 2026					
Chapter 02	107	03	Jul 2026					
Chapter 02	108	03	Jul 2026					
Chapter 02	109	00	Jun 2023					
Chapter 02	110	00	Jun 2023					
Chapter 02	111	03	Jul 2026					
Chapter 02	112	03	Jul 2026					
Chapter 02	113	00	Jun 2023					
Chapter 02	114	03	Jul 2026					
Chapter 02	115	00	Jul 2026					
Chapter 02	116	00	Jun 2023					
Chapter 02	117	03	Jul 2026					

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	INTRODUCTION	Chapter 00
		Page 27

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

Chapter	Page No	Rev No	Date		Chapter	Page No	Rev No	Date
Chapter 03	01	00	Jun 2023		Chapter 03	40	03	Jul 2026
Chapter 03	02	01	Jun 2023		Chapter 03	41	00	Jun 2023
Chapter 03	03	03	Jul 2026		Chapter 03	42	00	Jun 2023
Chapter 03	04	03	Jul 2026		Chapter 03	43	03	Jul 2026
Chapter 03	05	03	Jul 2026		Chapter 03	44	03	Jul 2026
Chapter 03	06	00	Jun 2023		Chapter 03	45	00	Jun 2023
Chapter 03	07	00	Jun 2023		Chapter 03	46	03	Jul 2026
Chapter 03	08	00	Jun 2023		Chapter 03	47	00	Jun 2023
Chapter 03	09	00	Jun 2023		Chapter 03	48	00	Jun 2023
Chapter 03	10	00	Jun 2023		Chapter 03	49	00	Jun 2023
Chapter 03	11	03	Jul 2026		Chapter 03	50	00	Jun 2023
Chapter 03	12	00	Jun 2023		Chapter 03	51	03	Jul 2026
Chapter 03	13	00	Jun 2023		Chapter 03	52	03	Jul 2026
Chapter 03	14	02	Aug 2024		Chapter 03	53	03	Jul 2026
Chapter 03	15	03	Jul 2026		Chapter 03	54	00	Jun 2023
Chapter 03	16	03	Jul 2026		Chapter 03	55	03	Jul 2026
Chapter 03	17	00	Jun 2023		Chapter 03	56	00	Jun 2023
Chapter 03	18	00	Jun 2023		Chapter 03	57	03	Jul 2026
Chapter 03	19	00	Jun 2023		Chapter 03	58	00	Jun 2023
Chapter 03	20	00	Jun 2023		Chapter 03	59	03	Jul 2026
Chapter 03	21	00	Jun 2023		Chapter 03	60	03	Jul 2026
Chapter 03	22	00	Jun 2023		Chapter 03	61	00	Jun 2023
Chapter 03	23	00	Jun 2023		Chapter 03	62	00	Jun 2023
Chapter 03	24	00	Jun 2023					
Chapter 03	25	00	Jun 2023					
Chapter 03	26	00	Jun 2023					
Chapter 03	27	00	Jun 2023					
Chapter 03	28	00	Jun 2023					
Chapter 03	29	00	Jun 2023					
Chapter 03	30	00	Jun 2023					
Chapter 03	31	03	Jul 2026					
Chapter 03	32	03	Jul 2026					
Chapter 03	33	00	Jun 2023					
Chapter 03	34	00	Jun 2023					
Chapter 03	35	00	Jun 2023					
Chapter 03	36	00	Jun 2023					
Chapter 03	37	01	April 2024					
Chapter 03	38	00	Jun 2023					
Chapter 03	39	01	April 2024					

Chapter	Page No	Rev No	Date		Chapter	Page No	Rev No	Date
Chapter 04	01	00	Jun 2023		Chapter 04	40	00	Jun 2023
Chapter 04	02	00	Jun 2023		Chapter 04	41	00	Jun 2023
Chapter 04	03	03	Jul 2026		Chapter 04	42	03	Jul 2026
Chapter 04	04	03	Jul 2026		Chapter 04	43	03	Jul 2026
Chapter 04	05	03	Jul 2026		Chapter 04	44	00	Jun 2023
Chapter 04	06	03	Jul 2026		Chapter 04	45	03	Jul 2026
Chapter 04	07	03	Jul 2026		Chapter 04	46	03	Jul 2026
Chapter 04	08	03	Jul 2026		Chapter 04	47	00	Jun 2023
Chapter 04	09	03	Jul 2026		Chapter 04	48	00	Jun 2023
Chapter 04	10	00	Jun 2023		Chapter 04	49	03	Jul 2026
Chapter 04	11	03	Jul 2026		Chapter 04	50	03	Jul 2026
Chapter 04	12	00	Jun 2023		Chapter 04	51	00	Jun 2023
Chapter 04	13	03	Jul 2026		Chapter 04	52	00	Jun 2023
Chapter 04	14	00	Jun 2023		Chapter 04	53	00	Jun 2023
Chapter 04	15	00	Jun 2023		Chapter 04	54	00	Jun 2023
Chapter 04	16	03	Jul 2026		Chapter 04	55	03	Jul 2026
Chapter 04	17	00	Jun 2023		Chapter 04	56	03	Jul 2026
Chapter 04	18	00	Jun 2023		Chapter 04	57	03	Jul 2026
Chapter 04	19	00	Jun 2023		Chapter 04	58	01	April 2024
Chapter 04	20	00	Jun 2023		Chapter 04	59	00	Jun 2023
Chapter 04	21	00	Jun 2023		Chapter 04	60	03	Jul 2026
Chapter 04	22	00	Jun 2023		Chapter 04	61	00	Jun 2023
Chapter 04	23	01	April 2024		Chapter 04	62	03	Jul 2026
Chapter 04	24	03	Jul 2026		Chapter 04	63	03	Jul 2026
Chapter 04	25	00	Jun 2023		Chapter 04	64	03	Jul 2026
Chapter 04	26	00	Jun 2023		Chapter 04	65	03	Jul 2026
Chapter 04	27	00	Jun 2023		Chapter 04	66	03	Jul 2026
Chapter 04	28	00	Jun 2023		Chapter 04	67	03	Jul 2026
Chapter 04	29	03	Jun 2023		Chapter 04	68	00	Jun 2023
Chapter 04	30	00	Jun 2023		Chapter 04	69	00	Jun 2023
Chapter 04	31	00	Jul 2026		Chapter 04	70	00	Jun 2023
Chapter 04	32	00	Jun 2023		Chapter 04	71	00	Jun 2023
Chapter 04	33	00	Jun 2023		Chapter 04	72	00	Jun 2023
Chapter 04	34	01	April 2024		Chapter 04	73	03	Jul 2026
Chapter 04	35	03	Jul 2026		Chapter 04	74	00	Jun 2023
Chapter 04	36	00	Jun 2023		Chapter 04	75	00	Jun 2023
Chapter 04	37	03	Jul 2026		Chapter 04	76	00	Jun 2023
Chapter 04	38	00	Jun 2023		Chapter 04	77	00	Jun 2023
Chapter 04	39	03	Jul 2026		Chapter 04	78	00	Jun 2023

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

SAFETY AND EMERGENCY PROCEDURES MANUAL

[illegible]

Chapter	Page No	Rev No	Date		Chapter	Page No	Rev No	Date
Chapter 05	01	00	Jun 2023		Chapter 05	40	00	Jun 2023
Chapter 05	02	00	Jun 2023		Chapter 05	41	03	Jul 2026
Chapter 05	03	03	Jul 2026		Chapter 05	42	00	Jun 2023
Chapter 05	04	03	Jul 2026		Chapter 05	43	00	Jun 2023
Chapter 05	05	03	Jul 2026		Chapter 05	44	00	Jun 2023
Chapter 05	06	03	Jul 2026		Chapter 05	45	00	Jun 2023
Chapter 05	07	03	Jul 2026		Chapter 05	46	02	Aug 2024
Chapter 05	08	03	Jul 2026		Chapter 05	47	03	Jul 2026
Chapter 05	09	03	Jul 2026		Chapter 05	48	03	Jul 2026
Chapter 05	10	03	Jul 2026		Chapter 05	49	00	Jun 2023
Chapter 05	11	00	Jun 2023		Chapter 05	50	00	Jun 2023
Chapter 05	12	00	Jun 2023		Chapter 05	51	03	Jul 2026
Chapter 05	13	00	Jun 2023		Chapter 05	52	00	Jun 2023
Chapter 05	14	00	Jun 2023		Chapter 05	53	00	Jun 2023
Chapter 05	15	03	Jul 2026		Chapter 05	54	03	Jul 2026
Chapter 05	16	00	Jun 2023		Chapter 05	55	00	Jun 2023
Chapter 05	17	00	Jun 2023		Chapter 05	56	00	Jun 2023
Chapter 05	18	00	Jun 2023		Chapter 05	57	00	Jun 2023
Chapter 05	19	00	Jun 2023		Chapter 05	58	00	Jun 2023
Chapter 05	20	00	Jun 2023		Chapter 05	59	03	Jul 2026
Chapter 05	21	00	Jun 2023		Chapter 05	60	00	Jun 2023
Chapter 05	22	01	April 2024		Chapter 05	61	00	Jun 2023
Chapter 05	23	00	Jun 2023		Chapter 05	62	00	Jun 2023
Chapter 05	24	00	Jun 2023		Chapter 05	63	00	Jun 2023
Chapter 05	25	00	Jun 2023		Chapter 05	64	00	Jun 2023
Chapter 05	26	00	Jun 2023		Chapter 05	65	00	Jun 2023
Chapter 05	27	00	Jun 2023		Chapter 05	66	03	Jul 2026
Chapter 05	28	03	Jul 2026		Chapter 05	67	00	Jun 2023
Chapter 05	29	03	Jul 2026		Chapter 05	68	00	Jun 2023
Chapter 05	30	03	Jul 2026		Chapter 05	69	00	Jun 2023
Chapter 05	31	00	Jun 2023		Chapter 05	70	00	Jun 2023
Chapter 05	32	03	Jul 2026		Chapter 05	71	00	Jun 2023
Chapter 05	33	00	Jun 2023		Chapter 05	72	00	Jun 2023
Chapter 05	34	03	Jul 2026		Chapter 05	73	00	Jun 2023
Chapter 05	35	03	Jul 2026		Chapter 05	74	03	Jul 2026
Chapter 05	36	03	Jul 2026		Chapter 05	75	00	Jun 2023
Chapter 05	37	03	Jul 2026		Chapter 05	76	00	Jun 2023
Chapter 05	38	00	Jun 2023		Chapter 05	77	00	Jun 2023
Chapter 05	39	00	Jun 2023		Chapter 05	78	00	Jun 2023

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

Chapter	Page No	Rev No	Date		Chapter	Page No	Rev No	Date
Chapter 06	01	00	Jun 2023		Chapter 06	40	03	Jul 2026
Chapter 06	02	00	Jun 2023		Chapter 06	41	00	Jun 2023
Chapter 06	03	03	Jul 2026		Chapter 06	42	03	Jul 2026
Chapter 06	04	03	Jul 2026		Chapter 06	43	00	Jun 2023
Chapter 06	05	03	Jul 2026		Chapter 06	44	03	Jul 2026
Chapter 06	06	03	Jul 2026		Chapter 06	45	03	Jul 2026
Chapter 06	07	03	Jul 2026		Chapter 06	46	03	Jul 2026
Chapter 06	08	03	Jul 2026		Chapter 06	47	00	Jun 2023
Chapter 06	09	00	Jun 2023		Chapter 06	48	03	Jul 2026
Chapter 06	10	00	Jun 2023		Chapter 06	49	00	Jun 2023
Chapter 06	11	00	Jun 2023		Chapter 06	50	00	Jun 2023
Chapter 06	12	00	Jun 2023		Chapter 06	51	00	Jun 2023
Chapter 06	13	00	Jun 2023		Chapter 06	52	03	Jul 2026
Chapter 06	14	03	Jul 2026		Chapter 06	53	00	Jul 2026
Chapter 06	15	03	Jul 2026		Chapter 06	54	03	Jul 2026
Chapter 06	16	03	Jul 2026		Chapter 06	55	03	Jul 2026
Chapter 06	17	03	Jul 2026		Chapter 06	56	03	Jul 2026
Chapter 06	18	00	Jun 2023		Chapter 06	57	00	Jun 2023
Chapter 06	19	00	Jun 2023		Chapter 06	58	03	Jul 2026
Chapter 06	20	00	Jun 2023		Chapter 06	59	00	Jun 2023
Chapter 06	21	00	Jun 2023		Chapter 06	60	00	Jun 2023
Chapter 06	22	00	Jun 2023		Chapter 06	61	03	Jul 2026
Chapter 06	23	00	Jun 2023		Chapter 06	62	03	Jul 2026
Chapter 06	24	00	Jun 2023		Chapter 06	63	00	Jun 2023
Chapter 06	25	00	Jun 2023		Chapter 06	64	00	Jun 2023
Chapter 06	26	00	Jun 2023		Chapter 06	65	03	Jul 2026
Chapter 06	27	03	Jul 2026		Chapter 06	66	00	Jun 2023
Chapter 06	28	00	Jun 2023		Chapter 06	67	03	Jul 2026
Chapter 06	29	03	Jul 2026		Chapter 06	68	00	Jun 2023
Chapter 06	30	03	Jul 2026		Chapter 06	69	03	Jul 2026
Chapter 06	31	00	Jun 2023		Chapter 06	70	00	Jun 2023
Chapter 06	32	03	Jul 2026		Chapter 06	71	00	Jun 2023
Chapter 06	33	00	Jun 2023		Chapter 06	72	03	Jul 2026
Chapter 06	34	03	Jul 2026		Chapter 06	73	00	Jun 2023
Chapter 06	35	03	Jul 2026		Chapter 06	74	00	Jun 2023
Chapter 06	36	00	Jun 2023		Chapter 06	75	02	Aug 2024
Chapter 06	37	03	Jul 2026		Chapter 06	76	03	Jul 2026
Chapter 06	38	00	Jun 2023		Chapter 06	77	02	Aug 2024
Chapter 06	39	00	Jun 2023		Chapter 06	78	02	Aug 2024

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

Chapter	Page No	Rev No	Date		Chapter	Page No	Rev No	Date
Chapter 6A	01	00	Jun 2023		Chapter 6A	40	03	Jul 2026
Chapter 6A	02	00	Jun 2023		Chapter 6A	41	00	Jun 2023
Chapter 6A	03	03	Jul 2026		Chapter 6A	42	03	Jul 2026
Chapter 6A	04	03	Aug 2024		Chapter 6A	43	00	Jun 2023
Chapter 6A	05	03	Jul 2026		Chapter 6A	44	03	Jul 2026
Chapter 6A	06	03	Jul 2026		Chapter 6A	45	00	Jun 2023
Chapter 6A	07	00	Jun 2023		Chapter 6A	46	00	Jun 2023
Chapter 6A	08	03	Jul 2026		Chapter 6A	47	03	Jul 2026
Chapter 6A	09	00	Jun 2023		Chapter 6A	48	00	Jun 2023
Chapter 6A	10	00	Jun 2023					
Chapter 6A	11	00	Jul 2026					
Chapter 6A	12	00	Jun 2023					
Chapter 6A	13	00	Jun 2023					
Chapter 6A	14	03	Jul 2026					
Chapter 6A	15	03	Jul 2026					
Chapter 6A	16	03	Jul 2026					
Chapter 6A	17	00	Jun 2023					
Chapter 6A	18	03	Jul 2026					
Chapter 6A	19	03	Jul 2026					
Chapter 6A	20	00	Jun 2023					
Chapter 6A	21	00	Jun 2023					
Chapter 6A	22	00	Jun 2023					
Chapter 6A	23	03	Jul 2026					
Chapter 6A	24	00	Jun 2023					
Chapter 6A	25	03	Jul 2026					
Chapter 6A	26	02	Aug 2024					
Chapter 6A	27	03	Jul 2026					
Chapter 6A	28	00	Jun 2023					
Chapter 6A	29	00	Jun 2023					
Chapter 6A	30	03	Jul 2026					
Chapter 6A	31	03	Jul 2026					
Chapter 6A	32	03	Jul 2026					
Chapter 6A	33	03	Jul 2026					
Chapter 6A	34	00	Jun 2023					
Chapter 6A	35	00	Jun 2023					
Chapter 6A	36	03	Jul 2026					
Chapter 6A	37	00	Jun 2023					
Chapter 6A	38	03	Jul 2026					
Chapter 6A	39	00	Jun 2023					

Chapter	Page No	Rev No	Date		Chapter	Page No	Rev No	Date
Chapter 08	01	00	Jun 2023		Chapter 08	40	00	Jun 2023
Chapter 08	02	00	Jun 2023		Chapter 08	41	00	Jun 2023
Chapter 08	03	00	Jun 2023		Chapter 08	42	00	Jun 2023
Chapter 08	04	00	Jun 2023		Chapter 08	43	00	Jun 2023
Chapter 08	05	00	Jun 2023		Chapter 08	44	00	Jun 2023
Chapter 08	06	00	Jun 2023		Chapter 08	45	00	Jun 2023
Chapter 08	07	00	Jun 2023		Chapter 08	46	00	Jun 2023
Chapter 08	08	00	Jun 2023					
Chapter 08	09	00	Jun 2023					
Chapter 08	10	00	Jun 2023					
Chapter 08	11	00	Jun 2023					
Chapter 08	12	00	Jun 2023					
Chapter 08	13	00	Jun 2023					
Chapter 08	14	00	Jun 2023					
Chapter 08	15	00	Jun 2023					
Chapter 08	16	00	Jun 2023					
Chapter 08	17	00	Jun 2023					
Chapter 08	18	00	Jun 2023					
Chapter 08	19	00	Jun 2023					
Chapter 08	20	00	Jun 2023					
Chapter 08	21	00	Jun 2023					
Chapter 08	22	00	Jun 2023					
Chapter 08	23	00	Jun 2023					
Chapter 08	24	00	Jun 2023					
Chapter 08	25	00	Jun 2023					
Chapter 08	26	00	Jun 2023					
Chapter 08	27	00	Jun 2023					
Chapter 08	28	00	Jun 2023					
Chapter 08	29	00	Jun 2023					
Chapter 08	30	00	Jun 2023					
Chapter 08	31	00	Jun 2023					
Chapter 08	32	00	Jun 2023					
Chapter 08	33	00	Jun 2023					
Chapter 08	34	00	Jun 2023					
Chapter 08	35	00	Jun 2023					
Chapter 08	36	00	Jun 2023					
Chapter 08	37	00	Jun 2023					
Chapter 08	38	00	Jun 2023					
Chapter 08	39	00	Jun 2023					

Chapter	Page No	Rev No	Date		Chapter	Page No	Rev No	Date
Chapter 09	01	00	Jun 2023		Chapter 09	40	00	Jun 2023
Chapter 09	02	00	Jun 2023		Chapter 09	41	00	Jun 2023
Chapter 09	03	03	Jul 2026		Chapter 09	42	00	Jun 2023
Chapter 09	04	03	Jul 2026		Chapter 09	43	00	Jun 2023
Chapter 09	05	00	Jun 2023		Chapter 09	44	00	Jun 2023
Chapter 09	06	03	Jul 2026		Chapter 09	45	00	Jun 2023
Chapter 09	07	00	Jun 2023		Chapter 09	46	00	Jun 2023
Chapter 09	08	00	Jun 2023		Chapter 09	47	00	Jun 2023
Chapter 09	09	03	Jul 2026		Chapter 09	48	00	Jun 2023
Chapter 09	10	00	Jun 2023		Chapter 09	49	00	Jun 2023
Chapter 09	11	00	Jun 2023		Chapter 09	50	00	Jun 2023
Chapter 09	12	00	Jun 2023		Chapter 09	51	00	Jun 2023
Chapter 09	13	00	Jun 2023		Chapter 09	52	00	Jun 2023
Chapter 09	14	00	Jun 2023		Chapter 09	53	00	Jun 2023
Chapter 09	15	00	Jun 2023		Chapter 09	54	03	Jul 2026
Chapter 09	16	00	Jun 2023		Chapter 09	55	03	Jul 2026
Chapter 09	17	00	Jun 2023		Chapter 09	56	03	Jul 2026
Chapter 09	18	00	Jun 2023		Chapter 09	57	01	April 2024
Chapter 09	19	00	Jun 2023		Chapter 09	58	00	Jun 2023
Chapter 09	20	00	Jun 2023		Chapter 09	59	03	Jul 2026
Chapter 09	21	03	Jul 2026		Chapter 09	60	03	Jul 2026
Chapter 09	22	00	Jun 2023		Chapter 09	61	00	Jun 2023
Chapter 09	23	00	Jun 2023		Chapter 09	62	00	Jun 2023
Chapter 09	24	00	Jun 2023					
Chapter 09	25	00	Jun 2023					
Chapter 09	26	00	Jun 2023					
Chapter 09	27	00	Jun 2023					
Chapter 09	28	00	Jun 2023					
Chapter 09	29	00	Jun 2023					
Chapter 09	30	03	Jul 2026					
Chapter 09	31	00	Jun 2023					
Chapter 09	32	00	Jun 2023					
Chapter 09	33	00	Jun 2023					
Chapter 09	34	00	Jun 2023					
Chapter 09	35	00	Jun 2023					
Chapter 09	36	00	Jun 2023					
Chapter 09	37	00	Jun 2023					
Chapter 09	38	00	Jun 2023					
Chapter 09	39	00	Jun 2023					

Chapter	Page No	Rev No	Date		Chapter	Page No	Rev No	Date
Chapter 10	01	00	Jun 2023		Chapter 10	40	03	Jul 2026
Chapter 10	02	00	Jun 2023		Chapter 10	41	01	Jun 2023
Chapter 10	03	03	Jul 2026		Chapter 10	42	03	Jul 2026
Chapter 10	04	03	Jul 2026		Chapter 10	43	01	Jun 2023
Chapter 10	05	03	Jul 2026		Chapter 10	44	01	Jun 2023
Chapter 10	06	00	Jun 2023					
Chapter 10	07	00	Jun 2023					
Chapter 10	08	00	Jun 2023					
Chapter 10	09	00	Jun 2023					
Chapter 10	10	03	Jul 2026					
Chapter 10	11	03	Jul 2026					
Chapter 10	12	00	Jun 2023					
Chapter 10	13	01	April 2024					
Chapter 10	14	00	Jun 2023					
Chapter 10	15	00	Jun 2023					
Chapter 10	16	00	Jun 2023					
Chapter 10	17	03	Jul 2026					
Chapter 10	18	00	Jun 2023					
Chapter 10	19	00	Jun 2023					
Chapter 10	20	00	Jun 2023					
Chapter 10	21	00	Jun 2023					
Chapter 10	22	00	Jun 2023					
Chapter 10	23	03	Jul 2026					
Chapter 10	24	03	Jul 2026					
Chapter 10	25	03	Jul 2026					
Chapter 10	26	00	Jun 2023					
Chapter 10	27	00	Jun 2023					
Chapter 10	28	00	Jun 2023					
Chapter 10	29	00	Jun 2023					
Chapter 10	30	00	Jun 2023					
Chapter 10	31	00	Jun 2023					
Chapter 10	32	00	Jun 2023					
Chapter 10	33	00	Jun 2023					
Chapter 10	34	00	Jun 2023					
Chapter 10	35	00	Jun 2023					
Chapter 10	36	00	Jun 2023					
Chapter 10	37	00	Jun 2023					
Chapter 10	38	00	Jun 2023					
Chapter 10	39	03	Jul 2026					

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	INTRODUCTION	Chapter 00
		Page 40

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL	Chapter 01
		Page 1

CHAPTER 01

ADMINISTRATION AND CONTROL OF THE MANUAL

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL	Chapter 01
		Page 2

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL	Chapter 01
		Page 3

Contents

1.0 Introduction To The Manual.....	5
1.1 Providing information to cabin crew	6
1.1.1 Electronic Mail (email)	6
1.1.2 Cabin Safety Instructions and Cabin Safety Notice	6
1.1.3 Copyrights ©	6
1.1.4 Quick Reference Handbook	7
1.2 Distribution list	7
1.3 Issue Status.....	9
1.4 Changes to the manual	10
1.5 Record Of Revisions	24

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL	Chapter 01
		Page 4

INTENTIONALLY LEFT BLANK

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL		Chapter 01
			Page 5

1.0 Introduction To The Manual

Safety and Emergency Procedures Manual shall be compiled as per requirements stipulated in SLCAP 5300- Standards for Manuals and Documents.

The SriLankan Airlines Safety & Emergency Procedures Manual shall comply with SLCAP 4300 - Cabin Crewmember Manual Standard and approved by the DGCA prior to being effective to ensure the information is accurate and legible.

Cabin safety training manager shall review the contents of this manual annually and do necessary changes as per requirements stipulated in SLCAIS 002

Cabin Crewmembers shall be in possession of an updated Safety and Emergency Procedures Manual in electronic format, whenever they are engaged in flight duties as a reference guide. The SEP Manual shall be carried in the personal cabin bag of the CCM with unobstructed access. The battery of the device shall be charged to a minimum of 70% prior to the flight and the screen shall not be damaged. The recommended screen size is 7 inches or more diagonally. CCM shall ensure that their reference devices are turned on, set to aircraft mode/offline and readily accessible at all times during flight duty except during critical phases, they should refer to the information or announcements stored on these devices as necessary to ensure compliance with safety protocols and to provide accurate information to passengers

The contents of this manual pertain predominantly to Cabin Crew members and shall be printed in English. However areas such as safety equipment, emergency procedures, survival and first aid which are relevant to Flight Crew members are included as well. Hence, copies of this manual are distributed to the management Pilots as depicted in the distribution list.

It is the responsibility of the individual Crew member to ensure that he is in possession of the most current digital copy of the SEP manual during flight duty and same needs to be downloaded from AeroDocs. CCMs shall not Copy or download the SEP Manual from Social Media platforms/Airdrop/Bluetooth/Pen drives/E-mail or any other mean as it will not register CCMs name on the system. Failure to do so will result in disciplinary action being taken against the CCM.

Joint training programs shall be carried out along with Flight Crew members on selected training programs for better synchronization of safety related duties.

The contents of the said manual shall not be communicated or discussed with persons outside SriLankan Airlines.

Holders of the manuals shall not edit its contents, and if found guilty shall be subject to strict disciplinary action. Cabin crew shall download the SEP Manual onto a personal device, read and understand the contents.

ONE OF THE MOST IMPORTANT ASPECTS OF FLIGHT SAFETY IS THAT IT IS VITAL TO COMMUNICATE, COOPERATE AND WORK TOGETHER AS A TEAM, IN BOTH ROUTINE AND EMERGENCY SITUATIONS, AS IT IS THE FINAL OUTCOME THAT MATTERS.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL		Chapter 01
			Page 6

1.1 Providing information to cabin crew

Promulgation of instructions, information of an administrative or operational nature which may supplement, or substitute information or instructions contained in the SEPM and the exchange of information relevant to the conduct of cabin safety operations is through the following modes of communication.

1. Electronic Mail (email)
2. Cabin Safety Instructions (CSI)
3. Cabin Safety Notice (CSN)
4. Provisional Issues
5. Telephone call or SMS

1.1.1 Electronic Mail (email)

Email is the official and primary mode of communication within SriLankan Airlines. The Cabin safety Training Management communicates most information, supplementary to information contained in the SEPM and other manuals, to crew and staff via email. Cabin crew can access company emails remotely with their iPads, smart phones, laptops or desktop PCs through the company Intranet or Microsoft 365.

1.1.2 Cabin Safety Instructions and Cabin Safety Notice

Cabin Safety Instructions (CSIs) and Cabin Safety Notice (CSN) contain information that has an impact on the safety and security of operational activities and procedures and will always override any other instructions in the SEPM. It is the responsibility of the individual Crew member to ensure that he is in possession of the most current digital copies of all CSNs and CSIs during flight duty and same needs to be downloaded from AeroDocs. For audit compliance CCMs shall not Copy or download CSI/CSN from Social Media platforms/Airdrop/Bluetooth/Pen drives/E-mail or any other mean as it will not register CCMs name on the system. Failure to do so will result in disciplinary action being taken against the CCM.

1.1.3 Copyrights ©

SriLankan Airlines holds all copyrights, intellectual property rights and licenses for this material. All use reproduction/modification/display/sale/distribution or publication of this material in part or full for whatever purpose is strictly prohibited unless SriLankan Airlines has given its explicit written consent for same. You expressly agree to indemnify and hold harmless SriLankan Airline from all claims/demands/expenses/loses/costs/fines/charges and/or legal fees of what so ever nature and how so ever arising made against or incurred by SriLankan Airline as a result of a violation/alleged violation of this undertaking by you (your agents, representatives, employees or assigns). Changes and revisions to the content shall be carried out by the Cabin Safety Training Manager in consultation with the Cabin Safety Procedures Committee and relevant Departmental heads.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL	Chapter 01
		Page 7

1.1.4 Quick Reference Handbook

This Quick Reference Handbook/Edition 04 has been issued as a practical manual for use by CCMs in the performance of cabin operation duties. This manual has been issued by Cabin Safety Training section of Srilankan Airlines in keeping with regulatory requirements. It is the responsibility of the individual Crew member to ensure that he is in possession of the most current digital copy of the QRHB during flight duty and same needs to be downloaded from AeroDocs. CCMs shall not Copy or download QRHB from Social Media platforms/Airdrop/Bluetooth/Pen drives/E-mail or any other mean as it will not register CCMs name on the system. Failure to do so will result in disciplinary action being taken against the CCM.

1.2 Distribution list

Revisions and updates shall be communicated as stated below

Manual no.	Holder	Medium
01	Master Copy – Cabin Safety Training Section	Hard Copy
02	Copy No 1 - Civil Aviation Authority of Sri Lanka	Hard Copy
	Holder	Style
	Accountable Manager	E-format
	Senior Manager Group Safety	E-format
	Cabin Safety Training Manager	E-format
	Chief Pilot (Training and Standards)	E-format
	Head of Flight Operations	E-format
	Manager Corporate Quality	E-format
	Chief Pilot A330/320	E-format
	Cabin Safety Training Section	E-format
	Corporate Library	E-format
	Cabin Crew (AeroDocs)	E-format
	Technical Publication and EFB Administration	E-format

Note: Manual no 01,02 are hard copies whilst the others are on e- format

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL	Chapter 01
		Page 8

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL	Chapter 01
		Page 9

1.3 Issue Status

DATE OF ISSUE	EDITION NO	DISTRIBUTED ON
1 October 2000	(1 st EDITION)	October 2000
1 July 2009	(2 ND EDITION)	July 2009
1 June 2014	(3 rd EDITION)	June 2014
1 June 2023	(4 th EDITION)	June 2023

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL		Chapter 01
			Page 10

1.4 Changes to the manual

Revision No	Reference	Areas subjected to change	Implementation Date
01	0.4.10	Removed - SFD	15 th April 2024
01	0.4.11	Critical Phases of Flight are as follows: • Take-off run / Take-off flight path • Final approach • Landing, including the landing roll until leaving the active runway	15 th April 2024
01	1.0	It is the responsibility of the individual Crew member to ensure that he is in possession of the most current digital copy of the SEP manual during flight duty and same needs to be downloaded from AeroDocs. For audit compliance CCMs shall not Copy or download the SEP Manual from Social Media platforms/Airdrop/Bluetooth/Pen drives/E-mail or any other mean as it will not register CCMs name on the system. Failure to do so will result in disciplinary action being taken against the CCM.	15 th April 2024
01	1.1.4	Quick Reference Handbook	15 th April 2024
01	2.4	CCMs who have an endorsement on the CCM certificate for hearing Aid shall wear them whilst on flight duty.	15 th April 2024
01	2.7.7	It is mandatory that regulatory documents are handed over to Cabin Safety Training section (Cabin Crew Members Certificate) and to Flight Operations Administration Manager (Crew Members Certificate)	15 th April 2024
01	2.12.4	Note: Briefing for passengers occupying flight deck observers' seat shall be done by the flight crew.	15 th April 2024
01	2.12.8	Flight deck policy - Unauthorized persons are prohibited access to the flight deck.	15 th April 2024
01	2.12.9	Sterile flight deck policy For departures - Duration of the Sterile Flight Deck shall be from the time the Flight Deck Door is closed for the purpose of push back & until such time the SEAT BELT sign is switched off after the initial ascent. For arrivals - Duration of the Sterile Flight Deck shall be from the time the SEAT BELT sign is selected on before the commencement of the Descent until the seat belt sign is switched off after landing.	15 th April 2024

Revision No	02	Revision Date	15 August 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL		Chapter 01
			Page 11

Revision No	Reference	Areas subjected to change	Implementation Date
01	2.13.2	A CCM shall be considered as “inexperienced” and should be detailed as assist crew member until they complete 20 sectors (A321 - L2 or R3) The 20 sectors shall commence from the date a Cabin Crew Member Certificate has been issued by CAASL.	15 th April 2024
01	2.13.8.7	8. (added) “if not the passenger load shall be reduced using the inoperative door procedure as guidance” Ref 2.32	15 th April 2024
01	2.13.8.7	8. (added) “if not the passenger load shall be reduced using the inoperative door procedure as guidance” Ref 2.32	15 th April 2024
01	2.13.8.8	Inter Personal Conflicts Between CCMs	15 th April 2024
01	2.15.2.6.1	Aircraft Door Slide Pack	15 th April 2024
01	2.13.8.8	Inter Personal Conflicts Between CCMs	15 th April 2024
01	2.15.2.6.1	Aircraft Door Slide Pack	15 th April 2024
01	2.15.2.15.1	re opening door after closing/arming	15 th April 2024
01	2.15.2.15.2	3.CCMs shall strictly adhere to the sterile flight deck policy once flight deck door is closed for the purpose of push back unless an emergency	15 th April 2024
01	2.15.2.17	Flight deck policy	15 th April 2024
01	2.15.2.18	Sterile flight deck policy -	15 th April 2024
01	2.15.2.22	In the event of a breakdown in the video system or if any malfunction in the safety video screening occurs, CCMs shall immediately notify the purser and a manual demonstration shall be carried out	15 th April 2024
01	2.15.3.3.1	FSS 1 shall demonstrate on the right side positioning at row 4 as the view to the passengers are limited. Change - A330 300 diagram demo positions	15 th April 2024
01	2.15.4	11.Passengers and crew shall not sit, place feet or any items on the slide pack. 12..Revenue passengers shall not sit on jump seats.	15 th April 2024
01	2.15.4.4	Blanket Bags	15 th April 2024
01	2.15.4.5	CAASL-IS 74	15 th April 2024
01	2.15.5.2	Ref 2.15.3.3.1	15 th April 2024
01	2.15.5.3	Sterile flight deck policy	15 th April 2024
01	2.15.11	Conclusion of Sterile flight deck policy	15 th April 2024
01	2.15.15	Ensure all lavatories are unlocked and checked	15 th April 2024
01	2.23	Fuelling may be carried out with passengers on board / boarding or disembarking provided the Flight Crew are on-board or Engineer/Technician on duty are in the vicinity	15 th April 2024

Revision No	01	Revision Date	01 April 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL		Chapter 01
			Page 12

Revision No	Reference	Areas subjected to change	Implementation Date
01	2.23.2	Shall Advise the Purser	15 th April 2024
01	2.23.3	The engineer-in-charge/technician shall be responsible in keeping the Purser/In charge CCM informed when refueling commences.	15 th April 2024
01	2.24.2.6	who appears to be	15 th April 2024
01	2.25.1	Passengers who are elderly and frail (crew to use their best judgment)	15 th April 2024
01	2.35.2	Crew Seat 63C	15 th April 2024
01	3.1.7.2	Note - PBE	15 th April 2024
01	3.8.3	Survival Cot 1. from 07 days to 18 months	15 th April 2024
01	3.8.6	Center Mast	15 th April 2024
01	3.15	AED (01)	15 th April 2024
01	3.22	Specific Equipment Location/Portable Bottles of Oxygen	15 th April 2024
01	4.3.10.1	7. Inform PIC of any passengers or crew injuries and cabin status.	15 th April 2024
01	4.6.5	Ensure engines are not running before opening door directly forward or aft of an engine Be prepared for more than one impact. Cabin Crew shall begin evacuation immediately upon F/D Command. Cabin Crew shall initiate an evacuation without waiting for commands from Flight Deck in the below situations:	15 th April 2024
01	4.10.2	Demo position 330-300	15 th April 2024
01	4.11.3.1	Type 1/Type 2 infant life vest (removed)	15 th April 2024
01	4.11.5	Cabin Crew to be seated for landing	15 th April 2024
01	4.11.5	20 Seconds before (removed)	15 th April 2024
01	5.3.3.1	An exit shall remain opened only if a step or aerobridge is positioned	15 th April 2024
01	5.19	Respective ACP (removed)	15 th April 2024
01	5.24.4	Zone C	15 th April 2024

Revision No	01	Revision Date	01 April 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL		Chapter 01
			Page 13

Revision No	Reference	Areas subjected to change	Implementation Date
01	6.5.2.1	2 knocks	15 th April 2024
01	6.12	Removed - 6th crew member may sit near hatches if seats are available	15 th April 2024
01	6.33	ABL Diagram	15 th April 2024
01	6.35.3	ABS added	15 th April 2024
01	6.36.1	10 kangaroo (MRE)	15 th April 2024
01	6.40	ABS Aircraft	15 th April 2024
01	6A.33	A321Neo Bassinet Points	15 th April 2024
01	9.14	UPK Added	15 th April 2024
01	10.11.2	Class 3 Gases	15 th April 2024
01	10.16.2	2.3A 65 2024	15 th April 2024
02	1.0	Removed - 1. CCM, 2. for audit compliance	26 th Aug 2024
02	2.7.1	Changed to - Training Standard Manual (Title Case)	26 th Aug 2024
02	2.15.2.21	Welcome Announcement	26 th Aug 2024
02	2.9.1	Removed - CCM	26 th Aug 2024
02	2.15.2.25	Removed - check list	26 th Aug 2024
02	2.15.3.6	Announcement	26 th Aug 2024
02	2.24.4.2	Removed - Duplicated	26 th Aug 2024
02	3.1.7.1	Corrected - PBE	26 th Aug 2024
02	3.1.7.2	2. Store in a dry, fire protected area, away from heat	26 th Aug 2024
02	3.20	ALS - Location changed PBE at L3/R3 - L4 Megaphone 01	26 th Aug 2024
02	5.12.1.1	Changed to - Shall	26 th Aug 2024
02	6.17.3	Point 7 - Removed (Duplicated)	26 th Aug 2024
02	6.36.1.1	MRE - Adult LJ changed to 10	26 th Aug 2024
02	6.40	Added ABT	26 th Aug 2024
02	6A.20.2.1	Added new Ref	26 th Aug 2024

Revision No	02	Revision Date	15 August 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

Revision No	Reference	Areas subjected to change	Implementation Date
03	1.0	CCM shall ensure that their reference devices are turned on, set to aircraft mode/offline and readily accessible at all times during flight duty except during critical phases, they should refer to the information or announcements stored on these devices as necessary to ensure compliance with safety protocols and to provide accurate information to passengers	17 th July 2026
03	1.1.4	Removed - For audit compliance	17 th July 2026
03	1.2	Changed to E-format	17 th July 2026
03	2.3.2	Removed Inflight Admin Manual Ref Number	17 th July 2026
03	2.3.3	Removed Inflight Admin Manual Ref Number	17 th July 2026
03	2.3.6	Removed Inflight Admin Manual Ref Number	17 th July 2026
03	2.4.1	Company ID	17 th July 2026
03	2.4.2	Loss of Company ID Card/Security Pass	17 th July 2026
03	2.4.3	Loss of Crew Member Certificate/Cabin Crew Member Certificate	17 th July 2026
03	2.5.4	To prevent confusion by passengers positioning/SNY CCM should no wear, or at least make invisible to passengers, part of the operator's cabin crew uniform that might identify them as members of the operating cabin crew	17 th July 2026
03	2.7.1	Human Trafficking	17 th July 2026
03	2.7.1.1	Initial training	17 th July 2026
03	2.7.2	Retention of records	17 th July 2026
03	2.7.5	They shall not be identified as CCMs, shall not occupy cabin crew seats and impede operating CCM's in their duties.,The cabin crew trainee shall be additional to the minimum number of operating cabin crew members required. They should not be identified as the crew member	17 th July 2026
03	2.7.6.1	Refresher Training Program	17 th July 2026
03	2.7.11.1	Requalification Assessment	17 th July 2026
03	2.7.12	Training Cycle 01	17 th July 2026
03	2.7.13	Training Cycle 02	17 th July 2026
03	2.7.14	Training Cycle 03	17 th July 2026

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL		Chapter 01
			Page 15

Revision No	Reference	Areas subjected to change	Implementation Date
03	2.8.1	To prevent confusion by passengers the Cabin Safety Instructor shall ensure that they do not perform tasks or wear a uniform in such a way that might identify them as members of the cabin crew	17 th July 2026
03	2.9.1	Cabin Crew member	17 th July 2026
03	2.11	Flight Time Limitation	17 th July 2026
03	2.12.1	The PIC is responsible to maintain safety and security of the aircraft and all crew, passengers and cargo, and may remove any crew member from his duty and /or off the aircraft at his discretion. PIC may refuse passengers including inadmissible passengers, deportees or persons in custody or disruptive passengers if they still behave in an objectionable and offensive manner or refuse to follow orders given for their own or other passenger's comfort and safety. Persons intoxicated and or under the influence of narcotics shall be refused boarding.	17 th July 2026
03	2.12.1.2	The Pilot in Command will ensure	17 th July 2026
03	2.12.2	Chain Of Command	17 th July 2026
03	2.12.4	Ensure passenger is seated before the flight deck door is closed	17 th July 2026
03	2.12.5	Note - A321 L2/R3 Crew Seats Shall be allocated only to a non-revenue, able-bodied adult above 18 years who appear to be capable of operating or assisting with the operation of the exit	17 th July 2026
03	2.12.10	Common language and safe two-way Communication Practices	17 th July 2026
03	2.12.10	4. CCM shall use "PRIO CAPT"/"EMER call" to inform PIC of any but not limited any Safety/security/medical emergencies 5. During in-flight rest periods, any request from the operating flight crew to wake the Commander or any resting flight crew member shall be acted upon without delay	17 th July 2026
03	2.12.13	In a two-man flight deck operation,	17 th July 2026
03	2.13.1	Minimum For Each Aircraft	17 th July 2026
03	2.13.7	5.If and when such a flight is operated necessary CAA approvals are obtained	17 th July 2026
03	2.14.2	7. Pic shall be notified of any passengers with alerts	17 th July 2026
03	2.15.2.2	Voyage Report	17 th July 2026
03	2.15.2.13	Passenger Boarding	17 th July 2026

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL		Chapter 01
			Page 16

Revision No	Reference	Areas subjected to change	Implementation Date
03	2.15.2.15	Overhead bins are closed	17 th July 2026
03	2.15.2.23	Mandatory Announcement Following Safety Demonstration - All aircraft	17 th July 2026
03	2.15.2.26	Spraying of Aerosol	17 th July 2026
03	2.15.3.1	Note: Cabin/Galley must never be in total darkness during the flight	17 th July 2026
03	2.15.3.3	Removed A330-200	17 th July 2026
03	2.15.3.3	Crew Stations A330-300 Aircraft - Diagram	17 th July 2026
03	2.15.5.1	Cease Cabin Service	17 th July 2026
03	2.15.4.4	4. removed (Blanket Bag)	17 th July 2026
03	2.15.5.6	Note - Cabin/Gally must never be in total darkness during the flight.	17 th July 2026
03	2.15.10	Opening Doors	17 th July 2026
03	2.15.14.1	Passenger count/Baggage Identification at a Transit Station	17 th July 2026
03	2.17.3	Seal Verification Process	17 th July 2026
03	2.20	Regulation on Smoking/Consumption of Alcohol/Psychoactive Substances	17 th July 2026
03	2.20.1	Regulation on Alcohol/Psychoactive Substances	17 th July 2026
03	2.20.1.1	Procedure for serving Alcohol	17 th July 2026
03	2.23	Refuelling and De-fuelling (fuelling) Procedures	17 th July 2026
03	2.23.1	Ground Dispatchers Responsibilities	17 th July 2026
03	2.23.2	Flight Crew Responsibilities	17 th July 2026
03	2.23.3	Engineering Staff Responsibilities	17 th July 2026
03	2.23.4	CCM Responsibilities, When fuelling with Passengers	17 th July 2026
03	2.24.2.2	Inadmissible Passenger (INAD)	17 th July 2026
03	2.24.2.3	Deportee with Escorts	17 th July 2026
03	2.24.3.5	Legal Action by the Company	17 th July 2026
03	2.24.4.2	Passengers with Disabilities (PWD)	17 th July 2026
03	2.24.4.2.1	3. Mobility Aids should not be used in an evacuation, but assisted by the crew	17 th July 2026
03	2.24.4.3.1	5. Fit the life vest to the stretcher passenger in case of a ditching evacuation	17 th July 2026
03	2.24.5.1	Blind Passenger	17 th July 2026
03	2.24.5.1.1	Briefing a Blind Passenger (SOLE B)	17 th July 2026
03	2.24.5.7.1	Briefing a UM/YP	17 th July 2026
03	2.25.1	Emergency Exit Row Seating	17 th July 2026
03	2.25.4.3	Infant/Child Restraint System	17 th July 2026

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL		Chapter 01
			Page 17

Revision No	Reference	Areas subjected to change	Implementation Date
03	2.25.5	Removed - The adult should don the oxygen mask prior to attending to the infant/child	17 th July 2026
03	2.26	Car Seat	17 th July 2026
03	2.26.1	Aviation Approved Car Seat	17 th July 2026
03	2.27.1	Mobility aids shall be stowed in overhead bins or coat closets with lockable doors.	17 th July 2026
03	2.29.2	Service Animal	17 th July 2026
03	2.29.3	Administrative guidelines/restrictions and conditions	17 th July 2026
03	2.30.1	Devices Permitted During Cruise	17 th July 2026
03	2.30.3	Devices Not Permitted at Anytime	17 th July 2026
03	2.31	Cabin Crew Seat	17 th July 2026
03	2.31.1	When should a Crew member Occupy a Seat	17 th July 2026
03	2.31.6	Primary Cabin Crew member Seating	17 th July 2026
03	2.33	Unserviceable Equipment	
03	2.33.2	Primary And Secondary Locking devices	17 th July 2026
03	2.35.1	A330 - ALT (18J/242Y Configuration)	17 th July 2026
03	2.35.1	Note: PWD/MEDA and PWD/Non-MEDA shall not be seated in emergency exits. They are entitled to the most appropriate seating according to their needs including the stowage of on board medical devices or equipment.	17 th July 2026
03	2.36	Documentation Section	17 th July 2026
03	3.1.5	3. Seal/Collar intact	17 th July 2026
03	3.1.7.2	Air Liquide	17 th July 2026
03	3.6	3. Re-stow bottle of oxygen	17 th July 2026
03	3.6.3	BC seat/Stretcher Passenger	17 th July 2026
03	3.8.7	Description- A 330-300 aircraft is provided with Supplementary Raft Accessory Kits. It is a bright yellow coloured bag. Contents as follows:	17 th July 2026
03	3.14.1	Requirement - 01 First Aid Kit for every 100 passengers	17 th July 2026
03	3.14.2	Contents Ref 9.14	17 th July 2026
03	3.14.3	Ref 9.12	17 th July 2026
03	3.17/3.17.1	Removed ALA/ALB/ALC	17 th July 2026
03	3.19	Adult Life jacket - Over head bin 65HK Supplementary Raft Accessory Kits 08	17 th July 2026

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL		Chapter 01
			Page 18

Revision No	Reference	Areas subjected to change	Implementation Date
03	3.20	Added - L4/R4 Demo kits	17 th July 2026
03	3.22	CCMs Designated Portable Bottles of Oxygen ALT	17 th July 2026
03	3.23	Removed A330-200 Aisle Chair	17 th July 2026
03	3.24	all	17 th July 2026
03	4.1	Turbulent Weather	17 th July 2026
03	4.2.2	Oxygen Masks Deployment	17 th July 2026
03	4.3.12	Time of Useful Consciousness (TUC)	17 th July 2026
03	4.4.6.13	3. Open the relevant overhead bin just enough to pass the nozzle of the fire extinguisher and discharge (Get on top of seat if necessary)	17 th July 2026
03	4.6.5.2	AAP (If Available)	17 th July 2026
03	4.7.3	Main/Total Gear Collapse	17 th July 2026
03	4.10.2	Demonstration Positions A330-300	17 th July 2026
03	4.10.2.1	THE EMERGENCY EXITS ARE LOCATED ON BOTH SIDES OF THE AIRCRAFT AND ARE INDICATED BY THE EXIT SIGNS AND FLOOR PATH MARKINGS.	17 th July 2026
03	4.10.3.3	Selecting/Briefing ABPs - Prepared Emergency Landing	17 th July 2026
03	4.11.2	THE EMERGENCY EXITS ARE LOCATED ON BOTH SIDES OF THE AIRCRAFT AND ARE INDICATED BY THE EXIT SIGNS AND FLOOR PATH MARKINGS.	17 th July 2026
03	4.11.3.1	To be inflated at the door sill	17 th July 2026
03	4.11.6.3	Added L3, R3 Type A Door	17 th July 2026
03	4.11.6.7	Unprepared Ditching Door Assist Checklist	17 th July 2026
03	4.11.9.2	Detaching and Disconnecting the Raft from the Door-sill	17 th July 2026
03	4.13	SRAK - L1A, R1, L2, R2, L3, R3, L4, R4	17 th July 2026
03	4.19.1	EVEC RESET (FAP, AAP's) button illuminates Red - Flashing Press to silence Horn SMOKE RESET (FAP) and SMOKE LAV buttons illuminates Red Press to cancel Chime	17 th July 2026
03	4.19.4	During an EMER descent (Rapid or Slow decompression/Smoke or Fire/Bom Threat)	17 th July 2026
03	4.19.6	Removed A330-200 ALA/ALB/ALC	17 th July 2026

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL		Chapter 01
			Page 19

Revision No	Reference	Areas subjected to change	Implementation Date
03	5.2	Removed ALA/ALB/ALC	17 th July 2026
03	5.6.9	Disconnecting the Raft Type 'A' Doors	17 th July 2026
03	5.6.10	Disconnecting the Slide (L3/R3) – Type '1' Doors	17 th July 2026
03	5.7.2	Secure Flight Deck Door	17 th July 2026
03	5.7.2.1	Removed ALA/ALB/ALC	17 th July 2026
03	5.7.2.1	The Evacuation and Decompression Panel	17 th July 2026
03	5.9	Removed ALA/ALB/ALC	17 th July 2026
03	5.12.3	Removed ALA/ALB/ALC	17 th July 2026
03	5.13.5.2	Removed ALA/ALB/ALC	17 th July 2026
03	5.15.1.6	Removed ALA/ALB/ALC	17 th July 2026
03	5.21.4	L1B - S1/R3 - S5/L4A - S3	17 th July 2026
03	5.21.16	Screening the Safety Video	17 th July 2026
03	5.23.1	Removed ALA/ALB/ALC	17 th July 2026
03	5.23.3	Removed ALA/ALB/ALC	17 th July 2026
03	5.23.5	Removed ALA/ALB/ALC	17 th July 2026
03	5.23.7	Removed ALA/ALB/ALC	17 th July 2026
03	5.23.13.	Aircraft Lavatory Locations	17 th July 2026
03	5.24.1	Removed ALA/ALB/ALC	17 th July 2026
03	5.24.4	Zone C : Between Exit L3R3 and Exit L4R4	17 th July 2026
03	5.25	ALT Aircraft Differences	17 th July 2026

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL		Chapter 01
			Page 20

Revision No	Reference	Areas subjected to change	Implementation Date
03	6.5.2.1	1, Check for the cabin pressure warning light through the viewing window 1. Grasp Frame assist handle	17 th July 2026
03	6.5.4	Slide Arming/Disarming Procedure	17 th July 2026
03	6.5.4.5	Calling Relevant Stations	17 th July 2026
03	6.9.4	2.10.8	17 th July 2026
03	6.11.4	2.12.4	17 th July 2026
03	6.12	Note - CCM occupying the Swivel Seat is R2 Door Primary. CCM occupying L1A is R1 Door Primary and shall be responsible for the Hatches during an emergency evacuation	17 th July 2026
03	6.14	Briefing passenger at the hatches	17 th July 2026
03	6.17.3	4. The amber light will flash at the relevant ACPs	17 th July 2026
03	6.18.8	Steady/Flashing red and EMER CALL on all AIPs. Flashing Amber on relevant ACPs.	17 th July 2026
03	6.20.5	Added MRE	17 th July 2026
03	6.28.4	8. Take torch	17 th July 2026
03	6.31.1	Removed 6th Cabin Crew	17 th July 2026
03	6.31.2	Removed 6th Cabin Crew	17 th July 2026
03	6.36.1	Protective Breathing Equipment (PBE) Description and Usage Ref: 3.1.7.3	17 th July 2026
03	6.37.1.1	Removed 6th Cabin Crew	17 th July 2026
03	6.37.6	All lavatories are equipped for PWD use and diaper changing facility.	17 th July 2026
03	6.40.18	Demo Kits- Narrow Overhead Compartment 45C	17 th July 2026

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL		Chapter 01
			Page 21

Revision No	Reference	Areas subjected to change	Implementation Date
03	6A.1	Removed ABQ	17 th July 2026
03	6A.5.11	Emergency Door Operation with minimum crew	17 th July 2026
03	6A.7.1	Ref 6.7.4	17 th July 2026
03	6A.9	09 DEF	17 th July 2026
03	6A.9	Details (Removed ABQ)	17 th July 2026
03	6A.9.3	Erecting the canopy	17 th July 2026
03	6A.10	Briefing passenger seated at the emergency exit	17 th July 2026
03	6A.11	Cabin Crew Seats and Stations	17 th July 2026
03	6A.11.1	The following exit shall be manned L1/R2/L3/L4/L4A	17 th July 2026
03	6A.15.6 6A.15.3 6A.15.5	Ref - 6A.47	17 th July 2026
03	6A.20.2.1	L4A	17 th July 2026
03	6A.20.7	L4A	17 th July 2026
03	6A.21,1	Removed ABQ	17 th July 2026
03	6A.21.2	Removed ABQ	17 th July 2026
03	6A.22	Removed ABQ	17 th July 2026
03	6A.26	Crew Seats and Stations	17 th July 2026
03	6A.30.2	6A.9	17 th July 2026
03	6A.30.3	6A.9	17 th July 2026
03	6A.31	6A.13/6.12.2/6.12.3	17 th July 2026
03	6A.47	Quick Reference Guide for ANC/D/E/F	17 th July 2026

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL		Chapter 01
			Page 22

Revision No	Reference	Areas subjected to change	Implementation Date
03	9	First Aid Kit Emergency Medical Kit (A10)	17 th July 2026
03	9.3	After Use Remove the face mask from the passenger Close the valve by turning ON/OFF knob clockwise Disconnect the tube from the bottle Restore bottle of oxygen Inform Purser of the location and the final reading Enter in cabin defects log book	17 th July 2026
03	9.13.6	Universal Precaution Kit	17 th July 2026
03	9.13.7	Universal Precaution Kit Usage	17 th July 2026
03	9.15	Emergency Medical Kit (A10)	17 th July 2026
03	10.11.9	Class 9 – Miscellaneous Dangerous Substances and Articles Including Environmentally Hazardous Substances	17 th July 2026
03	10.5.1	UL 4,6,7,8,12,13,14	17 th July 2026
03	10.16.2	DG items Carried by Passengers /Crew (Table 2.3A)	17 th July 2026
03	10.18.4	Emergency Response Kit (ERK)	17 th July 2026
03	10.24.4	Dangerous Goods Emergency Response Guidance	17 th July 2026
03	10.18.4.1	A 320 aircraft - L2 overhead compartment (MRE - R2 overhead compartment) A 321 aircraft - R4 overhead compartment	17 th July 2026
03	10.24.5	Power banks carried by passengers and crew for Personal Use	17 th July 2026
03	10.24.5.1	Portable electronic devices/Power Banks/Spare batteries	17 th July 2026
03	10.25.5	PED inadvertently crushed or damaged in electrically/Mechanically adjustable seat	17 th July 2026
03	10.26	Dangerous Goods Unit Coordinator - 00 94 19733 1553/00 94 74444 1553. Any incident pertaining to DG Shall be informed immediately to Dangerous Goods Policies Manager DGPM (DG Coordinator)	17 th July 2026

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL	Chapter 01
		Page 23

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL	Chapter 01
		Page 24

1.5 Record Of Revisions

Chapter	Revision No	Page No	Revision Date
00	01	1,10,18,23,24,25,26,28,29,31,33,35,38,39	April 24
01	01	3,5,6,9,10,11,12,13,15,16,17,18,19	April 24
02	01	3,4,5,6,7,8,9,10,11,19,24,40,41,44,47,48,50,53,58,59,61,68,71,72,73,77,79,89,92,104,105,123	April 24
03	01	3,4,5,16,36,37,39,46,59	April 24
04	01	3,5,6,7,23,34,56,58	April 24
05	01	3,7,22,74,100	April 24
06	01	3,7,8,15,30,56,61,75,76,77,78,79	April 24
06A	01	5,38	April 24
09	01	6,57	April 24
10	01	4,13,23,24	April 24
00	02	01,10,23,24,25,26,28,31,33,34,35	August 24
01	02	03,05,10,13,15	August 24
02	02	03,04,06,07,09,21,34,60,65,70,97	August 24
03	02	03,05,14,16,57	August 24
05	02	05,46	August 24
06	02	05,07,08,35,61,62,75,76,77,78,79	August 24
06A	02	04,26	August 24
00	03	01,06,07,10,12,13,14,22,23,24,25,26,28,29,30,31,32,33,34,35,38,39	July 2026
01	03	03,04,05,06,07,14,15,16,17,18,19,20,21,22,24,25	July 2026
02	03	03,04,05,06,07,08,09,10,11,12,17,18,19,20,21,22,23,24,25,26,27,28,29,30,34,37,38,39,40,41,42,44,45,46,48,49,51,55,56,57,58,62,64,65,66,67,68,69,72,73,74,77,78,81,84,85,89,90,91,92,94,97,98,99,101,102,103,104,105,106,107,108,111,112,114,115,117,121,122,127,128,129,130,131,132,133,134,135,136,137,138,139,140,141,142,143,144,	July 2026
03	03	03,04,05,11,15,16,31,32,40,43,44,46,51,52,53,55,57,59,60,	July 2026
04	03	03,04,05,06,07,08,09,11,12,13,14,16,24,31,35,37,39,42,43,45,46,49,50,55,56,57,60,62,63,64,65,66,67,73,81,82,83,86,88,89,	July 2026
05	03	03,04,05,06,07,08,09,10,15,28,29,30,32,34,35,36,37,41,47,48,54,59,66,74,80,83,87,91,94,95,97,98,99,100,101,102,103,104,	July 2026

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL		Chapter 01
			Page 25

06	03	03,04,05,06,07,08,14,15,16,17,27,29,30,32,34,35,37,40,42,44,45,46,48,52,54,55,56,58,61,62,65,67,69,72,76,79,	July 2026
06A	03	03,04,05,06,08,11,14,15,16,18,19,23,24,25,27,30,31,32,33,36,37,38,40,42,44,47,	July 2026
09	03	03,04,06,09,21,30,54,55,56,58,59,60	July 2026
10	03	03,04,05,10,11,17,18,23,24,25,39,40,42	July 2026

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	ADMINISTRATION AND CONTROL OF THE MANUAL	Chapter 01
		Page 26

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 1

CHAPTER 02 **GENERAL PROCEDURES**

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 2

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 3

Contents

2.0 GENERAL PROCEDURES.....	14
2.1 Regulatory Authorities.....	14
2.1.1 International Civil Aviation Organisation (ICAO)	14
2.1.2 The International Air Transport Association (IATA)	14
2.1.3 European Aviation Safety Agency (EASA)	14
2.1.4 Civil Aviation Authority of Sri Lanka (CAASL)	14
2.1.5 Roles/Functions of CAASL Inspectors	15
2.1.6 Inspector Identification	15
2.1.7 Authority of CAASL Inspectors.....	16
2.1.8 Carriage of Inspector	16
2.2 Requirements for Cabin Crew members	17
2.2.1 Minimum Requirements	17
2.3 Prohibitions	18
2.3.1 Consumption of Alcohol	18
2.3.2 Drugs and Stimulants.....	18
2.3.3 Psychoactive Substances	18
2.3.4 Deep Water Diving.....	18
2.3.5 Donating Blood	18
2.3.6 Pregnancy	18
2.3.7 Heating of Crew Meals	19
2.4 Mandatory Items to Be Carried By A CCM	19
2.4.1 Company ID	19
2.4.2 Loss of Company ID Card/Security Pass.....	19
2.4.3 Loss of Crew Member Certificate/Cabin Crew Member Certificate	19
2.5 Cabin Crew Member Certificate (CCMC)	20
2.5.1 Multiple Cabin Crew Operation,	20
2.5.2 Pursers/In-Charge CCM,	20
2.5.3 Single Cabin Crewmember Operation,	20
2.5.4 Positioning/Dead Heading Cabin Crewmembers	21
2.5.5 Crew Member Certificate (CMC)	21
2.6 Travelling on GD.....	21
2.7 Training Standard SLCAP 4305 (CAASL Publication).....	21

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 4

2.7.1 Training Programmes.....	21
2.7.1.1 Initial Training	22
2.7.2 Training requirements and retention of records,	23
2.7.3 Maintenance of Cabin Crew member Certificate	23
2.7.4 Withdrawal of a Cabin Crew member Certificate	23
2.7.5 Familiarization Flights/Line Indoctrination (SNY)	24
2.7.6 Recurrent Training	24
2.7.6.1 Refresher Training Program	24
2.7.7 Handing Over Regulatory Documents When On Long Leave	24
2.7.8 Re-qualification Training for CCMs Returning for Flight Duty	25
2.7.9 Re-qualification Training for CCMs Returning to Flight Duty after long Leave.....	25
2.7.10 Mandatory onboard Assessments.....	25
2.7.11 Operation of More Than One Type or Variations	26
2.7.11.1 Re-qualification Assessment.....	26
2.7.12 Training Cycle 1 - Initial training	27
2.7.13 Training Cycle 2 – Annual Re-Current/Onboard Assessment.....	28
2.7.14 Training Cycle 3 – Training following long absence of leave	29
2.8 Cabin Safety Instructors/Assessor	30
2.8.1 The Instructor Requirements For Online Evaluations	30
2.8.2 Mandatory Pre Flight-Briefing	32
2.9 Crew member Responsibilities	34
2.9.1 Cabin Crew member	34
2.9.2 In Charge Cabin Crew Training	34
2.10 Purser/In-Charge CCM	35
2.10.1 Nomination of a Purser from-base	36
2.10.2 Replacing the Operating Purser during flight	36
2.10.3 Purser Relieved Of Duty	36
2.10.4 Under The Supervision of Purser/Cabin Supervisor	36
2.10.5 Responsibilities of Primary Crew Member	37
2.10.6 Exception to the Primary Crew Member	37
2.10.7 Responsibilities of Assist Crew Member	37
2.11 Flight Time Limitation	37
2.11.1 Controlled Rest On-Board	37
2.11.2 Fatigue Management System (FMS)	37
2.12 Flight Deck	38

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 5

2.12.1 Authority of the PIC.....	38
2.12.1.1 The Pilot in Command Has Full Authority Over:	39
2.12.1.2 The Pilot in Command will ensure,	39
2.12.2 Chain Of Command While On Duty.....	40
2.12.3 Authorisation to Enter Flight Deck	40
2.12.4 Authorisation to occupy a flight Deck Observer Seat	40
2.12.5 Authorisation to Occupy a Cabin Crew Seat.....	41
2.12.6 Briefing passengers occupying a CCM assist seat,	41
2.12.7 Secure Flight Deck Door	41
2.12.8 Flight Deck Policy	41
2.12.9 Sterile Flight Deck Policy	41
2.12.10 Common language and safe two-way Communication Practices.....	42
2.12.11 Flight Deck Service.....	43
2.12.12 Checking on Flight Crew	43
2.12.13 Flight Crew two-man operation.....	43
2.13 Crew Complement	43
2.13.1 Minimums for each aircraft	43
2.13.2 Inexperienced cabin crew members.....	44
2.13.3 Ferry Flight with Cabin Crew	44
2.13.4 Operation of Flights under Exceptional Circumstances	44
2.13.5 VVIP Flights.....	44
2.13.6 Non-Revenue Flights.....	45
2.13.7 Upgrading A320 /321 to A330	45
2.13.8 Incapacitated CCM.....	46
2.13.8.1 Prior to Departure ex Base.....	46
2.13.8.2 Prior to departure en-route	46
2.13.8.3 Incapacitated Door Primary During Flight.....	46
2.13.8.4 Prior to Departure - Minimum Crew Operation (ex. Other Stations).....	46
2.13.8.5 During Flight - Minimum Crew Operation	46
2.13.8.6 Purser Incapacitated During Flight	46
2.13.8.7 Cabin Crewmember Injury/Sickness	46
2.13.8.8 Inter Personal Conflicts Between CCMs	48
2.14 Safety Briefings	48
2.14.1 Cabin Crew Pre Flight-Safety Briefing	48
2.14.2 PIC/Purser Briefing	48

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 6

2.14.3 Passenger Safety Briefing/ Demonstrations	49
2.14.4 Passenger Safety Announcements/Briefings	49
2.14.5 Safety Information Card	49
2.14.6 Preflight briefing for Pax seated at the emergency exits	49
2.14.7 Communicating Safety Concerns of Passengers	50
2.15 Cabin Crew Member Duties	50
2.15.1 Phases Of Flight	50
2.15.2 Pre-Departure.....	50
2.15.2.1 Cabin Defects	51
2.15.2.2 Voyage Report.....	51
2.15.2.3 Safety and Security Checks	52
2.15.2.4 Pre-Departure Safety/Security Check List - PSSCL.....	52
2.15.2.5 Pre departure Safety and Security Checks	52
2.15.2.6 Unserviceable hand set.....	53
2.15.2.6.1 Aircraft Door Slide Pack	53
2.15.2.7 Serviceability Check on Crew Seat	55
2.15.2.8 Systems Check on Two way communication	55
2.15.2.9 Serviceability Check; Passenger Seats.....	55
2.15.2.10 Safety and Security Checks in the Cabin	55
2.15.2.11 Safety and Security Checks in the Lavatory	56
2.15.2.12 Safety and Security Checks in the Galley	56
2.15.2.13 Passenger Boarding	56
2.15.2.14 Passenger Count	57
2.15.2.15 Closing and arming Doors Prior To Departure.....	58
2.15.2.15.1 Aircraft Door Re-Opening after arming of slides	58
2.15.2.15.2 Single CCM operation	59
2.15.2.16 Arming of Slides	59
2.15.2.17 Flight Deck Policy	59
2.15.2.18 Sterile Flight Deck Policy	59
2.15.2.19 Use of Electronic Devices	59
2.15.2.20 Ordinance Signs	59
2.15.2.21 Welcome Announcement	59
2.15.2.22 Passenger Safety Briefing	60
2.15.2.23 Content of Passenger Safety Briefing	61
2.15.2.24 Locking of Lavatories	64

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 7

2.15.2.25 Cabin Checks Prior to Departure	64
2.15.2.26 Spraying of Aerosol	65
2.15.2.27 Push Back/Taxiing out/Runway	66
2.15.2.28 Confirmation of Cabin Ready to PIC	66
2.15.3 Take Off.....	66
2.15.3.1 Night-Take Off	67
2.15.3.2 Imminent Take Off.....	67
2.15.3.3 Cabin Crew Seating Stations.....	67
2.15.3.3.1 Cabin Crew Demonstration Positions.....	69
2.15.3.4 Silent Thirty Seconds Review (STS).....	70
2.15.3.5 Climb (Ascent)	70
2.15.3.6 Safety Announcement after Seat Belt Sign Off (A330-300 A320/321Neo)	70
2.15.4 Cruise.....	70
2.15.4.1 Turbulence	71
2.15.4.2 Hygiene in lavatories	71
2.15.4.3 Waste Management in galleys	71
2.15.4.4 Stowing of used blankets in lavatories	71
2.15.4.5 Smoking Regulation	72
2.15.5 Descent.....	72
2.15.5.1 Cease Cabin Services.....	72
2.15.5.2 Before Landing Announcement on Flights Exceeding 4 Hours.....	73
2.15.5.3 Sterile Flight Deck Policy	73
2.15.5.4 Cabin Checks Prior To Landing	73
2.15.5.5 Confirmation of Secured Cabin to the PIC	73
2.15.5.6 Night Landing	74
2.15.6 Approach	74
2.15.6 .1 Silent Thirty Second Review (STS)	74
2.15.7 Landing/Taxiing In.....	74
2.15.8 After Landing Safety Announcement	74
2.15.8.1 Station related announcement	75
2.15.8.2 Delayed arrival	75
2.15.8.3 Transit Stations.....	75
2.15.8.4 Park in a remote bay.	75
2.15.8.5 Delay in Parking	76

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 8

2.15.8.6 Delayed arrival	76
2.15.9 Arrival	76
2.15.9.1 Disarming of Slides.....	76
2.15.10 Opening Doors.....	77
2.15.11 Conclusion of Sterile Flight Deck Policy	77
2.15.12 Aerodrome Restrictions Announcement	78
2.15.13 Steps/Aerobridges	78
2.15.14 Passenger Boarding/Disembarking During Transit	78
2.15.14.1 Passenger count/Baggage Identification at a Transit Station	78
2.15.15 Post Landing Duties	78
2.16 Weight and Balance	79
2.16.1 Load Sheet	79
2.16.2 Trim balance	80
2.16.3 Passenger Count	80
2.17 Services on Ground	80
2.17.1 Individual Video System	80
2.17.2 Meal Service on Ground	80
2.17.3 Seal Verification Process	81
2.18 Apron Safety/Security Procedures.....	83
2.19 ETOPS/EDTO	84
2.20 Regulation on Smoking/Consumption of Alcohol/Psychoactive Substances.....	84
2.20.1 Regulation on Alcohol/Psychoactive Substances.....	84
2.20.1.1 Procedure for Serving Alcohol.....	84
2.21 Incidents/Accidents.....	85
2.21.1 Incident	85
2.21.2 Accident.....	85
2.21.3 Reporting To Authority	86
2.21.4 Follow-Up Action/Selection of Witnesses	86
2.22 Hazardous Material Information System	86
2.22.1 Voluntary Disclosure of Safety or Security Matters	86
2.22.2 Discomfort on Board	86
2.22.3 Non Punitive Reporting	87
2.23 Refuelling and De-fuelling (fuelling) Procedures	89
2.23.1 Ground Dispatchers Responsibilities	89

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 9

2.23.2 Flight Crew Responsibilities	89
2.23.3 Engineering Staff Responsibilities.....	89
2.23.4 CCM Responsibilities, When fuelling with Passengers	89
2.24 Carriage of Special Handling Passengers (Passengers with Alerts).....	90
2.24.1 Armed Passengers	90
2.24.2 Passengers with a Security Alert.....	91
2.24.2.1 Disruptive passenger.....	91
2.24.2.2 Inadmissible Passenger (INAD)	91
2.24.2.3 Deportee with Escorts.....	91
2.24.2.4 Prisoners in custody with Escorts.....	92
2.24.2.5 Boarding /Seating Passengers With a Security Alert.....	92
2.24.2.6 Refusal of Carriage	92
2.24.2.7 Off-Loading.....	93
2.24.2.8 Handling a Disruptive Passenger	93
2.24.3 Warning	93
2.24.3.1 Formal Warning.....	93
2.24.3.2 Final warning.....	94
2.24.3.3 Police Assistance	94
2.24.3.4 Use of Restraining Ties	94
2.24.3.5 Legal Action by the Company.....	94
2.24.4 Passenger with a Medical Alert	94
2.24.4.1 Medical Clearance.....	95
2.24.4.2 Passenger with Disabilities (PWD)	97
2.24.4.2.1 Reassurance Briefing	98
2.24.4.3 Passenger on a Stretcher	98
2.24.4.3.1 Briefing for an escort accompanying a stretcher passenger	98
2.24.5 Passengers with Assistance Alert.....	98
2.24.5.1 Blind Passenger	99
2.24.5.1.1 Briefing a blind Passenger (SOLE B).....	99
2.24.5.2 Differently Able Passenger (Deaf)	99
2.24.5.3 Expectant Mother	100
2.24.5.4 Briefing an Expectant Mother	100
2.24.5.5 Carriage of New-born Babies	100
2.24.5.6 Adults with Infants	101

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 10

2.24.5.7 Un-Accompanied Minors (U/M)	101
2.24.5.7.1 Briefing a UM/YP	102
2.24.5.8 The pre-determined seats for U/M/s	102
2.24.5.9 Dedicated CCM for special handling of U/M's	102
2.24.5.10 Young Passengers (YP)	103
2.24.5.11 Intellectual Disability	103
2.24.5.12 Travelling with an assistant/attendant	103
2.24.5.13 Assistance on Board for Passengers with assistant and medical alert	103
2.25 Passenger Seat	103
2.25.1 Emergency Exit Row Seating	104
2.25.2 Briefing Pax seated at the emergency exits	104
2.25.3 Unserviceable Passenger Seat	104
2.25.4 Seat belts	104
2.25.4.1 Extension Seat Belts	104
2.25.4.2 Kangaroo belt.....	105
2.25.4.3 Infant/Child Restraint System	105
2.25.5 Briefing for Adults carrying Infants	105
2.25.5.1 S.L.O.B. - Briefing.....	105
2.26 Car Seat	106
2.26.1 Aviation Approved Car Seat.....	107
2.26.1.1 Briefing on usage of Bassinet	108
2.27 Carry-On Baggage	108
2.27.1 Acceptance and Stowage.....	108
2.27.2 Excess Baggage	109
2.28 Cargo in Passenger Seat/Cabin	109
2.28.1 Loading and Securing Cabin Seat Baggage	109
2.29 Carriage of Pets/Service Animal	111
2.29.1 Domestic Pets	111
2.29.2 Service Animal	111
2.29.3 Administrative guidelines/restrictions and conditions	111
2.30 Carriage/Restrictions on Portable Electronic Devices (PED)	114
2.30.1 Devices Permitted without restrictions	114
2.30.2 Devices Permitted During Cruise	114

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 11

2.30.3 Devices Not Permitted at Anytime	114
2.30.4 Interference to Aircraft Navigation Systems	114
2.30.5 Use of Devices on Open Ramps during Boarding/Disembarking.....	114
2.31 Cabin Crew Seat	115
2.31.1 Seat Belt/Seat Harness	115
2.31.2 Cabin Crew Seat Locations/Stations	115
2.31.3 When should a Crew member Occupy a Seat	115
2.31.4 Requirements to Occupy Assigned Seats/Stations	115
2.31.5 Persons Authorised To Occupy Crew Seats.....	115
2.31.6 Primary Cabin Crew member Seating.....	115
2.31.7 Unserviceable CCM Seat.....	115
2.32 Dispatch of an Air Craft with an In-Operative Door	116
2.32.1 The specific seats to be blocked shall be as specified in the MEL.	116
2.32.1.1 Blocking identified seats	116
2.32.1.2 No Exit Cards	116
2.33 Unserviceable Equipment	116
2.33.1 Procedure for Unserviceable Equipment.....	117
2.33.1.1 Unserviceable Aircraft Waste Carts and Fixed Waste Bins	117
2.33.1.2 Coat Stowage Door Unserviceable	118
2.33.1.3 Doghouse Compartment Unserviceable	119
2.33.1.4 Galley Stowage Compartment Unserviceable.....	119
2.33.1.5 Overhead Stowage Compartment (OHSC) Unserviceable	120
2.33.2 Primary And Secondary Locking devices	121
2.33.2.1 Securing and Locking	121
2.34 Aircraft Surface Contamination	121
2.34.1 Description of Surface Contamination.....	121
2.35 Quick Reference Guide	122
2.35.1 A330 - ALT (18J/242Y Configuration)	122
2.35.2 A330 - ALH (18J/252Y Configuration)	123
2.35.3 A330 - ALS (18J/251Y Configuration).....	124
2.35.4 A330 - ALL/M/N/O/P/Q/R (28J/269Y Configuration)	125
2.36 Documentation Section.....	127
2.36.1 Voyage Report	128
2.36.2 Pre Departure Safety/Security Checklist.....	129

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 12

2.36.3 Incident/ Accident/report	130
2.36.4 Illness Report.....	132
2.36.5 Air/Ground Safety Report.....	134
2.36.6 Final Warning.....	136
2.36.7 Witness Report.....	137
2.36.8 Disruptive Passenger Incident Report	138
2.36.9 Cabin Crew member regulatory online assessment Form	140
2.37 Briefing Fatigue Report Form (FRF)	142
2.38 Hatch/Exit/PWD/Stretcher(Briefing for a escort)	144

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 13

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 14

2.0 GENERAL PROCEDURES

2.1 Regulatory Authorities

2.1.1 International Civil Aviation Organisation (ICAO)

A specialized agency of the United Nations, the International Civil Aviation Organisation (ICAO) was created in 1944 to promote the safe and orderly development of international civil aviation throughout the world. ICAO sets standards and Regulations necessary for aviation safety, security and efficiency, as well as the forum for cooperation in all fields of civil aviation among its 193 member states. The membership of ICAO is obtained by the state. ICAO also develops standards and recommended practices (SARPS) and procedures relevant to the training of cabin crew and the operation of aircraft. The distinction between standards and recommended practices is an important one. ICAO does not prescribe how cabin crew should perform each procedure. Although standards and recommended practices are developed in collaboration with representatives of all member states, each country decides how certain SARPS are implemented. Moreover, each airline has some liberty how SARPS are applied.

2.1.2 The International Air Transport Association (IATA)

The International Air Transport Association is the airlines trade association. IATA was formed in 1945. Today the membership of IATA is 300 member airlines, which represents 84% of the world air traffic. Membership of IATA should be obtained by individual airlines. Although not a regulator, membership of IATA requires an airline to demonstrate that it complies with all aspects of the IATA operational safety audit (IOSA). IATA also manages a Cabin Safety Task Force (CSTF), which creates guidance material for airlines to operate safely. Meetings with member airlines are held twice a year. During which recent cabin safety related incidents are presented and discussed.

2.1.3 European Aviation Safety Agency (EASA)

The national aviation authorities in the European Union joined together to form the European Aviation Safety Agency (EASA) in 2002, by Regulation (EC) No 216/2008 of the European parliament and the Council. The purpose of EASA's mandate is to standardize the regulations between the EU member states; so that the same levels of safety can be assured to the passengers no matter which national authority issues the Air Operators Certificate (AOC).

2.1.4 Civil Aviation Authority of Sri Lanka (CAASL)

The Civil Aviation Authority of Sri Lanka (CAASL) was established under the Civil Aviation Authority Act NO. 34 of 2002 on 27th December 2002 and is deemed a Public Enterprise under Article 154 of the Constitution of the Democratic Socialist Republic of Sri Lanka. Civil Aviation Authorities primary function is to undertake activities that promote civil aviation safety and security in keeping with International Standards and Recommended Practices adopted by International Civil Aviation Organisation (ICAO) and to steer the aviation sector in Sri Lanka as a prime contributor to the growth of national economy, enhancing quality of life of its citizens.

Civil Aviation Authority of Sri Lanka shall exercise, perform and discharge the following powers, functions and duties,

1. Regulate civil air operations within the territory of Sri Lanka and the operations of Sri Lanka registered aircraft outside the territory of Sri Lanka.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 15

2. Develop and promulgate or adopt by reference as appropriate, clear and concise aviation safety requirements, practices and procedures, implement effective enforcement strategies to secure compliance by all persons of the Standards and such aviation safety requirements, practices and procedures.
3. Encourage through comprehensive and timely aviation safety advice and by fostering awareness within the aviation community, the importance of aviation safety, maintaining high standards of aviation safety; provide aviation safety education and training for persons involved in civil aviation activities.
4. Initiate investigations on aircraft accidents and any other related incidents, arrange for the establishment and provision of search and rescue operations; conduct inquiries with regard to any flight safety hazards.
5. CAASL has direct impact on the functioning of cabin crew operations by its approval of two foundational documents for each airline: The Operations Manual Approvals, and Issuance of Air Operator's Certificate (AOC).

The Civil Aviation Authority of Sri Lanka consists of eight (08) members appointed by the Minister in charge of the subject of Civil Aviation. Three members, The Secretary, Ministry of Defence, a representative of the Minister in charge of the subject of Finance and the Director-General of Civil Aviation are serving the CAASL as ex-officers. The term of office of the appointed members is three (03) years.

The Authority is subject to the direction and control of the Minister in charge of the Civil Aviation.

2.1.5 Roles/Functions of CAASL Inspectors

CAASL Inspectors carries out regular inspections of the airline to ensure that it is operating according to the terms of the AOC and procedures detailed in the operations manuals. Ensure safety equipment operating procedures systems are in accordance with prescribed standards and Srilankan air navigation regulations.

2.1.6 Inspector Identification

CAASL Inspectors appointed by the DGCA will identify themselves to CCMs by displaying a Civil Aviation Inspector credential Card at the time of boarding. It is mandatory that the PIC be informed of the Inspectors presence.

Specimen Authorisation Card of a CAASL Inspector



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 16

2.1.7 Authority of CAASL Inspectors

The Inspectors are authorised to audit flight operations, cabin safety and dangerous goods training, safety equipment, aircraft systems, standard operation procedures (SOP's), Safety and Emergency Procedures Manuals, Safety Training and Standards Manuals, evaluate Cabin Safety Instructors, evaluate and approve safety training devices and training organisations. The aforementioned shall be in accordance with the prescribed standards and Air Navigation Regulations of Sri Lanka.

Any person appointed by the DGCA as a Civil Aviation Inspector or Designated Examiner shall be permitted to board/fly on any SriLankan Airlines aircraft to observe/inspect or administer periodical tests/inspections.

2.1.8 Carriage of Inspector

CAASL Inspectors or Examiners are permitted to board and fly on SriLankan Airlines aircraft for the purpose of observing, inspecting or administering a safety over sight. He shall occupy a passenger seat in the cabin and would be a holder of a boarding card.

In the event the aircraft is full and passenger or crew seats are not available, they may occupy flight deck observer seats with the approval of the PIC.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 17

2.2 Requirements for Cabin Crew members

2.2.1 Minimum Requirements

Specific minimum standards ensure that individuals selected will be capable of satisfactorily completing the training program, be able to perform all designated safety related duties and be competent in dealing with safety and emergency procedures in compliance to SLCAIS 089.

CCMs shall be able to read and understand written instructions in English, exercise good judgment, communicate effectively with Flight Crew, fellow CCMs and passengers during an emergency.

CCMs shall refer the Inflight Services Administrative/Announcement Manual and Standard Operating Procedures for relevant guidance. The CCMs shall be responsible to inform the Inflight Services Administrative Department of any known concerns that would affect the performance on board an aircraft at the earliest.

It is the responsibility of the individual CCM to obtain and maintain the relevant immunizations as per the company standards prescribed by the Group Medical Officer/Company Medical Officer.

The recommended minimum requirements applicable to CCMs of Sri Lankan Airlines are,

Educational Qualifications

Ref : HR Peoples admin and policy Manual Chapter 12

Medical Fitness

CCMs shall meet the requirements of the Class II medical examination approved by the CAASL.

Ref. SLCAIS 097

Height

Minimum 157.5 cm (61 Inches)

The ability & the height to retrieve safety and emergency equipment and to open and close overhead bins on the aircraft, from a standing position.

Weight

Body Mass Index shall apply- Ref. SLCAIS 097

Eye Sight

Uncorrected - 6/60 Corrected - 6/90 (As stipulated by the GMO/CMO)

Colour Vision

Mandatory

Age

Minimum : 18 years of age

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 18

2.3 Prohibitions

CCMs are required to keep the company informed regarding any physical or mental concerns that might affect the performance on-board an aircraft or impair good judgement. Ref SLCAIS 035

2.3.1 Consumption of Alcohol

Alcohol in the system could affect the performance. It is prohibited for a CCM to commence flight duty with a blood alcohol level in excess of **0.02%** on the breathalyser. A CCM found above the stipulated alcohol level shall be relieved from duty with immediate effect and shall be subjected to administrative requirements.

CCMs shall be subjected to random testing by medical personnel for verification of blood alcohol level. CCM is prohibited from consuming alcohol,

1. 08 hours prior to the specified reporting time for flight duty
2. 08 hours prior to the commencement of standby duty
3. Whilst on standby
4. During flight duty

2.3.2 Drugs and Stimulants

Unless prescribed by a qualified medical practitioner, the use of stimulants and/or drugs are prohibited as it could affect the performance. When stimulants and/or drugs are prescribed for CCMs, they may undertake flying duties only with specific written clearance by the prescribing medical practitioner and clearance approved by Sri Lankan Airlines Group Medical Officer/Company Medical Officer.

2.3.3 Psychoactive Substances

CCMs are prohibited from taking psychoactive substances, as it could affect the performance. In the event a CCM is found in violation of the above, he shall be immediately removed from flight duty and referred to the . GMO/CMO's clearance as per the requirements of the authority is required prior to scheduling the CCM on active flight duty.

2.3.4 Deep Water Diving

A CCM is prohibited from reporting to flight duty unless a minimum of 24 hours has elapsed after scuba diving beyond a depth of 10 meters.

2.3.5 Donating Blood

A CCM is prohibited from reporting to flight duty unless a minimum of 24 hours has elapsed after donating blood.

2.3.6 Pregnancy

Once a CCM is confirmed to be pregnant, she shall inform the In-Flight Admin section. She will consequently be considered not fit to fly and shall be taken off the active roster. CCM is required to submit a medical certificate to confirm her pregnancy and follow the requirements.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 19

2.3.7 Heating of Crew Meals

Crew meals must not be heated along with the passenger meals unless served immediately to Crew. Passenger and Crew meals shall not be reheated as reheating may cause food poisoning.

2.4 Mandatory Items to Be Carried By A CCM

1. Sri Lankan Airlines staff identification card
2. CCM Certificate and Crew Member Certificate issued by the DGCA
3. Passport/Health Certificate (as applicable)
4. Safety and Emergency Procedures Manual (e-format)
5. Relevant keys
6. CCMs dependent on Spectacles/Lenses (contact lenses) shall carry a spare set when on flight duty
7. CCMs who have an endorsement on the CCM Certificate for hearing Aid shall wear them whilst on flight duty.

2.4.1 Company ID

A valid Company ID and a Crew Member Certificate shall be displayed by the CCM prior to entering the airport premises and shall remain clearly displayed at all times when on duty within the restricted zone at an airport.

2.4.2 Loss of Company ID Card/Security Pass

Loss/theft of Company ID card/Security Pass, shall be reported immediately to the police in the area concerned at base or overseas and Company Security and Investigation Department.

2.4.3 Loss of Crew Member Certificate/Cabin Crew Member Certificate

The loss of a CMC/CCMC Shall be reported immediately to the police in the area concerned at base or overseas/Company Security and Investigation Department/Inflight Admin and Flight Operations Admin.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 20

2.5 Cabin Crew Member Certificate (CCMC)

Pursuance to SLCAIS 089 it is mandatory that CCMs obtain a Cabin Crewmember certificate from the DGCA in order to operate as a required CCM on board SriLankan Airlines Aircraft. SriLankan Airlines shall ensure to fulfill the conditions stipulated in SLCAIS 089 in order to apply for the Cabin Crewmember certificate. The certificate shall be valid for 5 years from the date of issue. The CCM shall be responsible to update the certificate by obtaining endorsements on the relevant pages and shall be in possession of a valid certificate when reporting for flight duty. CCMs shall be responsible to renew the certificate prior to the date of expiry and the renewal process to commence 45 days prior to expiry. CCMs shall notify Cabin Safety Training section in writing if the renewed certificate is not received before 10 days of expiry. Only persons authorized by DGCA shall make endorsements on the certificate. The Regulatory Training/Onboard Safety Assessments records page issued by Cabin Safety Training shall be inserted into the last pocket of the certificate.

CCMs shall ensure medical/training records are current before operating a flight. Once a CCMs operates a flight with expired medical/training records he shall be in violation of the regulatory requirement of the authority. Ensuring currency before operating a flight shall be the responsibility of the operating Purser/In-Charge CCM and the CCM concern. If a CCM has not been scheduled for regulatory training, he shall keep the cabin safety training manager informed at least 14 days prior to the date of expiry. Upon renewal of Cabin Crew Member Certificate or Medical Endorsement page, update copies of the relevant pages shall be submitted via email to cabin safety training section 10 days prior to expiry.

2.5.1 Multiple Cabin Crew Operation,

Purser/In-Charge crew shall be responsible to check the cabin crewmember certificates (Blue Dockets) of all CCMs to ensure the currency of the following before operating each flight, The pages to be checked are,

1. Page I - Personal Information
2. Page III – Validity of SEP
3. Page V – Validity of Medical Records
4. Page VI – Validity of the certificate (CCC)
5. Page VII – Validity of Competency Training

2.5.2 Purser/In-Charge CCM,

Shall ensure the above procedure 2.5.1 is strictly adhered to prior to departing Colombo as you shall be held responsible for any violation/s along with the CCM/s.

2.5.3 Single Cabin Crewmember Operation,

On boarding the aircraft, the CCM shall present the cabin crewmember certificate (Blue Docket) to the operating PIC who shall check the validity of the above. Failing to seek validation from PIC and operating the flight shall be treated as a safety violation.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL


	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 21

2.5.4 Positioning/Dead Heading Cabin Crewmembers

To prevent confusion by passengers Positioning/Dead Heading CCM shall not wear, or at least make invisible to passengers, part of the operator's cabin crew uniform that might identify them as members of the operating cabin crew

2.5.5 Crew Member Certificate (CMC)

DGCA shall issue a CMC as per the requirement Ref. Implementation Standard 007 of 2012. The primary purpose of the issue is for identification as a crew member of an airline or persons essential for the operation of an aircraft. E.g. Flight Crew, Cabin Crew and Flight Engineers if applicable.

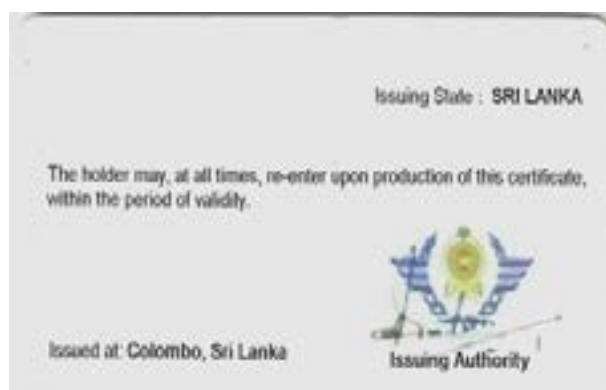

2.6 Travelling on GD

There could be Crew listed on the General Declaration who are certified by DGCA to carry out non safety related duties. Ref SLCAIS 07

E.g. - CLAs, PRAs

They shall adhere to the following,

1. Shall be identified in a different uniform from the operating CCMs
2. During a decompression, don an oxygen mask and act as a passenger
3. During an emergency evacuation/ditching, follow instructions

2.7 Training Standard SLCAP 4305 (CAASL Publication)

Training for a CCM on regulatory requirements on board an aircraft is a legal requirement.

All training required for the issuance of a certificate is published in ICAO Doc: 10002 Cabin Crew Safety Training Manual and SLCAP 4305 -Training Standards for CCMs, Paragraph 12.4 of annex 6 requires that, SriLankan Airlines shall establish and maintain a safety-training program, approved by the DGCA and all persons shall satisfactorily complete it prior to certification as required in SLCAIS 083/089

2.7.1 Training Programmes

Regulations require that Sri Lankan Airlines conduct approved training programs for all regulatory training purposes. Only Cabin Safety Instructors approved by the DGCA shall conduct cabin safety training. All training shall be conducted as stipulated in the Training Standard Manual & shall be guided by the procedures laid down in the approved Safety & Emergency Procedures Manual in accordance with

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 22

SLCAP 4300. The primary objective of a safety-training program is to motivate safe actions through establishment of a dynamic corporate safety culture. Designing the training shall be to underline the CCM responsibilities on the safety aspects at all times, and in the event of an emergency to react with confidence to save lives. The training shall be for CCMs to assume duties in any section within the cabin, not limiting to the work position assigned. If a CCM is incapacitated, another CCM shall assume the others responsibilities as well. The training programme shall also include awareness of the effects caused by loss of cabin pressure, hypoxia, human performance and the theory shall include as stated in ICAO Doc 10002

2.7.1.1 Initial Training

The goal of initial training is to ensure that each trainee acquired the competencies, knowledge and skill required to perform the duties and responsibilities related to the safety of passengers and flight during normal, abnormal and emergency situations

The content of Initial training

1. Theory of Flight
2. Knowledge & operation of safety equipment carried on board
3. Safety and Emergency Procedures
4. Aircraft Specific
5. Aviation Security
6. First Aid and Medical emergencies
7. Transporting of dangerous goods by air
8. Human Factors and Crew Resource Management
9. Safety Management Systems
10. Human Trafficking

A CCM shall be required to act as a CCM within 90 days of completion of regulatory training, if not further training or an assessment is required prior to undertaking flight duties as a CCM.

Competency Based training shall include but not limited to,

1. SEP/Dangerous Goods Regulations
2. Slide Drill/Ditching Drill/Firefighting drill
3. First Aid and Medical emergencies
4. Security & Self Defence Responses

An assessment is required on completion of the respective training modules. The question papers, question bank for assessment, any amendment or revisions to the approved training Programme or assessments shall have prior approval of the DGCA.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 23

2.7.2 Training requirements and retention of records,

The training section shall maintain training records of CCMs. The records shall be accessible to the CAASL. The guidelines are as per the regulatory training requirement.

TRAINING	REGULATORY REQUIREMENT	TRAINING RECORDS
SEP Re-current Training	Every 12 Months	As long as Employed
Flight Duty Period and Rest Period/ ICCT/Human Trafficking/Safety Management System	Every 12 Months	As long as Employed
Slide Drill/CRM	Every 12 Months	As long as Employed
Security & Self Defence Responses	Every 12 Months	As long as Employed
Dangerous Goods Regulations	Every 12 Months	As long as Employed
First Aid/Medical Emergencies	Every 24 Months	As long as Employed
Ditching Drill/Fire Fighting	Every 36 Months	As long as Employed
Regulatory safety checks (Onboard)	Minimum two (2) checks per year	As long as Employed

2.7.3 Maintenance of Cabin Crew member Certificate

DGCA approved Cabin Safety Instructors shall ensure the successful completion of the CAASL approved Initial SEP Training programme as per SLCAP 4305 (Sri Lanka Civil Aviation Publication) prior to issuing a certificate. Once issued, a certificate shall be renewed annually by the holder attending and being successful at a re-current SEP training program approved by the CAASL as per SLCAP 4305.

If a CCM is not scheduled for a recurrent training prior to the expiry, the CCM is required to inform the Cabin Safety Training Section in writing, two weeks prior to the date of expiry.

CCM who fails an examination, a re sit will be permitted, if unsuccessful; the Cabin Safety Training Manager shall inform the DGCA and relieve the CCM from active flying duties. The Cabin Safety Training Manager may recommend further training and assessments.

The CAASL requires that all CCMs hold a valid certificate to operate on a specific aircraft type and the CCM shall be in possession of it when reporting for flight duty.

2.7.4 Withdrawal of a Cabin Crew member Certificate

The CAASL Inspectors/Cabin Safety Training Manager may recommend to the DGCA for the withdrawal of a certificate of CCMs who are incompetent. The DGCA has the sole authority to withdraw the certificate.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 24

2.7.5 Familiarization Flights/Line Indoctrination (SNY)

Following successful completion of Initial training, CCMs shall operate at least two supernumerary flights/Line Indoctrination (SNY) on the aircraft types (One on each type) be carried out as specified in SLCAP 4305, supervised, and evaluated by a DGCA approved Cabin Safety Instructor. During the familiarization flight the cabin crew trainee shall be additional to the minimum number of operating CCMs. They shall not be identified as CCMs, shall not occupy cabin crew seats and impede operating CCM's in their duties. The duration of a SNY flight shall be a minimum of one hour of actual flying time. The CCM shall operate supernumerary flights/Line Indoctrination (SNY) flights within 90 days of successful completion of safety training. On issuance of the CCMC, a CCM shall operate flights as a certified Crew member unless specified by the SriLankan Airlines Cabin Safety Section.

On successful completion of operating flights on the aircraft type, a CCM may be recommended to operate another aircraft type on completion of a safety assessment carried out on board and being successful at a conversion-training programme. A CCM shall operate two supernumerary flights/ Line Indoctrination (SNY) flights (One on each type) supervised and evaluated by a DGCA approved Cabin Safety Instructor. The duration of a supernumerary flights/ Line Indoctrination (SNY) flight shall be a minimum of one hour of actual flying time.

Failures shall be offered an additional supernumerary flights/ Line Indoctrination (SNY) flight evaluated by a DGCA approved Cabin Safety Instructor.

2.7.6 Recurrent Training

Recurrent training is conducted as specified by the SLCAP 4305 annually to ensure the maintenance of competencies, knowledge and skills through a series of hands-on exercises, simulated exercises, exams etc., For general training elements relevant to each aircraft type on which the cabin crew member will be assigned duties. It may also be provided to familiarize crew members with new requirements, procedures and/or equipment introduced since their last training. Recurrent training ensures that cabin crew members, by practicing most competencies and skills, maintain the level of performance required for their duties and responsibilities.

Recurrent training has a 12-month validity period counted from the end of the month the training was completed, The validity of the training expires on the last day of the month of previous training

2.7.6.1 Refresher Training Program

A subject specific Refresher Training Programme shall be conducted for a period of three days and completed with an assessment. If the CCM is unsuccessful at the assessment, CCM shall be referred to Admin.

2.7.7 Handing Over Regulatory Documents When On Long Leave

It is mandatory that regulatory documents are handed over to Cabin Safety Training section (Cabin Crew Members Certificate) and to Flight Operations Administration Manager (Crew Members Certificate) prior to commencement of "NO PAY" leave for over 30 days due to Maternity Leave, Long medical leave or being "OFF" the roster for disciplinary reasons/any other reasons. CCMs shall ensure the above documents are repossessed from Cabin Safety Training Section and And Flight Operations Administration Manager on an office day prior to commencing flight duties.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 25

2.7.8 Re-qualification Training for CCMs Returning for Flight Duty

If a CCM has been absent from all flying duties for a period not exceeding 30 days, and still remains within the period of validity of the previous Annual Recurrent Training, a Requalification Assessment is not required prior to being assigned flight duties.

If a CCM has been absent from all flying duties for a period between 31 to 180 days and still remains within the period of validity of the previous Annual Recurrent Training, a Requalification Assessment as per training cycle 3 is required prior to being assigned flight duties.

If the CCM is unsuccessful at the Requalification Assessment, CCM shall be referred to follow a Refresher Training programme. Ref 2.7.6.1

If a CCM has not been absent from all flying duties, but has not, during the preceding 90 days, undertaken duties on a type of aircraft as a CCM, prior to undertaking such duties on that particular aircraft type, the CCM shall carry out 01 SNY flight on the said aircraft type.

2.7.9 Re-qualification Training for CCMs Returning to Flight Duty after long Leave

CCMs on approved long leave or not undertaken flying duties for above 2 years (730 Days) shall follow Ab-Initio Safety Training Program,

CCMs on approved long leave or not undertaken flying duties from 6 months (181 days) to 2 years (730 days) shall follow an Initial Safety Training program for Senior CCMs.

CCMs are required to be successful at the Ab-Initio Safety Training/Initial Safety Training program for Senior CCMs, prior to re-commencement of flight duty. If the CCM is unsuccessful at the Ab-Initio Safety Training Program/Initial Safety Training program for Senior CCMs, a re-sit is offered on a scheduled day. If unsuccessful at the re-sit, the CCM may cease to continue duties as a CCM.

CCMs that are successful will be detailed on 1 SNY flight on each certified aircraft type prior to being assigned for flight duty. An approved Cabin Safety Instructor shall conduct the onboard assessment on the CCMs knowledge on SEP and his competence/proficiency. The CCM shall operate on the certified aircraft type for a period determined by the SriLankan Airlines Cabin Safety Section and requires to be trained and be successful at a conversion-training program prior to being assigned to operate another type aircraft.

2.7.10 Mandatory onboard Assessments

Each CCM shall undergo a minimum of two mandatory safety onboard assessments for one calendar year, which shall be carried out on board an aircraft by a DGCA approved Cabin Safety Instructor. In the event a CCM is rated 'C' for an onboard assessment, CCM shall follow the training cycle 2 prior to being detailed for flight duties.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 26

2.7.11 Operation of More Than One Type or Variations

A CCM shall not operate more than three types of aircraft. However, with the approval of the DGCA, a CCM may operate on a fourth type if the safety equipment and emergency procedures for at least two aircraft types are similar in:

1. Emergency exit operation
2. Type of safety equipment
3. Location of safety equipment
4. Emergency procedures


2.7.11.1 Re-qualification Assessment

The re-qualification assessment shall be conducted by an instructor/assessor approved by the authority. The assessment shall be a means for verification of the cabin crew members knowledge on all areas pertinent to the the operation . it shall include questions as a minimum on the following areas, Aircraft specifics/Safety and emergency procedures/Abnormal and Emergency procedures/Oxygen system and decompression/Dangerous goods regulations/First aid/AVSEC. Pass mark for the assessment shall be 90% with viva conducted and marked to 100%. The assessment papers shall have prior approval of the authority


A Refresher Training Programme shall be carried out for CCMs who fail to obtain the required pass marks for the Requalification Assessment

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

2.7.13 Training Cycle 2 – Annual Re-Current/Onboard Assessment

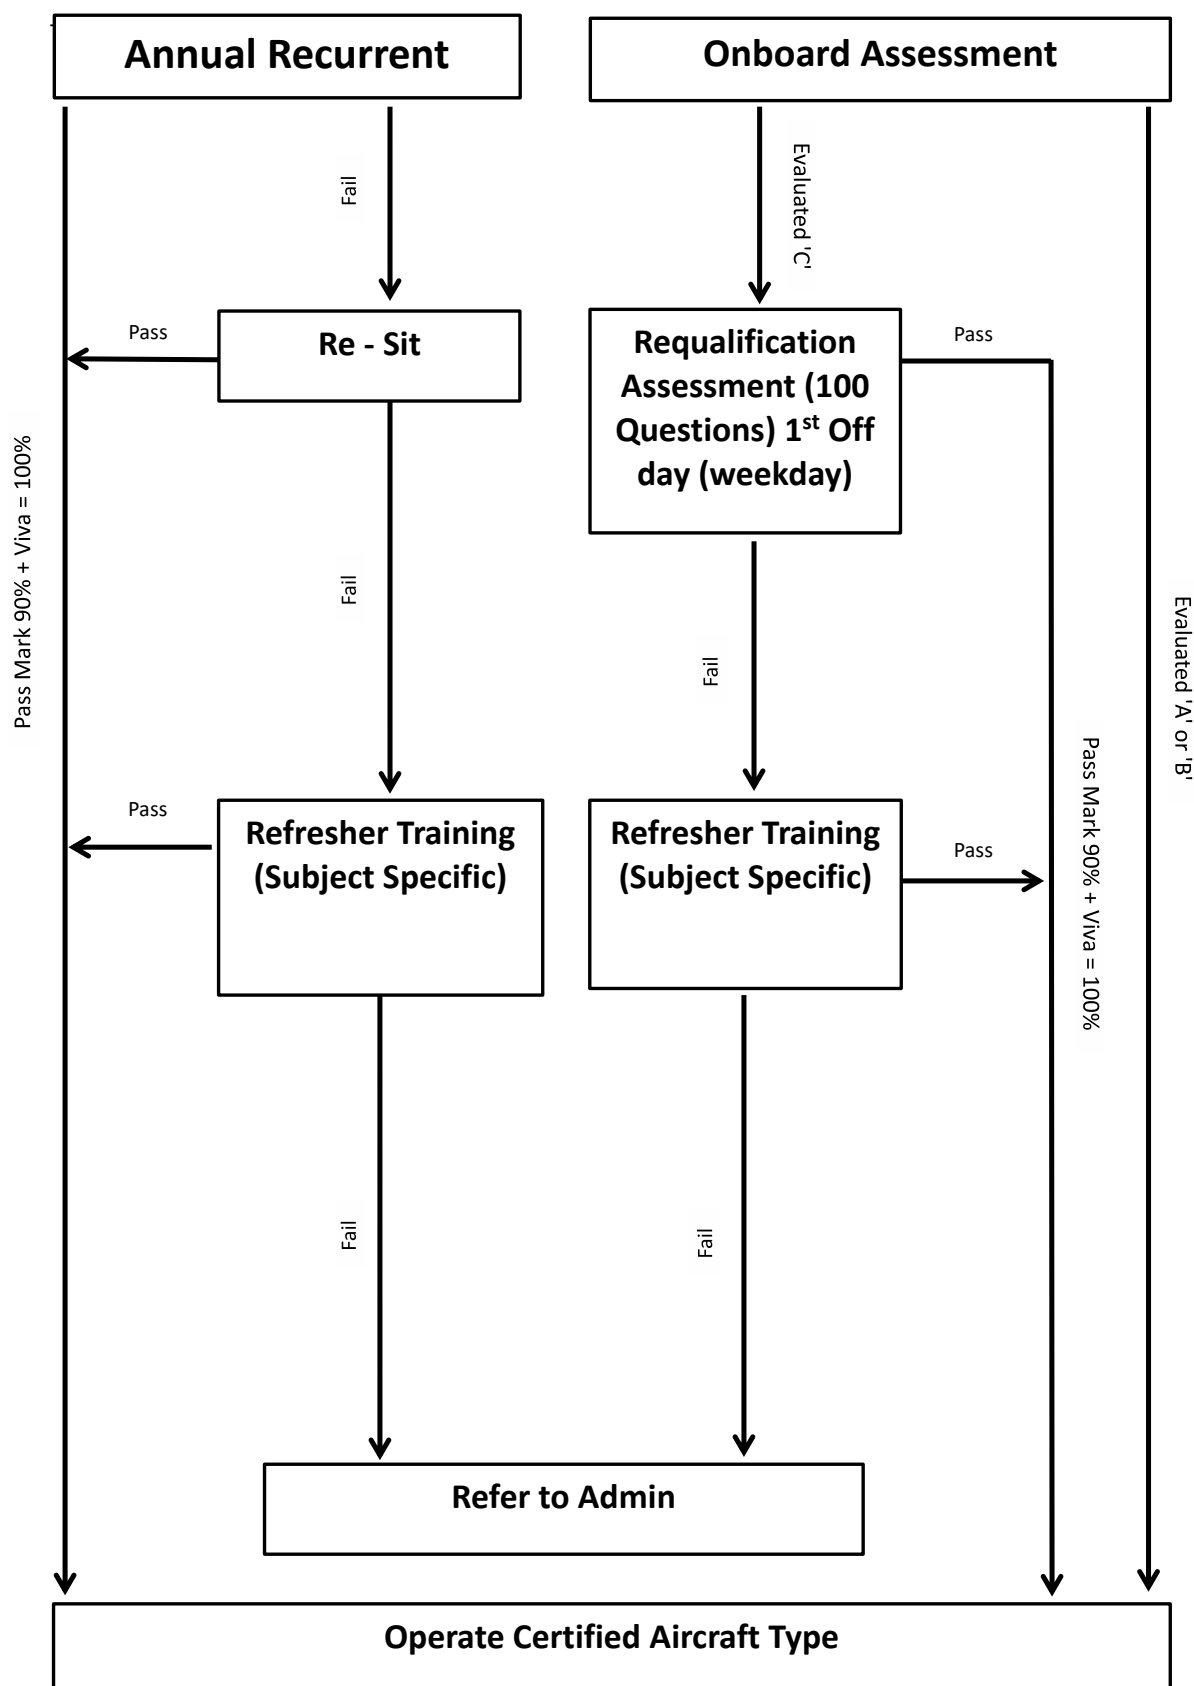

2.7.14 Training Cycle 3 – Training following long absence of leave

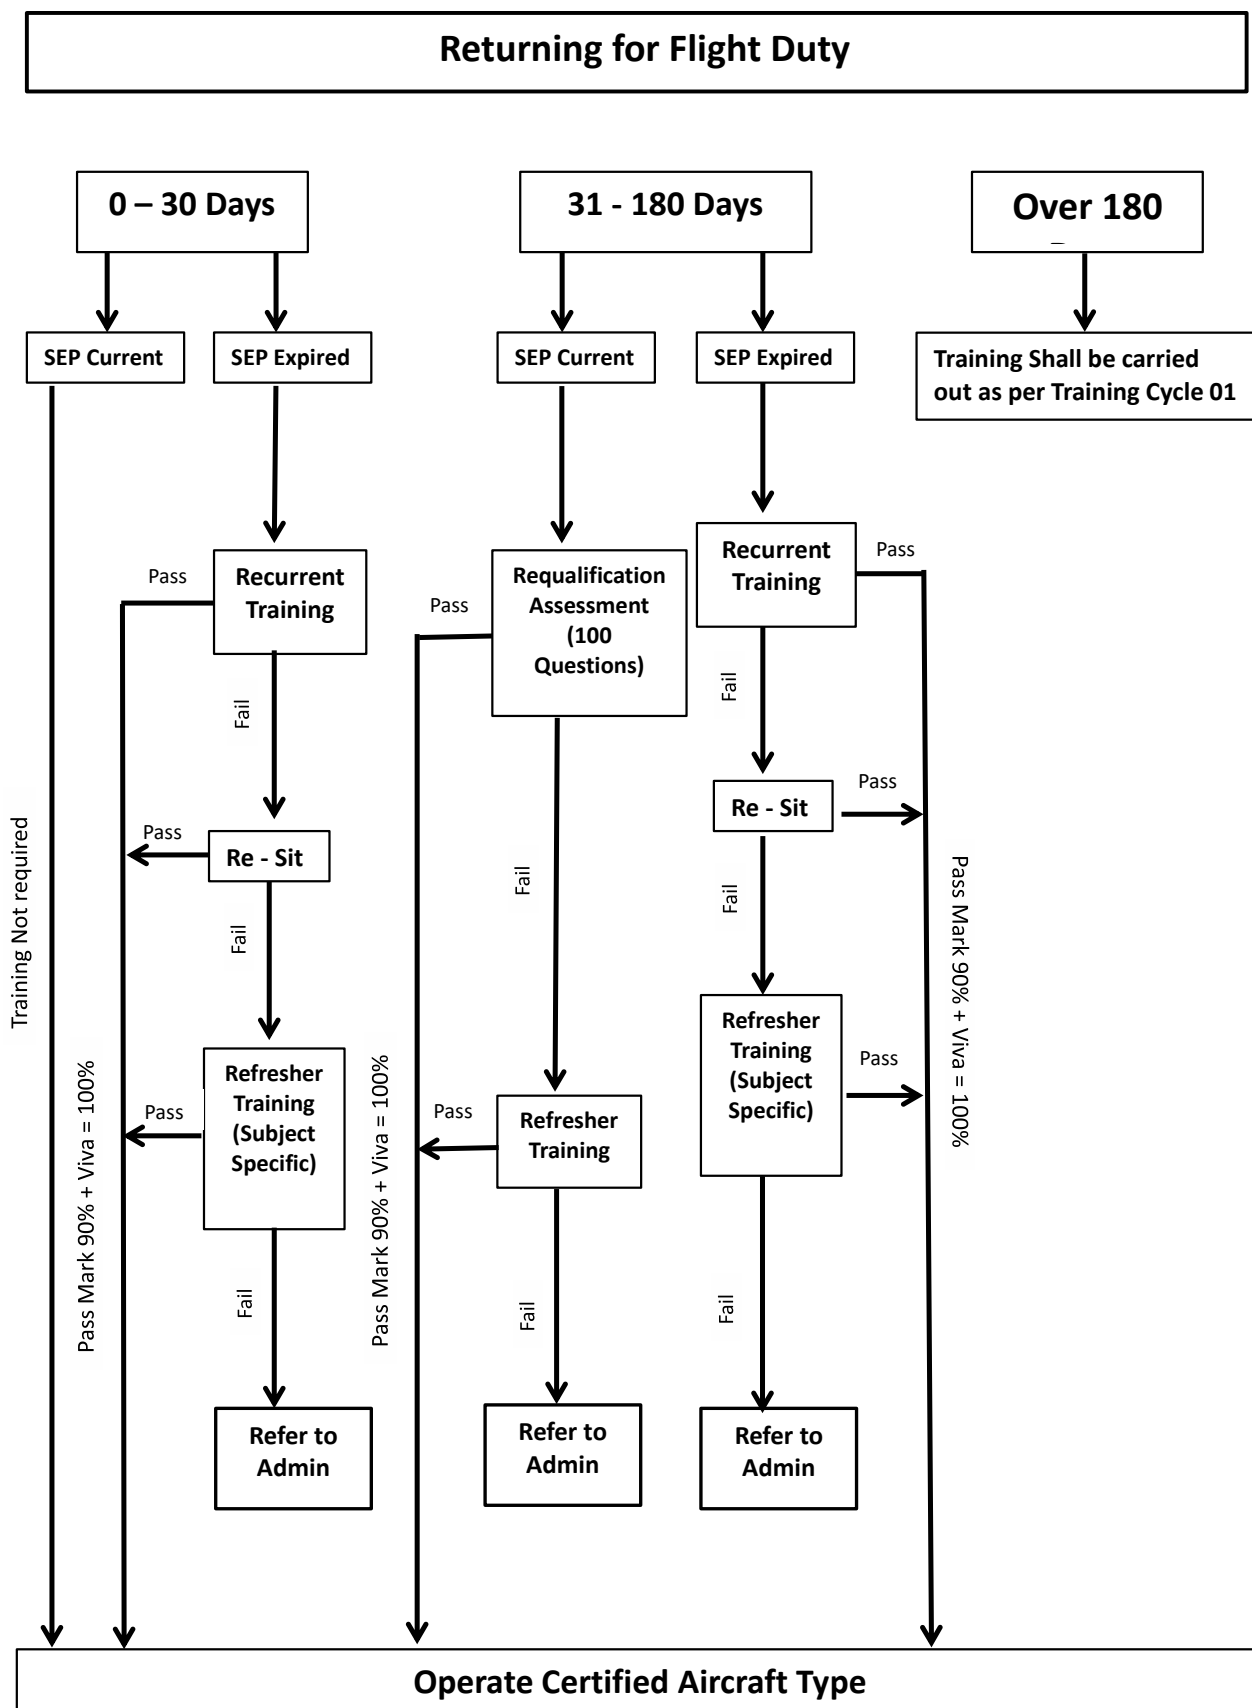

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 30

2.8 Cabin Safety Instructors/Assessor

Cabin Safety Instructors shall be approved by the DGCA as stated and specified in SLCAIS 090. Once approved, they shall be authorised to conduct cabin safety training and CAASL required online evaluations. All safety training Instructors shall comply with requirements published in SLCAIS 89 & SLCAIS 90.

Cabin Safety Instructors shall renew their certificates annually. The Cabin Safety Inspector (CAASL) shall carry out the evaluation and recommend to the DGCA for renewal.

Cabin Safety Instructors shall be fully conversant with the Training Standard Manual (SLCAP 4305) and other requirements pertaining to safety and training. They shall constantly enhance their knowledge on safety training techniques in keeping with international standards.

It is Mandatory that Cabin Safety Instructors train the CCMs on initial, conversion training and subject the successful CCMs for an onboard assessment to guide and enlighten them on SMS principles when on flight duty.

2.8.1 The Instructor Requirements For Onboard Assessment

As required by SLCAP 4305 Cabin Crew Training Manual and SLCAIS 89 all manuals shall be kept current and updated. The Cabin Safety Instructor shall always be satisfactorily current with the Safety Equipment/ Aircraft Systems/Standard Operation Procedures/ Safety and Emergency Procedures in order to ensure Cabin Crew are competent and constantly maintaining a high standard of safety management when on duty.

It is mandatory for Cabin Safety Instructors to carry out a minimum of two onboard assessments on CCMs when on flight duty for each calendar year.

To prevent confusion by passengers the Cabin Safety Instructor shall ensure that they do not perform tasks or wear a uniform in such a way that might identify them as members of the cabin crew. They Shall carry out duties of an instructor as stipulated in SLCAP 4305/ SLCAIS 89. In an emergency, the Cabin Safety Instructors shall act in the best interest of safety.

They shall also,

1. Monitor pre-flight briefings and communicate to the Cabin Safety Training Manager on recommendations for improvements
2. Observe and evaluate CCMs onboard and guide/encourage safety management systems throughout the flight duty period
3. Conduct checks on safety equipment/aircraft systems and safety information on board
4. Liaise with the Flight Crew & Engineering personnel on safety related issues
5. Communicate areas of concerns for continuous improvement to the Cabin Safety Training Manager
6. Be of guidance to CCMs on safety and emergency related issues.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 31

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 32

2.8.2 Mandatory Pre Flight-Briefing

CCMs reporting for flight duty shall be prepared in advance for the flight. Familiarization on the aircraft type is a key factor for safety awareness and safety management systems (SMS). Only the Purser/In-Charge CCM shall test the CCMs knowledge on SEP/DGR/Security and First Aid prior to each flight, to ensure all CCMs possess the required knowledge to handle an emergency situation. Purser/In-Charge shall not delegate same to cabin supervisors. If the knowledge is below accepted standards, and if the CCM concerned cannot be replaced, he shall not be allocated the duties of a door primary, and a report shall be forwarded to the Cabin Safety Training Manager. Guidance for a pre-flight testing/ briefing shall be as follows,

	Cabin Safety Training
	Pre Flight-Safety Briefing

1. SAFETY EQUIPMENT	1.1 Location relevant to the particular work area. A situation, reaction and the usage of the equipment with back up.
2. CRASH LANDING	2.1 Door Primary Responsibilities 2.2 Door Assist Responsibilities. 2.3 Responsibility for the Safety Equipment
3. DITCHING	3.1 Door Primary Responsibilities 3.2 Door Assist Responsibilities 3.3 Responsibility for equipment 3.4 Raft duties in sequence. 3.5 Raft capacities
4. CABIN PREPARATION (CRASH LANDING/ DITCHING)	4.1 Phase 1 - Demonstrations 4.2 Phase 2 - Cabin /Passenger/ Galley preparation 4.3 Phase 3 - Re-check. Specifics
5. CONDITIONS A CCM INITIATES AN EVAC	5.1 When / How Relevant to the particular work area
6. FIRE FIGHTING PROCEDURE (SPECIFIC FIRE)	6.1 Fire fighter 6.2 Communicator 6.3 Co-Ordinator 6.4 Relevant to the work area
7 EMER: COMMANDS	7.1 Bracing - Commands 7.2 Ditching – Commands (Prepared/Unprepared) 7.3 Crash landing - Commands 7.4 Blocked exit - Commands (Prepared/Unprepared)
8. GATE/RAMP EMERGENCY	8.1 Description 8.2 Procedure and action

Cabin Safety Training	FO/CST/001/23
-----------------------	---------------

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 33

	Cabin Safety Training
	Pre Flight-Safety Briefing

9. EMER: COMMUNICATION	9.1 Emergency call from the F/D 9.2 Pilot Incapacitation 9.3 Impending Emergency 9.4 Evacuation Required 9.5 Evacuation not Required 9.6 Emergency Descent (Mask not deployed)
10. DECOMPRESSION Situational awareness	10.1 Indications 10.2 Immediate action 10.3 TUC at 35,000 feet 10.4 Post duties
11. OXYGEN	11.1 Relevant locations 11.2 Pre — departure Checks 11.3 Announcement 11.4 Precautions 11.5 Administering procedure 11.6 Fixed oxygen
12. SECURITY	12.1 Least Risk Bomb Location (LRBL) 12.2 Hijack — CCM action
13. FIRST AID	13.1 Assessment of collapsed passenger 13.2 C.P.R — procedure
14. DGR	14.1 Location and contents of ERK 14.2 Procedure in case of a spillage
15. SAFETY Updates	15.1 Refer current safety update

Cabin Safety Training	FO/CST/001/23
-----------------------	---------------

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 34

2.9 Crew member Responsibilities

2.9.1 Cabin Crew member

1. CCM's shall comply with all safety related duties and instructions at all times as specified in the SEPM. CCMs shall be under the command of the PIC and be identified in SriLankan Airlines CCM uniform
2. Be responsible for the safety and security of the aircraft and it's occupants from the time of boarding to disembarking.
3. CCMs shall be responsible for promptly notifying the PIC, by the quickest available means, of any aircraft accident resulting in serious injury or death to any person, or causing substantial damage to the aircraft or property
4. Follow and enforce company policies/procedures/regulatory requirements and standard operating procedures (SOP) as specified
5. Be in possession and familiarize self with the contents of the SEPM and any subsequent amendments and revisions for reference during flight. This shall include all CSIs, CSNs and Safety Related Notices.
6. The aircraft shall not be left unattended whilst passengers are on board and CCM's shall be vigilant during catering and cleaning for any abnormalities.
7. Execute duties that relate to the safety of the aircraft and its occupants
8. CCM's shall report to the PIC any observation/fault/failure/malfunction/defect including emergency systems, or any incident that endangers the airworthiness or safe operation of the aircraft if not already reported by another CCM.
9. CCMs shall be responsible for their personal baggage and shall not leave them unattended at any time and if lost shall report same to the authority immediately. CCMs shall ensure, baggage left at layover stations are locked for security reasons
10. CCM's shall comply with all applicable flight time, flight duty period, duty period limitations and rest period requirements.

2.9.2 In Charge Cabin Crew Training

Cabin Crew members who are identified and promoted as Pursers and Cabin Supervisors shall receive a specialised leadership training in accordance with the applicable regulations and standards of the operator prior to being assigned duties.

1. Responsibilities to the commander
2. Briefing of CCMs - normal, abnormal, emergency situations
3. Safety briefing of passengers
4. Accident & Incident reporting
5. Documentation
6. Leadership
7. Decision making

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 35

8. Individual and team responsibilities
9. Effective two way communication
10. Flight time, Flight duty period, Rest period
11. CRM and human factors

2.10 Purser/In-Charge CCM

SriLankan Airlines operates flights with a Purser appointed, whenever assigning more than one CCM for flight duty. The Purser shall be acceptable to the authority, under the command of the PIC, and be responsible to the PIC for the conduct/co-ordination of normal, abnormal and emergency procedures as specified and shall,

1. Ensure the required number of CCMs are available for duty
2. Ensure self and all detailed CCMs are in possession of valid regulatory documents and an updated SEP Manual for guidance and reference.
3. Purser/In-Charge crew shall be responsible to check the cabin crewmember certificates (Blue Dockets) of all CCMs to ensure the currency of the following before operating each flight, The pages to be checked are,
 - Page I - Personal Information
 - Page III – Validity of SEP
 - Page V – Validity of Medical Records
 - Page VI – Validity of the certificate and Special Endorsements (CCC)
 - Page VII – Validity of Competency Training
4. Assign duties/responsibilities to CCMs as required for each flight.
5. Brief and test CCMs on the safety competencies prior to each flight
6. Ensure the Pre-departure Safety and Security checks are carried out, VR signed
7. Conduct a briefing with the PIC prior to departure. Obtain code red and hijack alert (denied entry code) and communicate the hijack alert to the CCMs
8. Ensure, all laid down procedures /SOP's are adhered to by all CCMs
9. Be responsible for the health/safety of the operating CCMs and the passengers
10. Be responsible for the discipline of all CCMs, whilst on duty/on company time
11. Be responsible to ensure safety regulations are adhered to in the cabin
12. Brief CCMs on routine door operations
13. Be responsible to prepare for an emergency when instructed by the PIC
14. Carry out systems check on FAP for defects; and an "ALL STN" call for serviceability.
15. Pre-flight check on the logged defects, keep the PIC/Engineer and CCMs informed. Concerns or missing items in reference to the MEL, shall be logged immediately and communicated to the PIC and the Engineer for airworthiness.
16. Report technical irregularities in the cabin in consultation with the PIC
17. Ensure documentation is completed as specified

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 36

18. Be vigilant and responsible for the general safety and security at all times
19. Report to the Cabin Safety Training Manager on safety related concerns or of any deviations to laid down service procedures due to safety concerns
20. Ensure SOP's are followed when the aircraft is on ground or in flight
21. Be responsible for effective man management to enable the crew to react efficiently in case of an emergency
22. Brief CCMs to be vigilant on Personnel (Authorised/Unauthorised) entering the aircraft and the nature of duties carried out by them
23. Ensure the following details are completed on the General Declaration (GD) on all sectors before landing.
 - Declaration of health (Any Pax with symptoms stated))
 - Details of disinsection (Number of aerosol cans sprayed)
 - Total Passenger count (Indicated on right corner)
 - Signature of Purser/In Charge CCM at the bottom
 - Counter signed by the Pilot in Command
24. Positioning/Dead Heading Cabin crewmembers, In the absence of a Purser/In-charge CCM, the operating Purser shall check the validity of the CCMC, medical and training records.
25. Shall check the Passenger Information List (PIL) for special handling passengers and the type of assistance required and communicate same to the rest of the crew through the cabin supervisors before departure and will ensure the relevant assistance is provided upon arrival. If wheelchair/Ambu lift is not available on arrival same should be coordinated with the ramp coordinator

2.10.1 Nomination of a Purser from-base

In the absence of the assigned Purser, a Cabin Supervisor who has completed a minimum 3 years of flight duties in the category of Cabin Supervisor shall be assigned to operate a certified type of aircraft. He will carry the designation of Acting Purser.

2.10.2 Replacing the Operating Purser during flight

In the event the scheduled Purser is unable to continue to operate the flight, SriLankan Airlines shall assign the next most senior Cabin Supervisor to operate as the Purser.

2.10.3 Purser Relieved Of Duty

When the Purser relieves himself from in-flight duty, The PIC shall be informed and the Purser shall nominate a Cabin Supervisor to be responsible for Purser's duties. The Purser shall re-brief the Cabin Supervisor of the (code red/hijack alert). In the event of an emergency, the Purser shall takeover responsibilities.

2.10.4 Under The Supervision of Purser/Cabin Supervisor

The Purser or in his absence the Cabin Supervisor shall be in charge of and has authority over all CCMs on duty regardless of the years of experience.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 37

2.10.5 Responsibilities of Primary Crew Member

A CCM who has been assigned as a door primary for a designated door/exit shall carry out routine and emergency operations. When there are two Cabin Crew seats located at a door, the Primary Crew shall sit at the outboard seat.

2.10.6 Exception to the Primary Crew Member

The door assist at L1 station, shall be responsible for the safety equipment check at L1 and L1A.

2.10.7 Responsibilities of Assist Crew Member

The designated CCM shall sit at the inboard seat and assist the Primary Crew to carry out routine and emergency operations.

2.11 Flight Time Limitation

State limitations applicable for flight time, duty periods and rest periods for CCMs employed to operate in aircraft/airlines registered in Sri Lanka for public transport is contained in SLCAIS 054 and SLCAP 4210. CCMs shall be guided by the Flight Operations Manual (FOM) - Chapter 08

Flight time limitation training shall be carried out as per approved Srilankan Airlines Cabin Crew Training Standards Manual. CCM requiring clarification shall contact the crew-scheduling department with specific details. CCMs may address concerns on his personal schedule in writing.

The records shall be maintained by the crew scheduling department for a minimum period of 15 months

2.11.1 Controlled Rest On-Board

PROCEDURE

1. Purser is responsible to ensure that CCM's adheres to crew rest procedures and requirements.
2. Purser shall determine the allocation of crew rest time.
3. Purser shall advise the PIC prior to application of the crew rest.
4. Half the number CCMs shall be active in the cabin at all times.
5. Prior to the Purser commencing his rest a senior CCM shall be appointed to carry out his duties and the PIC shall be kept informed.
6. Crew rest will commence after completion of inflight meal service.
7. Purser may disrupt or cease crew rest at any time should in-flight circumstances require (emergency/medical etc.)

2.11.2 Fatigue Management System (FMS)

A data-driven flexible alternative to prescriptive flight and duty time limitations which is based upon scientifically valid principles and measurements, and which involves a continuous process of monitoring and managing fatigue within the context of Srilankan' Safety Management System

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 38

2.12 Flight Deck

2.12.1 Authority of the PIC

Authority, Duties and Responsibilities of the Pilot in Command

The PIC assumes command the moment he enters the aircraft with the intention of operating a flight. His command continues until relieved either by another Commander/suitably qualified Pilot or until the termination of the flight when he completes all post flight documents and leaves the aircraft.

Duties and responsibilities of the PIC are laid down in various parts of the Flight Operation Administration Manual. It is, however, intended to bring to the attention of a Commander, important aspects of his responsibilities in the operation and conduct of a flight.

The PIC is responsible for the safety and security of the aircraft and all crew, passengers and cargo. He will supervise and direct the other members of the crew in the proper discharge of their duties. He is responsible for the safe operation of flights, regulatory compliance, efficiency, on time performance, courtesy, passenger comfort and economy of operation. He has the necessary authority to carry out the above responsibilities.

The PIC whether handling the controls or not is responsible for the operation of the aircraft in accordance with rules of the air except that he may depart from these rules in circumstances that render such departure absolutely necessary in the interest of safety.

It is incumbent on the PIC to comply with laws, regulations and procedures of the state in which the aircraft is flown. This includes complying with all health, customs and immigration laws in force. He shall ensure that no crew member violates any of these laws and no contraband or unauthorized articles are placed anywhere on board the aircraft. If an emergency situation arises which endangers the safety of the aircraft or personnel and necessitates taking action, which involves violation of local regulations or procedures, the PIC shall notify the appropriate local authority without delay.

A report shall be submitted of any such emergency action to the DGCA through the Senior Manager Flight Operations as soon as possible.

All Crew Members will report to the PIC to enable him to give specific instruction, if any, regarding the conduct of the flight. He shall ensure that the crews are on board well in time and all pre-departure procedures and safety checks are completed. Should a Commander's duties detain him and he is unable to board the aircraft before the passengers he must ensure that all preparations are made by the remainder of the crew so that departure can be made avoiding a delay, once he has boarded the aircraft.

The PIC is responsible for ensuring that all passengers are fully briefed on safety procedures and that all safety exits are unobstructed during taxi take off and landing. PIC shall ensure that all equipment and baggage are properly secured for take off, landing and whenever deemed necessary in the interest of safety and security

The primary responsibility of the PIC is that he must not commence a flight when in his judgment the aircraft is not in a satisfactory condition to maintain a high level of safety. It is his obligation to report to the management Flight Operations regarding any areas of operation, which could be detrimental to safety. The PIC is responsible for filling de-briefing reports and ensuring reporting of accidents/incidents.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 39

In the absence of SriLankan Airlines ground personnel the PIC during his period of command is responsible for the safety of the aircraft, passengers, crew and their comfort while on the ground. He shall make all efforts to mobilize available resources until SriLankan Airlines ground personnel are available to takeover and resume their responsibilities. The PIC has the necessary statutory authority to carry out his responsibilities during his period of command and exercise this authority over all crew and passengers at any stage when on duty. This authority is without question and any disagreement shall be furnished in writing after compliance. The authority of the PIC is final irrespective of the rank/position of the passengers or the crew.

2.12.1.1 The Pilot in Command Has Full Authority Over:

1. All members of his crew on duty and off duty when away from home base.
2. His passengers during flight, i.e. from closing until opening of the cabin doors.
3. The final authority as to the disposition of the aircraft while in command.
4. Supervision and direct other members of the crew in the proper discharge of their duties while under his command. It is incumbent on all crew members to carry out the instructions of the PIC at all times.
5. All air crew are subject to the disciplinary control of the PIC from the time they report to him at the airport till the completion of the flight duty and return to home base.
6. All air crew are responsible to the PIC for their competency and knowledge of, emergency procedures as well as the location and use of emergency equipment.
7. To ensure that the above responsibilities of air crew are enforced at overseas stations:
8. The PIC is responsible for ensuring that the provisions of the Air Navigation Act with regard to the airworthiness, equipment and the operation of aircraft are fully complied with.

2.12.1.2 The Pilot in Command will ensure,

1. All necessary equipment/documentation for the flight are on board the aircraft.
2. The aircraft is loaded in accordance with prescribed regulations in the Weight and Balance Manual. (Specified for each aircraft)
3. His crew members are currently licensed to perform their duties and have in their possession valid travel and health documents and are within stipulated flight and duty time limitations;
4. He is expected to make himself known to the passengers in the air and on the ground. When circumstances permit, regular in-flight announcements should be made to keep passengers informed of the progress of the flight.
5. When making up lost time, the PIC must be satisfied that his crew will not be excessively fatigued and the destinations ahead can adapt to the amended schedule.

The PIC and his crew will complete such reports as the Head of Flight Operations and or relevant authority requires in respect of the flight. It is his duty to be knowledgeable of the circumstances, which would warrant the filing of a report.

The PIC shall ensure that check-lists and SOP's as laid down are properly used by crew members at ap-

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 40

appropriate stages of flight. Only in extraordinary circumstances, and then only after specifically briefing the crew, will procedures other than SOPs be used. The PIC shall be responsible for bringing to the attention of the ground engineers all known or suspected defects of the aircraft. The PIC has the authority and responsibility to declare an emergency whenever deemed necessary. As far as practically possible, he shall keep the appropriate air traffic control centre fully informed of the progress of the flight, his intentions, and any action taken in such a situation. The PIC has the authority to disembark any person including CCM or any part of cargo that may pose a potential hazard to the safety and security of the aircraft or its occupants. PIC may refuse passengers including inadmissible passengers, deportees or persons in custody or disruptive passengers if they still behave in an objectionable and offensive manner or refuse to follow orders given for their own or other passenger's comfort, safety and security. Persons intoxicated and or under the influence of narcotics shall be refused boarding.

2.12.2 Chain Of Command While On Duty

1. Pilot In Command (PIC)
2. Captain or Cruise Captain
3. Cruise Pilot or First Officer
4. Junior First Officer
5. Trainee Junior First Officer/Cadet Pilot
6. Purser
7. Cabin Supervisor
8. Cabin Crew members in order of seniority
9. Positioning Flight Crew

Note - In the case of pilot incapacitation, any suitably qualified positioning flight crew may be utilized in accordance with chain of command

2.12.3 Authorisation to Enter Flight Deck

No person other than a Flight Crew assigned to operate a flight shall have access to the flight deck unless authorized by the PIC.

2.12.4 Authorisation to occupy a flight Deck Observer Seat

The PIC may authorize a non-revenue passenger to occupy a Flight Deck observer seat with the following conditions:

1. Above 14 years of age.
2. Not suffering from an ailment which impairs his free movement.
3. Briefed on safety/emergency procedures and security requirements by Flight Crew.
4. Not under the influence of alcohol/drugs
5. Shall not be served/consume alcohol
6. Of good judgment, the person would not endanger the aircraft or its occupants

Note - Briefing for passengers occupying flight deck observer's seat shall be done by the flight crew. Ensure passenger is seated before the flight deck door is closed

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 41

2.12.5 Authorisation to Occupy a Cabin Crew Seat

The PIC may authorize a non-revenue passenger to occupy a CCM assist seat with the same conditions applicable for occupation of a Flight Deck observer seat. CCM shall brief on safety/emergency procedures and security requirements. The ground staff shall inform the Purser in advance when allocating a CCM seat to a passenger.

Note - A321 L2/R3 Crew Seats Shall be allocated only to a non-revenue, able-bodied adult above 18 years who appear to be capable of operating or assisting with the operation of the exit

2.12.6 Briefing passengers occupying a CCM assist seat,

In the event a cabin crew assist seat is occupied by a passenger, the following briefing shall be conducted,

1. The seat is a foldable seat and the usage of the seat belt
2. The location and the use of the Life Vest
3. Drop down oxygen system
4. Ordinance signs display location
5. Closest and alternate exits

2.12.7 Secure Flight Deck Door

SriLankan Airlines operated aircraft are equipped with a secure flight deck door.

It is designed to resist penetration by small arms fire, grenade shrapnel and resist forcible intrusion by unauthorised persons. It is fully compliant with rapid decompression requirements.

2.12.8 Flight Deck Policy

Unauthorized persons are prohibited access to the flight deck. Flight Crew shall ensure the immediate vicinity of the door is clear and may require a CCM to move passenger(s) from the galley area prior to unlocking the door in compliance with CAASLIS 033. CCMs shall ensure the following,

1. The door shall be kept closed/locked at all times
2. Be vigilant to prevent any person from trying to enter the flight deck
3. When entering the flight deck, ensure the lavatory adjacent to the flight deck is vacant
4. Once communicated with Flight Crew, face the video monitor above the door for identification

2.12.9 Sterile Flight Deck Policy

For departures - Duration of the Sterile Flight Deck shall be from the time the Flight Deck Door is closed for the purpose of push back & until such time the SEAT BELT sign is switched off after the initial ascent.

For arrivals - Duration of the Sterile Flight Deck shall be from the time the SEAT BELT sign is selected on before the commencement of the Descent until the seat belt sign is switched off after landing.


Note : Sterile Flight Deck Policy Is Maintained To Prevent Any Interruption To The Flight Crew Work-flow, Which May Cause Distraction As This Is The Critical Phases Of The Flight.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 42

If it is clearly identified as an emergency, which requires the immediate attention of the PIC, a CCM shall press “PRIO Capt”/”EMER call” on the interphone to inform the PIC. Such situations arising during flight shall also be communicated to the PIC at the earliest, It shall be, but not limited to,

1. Fire/burning odour/smoke outside or inside of the aircraft
2. Critical medical emergency- Injury or Illness Crew/Passenger
3. Unusual noise or vibration
4. Fuel or other fluid leaking from the aircraft
5. Door/ Slide being unable to be closed/ locked/unlocked / armed/disarmed
6. Suspicious/unclaimed bag or package
7. Passengers behaving aggressively or potentially dangerous

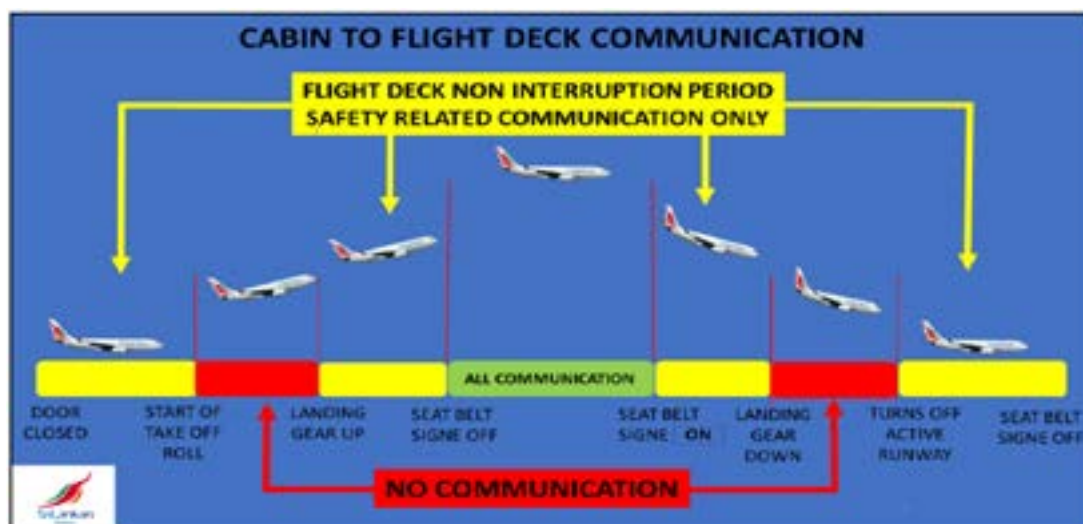

2.12.10 Common language and safe two-way Communication Practices

Flight Crew and Cabin Crew shall communicate in English at all times as a regulatory requirement. Two-way communication between the Cabin and the Flight Crew shall be via the inter phone during normal, abnormal and emergency situations. In case these systems do not work, during PIC and Purser Briefing: Specific alternate communication methods shall be determined and briefed before the flight. Crew shall use standard wording, terminology, and specified verbal commands for all types of communication with the flight crew.

1. CCM shall use the code red to enter the flight deck if Flight Crew incapacitation is suspected.
2. CCM shall follow instructions of PIC in the event of a suspected hijack situation.
3. CCM's shall constantly monitor the Flight Deck door area and bring to the notice of the PIC, if a suspected event is taking place or likely to take place in the aircraft.
4. CCM shall use “PRIO CAPT”/”EMER call” to inform PIC of any, but not limited to any Safety/security/medical emergencies
5. During in-flight rest periods, any request from the operating flight crew to wake the Commander or any resting flight crew member shall be acted upon without delay

Flight Information - The Purser shall obtain relevant information required for the flight during the PIC/ Purser briefing. **Ref 2.14.2**

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 43

2.12.11 Flight Deck Service

CCMs shall be cautious when serving beverages in the Flight Deck to avoid spillage on the center console. Beverages shall be offered less than $\frac{3}{4}$ full, placed on a tray and offered on the left side to the PIC and on the right side to the First-Officer.

All glasses and crockery shall be cleared from the flight deck before every take-off and landing.

1. Clearance for Take-off: Prior to closing the last cabin door
2. Clearance for Landing: Once "Cabin Crew Prepare Cabin for Landing" announcement is made
3. Ensure the similar type of food is not offered to both Flight Crew members.

2.12.12 Checking on Flight Crew

It is mandatory that CCMs check on the well-being of the Flight Crew every thirty minutes on all appropriate flights. Safe two way communication procedures shall be practiced. Prior to opening of the flight deck door, Flight crew to check with Cabin crew if surrounding area is free of passengers.

2.12.13 Flight Crew two-man operation

In a two-man flight deck operation, it is mandatory that a cabin crew member is positioned in the flight deck prior to the flight crew member leaving the station and until the flight crew member has returned. When a Flight Crew member requires leaving the Flight Deck, it is the duty of the Flight Crew member to inform a CCM. Ref SLCAIS 33

1. CCM shall disengage from other duties, inform the Purser and enter the flight deck.
2. Position self, close to the locking device on the flight deck door.
3. Remain until the Flight Crew member returns to the flight deck. Flight Crew member shall follow the standard entry procedure to enter the flight deck.
4. In the event of a pilot incapacitation, emergency or any other abnormal situation or behaviour takes place, CCM shall Open door, summon for assistance and remain in the flight deck.
5. CCM shall also be familiar with the opening, closing and locking/unlocking the flight deck door from inside the flight deck.

Note: In the event the door is locked electrically, it can be overridden by using the door handle manually from inside.

2.13 Crew Complement

2.13.1 Minimums for each aircraft

It is a requirement that SriLankan Airlines shall establish, to the satisfaction of the DGCA, the minimum number of CCMs required to be operating on each aircraft type, based on the seating capacity and the number of floor level exits of the aircraft type. The minimum crew compliment required to operate each aircraft type shall be as follows covering the specified exits.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 44

AIRCRAFT TYPE	MINIMUM CABIN CREW	SEATS TO BE OCCUPIED	No of inexperienced CCMs permitted
A 320	04 Cabin Crew members	L1/L1A/L2/Swivel seat	01
A 320 NEO	04 Cabin Crew members	L1/L1A/L2/Swivel seat	01
A321 NEO	05 Cabin Crew members	L1/R2/L3/L4/L4A	01
A330	08 Cabin Crew members	All Primary Exits	02

2.13.2 Inexperienced cabin crew members

The number of inexperienced cabin crew members to be present on board the aircraft shall be determined based on the aircraft type/variant.

A CCM shall be considered as “inexperienced” and should be detailed as assist crew member until they complete 20 sectors (A321 - L2 or R3) The 20 sectors shall commence from the date a Cabin Crew Member Certificate has been issued by CAASL. Each flight operated shall be documented by the individual CCM along with the signature of the Purser/In-Charge CCM on the document provided.

2.13.3 Ferry Flight with Cabin Crew

When an aircraft is dispatched without any passengers, CCMs shall ensure for take-off and landing:

1. Galleys/lavatories are secured.
2. All doors/slides are closed, armed/disarmed and cross checked.
3. Indicate cabin ready to the PIC.

2.13.4 Operation of Flights under Exceptional Circumstances

In unforeseen circumstances, the required number of CCMs may be reduced in accordance with procedures acceptable to the DGCA and a report shall be submitted to the DGCA on completion of the flight.

2.13.5 VVIP Flights

Prior approval shall be obtained from DGCA to operate with less than the required minimum number of CCMs. All slides shall be armed/disarmed, cross checked for take-off and landing.

(Cross checking shall be carried out by the opposite door primary, where available)

The purser shall delegate the exits to be occupied.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 45

2.13.6 Non-Revenue Flights

The following flights are categorized as non-revenue flights.

1. Ferry Flights
2. Delivery Flights
3. Positioning Flights

When such flights are operated with additional personnel such as cargo loaders, Load sheet officers, other than Positioning/Dead Heading tech and cabin crew the following procedure shall be carried out,

1. All additional personnel names shall appear on the general declaration (GD).
2. A safety demonstration shall be carried out indicating the use of seat belts, oxygen mask, bracing positions and exits to be used before take-off. In case the safety demonstration cannot be carried out they shall be briefed individually using the safety card.
3. Required doors (L1/R1) or as required shall be armed/disarmed following SOPs.
4. Cabin shall be secured ensuring all carry-on baggage is stowed as per SOPs and PIC informed.
5. Ensure they remain seated during taxi, take-off and landing with the seat belt secured and seat-backs in the upright position.
6. They shall be advised not to enter restricted areas such as galleys and flight deck unless required by the operating crew.
7. Announcements shall be made pertaining to turbulence, abnormal and emergency situations and CCMs shall ensure instructions are followed.
8. No smoking policy shall be strictly adhered to and they shall not be permitted to obstruct the duties of tech/cabin crew.

2.13.7 Upgrading A320 /321 to A330

If an A 321/320 aircraft is upgraded to an A 330 operation, the minimum crew complement shall be six (6) provided the following conditions are adhered to,

1. Passenger load is limited to
 - A320 – 162 passengers
 - A 321- 188 passengers.
2. Doors L1/R1, L2/R2, L3 and R4 are manned by CCMs
3. The CCM responsible for L3 shall be responsible for R3 door and the safety equipment at L3/R3 doors/respective areas
4. The CCM responsible for R4 shall be responsible for L4 door and the safety equipment at L4/R4 doors/respective areas
All slides shall be armed/ disarmed for take-off and landing.
5. If and when such a flight is operated necessary CAA approvals are obtained

NOTE: The passenger load shall not exceed the maximum load capacity on the particular aircraft type available in the fleet.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 46

2.13.8 Incapacitated CCM

A CCM who has reported for duty and subsequently unfit to perform his duties in the aircraft due to injury, medication, sickness or other similar causes, or CCM is in any doubt of being able to accomplish assigned duties or knows or suspects that CCM is suffering from fatigue or feeling otherwise unfit, to the extent that the flight may be endangered

2.13.8.1 Prior to Departure ex Base

The PIC shall be informed, CCM offloaded, and appropriate documentation completed by the Purser and forwarded to the Cabin Safety Section. Another CCM shall be nominated to operate the flight.

2.13.8.2 Prior to departure en-route

If the CCM cannot be replaced, the PIC shall be informed for guidance.

2.13.8.3 Incapacitated Door Primary During Flight

The PIC shall be informed, and the Purser shall re-delegate door primary duties to another CCM. The incapacitated CCM shall act as a passenger.

2.13.8.4 Prior to Departure - Minimum Crew Operation (ex. Other Stations)

If the CCM cannot be replaced, PIC to be informed for guidance.

2.13.8.5 During Flight - Minimum Crew Operation

One CCM incapacitated

The PIC shall be informed and an ABP shall be selected and briefed accordingly. The ABP shall be relocated to a passenger seat, closest to the crew seat.

More than One CCM incapacitated

The PIC shall be informed and the remaining CCMs shall be re delegated to cover the most appropriate doors. ABPs shall be selected and briefed accordingly to cover all unmanned doors. The ABPs shall be relocated to passenger seats, which is closest to the relevant crew seats. The seat shall be placarded as "Crew seat".

2.13.8.6 Purser Incapacitated During Flight

The PIC shall be informed, and the next most suitable CS shall take over duties.

2.13.8.7 Cabin Crewmember Injury/Sickness

Holders of Class II (Cabin Crew) medical certificates shall seek aero-medical advice from UL Medical Centre/GMO/CMO to assess their medical fitness and decide whether they are fit to exercise the privileges of their license, as stipulated in SLCAIS 36, when they:

1. Have undergone a surgical operation or invasive procedure.
2. Have commenced the regular use of any medication.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 47

3. Have suffered any significant personal injury involving incapacity to function as a member of the flight crew.
4. Have been suffering from any significant illness involving incapacity to function as a member of the flight crew.
5. Are pregnant.
6. Has been admitted to hospital or medical clinic.
7. First, require correcting lenses.

If a CCM has been injured or fallen sick, and/or is unable to perform his duties, during a layover, on ground at the airport or inflight, the following shall be applicable:

1. Prior to reporting for a flight, if a CCM has sustained an injury, fallen sick, he shall consult the GMO/CMO and obtain 'fit to fly' clearance prior to operating the flight.
2. During flight - Page for a medical practitioner and obtain a medical assessment on the illness report.
3. During flight- If a medical practitioner is unavailable and if any medication is administered to a CCM a medication consent form, Illness report shall be submitted along with other reports if available.
4. On ground - Medical assistance will be obtained as appropriate through the layover hotels resident, on-call doctor OR emergency medical services OR At the airport; A medical assessment shall be obtained on the illness report.
5. During a layover or on ground at the airport - If a CCM has been injured or fallen sick and/or is unable to perform his duties, the Purser shall inform the PIC. The PIC shall inform the station staff and the AOCC.
6. The PIC shall contact the UL Medical Centre/Company Medical Officer (GMO/CMO), through the AOCC. The injured /sick CCM shall not be used for flight duties until a 'Fit to Fly' clearance has been issued by the GMO/CMO. The 'Fit to Fly' clearance shall be communicated (company email and verbally to the PIC, by the AOCC. This shall be indicated on the voyage report along with an incident/accident report and the illness report/s.
7. If a Cabin Crewmember appears injured or sick, but states that he/she is fit to operate the flight; the PIC shall be responsible to take the final decision.
8. If the CCM is unable to carry out his duties a replacement CCM will be allocated by crew scheduling department. If a replacement CCM is not allocated, the flight shall be operated taking into consideration a minimum crew operation. If not the passenger load shall be reduced using the inoperative door procedure as guidance. Ref 2.32

Note 1: During layovers, the PIC shall be authorized and responsible for managing any cabin crew-member injury/sickness scenarios.

Note 2: If a Cabin crewmember appears injured or sick, but states that he is fit to operate the flight; the PIC shall be responsible to take the final decision.

Note 3: When required chain of command documented in SEP manual Ref: 2.12.2 shall be applicable for the above procedure.

Revision No	01	Revision Date	01 April 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 48

2.13.8.8 Inter Personal Conflicts Between CCMs

Cases of personal conflict arising from, personal differences, misunderstandings, disagreements, or incompatible expectations or needs. Situations of this nature should be immediately addressed by the Purser/In-Charge crew, who should act as the neutral mediator to resolve it and ensure smooth functioning of the in-flight operation continues. If the CCM feels emotionally traumatized, CCM should consult the GMO/CMO and obtain fit to fly clearance before operating the flight.

2.14 Safety Briefings

2.14.1 Cabin Crew Pre Flight-Safety Briefing

1. It is mandatory only the Purser/In-Charge CCM shall conduct a pre-flight safety briefing as required prior to operating a flight and ensure:
2. CCMs are in possession of an updated copy of the SEP Manual(e-manual)
3. Verify all CCMs are in possession of valid CAASL, Crew Member Certificate (white ID), CCM Certificate (Blue docket),
4. The CCMs are in possession of items indicated in point 3 for immediate verification
5. All CCMs are aircraft type certified
6. All CCMs possess the required knowledge to handle normal, abnormal and emergency situations.
7. All CCMs are current and knowledgeable on the operating aircraft
8. Assign work position and responsibilities to CCMs
9. Ensure the CCMs clearly understand their role and responsibilities
10. Provide additional information.

The CCMs shall be provided with briefing rooms/areas at base and at lay over stations. In the event of a delayed reporting or any other restriction, crew shall proceed to the aircraft directly and conduct the mandatory safety briefing prior to the commencement of Pre-departure duties.

2.14.2 PIC/Purser Briefing

The PIC shall conduct a pre-flight briefing with the Purser/In-Charge CCM regarding the flight and at his discretion may carry out a general briefing for all CCMs including the following but not limited to,

1. Purser shall hand over to the PIC the signed Pre-departure Safety and Security checklist confirming all responsibilities are completed
2. Confirm CCM names on the GD
3. Purser has carried out a pre-flight safety briefing for CCMs
4. Confirm all CCM's records/documents are in order
5. Distance of taxi way or to the runway
6. Estimated flight time and Anticipated weather
7. PIC shall be notified of any passengers with alerts
8. Functioning of the security camera
9. Emergency two way communication (Inclusive of medical situations)

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 49

10. Normal/ abnormal/ emergency situations
11. A hijack alert and the code red for the secure flight deck door

2.14.3 Passenger Safety Briefing/ Demonstrations

Appropriate passenger safety briefings/demonstrations shall be carried out as stipulated by the DGCA. It is mandatory to carry out the safety demonstration prior to take off. The CCMs shall ensure all lavatories are checked /locked/ and all passengers are seated prior to the head count and safety demonstration.

2.14.4 Passenger Safety Announcements/Briefings

1. Pre departure safety announcement
2. After take-off/during flight announcements
3. Turbulence announcements
4. Top-of-descent announcement - Ref 2.15.5
5. Pre-landing announcement
6. Demonstration of exits on flights, four hours or more
7. Aerodrome restrictions (if applicable)
8. After landing announcement/use of PED/Remain seated
9. Briefing passengers with alerts - Ref 2.24
10. Briefing on special doors/hatch operations - Ref 6A.6/2.14.6/2.25.2

2.14.5 Safety Information Card

Passengers are provided with a Safety information card which is easily accessible, Which contains appropriate information, instructions, restrictions and locations relevant to but not limited to

1. Seat Belts, Passenger oxygen masks
2. Emergency Exits, emergency path lighting (If Applicable)
3. Life jackets, Bracing positions
4. Smoking restrictions

2.14.6 Preflight briefing for Pax seated at the emergency exits

The Passengers occupying seats adjacent to the emergency exits shall be briefed prior to departure as stated below:

1. CCM shall introduce self
2. State that the passengers are seated next to an emergency exit (point to the exit)
3. Inquire the willingness to help in an emergency (If not change seating and keep Purser informed)
4. Act on command of CCM/s
5. Inform pax to refer the safety card for door operation (show safety card)

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 50

6. Check for any clarifications

2.14.7 Communicating Safety Concerns of Passengers

When a passenger requires the attention of a CCM in relation to a safety concern, CCM shall pay complete attention to passenger's concern and:


1. Shall not pre determine the concern
2. Clarify all doubts/specific details and thank the passenger
3. Informing the PIC, timely and specifically
4. If the concern is of an emergency, the CCM shall inform the PIC immediately by pressing "PRIO CAPT" / "EMER CALL" on the handset.
5. Preventive measures should be communicated by the PIC through the Purser
6. Communicate the feedback to the passenger.

Purser shall report such concerns to the Cabin Safety Training Manager

2.15 Cabin Crew Member Duties

CCM's safety related duties are categorised according to the phases of flight such as, Pre-departure /push-back/taxi/take-off/ascent/cruise/descent/approach/landing/after landing.

2.15.1 Phases Of Flight

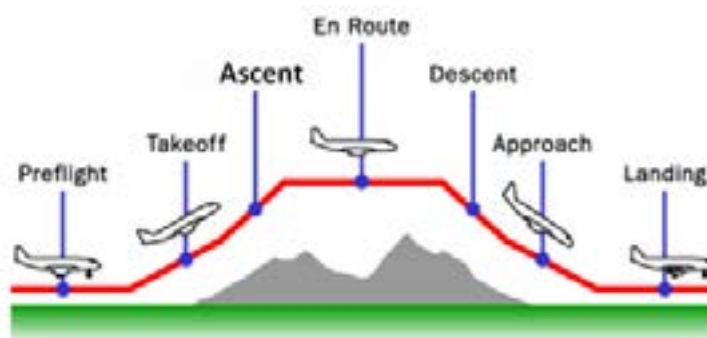

2.15.2 Pre-Departure

CCMs shall stow their baggage in the allocated location. Each CCM shall carry out the mandatory safety and security checks but not limited to, when boarding an aircraft for duty, during a crew change and on completion of any maintenance work performed. Safety Equipment Check Lists referred to as quick reference charts (QRC) are located under each primary crew seat with safety equipment locations for the relevant station. CCM shall confirm the safety equipment accuracy by placing the signature on the voyage report. Cabin Supervisors shall carry out a mini safety briefing to stress on key areas of safety concerns and to ensure CCMs carry out the safety and security checks prior to boarding of passengers. The checks shall consist of the following but not limited to, serviceability/ correct location/correct number /correctly secured and clear from obstruction.

1. Portable Safety/ Survival Equipment

Revision No	01	Revision Date	01 April 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 51

2. Demo equipment/ Safety equipment guided by the QRC
3. Passenger Seats, Crew Seat, Seat Belt and Harness
4. P.A. and Inter-phone
5. Emergency Doors
6. Safety and security check in lavatories
7. Relevant Passenger Safety Cards/ Disruptive Passenger Information Leaflet
8. Crew / Passenger life vests
9. Security check in stowage compartments
10. Locking and restraining devices in the galleys
11. Security check to ensure the aircraft is free of any foreign objects or unauthorized personnel on board.
12. Surveillance cameras are not obstructed.
13. A320/A321 - Check if the snap hook is attached to the survival pack

Identified defects or discrepancies shall be communicated to the PIC and Ground Engineer, and entered in the Cabin Defects Logbook for rectification prior to take off. The duty Engineer shall only be responsible for entries in the Cabin Defects logbook to sign off the aircraft as airworthy.

Note: Spare QRCs – are located at L1 stowage compartment or overhead compartment

2.15.2.1 Cabin Defects

Log Book - Cabin Defects Log Book is located in the flight deck. The Purser shall go through it as a pre departure duty and inform the CCMs of any pending defects. He shall liaise with the Ground Engineer to rectify any pending defects. In the event a discrepancy is observed/ reported during the pre-departure checks, the Purser shall inform the Ground Engineer and enter it in the Cabin Defects logbook. The Ground Engineer shall comment on all reported defects prior to signing off the aircraft for airworthiness.

CIDS - Any alerts on the FAP shall be communicated to the PIC and informed to the Ground Engineer for rectification prior to departure. All cabin defects observed by CCMs, during pre-flight/in-flight and post-flight shall be recorded, dated and signed by the Purser.

2.15.2.2 Voyage Report

The Voyage Report is a mandatory document to be completed for all flights, either in electronic format (CCVR) or as a hard copy. The Purser is responsible for entering all relevant voyage details and concerns. In the absence of a Purser, the In-Charge crew member shall complete the report.

Cabin Crew Members (CCMs) shall sign to confirm reporting, designated working positions, and that all safety and security checks have been completed prior to passenger boarding. The Purser shall not initiate or mandate signing during the briefing or before completion of these checks. All applicable fields must be completed or marked as N/A where not applicable.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 52

2.15.2.3 Safety and Security Checks

Purser shall ensure the safety equipment/survival and the security check of the aircraft has been carried out prior to the passenger boarding. The CCMs shall be guided by the QRCs at each location for the safety equipment check. CCMs are responsible to ensure the safety equipment is located as per the applicable decals. Once the checks are completed, CCMs shall confirm by placing a signature on the Voyage Report. The Cabin Supervisor shall ensure safety and survival equipment in the area under his purview is as per QRC and confirm by counter signing the VR. If a door assist is not detailed, the Door Primary shall carry out the checks and tick the relevant column and inform the CS. Any irregularities shall be communicated to the Purser at the earliest. Ref 2.35

2.15.2.4 Pre-Departure Safety/Security Check List - PSSCL

The Purser shall fill the Pre-Departure Safety/Security Check List sign and present it to the PIC informing him on the checks carried out. The PIC shall carry out the PIC/ Purser briefing and counter sign the form and attach it to the Flight Deck VR.

Change of Flight Crew – The Purser shall complete and forward a new PSSCL to the taking over PIC for his signature and the PIC/Purser briefing.

Change of Cabin Crew – The taking over Purser shall complete and forward a new PSSCL to the PIC for his signature and the PIC/Purser briefing. The taking over Cabin crew shall carry out the baggage identification of the transit passengers and shall be responsible for the Safety /Security checks and signing the voyage report. When passengers are on board the PA check shall be carried out at L1 only. The serviceability of all inter phones shall be carried out. Passenger Life Vests, Safety Cards and Disruptive Passenger Information Leaflets checks are not required at transit stations with passengers on board.

2.15.2.5 Pre departure Safety and Security Checks

All CCMs on duty shall be responsible for the specific safety, and security checks in the Cabin/ Galley and Lavatories but not limited to, which are as follows:

CCM	RESPONSIBLE AREAS
L1 Door Primary	FAP-CIDS/System checks/IFE/Defects log book, PA/Inter -phone/ personal survival equipment.
Door Primaries	PA/ Inter-phone, safety/ survival equipment as per the check list
All CCMs	Crew/ Passenger seats, seat belts, life vest/safety/ survival equipment
Aisle chair	The Door Primary closest to the location
Refuelling procedures	Shall be adhered to by all CCMs
Cabin Checks	All CCMs detailed for cabin duties - L/vests, Seat belts,Safety cards, and Passenger Information leaflet, Safety/Security of -O/H bins/closets and lavatories.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 53

Galley Checks	Designated galley in charge BC –EY Safety/Security/ locking, latching of carts/containers
----------------------	---

2.15.2.6 Unserviceable hand set

Prior to departure all handsets shall be serviceable. If one handset is unserviceable at a station, the adjoining handset shall be serviceable for safe dispatch.

If the L1 handset becomes unserviceable during flight, the PIC shall be informed and the adjoining hand set shall be used. In the event there is no serviceable handset at L1/R1 area, the handset in the flight deck shall be used with the permission of PIC. If not an alternate handset shall be used and the information shall be communicated to the PIC and other CCMs. Purser may nominate a Cabin Supervisor or another CCM at a serviceable handset location to carry out required announcements.

During flight if all handsets at L1/R1 area becomes unserviceable, PIC and Purser shall discuss and agree on a flight deck entry procedure and hijack alert procedure and communicate the information to the rest of the crew.

2.15.2.6.1 Aircraft Door Slide Pack

The slide pack is a critical component of the aircraft's emergency evacuation system, designed to facilitate rapid egress. It is crucial for the safety of all passengers and crew aboard an aircraft that the emergency exits, including the door slide packs, always remain unobstructed particularly when the aircraft is on the ground. Items should not be placed on top of slide packs and sitting or placing the feet on the slide packs is strictly prohibited. This ensures that in the event of an emergency, the slides can be deployed rapidly and efficiently, allowing for a swift and orderly evacuation. Regular safety briefings and checks are essential to reinforce this protocol and maintain the highest standards of safety.

Revision No	01	Revision Date	01 April 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 54

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 55

2.15.2.7 Serviceability Check on Crew Seat

CCMs shall ensure that allocated seats are fully functional (spring loaded seat pan) equipped with a shoulder harness and a seat belt which should have a functioning single point release mechanism. The straps should not be twisted, damaged or frayed.

In the event of non-designated crew seats, CS in charge of the area shall be responsible for the checks.

2.15.2.8 Systems Check on Two way communication

The Purser shall ensure the PA/Inter phone and video system is operational.

Door primaries shall ensure the individual screens/PA/Inter phone system is functioning and confirm same with Purser.

2.15.2.9 Serviceability Check; Passenger Seats


CCMs shall ensure all passenger seats are equipped with

Seat Belt	Functioning (Fastening and Opening)
Life Vest	In packing/in place
Safety Card	Relevant to the aircraft (In the seat pocket/visible/placed vertically)
Disruptive Passenger Information leaflet	In the seat pocket/visible/placed vertically
PSU	Serviceability(Information display)

2.15.2.10 Safety and Security Checks in the Cabin

The Purser to ensure, CCMs carry out the safety and security checks as follows

Purser	Walk around
S1/S2	L1/R1 to L2/R2 cabin and B/C lavatories
S3/S4	L2/R2 to L3/R3 cabin and lavatories L2/R2
S5/S6	L3/R3 to L4/R4 cabin and lavatories at L3/R3 / L4/R4
CS2	L2 to L4 Cabin (Recheck)confirm to CS3
CS3	R4 to R2 Cabin (Recheck) Confirm to CS1
CS1	Check and ensure flight deck and galleys cleared and confirm to Purser

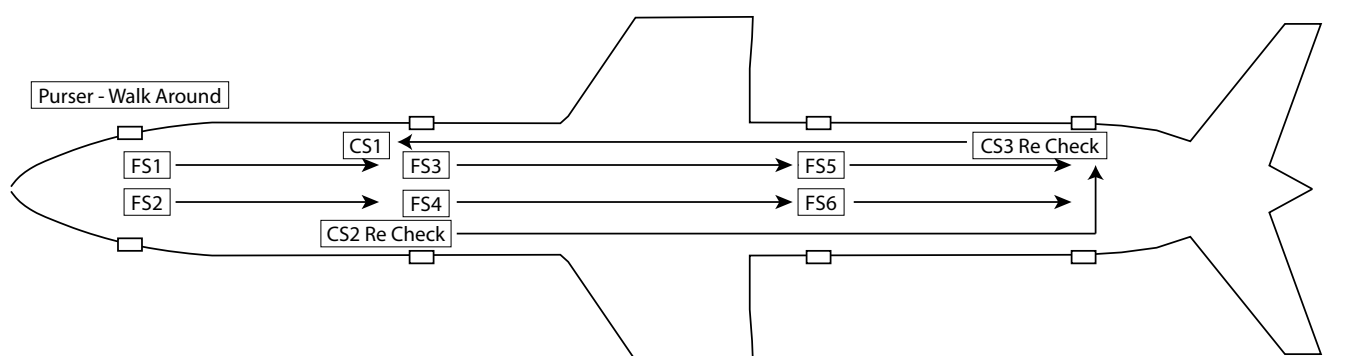

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 56

2.15.2.11 Safety and Security Checks in the Lavatory

Designated CCMs/ CSs shall ensure:

1. The smoke detector is free of obstruction
2. Lavatory waste bin extinguishers are serviceable
3. Waste bin flaps are spring loaded
4. Waste bin container is in place and the waste bin door can be latched
5. Water supply to the heater is not closed
6. No foreign objects in the cavities
7. Serviceability of the attendant call button

2.15.2.12 Safety and Security Checks in the Galley

Designated CCMs shall check and CS in charge of the area shall ensure:

1. Fixed galley primary and secondary locking/latching restraining devices are functional
2. Containers/air larder doors can be closed/latched and fits into the slot
3. Service carts/Waste carts are equipped with restraining devices and functioning
4. Service cart doors can be closed/locked and latches are operational,
5. Waste cart , waste bin flap is not bent or damaged and seals the waste cart opening securely
6. Fixed waste bin in the galley, the waste bin flap is not damaged or bent and seals the waste container in the closed position.
7. Circuit breakers are not popped out
8. Safety equipment located in the galley are checked and secured
9. No foreign objects are placed in the cavities.
10. Break catering seals from all carts/containers/headset bags and check the contents

Items that cannot be stowed, secured, restrained, shall be brought to the attention of the Purser immediately to be off loaded or replaced. Heaters, chillers, water system or the vacuum system defects shall be brought to the attention of the ground Engineer through the Purser. All defects shall be logged for rectification prior to departure.

2.15.2.13 Passenger Boarding

Purser shall ensure the following is completed prior to passenger boarding, and if not communicate with the flight dispatcher:

1. The minimum required CCM's are on-board. Ref 2.13.1
2. Pre departure safety & security checks are completed and VR signed by CCM's
3. Half the number of exits shall be manned
4. Refuelling procedures are followed
5. Aero bridges/ Steps are positioned appropriately
6. Passengers board with approved size carry-on baggage.

Announcement on stowage of luggage is to be carried out periodically during and on completion of boarding.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 57

“Ladies and Gentlemen,

Please stow, all your hand luggage in the overhead compartments or under the seat in front of you. Please ensure, that the items stowed in the overhead bin do not fall out and cause injury to passengers. Hand luggage, shall not be stowed under the seat in front of the exit rows. Please retain your boarding card for inspection, by airport staff at your final destination. Thank you for your attention.”

In the event a carryon baggage is retrieved, CCM shall check with passenger for DGR items/valuables/travel documents, prior to dispatching it as checked in luggage and keep the Purser informed.

If a passenger informs the cabin crew about spare lithium batteries in their checked luggage while the aircraft is still at the gate, the cabin crew will notify the ground staff to retrieve the passenger’s luggage. The passenger will then be required to remove the spare lithium batteries and place them in their carry-on luggage, ensuring compliance with IATA DGR 2.3.A table.

Furthermore, CCMs shall be vigilant during boarding for following passengers, who may be unfit to travel,

1. A person who appears to be intoxicated or who demonstrates by manner or physical indications that the individual is under the influence of psychoactive substances
2. Passengers who have sustained serious injury prior to boarding.
3. Passengers who are medically unfit due to illness e.g. Any contagious illness
4. Unruly passengers, Non adherence to crew instructions

Inform PIC/Dispatcher and off load passenger if required.

2.15.2.14 Passenger Count

Passenger Count In keeping with security regulations, it is mandatory to carry out a passenger count. The passenger count shall tally with the load sheet prior to take off. The Purser shall inform the physical count to the PIC and Dispatcher. In the event the passenger count is to be taken after all passengers have boarded the aircraft, Purser shall initiate a PA announcement requesting all passengers to be seated prior to the commencement of the count.

“LADIES AND GENTLEMEN, TO ENABLE THE CREW TO CARRY OUT A PASSENGER COUNT WE REQUEST YOU TO REFRAIN FROM USING THE TOILETS AND REMAIN SEATED, THANK YOU FOR YOUR COOPERATION”.

The responsible CCMs shall ensure EY lavatories are checked/locked, monitored until informed by the Purser. The CCMs responsible are as follows,

F/SS 2	BC Lavatories
F/SS 3	R2 Lavatories
F/SS 4	L2 Lavatories
F/SS 5	R3 Lavatories
F/SS 6	L3 Lavatories
G 2	L4/R4 Lavatories

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 58

The head count shall be carried out from the steps/aero bridge or by C/S -2 and C/S -3 on a wide body and C/S on a narrow body aircraft, after boarding is completed.

In the event of a discrepancy – In the event of a discrepancy, the purser shall get involved in the passenger count and achieving two counts tallying with the load sheet is mandatory.

The Purser shall initiate the following announcement on completion and confirmation of the count.

“CREW YOU MAY RESUME DUTIES”

Passenger Count at Transit Stations

The disembarking crew shall carry out the passenger count of the transit passengers on board and verify with ground staff. The crew taking over shall carry out a total passenger count prior to departure.

2.15.2.15 Closing and arming Doors Prior To Departure

Purser shall ensure that all carry-on baggage in the cabin is stowed, Overhead bins are closed and all passengers are seated prior to closing doors. On confirmation/completion of relevant documents, Purser shall request permission from the PIC to close doors and ARM slides. And ensure the Flight Deck door is closed before the last door is closed.

Purser shall initiate a precautionary announcement for any ground personnel in the aircraft to disembark.

“ALL GROUND STAFF ARE REQUESTED TO DISEMBARK FROM THE AIR CRAFT”.

Purser shall inform the door primaries to close the doors through an ‘all station call’

Once a door is closed the PIC’s authorisation is required to open it.

The following procedure shall be followed by cabin crew members before closing cabin doors

1. The aircraft dispatcher shall confirm with the Purser/In-charge CCM when to close the last door.
2. Announcement prior to closing doors requesting ground personnel to disembark is mandatory.

2.15.2.15.1 Aircraft Door Re-Opening after arming of slides

The following procedure shall be followed if an aircraft door has to be re-opened after closing and arming of slides (e.g. door not closed properly, additional delivery of catering and/or supplies, requirement to reconnect boarding equipment, as and when required by the ground handling personnel etc.), The request to re-open the aircraft door shall be communicated to the PIC through authorized ground personnel via flight to ground interphone system and the authorization to reopen the cabin door(s) shall be communicated to the Purser/In-charge CCM by the Pilot in Command.

- The Purser/In-charge CCM shall ensure door disarming and opening procedure is followed according to section 2.15.10

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 59

2.15.2.15.2 Single CCM operation

1. The operating CCM shall carry out a walk around the cabin prior to closing doors to ensure cabin is free from unwanted objects/ ground personnel have disembarked and the cabin, galleys, lavatories are secured for take-off. Confirm with PIC cabin ready for take-off and ARM L1/R1 doors
2. On arrival CCM to ensure the operating F/O is present when disarming doors. (L1/R1). This is a mandatory requirement in preventing an inadvertent slide deployment.
3. CCMs shall strictly adhere to the sterile flight deck policy once flight deck door is closed for the purpose of push back unless an emergency

2.15.2.16 Arming of Slides

The Purser shall advise CCMs to arm slides once all doors are closed, by initiating the following PA announcement.

“CREW ARM SLIDES AND CROSS CHECK”.

Door primaries shall arm the designated slides and cross check. Purser shall initiate an all station call to ensure slides are armed, cross-checked and confirm on FAP. Only door primaries shall operate the designated doors during routine operations.

2.15.2.17 Flight Deck Policy

The flight deck policy begins once the last cabin door is closed and CCMs compliance required. Ref 2.12.8

2.15.2.18 Sterile Flight Deck Policy

The sterile flight deck policy (for take-off) shall be active from the time flight deck door is closed for the purpose of push back & until the fasten seat belt sign is switched off after the initial ascent. Ref 2.12.9

2.15.2.19 Use of Electronic Devices

Purser shall initiate a PA announcement informing passengers on the use of electronic devices. CCMs shall ensure passenger compliance when checking the cabin.

***“LADIES AND GENTLEMEN,
OUR SAFETY REGULATIONS REQUIRE THAT ALL ELECTRONIC DEVICES INCLUDING MOBILE PHONES ON
AIRCRAFT MODE BE SWITCHED OFF.
THANK YOU”.***

2.15.2.20 Ordinance Signs

Passengers are required to adhere to ordinance signs. CCMs shall carry out an announcement and monitor the cabin for compliance.

2.15.2.21 Welcome Announcement

***“AYUBOWAN!
LADIES & GENTLEMEN,
ON BEHALF OF OUR CAPTAIN AND THE REST OF THE CREW, WE WELCOME YOU ON BOARD THIS
FLIGHT. (Code share if applicable)***

Revision No	01	Revision Date	01 April 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 60

AN ESPECIALLY WARM WELCOME TO OUR FLYSMILES AND ONEWORLD FREQUENT FLYERS.

In the event of a delayed departure

“WE SINCERELY APOLOGISE FOR THE DELAYED DEPARTURE WHICH WAS DUE TO... (REASON - OPERATIONAL/ TECHNICAL) AND REGRET THE INCONVENIENCE CAUSED”.

WE SHALL BE PREPARING FOR PUSH BACK SHORTLY. WE KINDLY REQUEST YOU TO ENSURE THAT ALL HAND LUGGAGE IS STORED IN THE OVERHEAD COMPARTMENTS OR UNDER THE SEAT IN FRONT OF YOU. SMOKING OF ANY FORM IS NOT PERMITTED ON THIS AIRCRAFT. SAFETY REGULATIONS REQUIRE THAT ALL ELECTRONIC DEVICES BE SWITCHED OFF FOR TAKE-OFF. WE WILL MAKE EVERY EFFORT TO ENSURE THAT YOU EXPERIENCE THE BEST OF SRI LANKAN HOSPITALITY THROUGHOUT THIS FLIGHT.

WE SHALL NOW BE SCREENING A VIDEO WHICH CONTAINS OUR SAFETY AND EMERGENCY PROCEDURES PERTAINING TO THIS AIRCRAFT, AND YOUR COMPLETE ATTENTION IS NECESSARY. WE WILL MAKE EVERY EFFORT TO MEET YOUR EXPECTATIONS. PLEASE FEEL FREE TO CONTACT ME SHOULD YOU REQUIRE FURTHER ASSISTANCE’.

‘THANK YOU FOR YOUR CO-OPERATION”.

Screen Safety Video

2.15.2.22 Passenger Safety Briefing

CCMs to ensure passengers remain seated during the safety briefing. Carrying out the safety briefing could be manually or on video. The aircraft shall not be airborne unless the passenger safety briefing is completed. The Purser shall ensure the following is completed prior to commencement of the passenger safety briefing.

1. All doors closed
2. Service related duties discontinued
3. The cabin lights and volume adjusted appropriately

Video screening

CCM shall ensure that the video screens are positioned in applicable seats and cabins for a clear view prior to screening of the safety video. In the event the main screens are not functioning CCMs are required to take out the relevant individual screens for the safety video. A physical demonstration shall be carried out of the closest and alternate exits. CCMs shall be positioned appropriately in the cabin prior to and remain until completion of the video presentation. CCMs shall not move about in the cabin whilst the safety video is screened. In the event of a breakdown in the video system or if any malfunction in the safety video screening occurs, CCMs shall immediately notify the purser and a manual demonstration shall be carried out

A 330-300 (B/C) The screens shall be unlocked for passengers seated at the window seats prior to the screening of the safety video and may remain in the said position for Take-off. In the event a delay occurs in the screening, the Purser shall advise the PIC of the progress of the safety demonstration.

Note : Video PA Shall Not Be Used During Critical Phase Of The Flight

Revision No	02	Revision Date	15 August 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 61

2.15.2.23 Content of Passenger Safety Briefing

1. Stowing of seat back/tray table/individual video monitors/window blinds
2. Use of seat belts
3. Showing of emergency exit/alternate exits and floor path markings
4. Oxygen system
5. Use of life vest
6. Regulation on smoking/ electronic devices/ carry-on baggage
7. Bring passenger concerns to the attention of the crew
8. Contents of the safety card/Passenger Information Leaflet

The Manual Safety Demonstration announcement is as follows:

**“AYUBOWAN,
LADIES AND GENTLEMEN,**

- INTRODUCTION AND WELCOME.....

PLEASE PAY YOUR COMPLETE ATTENTION TO THIS SAFETY DEMONSTRATION.

TO FASTEN YOUR SEAT BELT, INSERT THE METAL FITTING ON ONE STRAP INTO THE BUCKLE ON THE OTHER STRAP AND TIGHTEN. ENSURE THAT THE SEAT BELT IS AROUND YOUR HIPS. TO OPEN YOUR SEAT BELT, LIFT THE UPPER PORTION OF THE BUCKLE.

THIS IS YOUR LIFE VEST DEMONSTRATION,

FOR PASSENGERS IN THE BUSINESS CLASS CABIN, THE LIFE VEST IS LOCATED (indicate actual location)

- IN-BETWEEN THE SEATS AT THE FLOOR LEVEL
- BY THE SIDE OF THE SEAT

AND FOR PASSENGERS IN THE ECONOMY CABIN, THE LIFE VEST IS LOCATED UNDER YOUR SEAT, IF INSTRUCTED BY THE CREW TAKE IT OUT AND SLIP IT OVER YOUR HEAD.

PASS THE STRAP AROUND YOUR WAIST, INSERT THE FITTING INTO THE BUCKLE, AND TIGHTEN BY PULLING THE STRAP.

DO NOT INFLATE YOUR LIFE VEST INSIDE THE AIRCRAFT, AS THIS WOULD IMPEDE YOUR EXIT.

AS YOU LEAVE THE AIRCRAFT, INFLATE THE LIFE VEST BY PULLING THE RED TABS DOWNWARDS, SHOULD THE VEST NOT INFLATE IMMEDIATELY, BLOW INTO THE RUBBER TUBES. FOR INFANTS UNDER TWO YEARS SPECIAL LIFE VESTS ARE AVAILABLE.

PLEASE BE INFORMED THAT THE LIFE VEST IS A MANDATORY PIECE OF SAFETY EQUIPMENT PROVIDED FOR EVERY PASSENGER.

IT IS AN OFFENCE TO REMOVE THIS ITEM FROM THE AIRCRAFT.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 62

SHOULD THERE BE A LOSS OF CABIN PRESSURE, YOUR OXYGEN MASK WILL AUTOMATICALLY DROP FROM THE PANEL ABOVE YOUR HEAD.

PULL ONE MASK, COVER YOUR NOSE AND MOUTH WITH IT, AND TIGHTEN THE ELASTIC BAND OF THE MASK AROUND YOUR HEAD. REMAIN SEATED AND DO NOT REMOVE THE MASK UNTIL ADVISED TO DO SO.

ADULTS SHOULD PUT ON THEIR MASKS BEFORE ATTENDING TO CHILDREN.

THE EMERGENCY EXITS ARE LOCATED ON BOTH SIDES OF THE AIRCRAFT AND ARE INDICATED BY THE EXIT SIGNS AND FLOOR PATH MARKINGS.

THE CREW WILL NOW SHOW YOU THE EXITS CLOSEST TO YOU.

DURING EVACUATION FOLLOW THE FLOOR PATH MARKINGS TO THE NEAREST EXIT.

PLEASE READ THE SAFETY INFORMATION CARD AND PASSENGER INFORMATION LEAFLET PLACED IN YOUR SEAT POCKET BEFORE DEPARTURE.

EQUIPMENT CONTAINING RADIO TRANSMITTING DEVICES SUCH AS, PORTABLE RADIOS AND REMOTE CONTROLLED EQUIPMENT INCLUDING TOYS AND WALKIE-TALKIES SHOULD NOT BE USED AT ANY TIME. ALL OTHER DEVICES SHOULD BE SWITCHED OFF UNTIL 15 MINUTES AFTER TAKE OFF, AND ONCE AGAIN SWITCHED OFF WHEN THE FASTEN "SEAT BELT" SIGN COMES ON FOR LANDING.

YOU WILL BE ADVISED, WHEN IT IS SAFE TO SWITCH ON MOBILE PHONES AFTER LANDING.

FOR TAKE OFF ENSURE THAT YOUR SEAT BACKS ARE ADJUSTED UPRIGHT, TRAY TABLE STOWED, FOOT RESTS RETRACTED AND YOUR VIDEO SCREENS STOWED UNTIL THE FASTEN SEAT BELT SIGN IS SWITCHED OFF. SMOKING OF ANY FORM IS NOT PERMITTED ON THIS AIRCRAFT

PASSENGERS OCCUPYING WINDOW SEATS ARE REQUIRED TO OPEN THE WINDOW BLINDS FOR TAKE-OFF.

PLEASE FEEL FREE TO DRAW ANY CONCERNS TO THE IMMEDIATE ATTENTION OF THE CABIN CREW. WE WISH TO INFORM YOU THAT IN PREPARATION FOR DEPARTURE ALL TOILETS WOULD BE LOCKED UNTIL THE FASTEN SEATBELT SIGN IS SWITCHED OFF AFTER TAKE OFF

"THANK YOU FOR YOUR ATTENTION".

MANDATORY ANNOUNCEMENT FOLLOWING SAFETY DEMONSTRATION - ALL AIRCRAFT

LADIES AND GENTLEMEN, IF YOU DROP OR MISPLACE AN ELECTRONIC DEVICE, PLEASE DO NOT ADJUST YOUR SEAT. INFORM A CABIN CREW MEMBER IMMEDIATELY. ELECTRONIC DEVICES IN YOUR CABIN BAG MUST NOT BE CONNECTED TO ANY CHARGING DEVICES. CABIN BAGS CONTAINING CHARGING DEVICES MUST NOT BE STOWED IN THE OVERHEAD BINS. THEY MUST BE KEPT UNDER THE SEAT IN FRONT OF YOU OR THE CHARGING DEVICES MUST BE KEPT IN THE SEAT POCKET.

FOR SAFETY REASONS, ALL DEVICES MUST BE DISCONNECTED FROM AIRCRAFT POWER OUTLETS AND CHARGING DEVICES DURING TAXI, TAKE-OFF, LANDING, AND WHENEVER INSTRUCTED BY THE CABIN CREW. CHARGING DEVICES INCLUDING SPARE BATTERIES AND POWER BANKS MUST NOT BE CHARGED USING AIRCRAFT POWER AT ANY TIME. THANK YOU FOR YOUR COMPLIANCE.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 63

A 330- 300 SAFETY ANNOUNCEMENT (AIR BAG AVAILABILITY IN BC)

Ref 2.15.2.22

“AYUBOWAN, LADIES AND GENTLEMEN,

INTRODUCTION AND WELCOME.....

PLEASE PAY YOUR COMPLETE ATTENTION TO THIS SAFETY DEMONSTRATION. TO FASTEN YOUR SEAT BELT, INSERT THE METAL FITTING ON ONE STRAP INTO THE BUCKLE ON THE OTHER STRAP AND TIGHTEN. ENSURE THAT THE SEAT BELT IS AROUND YOUR HIPS. TO OPEN YOUR SEAT BELT, LIFT THE UPPER PORTION OF THE BUCKLE. THE BUSINESS CLASS SEATS ARE EQUIPPED WITH AIRBAGS.

THIS IS YOUR LIFE VEST DEMONSTRATION, FOR PASSENGERS IN THE BUSINESS CLASS CABIN, THE LIFE VEST IS LOCATED BY THE SIDE OF THE SEAT (Demonstrate the actual location). AND FOR PASSENGERS IN THE ECONOMY CABIN, THE LIFE VEST IS LOCATED UNDER YOUR SEAT, IF INSTRUCTED BY THE CREW TAKE IT OUT AND SLIP IT OVER YOUR HEAD. PASS THE STRAP AROUND YOUR WAIST, INSERT THE FITTING INTO THE BUCKLE, AND TIGHTEN BY PULLING THE STRAP. DO NOT INFLATE YOUR LIFE VEST INSIDE THE AIRCRAFT, AS THIS WOULD IMPEDE YOUR EXIT. AS YOU LEAVE THE AIRCRAFT, INFLATE THE LIFE VEST BY PULLING THE RED TABS DOWNWARDS, SHOULD THE VEST NOT INFLATE IMMEDIATELY, BLOW INTO THE RUBBER TUBES. FOR INFANTS UNDER TWO YEARS SPECIAL LIFE VESTS ARE AVAILABLE. PLEASE BE INFORMED THAT THE LIFE VEST IS A MANDATORY PIECE OF SAFETY EQUIPMENT PROVIDED FOR EVERY PASSENGER AND IT IS AN OFFENCE TO REMOVE IT FROM THE AIRCRAFT.

SHOULD THERE BE A LOSS OF CABIN PRESSURE, YOUR OXYGEN MASK WILL AUTOMATICALLY DROP FROM THE PANEL ABOVE YOUR HEAD. PULL ONE MASK, COVER YOUR NOSE AND MOUTH WITH IT, AND TIGHTEN THE ELASTIC BAND OF THE MASK AROUND YOUR HEAD. REMAIN SEATED AND DO NOT REMOVE THE MASK UNTIL ADVISED TO DO SO. ADULTS SHOULD PUT ON THEIR MASKS BEFORE ATTENDING TO CHILDREN.

THE EMERGENCY EXITS ARE LOCATED ON BOTH SIDES OF THE AIRCRAFT AND ARE INDICATED BY THE EXIT SIGNS AND FLOOR PATH MARKINGS. THE CREW WILL NOW SHOW YOU THE EXITS CLOSEST TO YOU. DURING AN EVACUATION FOLLOW THE FLOOR PATH MARKINGS TO THE NEAREST EXIT.

PLEASE READ THE SAFETY INFORMATION CARD AND PASSENGER INFORMATION LEAFLET PLACED IN YOUR SEAT POCKET BEFORE DEPARTURE. EQUIPMENT CONTAINING RADIO TRANSMITTING DEVICES SUCH AS, PORTABLE RADIOS AND REMOTE CONTROLLED EQUIPMENT INCLUDING TOYS AND WALK-IE-TALKIES SHOULD NOT BE USED AT ANY TIME. MOBILE PHONES AND ELECTRONIC DEVICES SHOULD BE SWITCHED OFF UNTIL 15 MINUTES AFTER TAKE OFF AND ONCE AGAIN SWITCHED OFF WHEN THE SEAT BELT SIGN COME ON FOR LANDING. YOU WILL BE ADVISED, WHEN IT IS SAFE TO SWITCH ON YOUR PHONES AFTER LANDING. FOR TAKE OFF ENSURE THAT YOUR SEAT BACKS ARE ADJUSTED UPRIGHT, TRAY TABLE STOWED, FOOT RESTS RETRACTED AND YOUR VIDEO SCREENS STOWED UNTIL THE FASTEN SEAT BELT SIGN IS SWITCHED OFF. SMOKING OF ANY FORM IS NOT PERMITTED ON THIS AIRCRAFT

PASSENGERS OCCUPYING WINDOW SEATS ARE REQUIRED TO OPEN THE WINDOW BLINDS FOR TAKE-OFF.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 64

PLEASE FEEL FREE TO DRAW ANY CONCERNS TO THE IMMEDIATE ATTENTION OF THE CABIN CREW. WE WISH TO INFORM YOU THAT IN PREPARATION FOR DEPARTURE ALL TOILETS WOULD BE LOCKED UNTIL THE FASTEN SEATBELT SIGN IS SWITCHED OFF AFTER TAKE OFF THANK YOU”.

MANDATORY ANNOUNCEMENT FOLLOWING SAFETY DEMONSTRATION - ALL AIRCRAFT

LADIES AND GENTLEMEN, IF YOU DROP OR MISPLACE AN ELECTRONIC DEVICE, PLEASE DO NOT ADJUST YOUR SEAT. INFORM A CABIN CREW MEMBER IMMEDIATELY. ELECTRONIC DEVICES IN YOUR CABIN BAG MUST NOT BE CONNECTED TO ANY CHARGING DEVICES. CABIN BAGS CONTAINING CHARGING DEVICES MUST NOT BE STOWED IN THE OVERHEAD BINS. THEY MUST BE KEPT UNDER THE SEAT IN FRONT OF YOU OR THE CHARGING DEVICES MUST BE KEPT IN THE SEAT POCKET.

FOR SAFETY REASONS, ALL DEVICES MUST BE DISCONNECTED FROM AIRCRAFT POWER OUTLETS AND CHARGING DEVICES DURING TAXI, TAKE-OFF, LANDING, AND WHENEVER INSTRUCTED BY THE CABIN CREW. CHARGING DEVICES INCLUDING SPARE BATTERIES AND POWER BANKS MUST NOT BE CHARGED USING AIRCRAFT POWER AT ANY TIME. THANK YOU FOR YOUR COMPLIANCE.

2.15.2.24 Locking of Lavatories

The EY lavatories shall remain locked during push back till the seat belt sign is switched off. CCMs responsible for locking/unlocking lavatories are:

L2/R2 Lavatories	S4
L3/R3 Lavatories	S5
L4/R4 Lavatories	S6

A 320/21 refer: chapter 6/6A

2.15.2.25 Cabin Checks Prior to Departure

CCMs designated for the relevant work position shall ensure the following preparations are carried out prior to departure and report to the cabin supervisor in relevant work area.

Purser announcement. **“CABIN CREW PREPARE CABIN FOR TAKE OFF”.**

1. Passengers seated and secured
2. Seat backs adjusted upright/Seat belts fastened
3. Tray tables stowed and latched
4. Window blinds opened and footrests stowed
5. Children/Infants restrained
6. Overhead bins/ compartments closed and locked
7. IVS stowed / strapped
8. Emergency equipment/exits/aisles/cross aisles clear of obstruction
9. Portable electronic devices switched off
10. Carry-on baggage stowed and secured

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 65

11. Curtains and partitions opened and secured
12. Lavatories unoccupied and locked
13. Galley equipment latched, locked and secured, galley electrics switched off
14. Waste bin flaps closed
15. Cabin lights adjusted appropriately
16. Ensure Flight Deck cleared
17. PED facility switched off from the FAP
18. Cabin Closets/Compartments/Dog Houses are Closed, Locked and Secured

CCMs shall be responsible to check their designated area, and open door observation window for external visibility.

2.15.2.26 Spraying of Aerosol

The Purser shall ensure the following announcement is made prior to spraying. CCMs should spray aerosol towards the cabin ceiling working from AFT to FWD.

***“LADIES AND GENTLEMEN,
IN ACCORDANCE WITH HEALTH AND AGRICULTURAL REQUIREMENTS, AN AEROSOL CONFORMING TO WORLD HEALTH ORGANISATION STANDARDS WILL BE SPRAYED THROUGHOUT THE CABIN. WE KINDLY REQUEST YOU TO REMAIN SEATED, AND RECOMMEND YOU KEEP YOUR NOSE, EYES AND MOUTH COVERED UNTIL THE SPRAYING IS COMPLETED. THANK YOU”.***

Flights to other countries - The spraying shall be carried out as specified, conforming to regulatory requirements of the destination country.

Inbound flights to Sri Lanka - the following procedures shall be adhered.

1. For single sector flights into Sri Lanka, aerosol spraying shall be carried out prior to passenger boarding.
2. For multiple sector flights, spraying of aerosol shall be carried out at the last overseas port before departure to Sri Lanka.
3. The spraying shall be carried out after the aircraft has been fully catered, the service doors closed and prior to passenger boarding. One main entry door may remain open for operational requirements.
4. Spray should be directed towards the open Overhead lockers, ceiling and galley areas. Ensure that the spray does not fall on the face of the operator while he or she is walking along the aisle at the rate of not more than one step or row of seats per second.
5. Aerosol shall be sprayed into all toilets and coat closets for 2sec each. Ensure the toilet seats and diaper changing boards are up and not sprayed.
6. Aerosol shall be sprayed in the flight deck for 3sec. Spray shall not be directed on aircraft equipment and on persons in the flight deck.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 66

Upon arrival, the empty cans shall be handed over to the relevant authority. This shall be accompanied by a signed copy of the General Declaration / other destination specific documents, which must include all relevant information filled out as required.

Refer SLCAIS 088

2.15.2.27 Push Back/Taxiing out/Runway

Pushback - A procedure, to push back an aircraft from the gate using external power.

Push back tugs - Special, low profile vehicle that pushes an aircraft back.

Taxiing - Refers to the movement of an aircraft on the ground, under its own power to and from a runway for a take-off or after a landing.

Runway - A defined rectangular area on a land aerodrome prepared for the landing and take-off run of an aircraft along its length.

CCM Responsibilities

CCMs shall adhere to the following guidelines in preparation for take-off.

1. All service related duties should cease/class dividers opened and secured
2. Galley electrics switched off
3. CCMs shall sit and be restrained in preparation for departure
4. Cabin Supervisors shall check and report to the Purser individually that the respective areas are checked and ready for take-off

CCMs shall not leave their seats except to attend to a critical safety related duty, and should be vigilant to ensure that passengers remain seated until the seat belt sign is switched off.

If required the CCM may initiate a PA announcement advising passengers to remain seated for safety reasons and shall not place themselves in danger in trying to seat passengers.

2.15.2.28 Confirmation of Cabin Ready to PIC

Purser shall indicate Cabin Ready to the PIC before take-off and landing using the FAP when available or via the inter-phone, once all CCMs are seated and restrained. The Purser may walk around prior to confirmation.

2.15.3 Take Off

Take off is the phase of flight in which an aircraft moves through a transition from taxiing (moving to the runway) to flying in the air, starting from the runway until airborne.

Purser may initiate the following announcement as a reminder to the passengers if the duration between the completion of the passenger safety briefing and the time of departure is over 20 minutes.

***“LADIES AND GENTLEMEN,
AS WE SHALL BE AIRBORNE SHORTLY, PLEASE MAKE SURE, YOUR SEAT BELTS FASTENED, CHAIR BACKS ADJUSTED UPRIGHT, WINDOW BLIND OPENED, TRAY TABLE, VIDEO SCREENS AND FOOT REST STOWED. YOU ARE REMINDED TO SWITCH-OFF ALL ELECTRONIC DEVICES.
THANK YOU”.***

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 67

2.15.3.1 Night-Take Off

The cabin/galley and entry lights should be in the 'DIM' position and the window lights in the 'OFF' position for night take-off. This is to acclimatise passenger and CCM vision for an unprepared evacuation.

Note: Cabin/Galley must never be in total darkness during the flight.

The Purser shall initiate the following announcement:

***"LADIES AND GENTLEMEN,
CABIN SAFETY REGULATIONS REQUIRE THAT WE DIM THE CABIN LIGHTS IN PREPARATION FOR TAKE OFF. PASSENGERS WHO WISH TO CONTINUE READING MAY USE THEIR PERSONAL READING LIGHTS.
THANK YOU"***

2.15.3.2 Imminent Take Off

The PIC shall advise CCMs to sit for take-off through the PA system.

"CABIN CREW, BE SEATED FOR TAKE-OFF"


(Cabin crew are required to sit at their stations and restrain themselves once all checks are completed prior to Purser informing PIC, 'CABIN READY' via FAP or inter phone. C/S's to ensure compliance of the aforementioned to the Purser)

2.15.3.3 Cabin Crew Seating Stations

It is mandatory that CCMs be in uniform for every take-off and landing for identification in an emergency. Window blinds on the doors shall be opened for take-off and landing.

The CCM shall observe STS and be vigilant for abnormalities.


Crew Stations A330 – ALT Aircraft

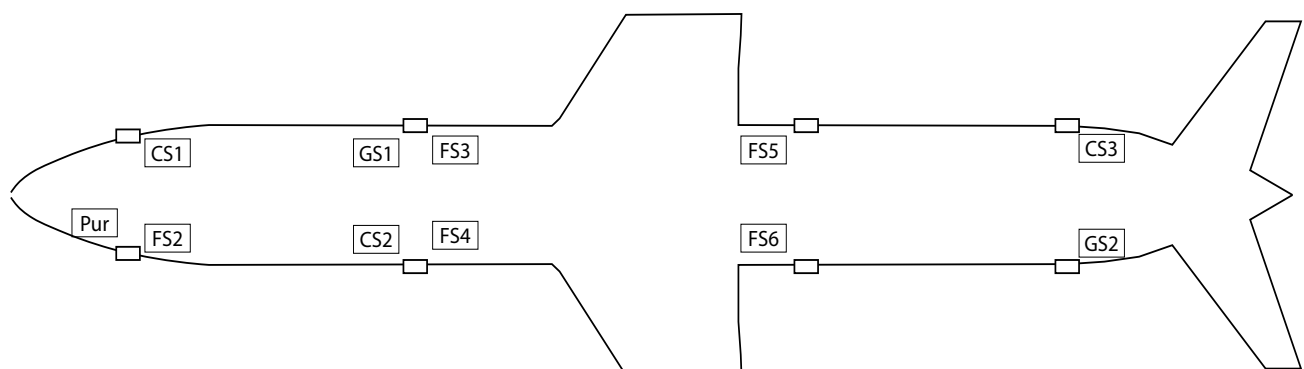

51H – Reserved for Cabin Crew Seating


Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

Crew Stations A330 – ALH Aircraft

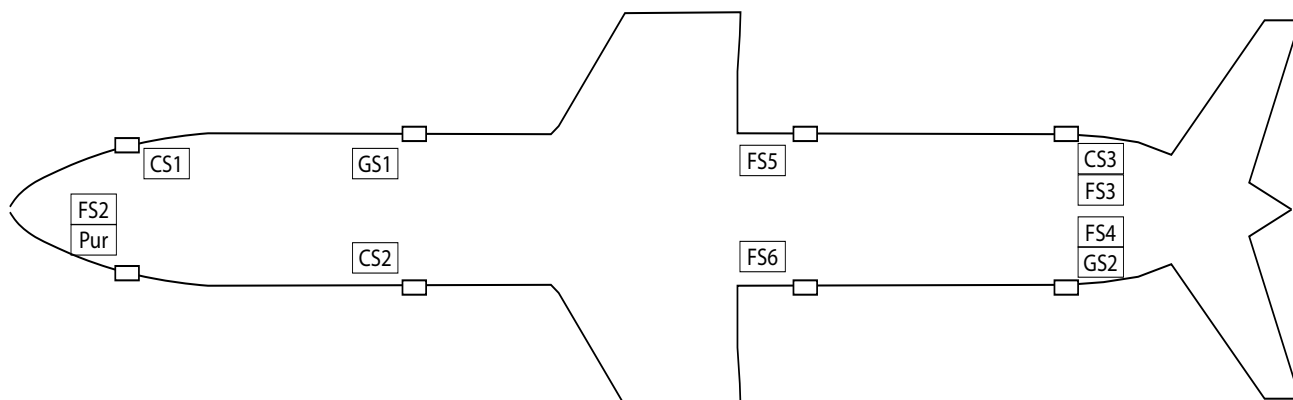


63C – Reserved for Cabin Crew Seating

Crew Stations A330-300 Aircraft

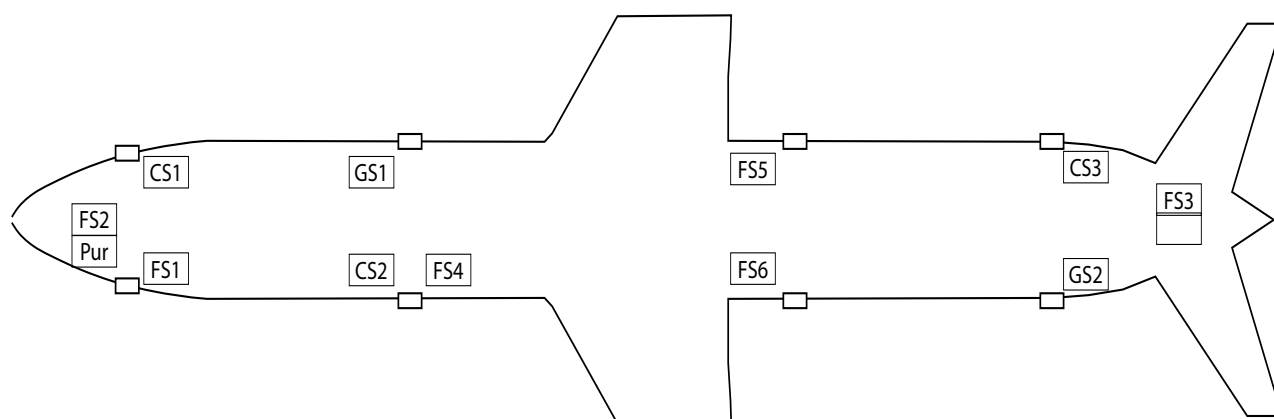


A330 -300 L2A Crew seat shall be occupied by FSS 4 when an interpreter is not on duty.

Crew Stations 4R ALS Aircraft

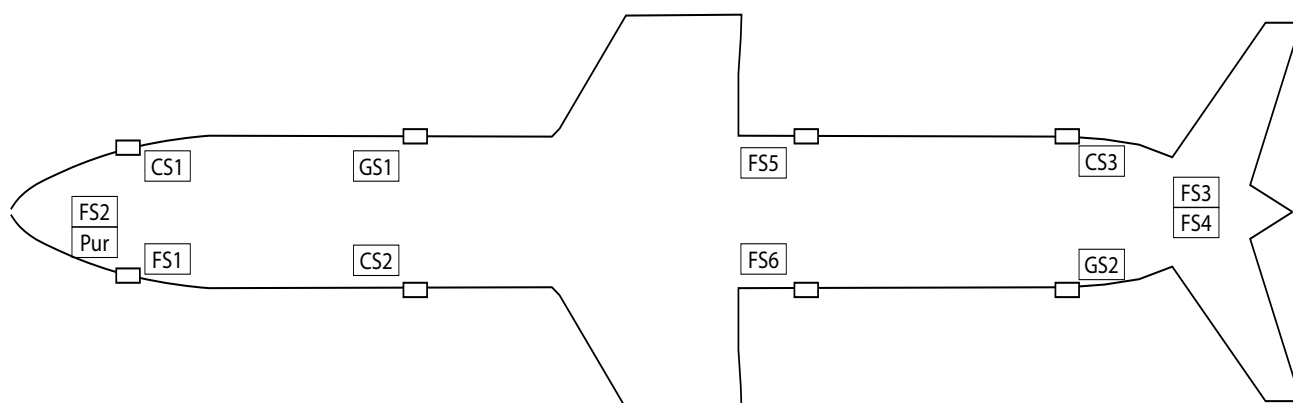


2.15.3.3.1 Cabin Crew Demonstration Positions

Demonstration Positions A330-200

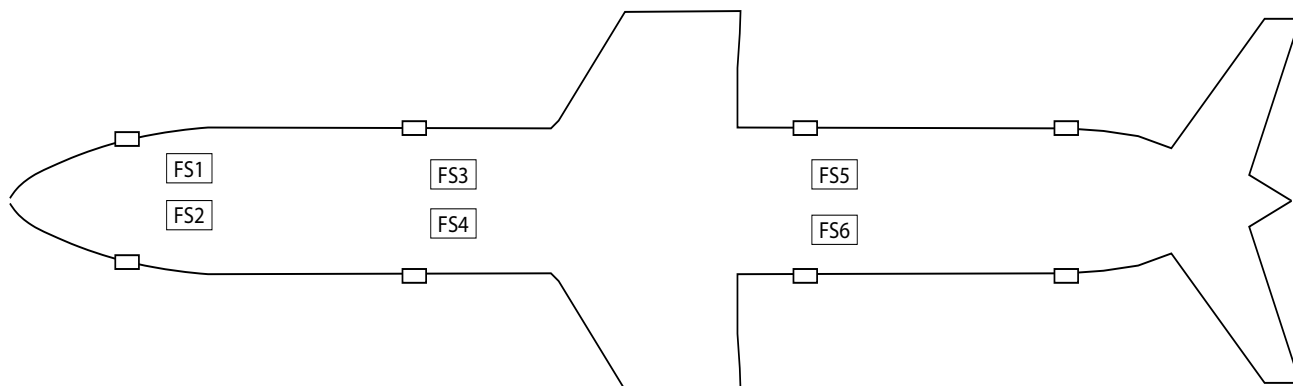

CS1 shall demonstrate if S1 is not detailed.

Demonstration Positions A330-300

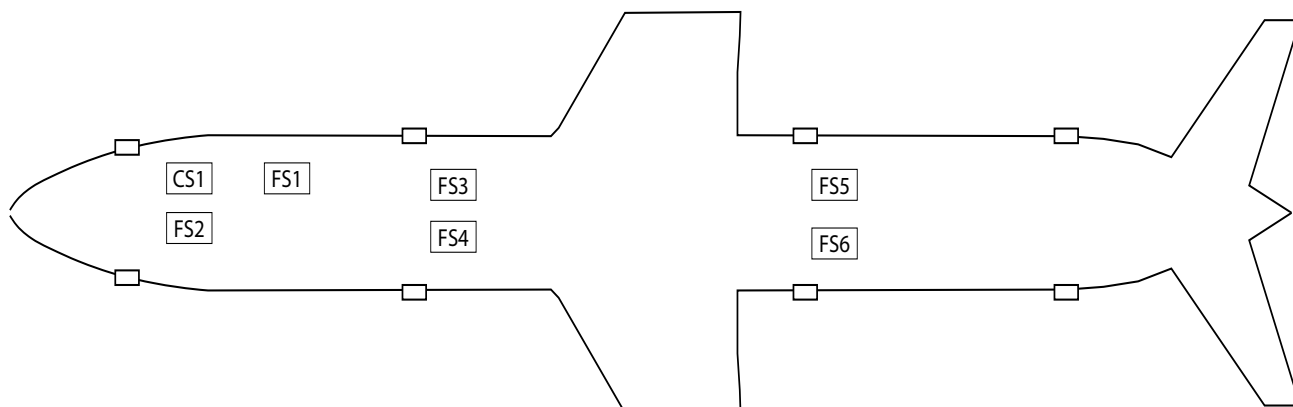

FSS 1 shall demonstrate on the right side positioning at row 4 as the view to the passengers are limited.

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 70

2.15.3.4 Silent Thirty Seconds Review (STS)

When secured for take-off, CCMs shall observe **STS – (BDEEP)**

Brace for impact
Door operation
Evacuation commands
Evacuation route
Passenger control

2.15.3.5 Climb (Ascent)

Ascent - climbing to a higher altitude after take-off.

Flight Crew shall not be disturbed until the aircraft reaches cruise altitude and the seat belt sign is switched off, unless in an emergency that needs immediate attention.

2.15.3.6 Safety Announcement after Seat Belt Sign Off (A330-300 A320/321Neo)

“LADIES AND GENTLEMEN,

PASSENGERS MAY USE YOUR SMART DEVICES TO ACCESS THE INTERNET THROUGH THE ONBOARD WIFI NETWORK OR GSM NETWORK, TO ENSURE YOU DO NOT DISTURB THE PASSENGERS AROUND YOU, PLEASE SWITCH YOUR PHONES TO SILENT MODE.

(ON ALL AIRCRAFT’S EXCEPT A330-300 & A321/A320 NEO PLEASE ADD)

“MOBILE PHONES MAY BE USED ONLY ON FLIGHT MODE DURING CRUISE”

WE RECOMMEND THAT YOU HAVE YOUR SEATBELT SECURELY FASTENED AT ALL TIMES WHEN SEATED. PASSENGERS WHO DO NOT WISH TO BE DISTURBED, SHOULD FASTEN THEIR SEATBELT OVER THE BLANKET, VISIBLE TO THE CREW. IF THE “FASTEN SEATBELT” SIGN IS SWITCHED ON DURING FLIGHT, REFRAIN FROM USING THE TOILETS, RETURN TO YOUR SEAT IMMEDIATELY AND FASTEN YOUR SEATBELT. AS A SAFETY MEASURE, ALL TOILETS ARE FITTED WITH SMOKE DETECTORS. THE USE OF MOBILE PHONES IN THE TOILET IS PROHIBITED.

OUR CREW WILL ENDEAVOUR TO MAKE YOUR FLIGHT WITH US A TRULY PLEASANT EXPERIENCE. THANK YOU!”

2.15.4 Cruise

A level maintained during a significant portion of the flight and when the aircraft flies most fuel efficiently between the ascent and descent phases.

During cruise, the CCMs shall check the following in the cabin/lavatories and galleys but not limited to,

1. Overhead stowage compartments to remain closed at all times
2. Infants in bassinets checked periodically
3. Passengers sleeping have their seat belts fastened

Revision No	02	Revision Date	15 August 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 71

4. Passengers not sleeping on the floor (inclusive of children/ infants)
5. Conduct regular check on lavatories/ waste bins, flaps for prevention of fire
6. Carts /trolleys shall be manned and locked when in the cabin
7. Containers in galleys to be locked and latched
8. Carts /trolleys to be secured at all times in the galleys
9. Be Vigilant for fire hazards
10. Waste management carried out for safety and hygiene conditions
11. Passengers and crew shall not sit, place feet or any items on the slide pack.
12. Revenue passengers shall not sit on jump seats.

2.15.4.1 Turbulence

Definition - Turbulence is the result of atmospheric and environmental effects, which can be light/moderate/severe. The degree of turbulence can vary for many reasons. It is important to be aware that clear air turbulence may occur without warning.

Passenger Announcement - The CCMs shall initiate the following PA announcement to advise the passengers. Ref 4.1

2.15.4.2 Hygiene in lavatories

During cruise, the CCMs should check the lavatories at regular intervals to maintain safety and hygienic conditions and address the following:

Waste bins not over filled (Waste bin flap closed)/Paper towels and tissues not piled on the lavatory floor

The sink is dry and the drain system functioning.

In the event water is shut off in the lavatory, the power to the water heater shall be switched off.

Unserviceable lavatories shall be locked and placarded.

2.15.4.3 Waste Management in galleys

CCMs should be concerned of waste management in galleys. The waste bins shall not be over filled due to health/ hygiene condition and safety hazards. All waste bin flaps shall be closed during flight. Methodical waste management and stowage should be addressed depending on the aircraft type and available resources.

If waste is to be stowed in lavatories for landing, it shall be in transparent bags in order to identify any fire hazards. The bags shall be stowed once the "fasten seat belt" sign has been switched on for landing. The waste bags shall be removed after all passenger have disembarked.

2.15.4.4 Stowing of used blankets in lavatories

Used blankets may be stowed in lavatories provided the following conditions are strictly adhered to,

1. The lavatories shall be used to stow blankets as a last resort (only after all other means of stowage has been utilized)
2. Blankets shall be stowed only in transparent bags

Revision No	01	Revision Date	01 April 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 72

3. A maximum of 25 blankets shall be stowed in each bag
4. A maximum of 3 such bags shall be stowed in each lavatory
5. Lavatories shall be checked for fire hazards prior to stowing the blankets
6. Lavatories next to CCM stations shall be used for this purpose
7. The bags shall be stowed once the “fasten seat belt” sign has been switched on for landing, (approximately 20 minutes prior to landing)
8. The bags shall not surpass the height of the lavatory sink
9. The lavatory door shall be locked to prevent passenger access
10. The Crew shall monitor the lavatories after stowage of the bags
11. The blankets shall be removed after all passenger have disembarked and shall not be positioned blocking direct access to exits.

The following technical conditions shall be applicable in the lavatories to stow blankets/Waste,

1. An operational smoke detector (Refer NOTE below)
2. An operative door locking mechanism
3. Can be locked and unlocked externally
4. Not used for the stowage of any other items

Note : An aircraft may be dispatched with an inoperative smoke detector if blanket collection bags are not placed in the lavatory, therefore minimum equipment list (MEL) relief shall not be applicable if such bags are to be placed in the lavatory.

2.15.4.5 Smoking Regulation

Smoking of any form is not permitted on all Civil Aircraft registered in Sri Lanka or operated within Sri Lanka's airspace, SLCAIS 74, CCMs shall ensure the observation of the 'No smoking regulation'.
Ref 2.20

2.15.5 Descent

Descent is the phase where an aircraft decreases altitude in preparation for landing.

The fasten seat belt and no smoking signs (330-300 not applicable) shall be switched on and should be observed. Unless in an emergency, CCMs are advised to refrain from interrupting the Flight Crew until the aircraft is parked and the fasten seat belt sign is switched off.

The PIC shall initiate a PA announcement on top of descent to advice CCMs to prepare cabin for landing.

“CABIN CREW PREPARE CABIN FOR LANDING”.

2.15.5.1 Cease Cabin Services

CCMs shall cease service related duties on top of descent and commence pre-landing safety duties. The cabin lights shall be at full intensity to carry out the cabin checks.

Initiate the following announcement prior to the collection of headsets.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 73

***“LADIES AND GENTLEMEN,
IN PREPARATION FOR LANDING THE HEADSETS AND BLANKETS PROVIDED TO YOU WILL BE COLLECTED BY THE CABIN CREW. WE TRUST YOU ENJOYED THE ENTERTAINMENT PROVIDED.
PLEASE NOTE THE REMOVAL OF BLANKETS FROM THE AIRCRAFT IS PROHIBITED AND THE TOILETS WILL BE LOCKED SHORTLY,
THANK YOU”***

***“LADIES AND GENTLEMEN,
IN PREPARATION FOR LANDING, WE SHALL BE LOCKING ALL TOILETS AND SECURING THE CABIN. PLEASE RETURN TO YOUR SEAT, ADJUST YOUR SEAT BACK TO THE UPRIGHT POSITION, STOW AWAY YOUR TRAY TABLE/VIDEO SCREEN/RETRACT THE FOOTREST/FASTEN YOUR SEATBELT, AND HAVE THE WINDOW BLINDS OPEN FOR LANDING. ALL HAND LUGGAGE TO BE STORED IN THE OVERHEAD BIN OR UNDER THE SEAT IN FRONT OF YOU, FOR SAFETY REASONS, IT IS MANDATORY THAT WE CLEAR THE CABIN OF ALL DISPOSABLE ITEMS. PLEASE HAND OVER ALL SUCH ITEMS TO THE CREW WHO WILL BE IN THE CABIN SHORTLY. YOU ARE REMINDED TO SWITCH OFF ALL ELETRONIC DEVICES,
YOU ARE REQUIRED TO REMAIN SEATED UNTIL THE SEATBELT SIGN IS SWITCHED OFF.***

THANK YOU”

2.15.5.2 Before Landing Announcement on Flights Exceeding 4 Hours

The CCMs shall carry out a manual demonstration to advice passengers of the locations of exits as a reminder on flights exceeding 4 hours. Ref 2.15.3.3.1

***“LADIES AND GENTLEMEN,
THE CREW IN FRONT OF YOU WILL ONCE AGAIN DEMONSTRATE THE CLOSEST AND ALTERNATE EXITS. IT HAS BEEN OUR PLEASURE HAVING YOU WITH US AND WE LOOK FORWARD TO BEING OF SERVICE TO YOU AGAIN IN THE NEAR FUTURE.
THANK YOU FOR FLYING SRILANKAN AIRLINES, A MEMBER OF THE ONEWORLD ALLIANCE.
AYUBOWAN”.***

2.15.5.3 Sterile Flight Deck Policy

CCMs shall observe and enforce Sterile Flight Deck Policy when the seat belt sign is switched on in preparation for landing. Ref 2.12.9

2.15.5.4 Cabin Checks Prior To Landing

CCMs shall carry out the following checks in preparation for landing,(Checks similar to pre departure checks) Ref 2.15.2.25

2.15.5.5 Confirmation of Secured Cabin to the PIC

The Flight Crew shall initiate a PA announcement advising CCMs to sit for landing

“CABIN CREW BE SEATED FOR LANDING”.

All CCMs shall sit at their stations with their seat belts and shoulder harness fastened. CCMs shall

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 74

ensure the blind on the viewing window is opened. It is mandatory that CCMs be in uniform for every take-off and landing and shall be vigilant to observe any abnormalities. The Purser may carry out a walk around prior to confirming cabin ready to the PIC. It is mandatory that the cabin is secured and confirmed to the PIC prior to the announcement

The facility to inform PIC is available on the FAP or via the inter-phone. It is mandatory that cabin secure is confirmed to the PIC 10 minutes prior to landing. The Purser shall ensure the cabin is prepared for landing as required/on time and if not inform the PIC of the delay.

2.15.5.6 Night Landing

The cabin/galley and entry lights should be in the dim position & window lights switched off for night landing. This is to acclimatize passenger and CCM vision for an unprepared evacuation.

Note - Cabin/Gally must never be in total darkness during the flight.

The Purser shall initiate the following announcement prior to adjusting the lights.

“LADIES AND GENTLEMEN”

CABIN SAFETY REGULATIONS REQUIRE THAT WE DIM THE CABIN LIGHTS IN PREPARATION FOR LANDING. THOSE WHO WISH TO CONTINUE READING MAY USE THEIR PERSONAL READING LIGHTS. THANK YOU”.

2.15.6 Approach

Approach is, when an aircraft leaves its cruise altitude and commences to descend in preparation for landing.

2.15.6 .1 Silent Thirty Second Review (STS)

When seated for landing CCMs shall observe “STS” – **(BDEEP)** Ref 4.6.2/2.15.3.4

2.15.7 Landing/Taxiing In

CCMs shall remain seated and ensure passengers remain seated until the aircraft comes to a complete stop and the fasten seat belt sign is switched off. CCMs shall leave their seats only to perform safety related duties. Purser/Door assists are permitted to leave their seats once the aircraft leaves the active runway.

2.15.8 After Landing Safety Announcement

The under mentioned announcements shall be carried out having taxied out of the active runway at Transit/Terminating stations.

“LADIES AND GENTLEMEN,

WE HAVE ARRIVED AT OUR DESTINATION. PLEASE REMAIN SEATED UNTIL THE SEATBELT SIGN IS SWITCHED OFF. WE AT SRILANKAN AIRLINES WOULD LIKE TO MAKE EVERY EFFORT TO ENSURE YOUR SAFETY AND WELL-BEING. UPON ARRIVAL, PLEASE DO NOT STAND ALTOGETHER AND BLOCK THE AISLES FROM FREE MOVEMENT, PLEASE BE MINDFUL WHEN RETRIEVING BELONG-

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 75

INGS FROM THE OVERHEAD COMPARTMENTS AS ITEMS MAY FALL OUT AND CAUSE INJURY TO THOSE AROUND YOU. MAY WE ALSO REMIND YOU TO KINDLY TAKE ALL YOUR BELONGINGS WITH YOU, WHEN LEAVING THE AIRCRAFT. SHOULD YOU REQUIRE ASSISTANCE PLEASE INFORM A MEMBER OF THE CABIN CREW.

FOR PASSENGERS WHO HAVE REQUESTED SPECIAL ASSISTANCE ON ARRIVAL, KINDLY REMAIN SEATED UNTIL ALL OTHER PASSENGERS HAVE DISEMBARKED. AIRPORT STAFF WILL ASSIST YOU AS SOON AS POSSIBLE.

SHOULD YOU NEED ANY ASSISTANCE AT THE TERMINAL, PLEASE PROCEED TO THE TRANSFER DESK OR CONTACT A MEMBER OF THE GROUND STAFF OF SRILANKAN AIRLINES. WE INVITE YOU TO LOG ON TO SRILANKAN.COM, FOR THE LATEST DISCOUNTS AND SPECIAL OFFERS ON TRAVEL AND HOLIDAYS WITH SRILANKAN AIRLINES. IT HAS BEEN ENTIRELY OUR PLEASURE TO SERVE YOU AND WE HOPE TO SEE YOU AGAIN SOON. THANK YOU FOR FLYING SRILANKAN AIRLINES, A MEMBER OF THE ONEWORLD ALLIANCE. (AND OUR CODE SHARE PARTNER" ...if applicable)".

2.15.8.1 Station related announcement

2.15.8.2 Delayed arrival

"ONCE AGAIN, WE SINCERELY APOLOGISE FOR THE DELAY AND THANK YOU FOR YOUR PATIENCE AND UNDERSTANDING.

IT HAS BEEN A PLEASURE LOOKING AFTER YOU AND WE HOPE TO SEE YOU AGAIN SOON.

THANK YOU FOR FLYING SRI LANKAN AIRLINES, A MEMBER OF THE ONE WORLD ALLIANCE (AND OUR CODE SHARE PARTNER" ...if applicable)".

2.15.8.3 Transit Stations

Ref 2.15.8

"THOSE WHO ARE CONTINUING THEIR JOURNEY WITH US ON THIS AIRCRAFT, PLEASE REMAIN SEATED."

If facilities are provided for smokers at the arrival airport, the relevant information should be included in the announcement.

2.15.8.4 Park in a remote bay.

Note: CCMs stationed at the passenger disembarking doors should mention "mind your step and hold on to the railing". If a passenger is carrying multiple bags/items, caution the passenger to have a free hand to hold on to the railing.

"LADIES AND GENTLEMEN

WE AT SRILANKAN AIRLINES WOULD LIKE TO MAKE EVERY EFFORT TO ENSURE YOUR SAFETY AND WELL-BEING. PLEASE REMAIN AT YOUR DESIGNATED SEAT AND AWAIT YOUR TURN. REFRAIN FROM RETRIEVING YOUR CARRY-ON BAGGAGE FROM THE OVERHEAD BINS UNTIL THE SEAT ROW IN FRONT

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 76

OF YOU HAS BEEN CLEARED. DO NOT STAND ALTOGETHER AND BLOCK THE AISLES FROM FREE MOVEMENT. ON ARRIVAL AT << NAME OF AIRPORT>> THIS AIR-CRAFT HAS BEEN ALLOCATED TO A REMOTE PARKING BAY.

WE ADVISE YOU TO BE CAUTIOUS WHEN DISEMBARKING THE AIRCRAFT USING THE PROVIDED STEPS. PLEASE BE MINDFUL OF THE PERSON IN FRONT OF YOU WHILST USING THE STEPS. WE RECOMMEND THAT YOU GRIP AND USE THE HAND RAILING WITH YOUR FREE HAND, ON THE MOBILE STEPS, TO ASSIST YOU IN DISEMBARKING SAFELY. PASSENGER COACHES WILL TRANSPORT YOU TO THE ARRIVAL TERMINAL. SHOULD YOU REQUIRE ASSISTANCE PLEASE INFORM A MEMBER OF THE CABIN CREW.

**FOR PASSENGERS WHO HAVE REQUESTED SPECIAL ASSISTANCE ON ARRIVAL, KINDLY REMAIN SEATED UNTIL ALL OTHER PASSENGERS HAVE DISEMBARKED. AIRPORT STAFF WILL ASSIST YOU AS SOON AS POSSIBLE
THANK YOU FOR YOUR ATTENTION.”**

2.15.8.5 Delay in Parking

Flight Crew or CCMs should prevent disorder by initiating a brief PA announcement-advising passenger to remain seated until the aircraft approaches the gate/ parked and the seat belt sign is switched off.

**“LADIES AND GENTLEMEN,
FOR YOUR OWN SAFETY, WE ADVISE ALL PASSENGERS TO REMAIN SEATED UNTIL THE AIRCRAFT COMES TO A COMPLETE STOP AND THE SEATBELT SIGN IS SWITCHED OFF”.**

2.15.8.6 Delayed arrival

**“WE SINCERELY APOLOGISE FOR THE DELAY AND THANK YOU FOR YOUR PATIENCE AND UNDERSTANDING.
IT HAS BEEN A PLEASURE LOOKING AFTER YOU AND WE HOPE TO SEE YOU AGAIN SOON.
THANK YOU FOR FLYING SRILANKAN AIRLINES, A MEMBER OF THE ONE WORLD ALLIANCE (AND OUR CODE SHARE PARTNER”if applicable)”.
THANK YOU FOR YOUR PATIENCE AND UNDERSTANDING.”**

2.15.9 Arrival

Arrival is the conclusion of a sector when the aircraft is parked/engines are shut down/fasten seat belt sign is switched off.

2.15.9.1 Disarming of Slides

When the seat belt sign is switched off, the Purser shall advise CCMs to disarm the slides and cross check by initiating the following PA announcement:

“CREW DISARM SLIDES AND CROSS CHECK”

The slides on the right shall be disarmed first.

Prior to disarming the slides on the right, door primaries on the left shall cross over to the right. The following disarming procedure shall be carried out. (PIN/LEVER/PIN verbally stated by the CCM whilst disarming the slide)

1. Remove safety Pin.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 77

2. Move door arming lever to disarm position.

3. Insert safety pin.

The slides on the left shall be disarmed next,

Once the right-side slides are disarmed, both door primaries shall cross over to the left and the left side door primary shall disarm the slide observed by the opposite door primary. The following disarming procedure shall be carried out.

(PIN/LEVER/PIN verbally stated by the CCM whilst disarming the slide)

1. Remove safety Pin.

2. Move door arming lever to disarm position.

3. Insert safety pin.

The above procedure shall be carried out on all types of aircraft in the fleet.

Routine door operations shall be carried out only by the door primaries.

Purser shall initiate an **“ALL STATION”** call to obtain confirmation by the door primaries and shall check for slides disarmed indication on the FAP.

2.15.10 Opening Doors

Once the slides are disarmed the PIC shall give the confirmation by making the following announcement:

“CABIN CREW YOU MAY OPEN DOORS WHEN REQUIRED”

In the event the above command is not received, Purser shall check with PIC and advice CCMs accordingly.

NOTE: In the event the opposite door is unmanned (CCM not assigned), the door primary shall be responsible for disarming both slides and shall be extra cautious when doing so.

CCMs shall await the confirmation by ground staff to open the doors with two knocks and thumbs up prior to opening doors. Exception would be at airports where the door has to be opened to position steps. The Purser shall obtain permission from the PIC prior to opening the door at such stations. CCMs shall man half the doors until completion of passenger disembarkation

2.15.11 Conclusion of Sterile Flight Deck Policy

Sterile flight deck policy ceases when the aircraft comes to a complete stop after completing a flight leg and the fasten seat belt sign is switched off.

CAUTION: CARRYING OUT SERVICE RELATED DUTIES SHALL ONLY BE AFTER THE SEAT BELT SIGN HAS BEEN SWITCHED OFF AND THE SLIDES ARE DISARMED.

CAUTION: DO NOT LEAVE AN OPEN DOOR UNATTENDED AS THE SAFETY STRAP PULLED ACROSS THE DOOR WILL NOT PREVENT PASSENGERS/CREW MEMBERS FROM FALLING OUT.

2.15.12 Aerodrome Restrictions Announcement

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 78

The following announcement should be initiated advising passengers of the local restrictions when the aircraft is on ground.

“LADIES AND GENTLEMEN

PLEASE BE INFORMED THAT ANY FORM OF PHOTOGRAPHY IS PROHIBITED BY THE AIRPORT AUTHORITIES, VIOLATION OF THIS LAW COULD LEAD TO PROSECUTION, THANK YOU”.

2.15.13 Steps/Aerobridges

CCM in charge of the door shall ensure safe positioning of steps/aerobridges prior to passengers disembarking. The gap between the aircraft threshold and the steps shall not exceed 6”(inches).

If reposition is required passenger boarding/disembarking shall be stopped immediately and same communicated to the ground staff through the Purser.

2.15.14 Passenger Boarding/Disembarking During Transit

The Purser shall ensure that half the doors are manned at transit stations when passengers are disembarking. CCMs shall remain at the respective stations until the joining CCMs take over duties.

2.15.14.1 Passenger count/Baggage Identification at a Transit Station

The disembarking Purser shall ensure a transit passenger count is carried out and confirmed with the load sheet. CCMs should ensure the passengers remain seated prior to the commencement of the passenger count. Purser shall initiate the following PA announcement,

“LADIES AND GENTLEMEN,

TO ENABLE US TO CARRY OUT AN ACCURATE PASSENGER COUNT WE REQUEST YOU TO REFRAIN FROM USING THE TOILETS AND REMAIN SEATED. THANK YOU”.

On completion of the passenger count, the lavatories shall be unlocked for cleaning. The joining crew shall carry out transit passenger carryon baggage identification and check all seats, including seat pockets, that were occupied by disembarking passengers. The Purser shall initiate a PA announcement prior to the baggage identification. In the event of a delay of the joining crew boarding the aircraft, the disembarking crew shall carry out the baggage identification and seat check. Unclaimed items must be reported to ground staff immediately.

“LADIES AND GENTLEMEN,

OUR SECURITY REGULATIONS REQUIRE THAT ALL CABIN BAGGAGE IS IDENTIFIED. PLEASE BE INFORMED THAT ALL UNIDENTIFIED BAGGAGE WILL BE OFFLOADED. PLEASE ASSIST THE CREW BY IDENTIFYING YOUR BAGS. THANK YOU”.

2.15.15 Post Landing Duties

The following duties shall be performed by CCMs after all passengers have disembarked,

Purser Duties

1. Ensure deportees and INADS handed over to ground staff and documentation completed.
2. UMs/YPs handed over including special handling passengers.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 79

3. Cabin Defects logged in the cabin defects logbook.
4. IFE system switched off.
5. Ensure all kangaroo belts collected stored and in correct numbers.
6. A mandatory walk around the cabin needs to be performed to ensure all after landing duties are completed by CCMs.

CCM Duties

1. Ensure all passengers have disembarked from the aircraft. This includes passengers with special requirements.
2. Security check shall be carried out from AFT to the FWD of the aircraft ensuring all passengers have disembarked the aircraft and items have not been left behind in overhead compartments, under seats, on seats, refrigerators and chillers, stowage compartments and coat closets. Such items shall be handed over to the security personnel on board.
3. Ensure all lavatories are unlocked and checked.
4. Ensure all overhead compartments are kept opened during above checks.
5. Kangaroo belts shall be collected, stowed and accounted for. Soiled/unserviceable kangaroo belts shall be entered in the defect's logbook.
6. Safety equipment used during flight shall be handed over to engineering personnel and indicated in the cabin defects logbook.
7. Soiled bassinets are handed over to AIC staff for replacement.
8. Inform support service staff the location of the used First aid kit for replacement

2.16 Weight and Balance

2.16.1 Load Sheet

Weight and balance is referred to as Load Control and is part of each airlines operational responsibility. The primary function of Load Control is to prepare the Load Sheet/Trim Sheet.

It shows the number of passengers on board and baggage/cargo/Mail figures. The Trim Sheet also shows the centre of gravity of the aircraft is within limits, and the maximum aircraft weights are within limits.

The load sheet shall carry the following information,

1. Total passenger weight
2. Total Cargo weight
3. Total fuel weight
4. Total take-off weight
5. Total number of passengers on board
6. Number of passengers disembarking at various stations
7. Number of Adults/Children/Infants
8. Last minute changes – referred to as LMC

2.16.2 Trim balance

Revision No	01	Revision Date	01 April 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 80

Prior to departure, Load Control staff will present the load sheet to the PIC for his verification, approval and signature.

The PIC will retain the original and a copy shall be handed over to the Purser by Load Control staff. A weight and balance document (manual/EDP or ACARS) shall be calculated for every flight. EDP weight and balance documentation shall be produced with EDP systems approved by Colombo load control. Standard masses, including hand baggage, of

- 85 kg for a Flight Crew member
- 75 kg for a Cabin Crew member

RESEATING OF PASSENGERS IN LARGE NUMBERS SHALL NOT BE PERMITTED FOR TAKE OFF/LANDING IN THE EVENT THE AIRCRAFT IS NOT FULL.

2.16.3 Passenger Count

The Purser shall be responsible for the final head count and ensure the total number of passengers on board the aircraft confirms to the total number stated on the Load Sheet. Once established that the head count tallies with the Load Sheet/Trim Sheet, the Purser shall confirm it to the PIC. Confirmation of the number of passengers against the load sheet is a mandatory safety and security requirement.

2.17 Services on Ground

2.17.1 Individual Video System

Use of individual video screens are permitted when the aircraft is on ground/transit.

2.17.2 Meal Service on Ground

The decision to carry out a meal service on ground during a delay shall be at the discretion of the Purser in consultation with the PIC under the following conditions:

Purser responsibilities

1. Minimum delay should exceed 2 hours or as decided by the Purser
2. Purser should determine the time required and inform the PIC and ground staff
3. Obtain permission from the local Air Port Authority (through ground staff)
4. Refuelling shall not be carried out during the service
5. One FWD exit shall be opened with an aero bridge or steps positioned
6. One Aft exit may be opened with steps positioned or the door could be kept closed with the ground area clear of obstruction

CCM Responsibilities

1. Alcohol and Tea/Coffee shall not be a part of the service
2. Loose items shall not be carried on top of the carts
3. Only one meal cart on each aisle is permitted for a twin aisle cabin
4. Each cart should be manned by two CCMs when in the cabin

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 81

5. Meal carts shall not be permitted in the cabin for a single aisle cabin, service shall be carried out by hand
6. Curtains and class dividers shall be opened during the service

2.17.3 Seal Verification Process

In compliance with CAASL regulations, the verification of catering seals is the responsibility of the operating crew. This procedure is mandatory and shall be strictly followed on all flight's ex CMB.

For wide-body aircraft, the seal verification form will include three carbonized copies, distributed as follows:

- Forward Galley, Mid Galley, Aft Galley – 1 copy each

Narrow-body aircraft will receive a single seal verification form by the catering office.

Crew members shall:

- Verify all seals on carts and containers against the corresponding seal form.
- Sign the form once verification is complete.
- During seal verification of carts and containers against the catering seal form, any discrepancy in the seal number shall require the crew to summon security to verify the contents and record the details in the VR.

Crew Responsibilities

- Wide-body aircraft:
 - Forward Galley – Cabin Supervisor 1
 - Mid Galley – Cabin Supervisor 2
 - Aft Galley – Cabin Supervisor 3

Narrow-body aircraft:

- FSS2 and Cabin Supervisor

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 82

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 83

2.18 Apron Safety/Security Procedures

Apron is a defined area, a part of an aerodrome intended to accommodate loading and unloading of passengers /cargo / fuelling/ servicing or parking for maintenance.

Safety

The ramp could be dangerous due to movements of ground support equipment (vehicles, tugs etc.).



CCMs shall be alert and exercise caution, be aware of the circle of safety of an aircraft, and follow the guidelines given below:

1. Walk out and around the wing tips
2. Never walk under the wings even when engines are not running
3. Never pass directly in front or behind, operating aircraft engines
4. Walk only on cleared areas when ice or snow is observed on the ramp,
5. Be cautious as rain could cause the ramp to be slippery
6. Do not throw trash on the ramp
7. Ensure passengers do not smoke when boarding or disembarking

Vehicles that should observe the circle of safety

Vehicles when parking should adhere to the circle of safety regulations.

Vehicles transporting staff to service the aircraft shall be parked outside the circle of safety.

Direct contact vehicles

Vehicles that need direct contact with the aircraft are Ambu-lift/aircraft step/ cargo loading trucks/ high loaders etc.

Persons Walking Across Tarmac/ Safety Attire

All persons shall observe the circle of safety and don a reflective tabard (safety attire) when walking on the tarmac/ramp. CCMs shall wear the tabard when on the ramp for baggage identification or otherwise.

Photography

Photography will not be permitted as per the regulations in force at the respective airports.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 84

2.19 ETOPS/EDTO

Extended Range Operations with Two-Engine Aircraft./Extended Diversion Time Operation

ETOPS/EDTO is an acronym from International Civil Aviation Organisation (ICAO), a rule permitting newer twin-engine commercial aircraft to fly routes that, at some points are further than a distance of 60 minutes flying time from an emergency or diversion airport. Authorisation for ETOPS/ times are 120,180 minutes from a suitable aerodrome available subject to the operator showing compliance with the laid down operational criteria, and the aircraft airframe/engine combination has the appropriate Type Design approval.

EDTO is an acronym from ICAO for any operation by an aeroplane with two or more turbines where the diversion time to an En-route alternate aerodrome is greater than the threshold time established by the state of the operator. Shall comply with SLCAIS 062

2.20 Regulation on Smoking/Consumption of Alcohol/Psychoactive Substances

Smoking - Smoking is prohibited on any Civil Aircraft registered in Sri Lanka. Ref SLCAIS 74

E- cigarettes and Vape are permitted only in crew and passengers carryon baggage. Recharging and use of E-cigarettes and Vape shall not be permitted inflight.

Cabin Crew member Responsibility for non-Compliance

CCM shall ensure passengers adhere to the regulation, if not follow the below mentioned procedure,

1. Carry out a verbal warning (if it fails to achieve compliance)
2. The Purser shall be guided by the disruptive passenger policy, Ref 2.24.2.1
3. Purser to hand over a final warning authorised by PIC, stating it is the final warning
4. Purser to fill in an DPIR Ref 2.36.8

In addition to the above, CCMs should be vigilant and ensure no smoking regulation is adhered to when,

1. Administering oxygen
2. In a Decompression

2.20.1 Regulation on Alcohol/Psychoactive Substances

A person who appears to be intoxicated or who demonstrates by manner or physical indications that the individual is under the influence of psychoactive substances shall not be permitted to enter the aircraft. On observation, the Purser shall inform the PIC and Ground staff for necessary action.

2.20.1.1 Procedure for Serving Alcohol

Passengers are prohibited to consume alcohol on board an aircraft unless served by the airline. Hence they are not permitted to consume alcohol from their personal possession.

The Purser is empowered to refuse serving alcohol if a passenger exhibits signs of intoxication.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 85

Alcoholic beverages shall not be served to the following:

1. Passenger who appears to be intoxicated
2. An escorted Prisoner/ Escorted Deportee/ Deportee Escort/ INAD
3. Anyone under the age of 18
4. Any person occupying a Flight Deck or Cabin Crew assist seat

If a passenger does not follow instructions and continues to consume alcohol off a personal bottle, Purser shall deliver a verbal warning and keep the PIC informed.

If he continues, the PIC should be informed and the final warning document signed by the PIC shall be handed over to the passenger.

The bottle should be confiscated, the content measured, kept in the custody of the Purser and handed over to the Security Personnel at the arrival airport.

The Disruptive Passenger Incident Report (DPIR) with witness reports should be forwarded to the Corporate Safety along with the VR.

Ref 2.36

Note : It is mandatory to complete a DPIR form for every incident of unruly/disruptive behaviour that may threaten the safety of the aircraft or its occupants

2.21 Incidents/Accidents

2.21.1 Incident

An occurrence, other than an accident, associated with the operation of an aircraft which could affect the safe operation such as, Jeopardises the safety of crew, passengers or aircraft. Cause trauma to the crew or passengers. Cause damage to any major components.

2.21.2 Accident

An occurrence associated with the operation of an aircraft that takes place between the time any person boards the aircraft with the intention of flight and such time as all persons have disembarked there from, which Any person suffers death or serious injury, Except when the injuries are self-inflicted or inflicted by other persons or when the injuries caused due to stowaways hiding outside the areas available to the passengers and Crew.

The aircraft incurs damage or structural failure,

The aircraft is missing or completely inaccessible.

Reporting: In the event of an incident/ accident during flight, the Purser shall forward a duly completed report bearing in mind that the reader should be able to obtain an overall view of the incident stating the specific details, timings and locations.

The report shall state the occurrences in the sequence that took place, and shall include additional information helpful for an investigation.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 86

2.21.3 Reporting To Authority

The Accident/Serious Incident must be notified immediately by the aircraft commander to the company. The commander or Flight Safety Manager or Operations Control Manager at Airlines Operations Control Centre (AOCC) must raise the Accident/Serious Incident Reports Immediately with the minimum of delay and by expeditious means to Civil Aviation Authority of Sri Lanka and all other official agencies concerned, with a copy to AOCC and the original to Corporate Safety.

The Purser shall inform the PIC and forward a completed report to the Manager Group Safety on arrival at base or on electronic format at overseas stations, in keeping with the policy. In the event the Incident/Accident is pertaining to the Purser, or the Purser is injured, the next most suitable Cabin Supervisor shall be responsible to ensure compliance. The report shall be submitted to the DGCA by the Cooperate Safety Section.

2.21.4 Follow-Up Action/Selection of Witnesses

If a CCM/Passenger is required to be a witness in an incident/accident, Purser should ensure the witnesses of incident/accident fill up the witness form.

The following are the guidelines but not restricted to when selecting a witness.

Crew/passengers who witnessed the incident/part of the incident or accident

A witness (passenger) who is a resident or employed in the country of prosecution

2.22 Hazardous Material Information System

Srilankan Airlines sets and enforces occupational safety and health standards in the work place. The objective is to ensure a safe and healthy working environment is maintained for all employees and crew. The company further encourages voluntary compliance through consultation/partnerships and promotes training and education on safety for its employees.

2.22.1 Voluntary Disclosure of Safety or Security Matters

The CAASL requires employees to voluntarily disclose hazardous occurrences/accidents/ security sensitive or any other malpractices which takes place in the airline which will result in an unsafe working environment.

The reporting is encouraged to identify cause of the events to ensure that suitable corrective action is taken and not apportion blame to any individual/s involved.

An Air/Ground Safety Report (AGSR) is available for voluntary disclosure on incidents/accidents/fatigue or any other matters relating to safety. When an AGSR is raised, it should be addressed and forwarded to the Senior Manager Group Safety and shall be signed prior to submitting.

2.22.2 Discomfort on Board

The crew shall inform the Purser regarding any passengers or crew feeling dizzy/ faintish/ difficulty in breathing or vomiting. The Purser in turn will inform the PIC for any remedial action and documentation on the Technical Defects logbook. The Purser shall enter it in the Cabin Defects Logbook giving specific details for rectification prior to the next departure.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 87

2.22.3 Non Punitive Reporting

Voluntary disclosure is a method of non-punitive information expected from staff to implement and maintain safer working methods. Establishing a reporting system is to encourage a proactive safety culture system wide. It is not recommended to report on behalf of another. Reporting may include the under mentioned but not restricted to:

1. Using wrong procedures or deviating from standard operating procedures
2. Ignoring procedures
3. Lack of knowledge/ comprehension or skills to perform tasks
4. Use of improper equipment or tools
5. Lack of facilities or inadequate facilities for maximum performance
6. Giving or obeying wrong orders
7. Disobeying orders
8. Carelessness /Negligence
9. Hurrying to finish a task
10. Lack of concentration due to overwork or inadequate rest
11. Habitually undertaking risks
12. Improper management or lack of awareness
13. Lack of training or inadequate training
14. Lack of supervision
15. Excessive workload
16. Lack of fitness to work/lethargy-laziness
17. Lack or inadequate two way communication
18. Misunderstanding/Misguidance
19. Misinterpretation or ambiguity
20. Low alertness due to direct or accumulated fatigue

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 88

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 89

2.23 Refuelling and De-fuelling (fuelling) Procedures

Subject to any local airport regulation and/or restrictions, minimum required CCM's are on-board. Ref 2.13.1. Fuelling is permitted with passengers on board the aircraft or while embarkation and disembarkation is taking place. The following precautions must be observed.

1. One qualified person shall remain in the Flight deck during fuelling and be capable of using emergency procedures for fire protection and fire fighting, communications, as well as for initiating and directing an evacuation
2. Two-way communication shall be established and remain available through the aircraft's inter-communications system, or other suitable means, between the ground crew that supervises the refuelling and the qualified personnel on board the aircraft.

When designation of exits for rapid de-planing or an evacuation, the following factors should be considered: Aircraft type (Eg; some aircraft might require to designate over wing hatches), Number of CCMs on board, the method utilized for de-planing passengers (steps/aero-bridges), Exterior obstructions (parked service vehicles) that might block one or more exits.

Cabin crew procedures to ensure a method of two-way communication is established,

1. Among CCMs positioned throughout the cabin for coordination should an evacuation be required
2. Between CCMs and passengers (one-way) for the purpose of providing instructions for an emergency evacuation
3. Between CCMs and Flight crew (when on board) for notification of refuelling commencement and when an evacuation is required
4. Between Cabin crew/Flight crew/Engineering/Ground handling personnel for the purpose of ensuring notification, if fuelling needs to be discontinued for any reason

2.23.1 Reserved

2.23.2 Flight Crew Responsibilities

Shall Advise the Purser when fuelling commences and ensure the fasten seat belt sign is switched off and the no smoking signs are illuminated (if applicable).

2.23.3 Engineering Staff Responsibilities

The engineer-in-charge/technician shall be responsible in keeping the Purser/In charge CCM informed when fuelling commences.

2.23.4 CCM Responsibilities, When fuelling with Passengers

On receiving the information, the Purser shall initiate the following announcement:

"LADIES AND GENTLEMEN,

AS THE AIRCRAFT IS BEEN FUELLED, WE ADVISE ALL PASSENGERS TO KEEP YOUR SEAT BELTS OPENED AND SWITCH-OFF MOBILE PHONES UNTIL THE SEAT BELT SIGN IS SWITCHED ON, THANK YOU"

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 90

CCMs shall ensure the following while fuelling is in progress:

1. One cabin crew member is positioned by the boarding door (s).
2. Passengers open their seat belts, Prepared for an emergency evacuation
3. Cabin lighting selected to bright
4. Passengers do not smoke/strike matches/use cigarette lighters/ use mobile phones

In case of an emergency, passengers shall be evacuated using at least two main exits. To fulfil this requirement, the following shall be adhered to:

1. One FWD passenger exit shall be opened with an aero-bridge or steps positioned and
2. One AFT passenger exit should be opened with steps positioned,
3. If the AFT passenger exit is kept closed, the area below shall be clear of obstruction including catering/service trucks or boarding steps. This shall enable the deployment of the slide safely.
4. All aisles / cross aisles and exits are free of obstruction
5. Half the number of exits shall be manned. (Each CCM is responsible for the opposite door)
6. Should any condition arise during fuelling, which may constitute a potential hazard (detection of fuel vapour in the cabin etc.) notify the Flight Crew/Ground Engineer and prepare for a deplaning
7. No meal services to be carried out

If deplaning of passengers is required steps/aerobridge is preferred, than the use of escape slides

2.24 Carriage of Special Handling Passengers (Passengers with Alerts)

The PIC/Purser shall be notified when the above passengers are traveling. The seat allocation and type of service will vary depending on the category of passengers. Allocation of seats is the responsibility of the reservations/ground handling departments. However, CCMs shall ensure the seat allocation regulations are adhered to whilst the passenger is on board.

1. Passengers with a Security Alert
2. Passenger with a Medical Alert
3. Passengers with Assistance Alert

2.24.1 Armed Passengers

Whenever armed guards on official VIP's escort duties or other authorised state officials are travelling on SriLankan Airlines flights, the laid down procedures shall be followed (Security Handling).

Ref 8.5

CAUTION: NO PASSENGER IS ALLOWED TO CARRY WEAPONS AND/OR AMMUNITION IN THE CABIN. IF A PASSENGER DECLARES OR IS DETECTED WITH SUCH ITEMS, INFORM PIC, CHECK FOR REQUIRED AUTHORISATION/PERMITS AND ADVISE THE PASSENGER SUCH CAN BE CARRIED ONLY IN CHECKED IN BAGGAGE. SUCH ITEMS SHALL BE RETRIEVED BY AIRPORT SECURITY AND WOULD BE LOADED IN THE DESIGNATED LOCATION.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 91

2.24.2 Passengers with a Security Alert

2.24.2.1 Disruptive passenger

Type of Disruptive Behaviour, A disruptive passenger is a person who may, but not limited to;

1. Use threatening/abusive or suggestive language
2. Imperil the safety of the aircraft/passengers or crew
3. Suffer from a mental/physical state and the conduct may cause discomfort or make him objectionable to other passengers
4. Involving in any hazard or risk to the passengers/crew or property
5. Refusing to observe/comply with the instructions of SriLankan Airlines staff
6. Indecent exposure
7. Assault of a Crew Member/passenger

The Disruptive Passenger Policy

SriLankan Airlines has a zero tolerance policy for abusive/disruptive passengers.

The Company shall take reasonable steps to ensure a safe and secure environment for its customers and employees on board its aircraft.

The following shall be considered when transporting such passengers

- i. The risk on other passengers, crew and aircraft
- ii. The type of the aircraft and the number of such passengers
- iii. The risk evaluation on the special category passenger (Prisoner, Deportee & Inadmissible)

If the passenger is considered a potential risk, a minimum of two escorts shall be provided.

The number to transport and the potential threat should be determined by the airline (security management) and agreed by the PIC.

2.24.2.2 Inadmissible Passenger (INAD)

An "inadmissible passenger" (INAD) is a passenger, who is refused admission to a country by authorities of that country eg. due invalid visa, expired passport etc. Alcoholic beverages shall not be served to INAD

2.24.2.3 Deportee with Escorts

A deportee is a passenger, who has legally arrived in a country, or who entered a country illegally and who at some later time is ordered by the authorities to leave the State and if considered dangerous, Deportee should be escorted by two or more security officers, they shall be seated on either side of the deportee. Wide body aircraft maximum of 04 DEPA/DEPU passengers and narrow body aircraft maximum of 02 DEPA/DEPU passengers

1. The escorting officers shall identify themselves to the Purser/PIC.
2. Service of meals to such a deportee shall be with plastic cutlery.
3. Alcoholic beverages shall not be served to the escorting officers or the deportee.
4. Deportee shall be escorted to the toilet

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 92

5. DEPA/DEPU shall be indicated on the PIL.

Note : A deportee passenger (DEPU) unescorted and (DEPA) escorted

2.24.2.4 Prisoners in custody with Escorts

Prisoners and passengers in Custody are handled by the SriLankan Airlines Security and Investigation Department who are the authorised personnel to determine the maximum number allowed and the number of escort Security officers required. They shall be accepted with authorised escorts and be seated at the rear end of the aircraft and never at an emergency exit. Prisoners and passengers in custody must be boarded first and disembarked last.

The ground/security staff shall inform the PIC/Purser prior to boarding a Prisoner/Escort. Service of meals to the prisoner should be with plastic cutlery.

Alcoholic beverages shall not be served to the escorting officers or the prisoner.

At transit stations, the Purser shall ensure the disembarking crew introduces the escorts and identifies the deportee/prisoner to the joining crew, and handover the necessary documents for onward carriage. On arrival, the deportee/prisoner should remain seated (unless specified) until the Purser introduces the escorts and identifies the deportee/prisoner and hand over documents to the ground staff or relevant authorities. In certain countries they shall be disembarked first.

Prisoner should be escorted by two or more security officers, they shall be seated on either side of the Prisoner.

2.24.2.5 Boarding /Seating Passengers With a Security Alert

The ground staff shall inform the PIC/Purser prior to boarding a passenger with a security alert.

1. Purser shall ensure the alert passenger is identified by all CCMs
2. The CS in charge shall not allow the passenger to disembark at transit stations
3. The local immigration or relevant authority at the departure/arrival stations shall be notified in accordance with local laws and regulations

They should board the aircraft prior to other passengers and disembark (unless specified) last. The seats at the rear of the aircraft shall be allocated to escorting officers and the alert passenger. CCMs shall ensure the passenger does not have the opportunity to gain access to offensive or dangerous articles during flight.

The passenger if escorted should be under surveillance by the escorting officers, right throughout the journey (i.e. visiting the lavatory etc.).

2.24.2.6 Refusal of Carriage

CCMs shall be vigilant during boarding for following passengers, who may be unfit to travel,

1. Passengers who appears to be under the influence of alcohol and/or psychoactive drugs at a level that may risk the safety of the aircraft, other passengers and himself during an emergency,

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 93

2. Passengers who have sustained serious injury prior to boarding,
3. Passengers who are medically unfit due to illness/injury,
4. Passengers who have been detected to have an infectious diseases and/or within the incubation period of any infectious diseases (e.g. chicken pox, measles etc...)
5. Unruly passengers, Non adherence to crew instructions

Inform PIC/Dispatcher and off load passenger if required

2.24.2.7 Off-Loading

The PIC or ground staff may use their authority to off-load a disruptive passenger if there is reasonable doubt that his presence may jeopardise the safety of the aircraft or its occupants and/or but not restricted to the following:

1. If the disruptive behaviour takes place prior to passenger boarding or at the point of boarding, the ground staff should deny boarding.
2. If the disruptive behaviour takes place whilst taxiing the Purser shall inform the PIC and he may decide to return to the parking bay and off-load the passenger.
3. If the disruptive behaviour takes place during flight, the PIC may decide to off-load the passenger at the next scheduled destination or in extreme situations, divert the aircraft to the nearest airport to off load the passenger/s.

2.24.2.8 Handling a Disruptive Passenger

The PIC may delegate to the Purser, his authority to deal with any disruptive situation that occurs in the aircraft.

The Purser shall take charge of the situation and request those witnessing the incident (passengers) to assist in restraining the passenger/complete a witness report form with names/seat numbers and any other personal details as required.

The Purser shall report all details to the PIC and submit a completed Disruptive Passenger Incident Report form (DPIR) to the Coorate Safety along with the witness reports etc. A copy will be forwarded to the Manager Security and Investigations and the Authority.

The Purser shall be guided by the following procedures when handling a disruptive passenger:

2.24.3 Warning

1. Formally warned (verbal warning) carried out
2. Final warning notice read to passenger and handed over
3. Seek authorisation from the PIC to use the restraints
4. Use the restraints with the assistance of passengers if required
5. Reseat the passenger in the AFT with the permission of the PIC (if possible)

2.24.3.1 Formal Warning

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 94

The Purser shall carry out a formal (Verbal) warning to a passenger who exhibits disruptive behaviour.

2.24.3.2 Final warning

If the formal warning fails to achieve compliance, the Purser shall read out and hand over the final warning document authorised by the PIC.

2.24.3.3 Police Assistance

In the event a disruptive passenger is off loaded, the PIC may request Police/Security assistance. Any carry on/checked-in baggage of the passenger should be off loaded. (Passengers may be required to remain in their seats until the disruptive passenger/ passengers are off loaded)

2.24.3.4 Use of Restraining Ties

The following procedure shall be followed, prior to and during restraining a passenger.
Any measures to restrain a passenger shall be with the authorisation of the PIC.

Briefing - in the event of a decompression, the passenger seated next to the restrained passenger shall be briefed to assist the disruptive passenger with the oxygen mask.

Subject to restraining CCMs shall, Check on blood circulation regularly,

1. Brief the passengers adjacent on the (procedure) in case of a decompression
2. Sit at a CCM seat, adjacent to the passenger seat for landing with a pair of scissors kept in the vicinity,
3. Cut the restraints in a planned emergency with the PIC's permission,
4. Allocate a centre seat at the rear of the cabin,
5. If escorted, brief them on the procedure in the event of a decompression or an emergency.
6. Removing the restraints for any other reason is at the sole discretion of the PIC.

A passenger once restrained shall be handed over to the relevant authorities on arrival.

2.24.3.5 Legal Action by the Company

In the event a CCM is subjected to physical assault, a report must be submitted to the company without delay and the company may in accordance with applicable laws and regulations initiate a civil or Criminal complaint against the passenger.

At overseas stations, the Station Manager or a senior member of its staff shall assist the PIC, Purser and the CCMs involved when dealing with the Police and/or relevant authorities. The In-flight Services management shall be informed at the earliest.

2.24.4 Passenger with a Medical Alert

Passengers under medication and or on the way for treatment / after treatment is categorised as passengers with a Medical alert.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 95

Cabin Crew training is limited to handle injuries and illness on board.

2.24.4.1 Medical Clearance

Not all incapacitated passengers require medical clearance before being accepted for travel. However, passengers with the following incapacities and/or disabilities such as Alzheimer's, Downs Syndrome, Autism, Dementia, Learning difficulties (other) and cognitive impairment must be subject to medical clearance by the UL GMO/CMO before being accepted for travel. In addition:

1. Those who, because of certain diseases or incapacitations, may have or may develop unusual behaviour or physical conditions which could have an adverse effect on the welfare and comfort of other passengers and/or crew members
2. Those who can be considered to be a potential hazard to the safety or punctuality of the flight, including possible diversion and unscheduled landing
3. Those who would require medical attention/constant monitoring and/or special equipment to maintain their health during the flight
4. Those who may have their medical condition aggravated during or because of the flight
5. Those suffering from a disease, which is believed to be actively contagious and communicable.

In order to facilitate acceptance of a passenger with a disability for travel by air, the passenger's personal doctor shall complete the SriLankan Airlines Medical Information Form (MEDIF).

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 96

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 97

2.24.4.2 Passenger with Disabilities (PWD)

The category of passenger with disabilities is as,

Ambulatory	Able to board/disembark/move about unassisted.
Non-ambulatory	Unable to board/disembark/move about unassisted.

A PWD is a person whose physical/medical or mental condition requires assistance when embarking/ during flight/disembarking/on ground and in an emergency. The Purser shall inform the PIC of PWDs after referring the passenger information list.

When the above passengers travel, depending on the category and disability, they shall board prior to other passengers with the escort (if available) to be briefed on safety/emergency procedures. If applicable, briefed on securing and opening seatbelts, donning of life jackets for a ditching and oxygen mask during a decompression. Allocation of seats/stretcher as per regulations is the responsibility of the Reservations/Ground Handling Departments. However, CCMs shall ensure the seat/stretcher allocation regulations are adhered to whilst the passenger is on the aircraft.

The number of PWDs accepted on a flight shall not exceed the number of ABPs capable of assisting them in an emergency evacuation.

Accepting a PWD on board,

- PWDs shall board the aircraft first for departure and the relevant safety briefing shall be conducted by the relevant CCM.
- Frequent checks shall be carried out during flight to ensure safety and comfort of the PWD.
- CCM to brief PWDs prior to landing to remain seated until assistance is provided.

Handing Over a PWD,

The PWD shall be handed over to the relevant station staff by the Purser or Cabin Supervisor 2 by ensuring they disembark in an orderly manner once all other passengers have disembarked to prevent injury/discomfort.

Passenger In A Wheelchair

Is a person who requires assistance when boarding/during flight/disembarking and on ground. Such passengers are categorised as follows,

WCHR	Passengers who can ascend/descend steps and make own way to/from cabin seat but cannot manage long distances (wheel chair Ramp)
WCHS	Passengers who cannot ascend/descend steps but is able to make own way to/from the cabin seat to the exit (wheel chair Steps)
WCHC	Passengers completely immobile and requires wheel chair to/from cabin seat (wheelchair Cabin)

MEDA Passenger

Is a person who may travel for/after medical attention and requires assistance when boarding/during flight/disembarking and on ground. Approval by the GMO/CMO is required for clearance to travel cate-

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 98

gorising the level of assistance.

CCMs shall be guided by the following precautions when allocating seats for the passenger

1. Seats shall not be allocated at emergency exit seat/seat rows
2. Two non-ambulatory passengers should not be seated across the aisle (e.g. Seat C and D)
3. Accompanying escorts should be allocated the relevant aisle seat
4. Passenger with a plaster cast should not be seated obstructing the aisle

2.24.4.2.1 Reassurance Briefing

CCMs shall conduct a briefing to PWDs as follows,

1. CCMs would be assigned to assist during an emergency
2. In an emergency, remain seated until assisted by the crew
3. Mobility Aids shall not be used in an evacuation, but assisted by the crew

2.24.4.3 Passenger on a Stretcher

May be paralytic or severely ill person categorised as:

Quadriplegic Passenger	Paralysed from the neck or shoulder down
Paraplegic Passenger	Paralysed from the legs and/or some part of the body
Hemiplegics Passenger	Paralysed on either side of the body

Qualified medical personnel shall accompany the above stated passengers. The stretcher locations are pre-determined and a maximum of two stretcher passengers could be accommodated on an aircraft. For carriage, medical clearance by the GMO/CMO and a completed MEDA form is required. The stretcher positions Ref 2.35

2.24.4.3.1 Briefing for an escort accompanying a stretcher passenger

Cabin Supervisor shall carry out a briefing to the escort as follows:

1. To remain in the vicinity of the stretcher passenger
2. In an emergency, the exits and alternates which would be used
3. Discuss details and precautions when evacuating the passenger without the stretcher
4. The escort shall be briefed to place the drop-down oxygen mask on the stretcher passenger in the event of a decompression after donning their personal mask
5. Fit the life vest to the stretcher passenger in case of a ditching evacuation

2.24.5 Passengers with Assistance Alert

- A passenger with assistance alert is a person who is stable but needs assistance when boarding/ during flight/disembarking/on ground and in an emergency.
- Even though they may have their own doctor's certificates of fitness for travel, medical clear-

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 99

ance shall be referred to UL Medical Centre and the SriLankan Airlines Medical Information Form (MEDIF) has to be completed for travel.

- Persons who are reduced in mobility due to age (between 75 - 85 years of age need to provide a copy of the Passport data page at the time of booking). A form of Indemnity to be signed by the passenger at the time of acceptance to prove that s/he can fend themselves, have meals without any assistance and manage the toilet needs on board the aircraft on their own without any assistance.
- Seating shall be assigned as per SriLankan Airlines policy, which is most suited to meet the passenger's need.
- In order to meet safety requirements, such passengers shall not be allocated seats where they would obstruct emergency exits, impede the crew in their duties, obstruct access to emergency equipment or hinder an evacuation.

2.24.5.1 Blind Passenger

A Service Animal may accompany a blind passenger who is mobile with /without assistance. (Ref 2.29.2) | A passenger, with a guide dog, should be assigned a window seat at a bulkhead, non- emergency exit row so the dog has enough floor space to lie on and other passengers do not step on it.

2.24.5.1.1 Briefing a blind Passenger (SOLE B)

CCMs shall conduct a briefing using the demo kit as follows:

Seat belt	Fastening adjusting and opening the seat belt
Oxygen mask	Location and Usage
Life Vest	Location & Usage
Exits	Closest and alternate exits / number of seats rows from the exits
Bracing	How to brace and pay attention to all the announcements

The passenger seated next to the blind passenger (buddy), shall be briefed to assist the said passenger to don the oxygen mask in the event of a decompression.

Reservations code: BLND

Blind Passengers do not require a medical certificate for clearance to travel by air. They will be provided assistance by the ground staff during the process of boarding and disembarkation.

Two blind passengers shall not be seated across the aisle. If blind passengers travel with escorts, the escorts shall be seated at an aisle seats next to the blind passenger. A Blind passenger is not permitted to be seated at any emergency exit. SriLankan Airlines will not provide passengers with any assistance for personal care needs on board the aircraft such as:consumption of food and drink, administration of medication, elimination functions including assistance inside the lavatory or other personal care needs. If such assistance is required during flight, the blind passenger shall travel with a personal care attendant or make alternative arrangements. A Service Animal may accompany them. Ref 2.29.2

2.24.5.2 Differently Able Passenger (Deaf)

Passengers who need less help but may communicate mainly through sign language/ lip reading or writing. A Hearing dog may accompany them. Ref 2.29.2

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 100

Reservations code: **DEAF**

Deaf passengers are considered ambulatory/mobile and therefore they do not require any special assistance. No restrictions to the numbers that may be carried. In the event of a large group of deaf passengers (e.g. 20 Deaf students), they must be accompanied by able-bodied passenger at a ratio of 1:4. When a group of deaf passengers are booked to travel, they must be seated together as a group with their escort(s).

Briefing

CCMs shall conduct a briefing advising the passenger the importance of observing signs to brace and to evacuate when required.

2.24.5.3 Expectant Mother

Expectant mothers are required to visit the medical practitioner prior to travel, in order to inquire about their fitness to fly the length of the trip. Expectant mothers without any complications traveling after their 28th week of pregnancy are required to provide a medical certificate from a qualified medical practitioner issued within 7 days of travel, confirming the pregnancy is free of complications, Fitness to travel and the estimate date of delivery. Expectant mothers with multiple and /or complicated pregnancy shall carry a medical certificate at all times from a qualified medical practitioner issued within 7 days of travel, confirming fitness to travel and the estimate date of delivery.

During an evacuation, the appointed ABP shall assist by blocking other passengers and helping the expectant mother to open the seat belt and evacuate.

Single Uncomplicated Pregnancy	
Up to 36 weeks of pregnancy	For flights up to 4 hours only
Up to 35 weeks of pregnancy	No restriction

Multiple, Complicated Pregnancies (twins/triplets etc.)	
Up to 32 weeks of pregnancy	For flight up to 4 hours
Up to 28 weeks of pregnancy	No restriction

Air travel is not recommended within the last 7 days prior to the confinement and within the first 7 days after delivery.

At the time of passenger boarding if the CCMs observe any doubt regarding the above guidelines they should inform the Purser.

2.24.5.4 Briefing an Expectant Mother

An expectant mother shall be advised to place and secure the belt over the hips and below the abdomen and avoid placing any pillows between the seat belt and abdomen.

2.24.5.5 Carriage of New-born Babies

New-born babies cannot be accepted for air travel within the first 7 days of birth. Prematurely born

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 101

babies, babies born with delivery complications who require immediate medical treatment, who are below 7 days old can be accepted only with medical clearance. A qualified escort eg. Doctor, Specialized Medical Nurse shall escort the baby.

An indemnity to be signed by the parent and/or guardian who accompanies the baby. Passenger Information List (PIL) to be handed over to Purser. At the time of passenger boarding if the CCMs observe any doubt regarding the above guidelines they should inform the Purser.

Recommended travel to be practiced for new born babies/infants

TYPE	PERIOD	MEDICAL CLEARANCE	REMARKS
Normal Healthy Babies	From 7 days up to the age not exceeding 02 years	NO	Accompanied by parents or an adult over 18 yrs. or suitable escort e.g. Qualified Nurse
New Born Babies	Below 7 days	YES	Accompanied by parents or suitable escort e.g. Qualified Nurse
Premature babies with or without complications Babies with delivery complications Babies who require immediate medical treatment depending on the severity of the illness	From birth up to the age not exceeding 02 years	YES	Escort needed: e.g. Medical Practitioner, Qualified nurse and/or Attendant

2.24.5.6 Adults with Infants

Briefing for adults with infants (SLOB Briefing) Ref 2.25.5

Elderly/Frail passenger

Is a person who may require assistance when boarding/during flight /disembarking/ on ground and in an emergency. They may be under medication. Assistance to and from the lavatory may be required and should be advised how to lock /unlock the lavatory door and the use of the attendant call button in the lavatory. If they are elderly and frail, they shall not occupy a seat next to an emergency exit.

2.24.5.7 Un-Accompanied Minors (U/M)

A child between the ages of 5 - 11 years, and not accompanied by an adult over 18 years is defined as a U/M. A U/M accepted for travel is in the custody of SriLankan Airlines until handed over to the parent/guardian. When accepting a U/M/s, all required documents shall be completed and handed over to the

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 102

Purser by the ground staff. The Purser shall ensure the following is received in the UM pouch; name and address of the U/M, name and phone number of the person authorised to accept the U/M, special instructions (Medicine/ Food/Allergies), ticket/boarding passes/passport/baggage claim tags, accepting and handing over booklet with details. A female CCM from the operating crew shall be nominated to be responsible for the U/M. During a change of crew, the taking over Purser shall accept the UM, complete documentation and introduce the UM to the rest of the CCMs. In the event, a CCM is dedicated for the U/M/s, the said CCM shall not disembark at any transit point and shall continue the duration of the journey with the U/M/s.

Allocation of seats is the responsibility of the Reservations/Ground Handling Departments. However, CCMs shall ensure U/M's are not seated next to an adult male passenger whilst in the aircraft.

2.24.5.7.1 Briefing a UM/YP

1. Inform the unaccompanied minor which adult will assist with the operation of the seat belt and the fitting of the oxygen if the situation requires it.
2. The content of the passenger briefing card and in case of evacuation to seek assistance of adult passenger in contacting a crew member.
3. Inform the passenger sitting next to the unaccompanied minor to assist with, providing the minor with an oxygen mask in case of a decompression after fitting one's own mask
4. Securing/releasing the minor's seatbelt, if necessary and calling a cabin crew member in all other in flight situations.

Note - A child under the age of 12 years separated from the accompanying adult, who is travelling in another cabin class, shall be considered a UM in order to ensure that the child is assisted in case of an emergency and appropriate briefing carried out. The adult and child should be informed that in the event of an emergency they should follow the instructions of cabin crew and not try to reunite inside the cabin as this would slow down the overall evacuation.

2.24.5.8 The pre-determined seats for U/M/s

1. B/C - any seat
2. E/Y – Outboard left rows (A/C) as stipulated according to the aircraft type

2.24.5.9 Dedicated CCM for special handling of U/M's

An additional (dedicated) CCM shall be assigned to take care of U/Ms. The specified duties for the CCM shall be limited to being responsible for them.

1. A child between ages of 2 - 5 yrs, up to a maximum of 3 children are accepted for travel provided the services of an Escort (Flight Stewardess) is obtained by the parent/guardian.
2. As per SriLankan Airlines policy, maximum number of U/M's (5 -11 years) allowed on-board an aircraft is 15 numbers. Whenever there are more than 15 U/M's travelling on any one flight, it is UL's policy to assign an additional stewardess to care for the children on board.
3. If a U/M is a PWD, the dedicated CCM shall be responsible for only for 01 child.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 103

4. Children below the age of 5 but over 2 years of age or those who require special attention (i.e. Differently able) may be accepted as an UM provided the services of an Escort (Flight Stewardess) is obtained by the parent/guardian.
5. The dedicated CCM shall sit adjacent to the U/M.

2.24.5.10 Young Passengers (YP)

Passengers between the ages of 12 - 15 years are categorised as Y/P's

Assistance would be offered according to the request/requirement. A young passenger from the age of 12 to 15 may request to travel as an U/M.

2.24.5.11 Intellectual Disability

SriLankan Airlines will assist individuals with cognitive and developmental disabilities in boarding and disembarking, and in making flight connections between gates when applicable. An escort will not be available to remain with or supervise the passenger whilst in the terminal building or in-flight, to ensure that the passenger's travel needs are met. It is important that passengers requiring such assistance state their needs at the time of reservation.

2.24.5.12 Travelling with an assistant/attendant

For safety reasons, SriLankan Airlines require some passengers with cognitive or development disabilities to travel with a safety assistant that can provide them with assistance in comprehending and responding appropriately to safety instructions from cabin crew and/or assist them to evacuate the aircraft in the event of an emergency. The safety assistant or personal care attendant must be self-reliant and mentally and physically able to provide the passenger with the assistance required. If such passengers are identified it shall be brought to the attention of Purser/PIC immediately

2.24.5.13 Assistance on Board for Passengers with assistant and medical alert

SriLankan Airlines will not provide passengers with any assistance for personal care needs on board the aircraft such as: consumption of food/drink, administration of medication, elimination functions including assistance inside the lavatory, or other personal care needs. If such assistance is required inflight, it is recommended that the passenger travel with a personal care attendant or make alternative arrangements.

2.25 Passenger Seat

It is a regulatory requirement that each passenger on board has a fully functioning seat. The safety feature of a passenger seat shall consist of, Functional Seat belt/adjustable seat back/passenger service unit- (Drop down Oxygen masks)/life vest and a relevant safety card/disruptive passenger leaflet. A passenger seat shall be allocated to each adult and child - (2 years and above).

Each passenger shall occupy a fully functional seat with the seat belt securely fastened during:

1. Taxiing / Take-off/ Landing (TTOL)
2. In an emergency when required
3. When the seat belt sign is switched on

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 104

Multiple occupancy of a passenger seat is permitted when an infant is lap carried by an adult, secured by a kangaroo belt to the adult's seat belt.

2.25.1 Emergency Exit Row Seating

Occupancy of emergency exit row seating is restricted as per SriLankan airline's policy which is also approved by the Civil Aviation Authority of Sri Lanka (CAASL). Seats adjacent to emergency exits shall be allocated only to able-bodied adults (above 18 years) who appear to be capable of operating or assisting with the operation of the exit. Such seats will not be pre-assigned and check-in agents must physically ascertain the suitability of the passengers before allocating these seats.

Emergency exit row seats shall not be allocated to the following category of passengers:

1. Children and infants (accompanied/unaccompanied)
2. Incapacitated Passengers (including blind and deaf)/Passengers with disabilities (MEDA and non-MEDA/Passengers with intellectual disabilities), Pregnant Passengers
3. Passengers who are elderly and frail (crew to use their best judgment)
4. Disruptive passengers, INAD, Deportees or prisoners in custody
5. Obese passengers, Passengers with plaster casts

2.25.2 Briefing Pax seated at the emergency exits

The Passengers occupying seats adjacent to the emergency exits shall be briefed as stated below:

- CCM shall introduce self to pax
- State that the passengers are seated next to an emergency exit (point to the exit)
- Inquire the willingness to help in an emergency
- Act on command of CCM
- Inform pax to refer the safety card for door operation (show safety card)
- Check for any clarifications

2.25.3 Unserviceable Passenger Seat

If a seat is identified as unserviceable prior to take off, PIC shall be informed and immediate action shall be taken to rectify the defect. In the event a passenger seat remains unserviceable, an alternate seat with all safety features should be provided. A defective seat shall not be occupied.

2.25.4 Seat belts

The seat belts should be used as a restraint at all times when seated and when the fasten seat belt sign is switched on. Passengers shall be briefed of the usage of the seat belts prior to departure. Ref: 3.5.1

2.25.4.1 Extension Seat Belts

The extension seat belt is a standard seat belt but with extra length to restrain expectant mothers or obese passengers.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 105

2.25.4.2 Kangaroo belt

It shall be used with the purpose of securing an infant under the age of 02 years who are lap carried by an adult.

2.25.4.3 Infant/Child Restraint System

The maximum number of infants on any type of aircraft are limited by the number of infant life vests and the kangaroo belts available on board the aircraft which is limited as follows:

A330 Aircraft	20 infants
A321 Aircraft	16 infants
A320 Aircraft	14 infants (MRE 10 infants)

If extra infants are to be transported, sufficient infant life vests and kangaroo belts shall be up-lifted from base.

7 days - 6 months	Kangaroo belt (accompanied and lap carried by an adult)
6 months - 2 years	Kangaroo belt/Car seat (accompanied by an adult)
2 years - 5 years	Seat belt (accompanied by an adult)

1. If one adult is traveling with two infants, One infant must be seated on the adult's lap and secured with an approved infant seat belt (kangaroo belt), The second infant shall be above 6 months old, secured in an approved child car seat installed on an adjacent passenger seat (Revenue Seat)
2. The passenger with the infant shall be seated in compliance with additional drop-down oxygen mask and shall be informed regarding the use. No two (2) infants should occupy the same seat row, due to oxygen mask limitation unless there are sufficient oxygen masks available (example: Bassinet point seats). There must be an additional oxygen mask in each PSU for infant in the event of a decompression.
3. A mother with a gestational period (pregnant) up to 16 weeks (4 Months) may lap carry an infant. It is mandatory that each infant is accompanied by an able-bodied adult over 18 years of age.

2.25.5 Briefing for Adults carrying Infants

CCMs shall carry out a safety briefing to the passenger with the infant as follows,

2.25.5.1 S.L.O.B. - Briefing

Seatbelt	Instruct the adult to secure the infant with a Kangaroo belt for take-off, landing and whenever the seat belt sign is switched on during flight
Life Vest	The availability of infant life vests, floatation cots, and the distribution in the event of a ditching
Oxygen	If decompression occurs, to don the oxygen mask first and place a spare mask on the infant
Bracing	Bracing with an infant or the infant may remain in a car seat for Impact.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 106

2.26 Car Seat

An approved child car seat may be fitted to an aircraft seat and the manufacturer's instructions/weight restrictions shall be followed. All safety and installation instructions shall be followed by the responsible adult accompanying the infant/child. The child car seat shall be marked with an associated qualification sign, which shows the name of the qualification organisation and a specific identification number and/or a label which states it is acceptable for use on an aircraft.

The child car seat shall be secured to the assigned seat (Revenue seat) by the aircraft seat belt. The seat shall preferably be a window seat or a seat that does not obstruct a passenger's direct access to an exit. The seat shall not be secured in an aisle seat or a cross-aisle seat that forms part of the evacuation route to exits. No part of the child car seat shall obstruct passenger movement, and the lower part of the shell (under structure) should not prominently extend beyond the passenger seat. The child car seat shall not be secured in any rows leading to an emergency exit nor in a row immediately forward or aft of an emergency exit, where it may hinder evacuation for any passenger. The child car seat should be secured so as the nearest exit for evacuation is a floor level exit.

A forward-facing child car seat shall only be fitted in the same direction as the passenger seat on which they are secured. Rear-facing child car seats shall only be installed on forward-facing passenger seats. If a forward-facing child car seat with a rigid backrest is to be secured, it should be done with the passenger seat in the reclined position, then positioned upright once the child car seat has been secured. This would ensure better tightening of the child car seat onto the passenger seat. The child car seat shall not be installed on a seat that is equipped with an airbag unless it is obvious that the airbag is de-activated. The child car seat shall be secured to the passenger seat for the entire duration of the flight, even if not occupied by an infant or stored away when not in use. If stored away, the adult shall be provided with a kangaroo belt to secure the infant when the seat belt sign is switched on. More than one child car seat per seat row is allowed, provided the responsible adult for each infant occupies the adjacent seat. The child car seat shall not obstruct access of neighbour passengers to the nearest aisle.

If the child car seat could be reclined, it shall be re-adjusted upright, and tables used with the child car seat shall be removed when the seat belt sign is switched on and in preparation for an emergency. The infant shall be secured using only the child car seat restraining device and always restrained when in the child car seat. The passenger seat belt shall not be used over the child car seat to secure the infant at any time. The infant shall be secured in the child car seat for taxi, take off, landing and any time the seat belt sign is switched on.

During an evacuation, only the infant shall be removed and evacuated without the child car seat.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 107

2.26.1 Aviation Approved Car Seat

Devices meeting the following requirements are acceptable on board. Ref GD 006/Doc 10049

Australian/New Zealand Standards - AS/NZS 1754.

USA Standards - FMVSS213

European Standards - ECE-R44



Figure 01. Example of labeling requirements



Figure 02 FWD facing car seat



Figure 03 - AFT facing car seat

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 108

2.26.1.1 Briefing on usage of Bassinet

CCMs should be responsible to use their best judgment when offering bassinets.

1. Check the function of bassinet points on the bulk head (Pre Flight Checks)
2. Fix bassinet/s and ensure it is secured prior to placing the infant
3. Do not provide a bassinet for infants who could sit up un-assisted
4. The maximum weight of an infant shall not exceed the specified limit if stated on the bassinet
5. Bassinet shall not be fixed, prior to take-off/landing or during transit

The guidelines for the adult briefing;

1. The infant to be removed from the bassinet when the fasten seat belt sign is switched on
2. Bassinets shall be removed, for take-off/ landing and for an emergency preparation
3. Pillows and covers shall be placed below shoulder level
4. To constantly check on the infant
5. Not to leave the infant unattended at any time
6. If assistance is required to use the call bell
7. The infant to be restrained by the bassinet restraints (Flaps) all times

2.27 Carry-On Baggage

A crew member/passenger may carry a maximum of 7 kg as carryon baggage.
Hand baggage brought into the cabin shall be stowed securely.

2.27.1 Acceptance and Stowage

Carryon baggage should be stowed under the seat or in an overhead bin. The use of the stowage space under the seat shall be only if the seat is equipped with a restraint bar and the baggage is secure. The weight restriction on stowage bins shall be adhered to. The stowage bins should have functioning hinges and slam locks.

Mobility aids shall be stowed in overhead bins or coat closets with lockable doors.

Restrictions

Carryon baggage shall not be stowed,

1. In lavatories
2. Behind the last row of seats
3. On the aisle or adjacent to exits
4. On top of emergency equipment
5. In the 1st row against the bulkhead in each cabin
6. Strapped onto empty seats unless approved

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 109

2.27.2 Excess Baggage

Excess/Extra/Large baggage that does not fit in to the designated stowages shall be removed from the cabin and referred to the ground staff for loading in the cargo hold.

2.28 Cargo in Passenger Seat/Cabin

‘Cabin Seat Baggage’ on passenger seats which is also known as Bulky Baggage on passenger seats, which is not usually suitable for loading in the aircraft hold due to its nature and or specifications. Such baggage may include:

1. Musical instruments
2. Works of art
3. Electronic equipment
4. Diplomatic baggage
5. Valuable baggage

If such baggage is not accepted in the cabin on a seat due to certain restrictions and/or limitations, it can travel as hold checked baggage provided packaging is appropriate.

As per SriLankan Airlines policy, only a maximum weight of 75 kgs can be carried as ‘cabin seat baggage’.

There is no change to the passenger’s FBA (Free Baggage Allowance) as a result of cabin seat baggage. In other words, the FBA shall not be used to account for cabin seat baggage in excess of 75 kgs. Ensure a window seat(away from the Emergency Exits) is blocked unless specified. Booking has to be made prior.

2.28.1 Loading and Securing Cabin Seat Baggage

CCMs shall ensure that the ‘cabin seat baggage’ i.e. , bulky, oversized, fragile or valuable baggage on a cabin seat is;

1. Properly secured by a passenger seat belt/and or a Kangaroo belt having enough strength to eliminate the possibility of shifting under all normal anticipated flight and ground conditions.
2. The Item should be packed or covered in a manner to avoid possible injury to passengers and cabin crew members.(If not it can be denied acceptance)
3. Ensure load limitation of the seat is maintained. (75 kgs.)
4. Does not restrict access to use of any emergency or regular exit, or aisle(s).
5. Does not obstruct any passenger’s view of the seat belt sign, no-smoking sign or required exit signs.

Cabin crew shall not be responsible for any damages to the item and or musical instrument during flight.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 110

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 111

2.29 Carriage of Pets/Service Animal

2.29.1 Domestic Pets

Carriage of pets in the passenger cabin shall not be permitted. Unless special approval is obtained from CAASL

2.29.2 Service Animal

Service Animal can only accompany passenger whose vision or hearing is impaired and the passenger is actually dependant on the Service Animal

1. Such a service Animal is permitted in the Business Class or Economy Class cabin
2. The Service Animal is not allowed to move in the cabin and is expected to be seated near the passenger
3. Service Animal must be well behaved, clean and odourless
4. A suitable restraint harness shall be provided by the owner to secure and restrain the Service Animal during taxi, take off, landing turbulence or whenever the "Fasten seat belt" sign is illuminated. In cruise, it is acceptable for the Service Animal to be less restrained
5. The passenger shall be allocated a bulkhead window seat

Note - Advise passenger how to evacuate Service Animal by holding the it and sliding.

Designated Seat numbers for passengers escorted with Service Animals,

Aircraft Type	Business Class	Economy Class
A 320	1A or 1F	5/6A or 5/6F
A 321	1A or 1F	6A or 6F
A 330	1A or 1K	20A or 20K

2.29.3 Administrative guidelines/restrictions and conditions

1. Only one service animal per aircraft shall be permitted.
2. If a service animal is confirmed to travel at a bassinet row window seat, allocating a bassinet shall not be permitted.
3. Passengers having onward connections should obtain the onward airline confirmation for their onward travel.
4. The Service Animal, however, cannot be seated where it may obstruct aisle or affect leg space of the passenger seated adjoining. if the Service Animal cannot be accommodated at the seat location along with the passenger due to Service Animal is disruptive or too large to fit at the passenger's feet without encroaching on another passenger's space or protruding into the aisle, It will need to travel in a kennel (provided by the passenger) in the cargo hold

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 112

5. SriLankan Airlines cannot accommodate a service animal in the cargo hold when it is a narrow body operation
6. There is no charge for Service Animals used by passengers with disabilities.
7. The passenger must ensure that the accompanying Service Animal will not need to relieve itself during the flight or that he can adequately manage the dog's waste without creating any health and sanitation issues on the flight. The passenger must bring whatever absorbent or other material required for this purpose. The passenger shall ensure the Service Animal is prepared for the flight by exercising and limiting its fluid intake before the flight.
8. The Service Service Animal needs to be properly harnessed, and the leash of the Service Animal must be secured to the owner's seatbelt at all times during flight.
9. SriLankan Airlines will not be responsible for the health and well-being of the Service Animal whilst accompanying the passenger in the cabin.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 113

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 114

2.30 Carriage/Restrictions on Portable Electronic Devices (PED)

Use of PEDs on board are restricted as they could affect the aircraft navigation and two way communication systems. PEDs may be used on flight mode during flight. Mobile phones for two way communication are permitted once the aircraft has landed and taxied out of the active runway on completion of a sector. An announcement shall be carried out advising passengers on the regulations.

On aircrafts with satellite two way communication facilities for passengers, the use of PEDs shall be restricted during the critical phases of the flight.

CCMs shall monitor for passenger compliance.

2.30.1 Devices Permitted without restrictions

Medical prescribed instruments such as hearing aids/ pacemakers.
Cameras/calculators.

2.30.2 Devices Permitted During Cruise

Personal Electronic Devices,

2.30.3 Devices Not Permitted at Anytime

Devices transmitting and/or receiving signals other than stated above
e.g. Portable radios, Televisions

2.30.4 Interference to Aircraft Navigation Systems

If abnormal interference to two way communication and navigation equipment is detected or suspected, the Flight Crew shall alert the Cabin crew who shall check for compliance. If any abnormal occurrence takes place, it should be recorded in the Cabin Defects Log book with the passenger seat number and the type of device used.

2.30.5 Use of Devices on Open Ramps during Boarding/Disembarking

Certain airport regulations may restrict the use of PEDs while boarding/ disembarking or during transit. A PA announcement shall be initiated informing the passengers of such regulations.

***“LADIES AND GENTLEMEN,
IN KEEPING WITH THE AIRPORT REGULATIONS, WE REQUEST PASSENGERS TO SWITCH OFF MOBILE PHONES AND ALL OTHER ELECTRONIC DEVICES WHILST THE AIRCRAFT IS ON GROUND.
THANK YOU”.***

The use of PEDs while re fuelling shall not be permitted and the appropriate announcement shall be carried out.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 115

2.31 Cabin Crew Seat

Seats for the minimum required CCMs shall be located near required floor level emergency exits. Such seats shall be forward-or rearward-facing. Each CCM assigned emergency evacuation duties shall occupy a designated seat for take-off, landing and whenever the PIC so directs.

2.31.1 Seat Belt/Seat Harness

The seat belt and the shoulder harness on a CCM seat are equipped with a single point release mechanism. During pre-flight checks, CCMs shall ensure the release mechanism is functioning and the restraining belts are not damaged. The seat pan shall have a spring loaded function to restore it back to stowed position. The harness should be adjusted to sit tight but does not pull the lap strap upward.

The webbing of the seat belt and shoulder harness shall lie flat against the body and the single point release buckle facing outwards for quick release. The device, will automatically restrain the occupant's torso in the event of sudden movement, (Jerk). Under certain circumstances additional CCM's (above the required minimum number) may sit at passenger seats (with lap belts only).

2.31.2 Cabin Crew Seat Locations/Stations

Ref 2.15.3.3

2.31.3 When should a Crew member Occupy a Seat

CCMs shall be seated and secured with the seat belt and shoulder harness, only at their assigned cabin crew seats, during take-off/landing and when ever deemed necessary by the PIC in the interest of safety

2.31.4 Requirements to Occupy Assigned Seats/Stations

The minimum number of CCM required for each type of aircraft is based on the seating capacity/number of passengers carried, or the number of exits in order to effectively carry out a safe evacuation of passengers from the aircraft.

2.31.5 Persons Authorised To Occupy Crew Seats

The PIC may permit a non-revenue passenger to occupy a door assist CCM seat. Ref 2.12.5

2.31.6 Primary Cabin Crew member Seating

A CCM on a familiarization flight shall not occupy a Primary/Assist cabin crew seat.

2.31.7 Unserviceable CCM Seat

A CCM seat is considered unserviceable if the seat belt/shoulder harness the stowing of the seat pan is not functioning. If the seat is unserviceable, the Purser shall be guided by the following,

1. Allocate a cabin seat at an exit row closest to the CCMs allocated exit
2. Inform the PIC and all CCMs of the alternate seat allocation
3. The passenger seat should be designated and marked as a crew seat

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 116

4. The defective crew seat shall be stowed, secured or removed

2.32 Dispatch of an Air Craft with an In-Operative Door

The aircraft may be dispatched with one door inoperative as required by the MEL.

CCMs shall communicate to the Purser when a door is observed inoperative. The Purser shall inform the PIC at the earliest for two way communication and rectification by the Engineers.

Dispatching an aircraft with a door inoperative shall be under the following conditions,

1. All other doors are operational.
2. Exit light/floor path lighting associated with the inoperative exit is covered and marked "NO EXIT" by approved placards prior to passenger boarding.
3. The affected door is not used for passenger boarding/disembarking and is not used for any other purpose whilst passengers are on board.
4. Passengers in the location are advised regarding the defective door.
5. Manual safety demonstration carried out, not pointing to the defective door as an exit.
6. All Cabin crew shall be aware that evacuation procedure shall not include the affected door. (The opposite door may be used).
7. In an evacuation, a CCM shall remain at the defective door to redirect the passengers to usable exits.
8. The aircraft may continue the flight or a series of flights but shall not depart an airport where repairs or replacements can be carried out.

2.32.1 The specific seats to be blocked shall be as specified in the MEL.

Ref: A330 aircraft 5.24, A320 aircraft 6.39, A321 aircraft 6A.23 and 6A.46

2.32.1.1 Blocking identified seats

Identified seats in the vicinity of the inoperative door should be placard as 'Do Not Occupy' and the CCMs shall ensure that these seats remain vacant for taxi, take-off and landing.

2.32.1.2 No Exit Cards

04 NO EXIT cards are provided to be used in case of an in-operative door.

Relevant EXIT signs should be covered and NO EXIT stickers shall be placed on the inoperative door and other pathways to the exit.

2.33 Unserviceable Equipment

Purser shall check the cabin defects log book prior to passenger boarding and coordinate with the maintenance personnel to rectify any unattended defects.

1. Purser shall brief CCMs to identify defects/ shortcomings as per the MEL and inform same at their earliest to report it in the cabin defects log book for rectification prior to departure.
2. Inform the CCMs of any pending defects as per the cabin defects logbook.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 117

CCMs shall carry out the following serviceability checks on the equipment but not limited to:

1. Heaters - (Coffee makers/Ovens/Hot Cups/Water Boilers)
2. Chillers – Bins/drawers and units
3. Vacuum Systems - In lavatories
4. Electrical System - Circuit breakers
5. Water shut off valves - In lavatories and galleys
6. Locks and Latches - In galleys
7. Containers with lockable doors
8. Carts with lockable doors
9. Carts with functioning locking/braking and releasing mechanisms
10. Waste carts/containers with spring loaded flaps or other covers

2.33.1 Procedure for Unserviceable Equipment

An unserviceable sticker (U/S) shall be pasted on all unserviceable equipment, which have been entered in the cabin defects logbook and on the VR.

In the event equipment is identified to be unserviceable, CCMs shall be guided by the following,

1. Ex base - Containers not fitting in to the slot/ trolley and cart not locking / equipment not latching shall be offloaded.
2. Ex other stations - The defective equipment could remain on board provided such equipment could be safely secured and remain in the galley.
3. During flight - The equipment shall remain secured in the galley

Galley restraining devices(locks/latches)	Do not use the stowage space
Containers with lockable doors	Off load container
Carts with lockable doors	Off load cart
Carts with brake/release mechanism	Off load cart
Circuit breaker popped out	Do not reset/ do not use
Waste carts/ containers without flaps/covers	Off load cart

2.33.1.1 Unserviceable Aircraft Waste Carts and Fixed Waste Bins

Ex-Base (CMB),

CCMs in charge of galleys shall check the waste cart and fixed waste bins for the following before departure and confirm with the cabin supervisor in charge,

1. Waste cart locking devices (Breaks) are serviceable and the waste bin flap is not bent or damaged and seals the waste cart opening securely. If not inform the Purser/cabin supervisor and

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 118

the cart shall be replaced.

2. Fixed waste bin in the galleys - The waste bin flap is not damaged or bent and seals the waste container in the closed position. This shall ensure if a waste bin fire occurs it shall cut-off the supply of oxygen.

During Flight,

1. CCMs shall ensure the waste collected is managed and distributed evenly into the waste carts & waste bins. When available, use the trash compactor/s initially to dispose waste.
2. If the waste cart/bin flap is found damaged and cannot be secured the waste cart /bin shall not be used to dispose waste.
3. In case of a defective waste bin flap, which is bent or damaged and cannot be secured properly, it shall be entered in the cabin defects logbook before landing and the Purser shall enter same in the voyage report for follow-up action.

Before /After landing,

Cabin Supervisor/s shall ensure all waste carts are not over-filled and the waste bin flaps are closed and secured for landing until all passengers and the operating crew have disembarked. This is to prevent the contents does not spill-out and hamper an emergency evacuation.

2.33.1.2 Coat Stowage Door Unserviceable

Door Secured Closed

May be inoperative provided that:

1. The affected stowage compartment is secured in the closed position, and
2. The affected stowage compartment is placarded "DO NOT USE", and
3. The affected stowage compartment is not used for stowage of any items except for those permanently affixed, and
4. Emergency equipment located in the affected stowage compartment shall be moved by engineering to a different stowage compartment with a decals on the outside, indicating the relocated emergency equipment.

Door Removed

Pre-flight briefing

Cabin crew members shall brief passengers not to use the associated stowage compartment prior to departure.

May be inoperative provided that:

1. The affected stowage compartment is placarded "DO NOT USE", and
2. The affected stowage compartment door is removed, and
3. The affected stowage compartment is not used for stowage of any items, except for those permanently affixed, and
4. The crew members and passengers are briefed that the affected stowage compartment is not to

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 119

be used, and

- Any crash axes stowed in the affected compartment must be relocated in a different stowage compartment compliant with security requirements or removed and considered inoperative, and
- Emergency equipment located in the affected stowage compartment shall be moved by engineering to a different stowage compartment with a decals on the outside, indicating the relocated emergency equipment.

2.33.1.3 Doghouse Compartment Unserviceable

One or more may be inoperative provided that:

- The affected stowage compartment is secured in the closed position, and
- The affected stowage compartment is placarded "DO NOT USE", and
- The affected stowage compartment is not used for stowage of any items except for those permanently affixed, and
- Emergency equipment located in the affected Doghouse Compartment shall be moved by engineering to a different stowage compartment with a decals on the outside, indicating the relocated emergency equipment.

2.33.1.4 Galley Stowage Compartment Unserviceable

Door Secured Closed

May be inoperative provided that:

- The affected stowage compartment is secured in the closed position, and
- The affected stowage compartment is placarded "DO NOT USE", and
- The affected stowage compartment is not used for stowage of any items except for those permanently affixed, and
- Emergency equipment located in the affected stowage compartment shall be moved by engineering to a different stowage compartment with a decals on the outside, indicating the relocated emergency equipment.

Door Removed

Pre-flight briefing

Purser shall brief the cabin crew not to use the associated stowage compartment. May be inoperative provided that:

- The affected stowage compartment is placarded "DO NOT USE", and
- The affected stowage compartment door is removed, and
- The affected stowage compartment is not used for stowage of any items, except for those permanently affixed, and
- The crew members are briefed that the affected stowage compartment is not to be used, and
- Any crash axes stowed in the affected compartment must be relocated in a different stowage compartment compliant with security requirements, or removed and considered inoperative,

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 120

and

- Emergency equipment located in the affected stowage compartment shall be moved by engineering to a different stowage compartment with a decal on the outside, indicating the relocated emergency equipment

2.33.1.5 Overhead Stowage Compartment (OHSC) Unserviceable

Pre-flight briefing

Cabin crew members shall brief passengers not to use the associated stowage compartment prior to departure.

One latch is inoperative.

One latch may be inoperative per compartment door provided that:

- The affected stowage compartment is secured in the closed position, and
- The affected stowage compartment is placarded "DO NOT USE", and
- The affected stowage compartment is not used for stowage of any items except for those permanently affixed, and
- If the OHSC has several doors with only one compartment behind, all doors of the compartment are secured closed, and
- The rest of the elements of the affected OHSC are operational, and
- Emergency equipment located in the affected stowage compartment shall be moved by engineering to a different stowage compartment with a decal on the outside, indicating the relocated emergency equipment

Overhead Stowage Compartment with Movable Bins-Bin Removed

May be inoperative provided that:

- The affected stowage compartment bin is removed, and
- The remaining empty area is covered and placarded "DO NOT USE", and
- Emergency equipment located in the affected stowage compartment shall be moved by engineering to a different stowage compartment with a decal on the outside, indicating the relocated emergency equipment.

Overhead Stowage Compartment with Fixed Bins - Bin Removed

May be inoperative provided that:

- The affected stowage compartment door is removed, and
- The remaining empty area is covered and placarded "DO NOT USE", and
- The affected stowage compartment is not used for stowage of any items, except for those permanently affixed, and
- If the OHSC has several doors with only one compartment behind, remaining doors of the compartment are removed or placarded "DO NOT USE", and
- The crew members and passengers are briefed that the affected stowage compartment is not to be used, and

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 121

6. Emergency equipment located in the affected stowage compartment shall be moved by engineering to a different stowage compartment with a decal on the outside, indicating the relocated emergency equipment.

2.33.2 Primary And Secondary Locking devices

All carts and trolleys utilised for passenger services on board shall be equipped with primary locking devices and shall be checked by CCMs in charge prior to departure. Carts and trolleys with unserviceable locking devices shall be off loaded or used as per Ref 2.33.1

Carts and trolleys shall be secured by using the primary and secondary locking devices available in galleys during taxi, take-off, landing, turbulent weather, and all other emergencies as declared by the Flight crew. If a primary or secondary locking device is unserviceable, such position shall not be used to stow carts and trolleys. All carts and trolleys shall be attended by cabin crew at all times when in use, when stationary the braking device must be engaged and attended. Carts and trolleys must be properly stowed when not in use.

2.33.2.1 Securing and Locking

CCM designated and the area supervisors shall ensure, prior to push back/landing and during turbulence all moveable equipment are stowed/secured/ latched and locked.

All loose service equipment shall be securely stowed /locked when in the cabin or in the galley.

2.34 Aircraft Surface Contamination

2.34.1 Description of Surface Contamination

Ice formation on ground may be expected when air temperature drops below freezing (0 °C /32 °F) and when moisture or ice forms due to condensation. The aircraft is vulnerable to ice build-up when exposed to any form of moisture after the surfaces have been cold soaked during the previous cruise and when fuelled with cold fuel or after an overnight parking at low temperatures.

Critical surfaces of the aircraft (wings, vertical & horizontal stabilisers, control surfaces slats, flaps, and ailerons) must be clear of snow, frost and ice before take-off.

Thin hoarfrost is acceptable on the surface of the fuselage but not on the primary control's surfaces.

CCMs Responsibility and Duties

CCMs shall be always vigilant for any type of ice (hoarfrost) and shall report to the PIC immediately. CCM shall convey to the PIC any concerns raised by a passenger relating to an observation made on ice contamination. Observation by a CCM or a passenger regarding contamination or any other concerns shall be reported to the PIC immediately prior to the take-off roll.

De Icing/Anti Icing

When the aircraft is on ground in sub-zero conditions and ice accumulates on the wings or primary control surfaces, it has to be de-iced by spraying de-icing liquid. This prevents ice formation for a considerable period.

During taxiing in icing conditions, the anti-icing system would be switched on by the flight crew to prevent further ice formation.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 122

Emergency during de icing

In the event of an evacuation during de-icing, crew shall be mindful of checking on outside conditions, to be clear of obstructions prior to deploying the slides.

2.35 Quick Reference Guide

2.35.1 A330 - ALT (18J/242Y Configuration)

Seating Categories	Business Class	Economy Class	Remarks
Bassinets	1AC, 1DG, 1HK	21A, 21E, 21K, 39E	
Infants Life Vests/Seat Belts			20/20
Emergency Exits		39AC, 39HK	
Maximum Leg Room		Row 20, Row 39	
Stretcher Positions		50/51/52 AC	
Passengers With Disabilities (PWD)		22-27GK 41-49GK	
Unaccompanied Minors		22-29AC, 30A	
Prisoners		51/52DFG	
Deportee/INAD		51/52DFG	
Over wing			
Cabin Crew Rest		49/50/51 HK	
Flight Crew Rest	3HK		
Cabin Crew Seats	03	08	51H
Passengers needing extra oxygen on board	3DG	22 - 27GK 44 - 47GK	
Completely immobile passengers		50/51/52AC	With an escort
Passenger travelling with a Service Animal	1AK	21AK	BSCT may restrict
Passenger with a fused or immobilized leg	3DG	22 - 27GK 44 - 47GK	
Personal care attendant/ Safety assistant/ Reader/ interpreter in case of a vision or hearing impairment			Adjoining seats to be allocated to the travelling party

Note: PWD/MEDA and PWD/Non-MEDA shall not be seated in emergency exits. They are entitled to the most appropriate seating according to their needs including the stowage of on board medical devices or equipment.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 123

2.35.2 A330 - ALH (18J/252Y Configuration)

SEATING CATEGORIES	B/C	E/Y	REMARKS
BASSINETS	N/A	20 AC, 20 DE, 20 FG, 20 HK, 50 DE, 50 FG,	
MAXIMUM LEG ROOM	LIE FLAT SEATS	20 AC, 20 DE, 20 FG, 20 HK, 50 AC, 50 DE, 50 FG, 50 HK	
STRETCHER POSITIONS	N/A	62/63/64 HK	2 ND POSN
PWD	3D/G	21/22/23/24/25 GK 52/53/54/55/56/57/58 GK	
UM	N/A	21/22/23 AC	
PRISONERS	N/A	AFT CABIN	CENTRE SEAT WITH AN ESCORT
DEPORTEE/INAD PAX WITH AN ESCORT	N/A	62 E 63 E	NO AISLE SEATS
OVER WING	N/A	ROWS 23-37	
CABIN CREW REST	N/A	61/62/63 HK	MAY CHANGE IF STCR
FLIGHT CREW REST	3 HK	N/A	
CABIN CREW SEATS		63C	

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 124

2.35.3 A330 - ALS (18J/251Y Configuration)

SEATING CATEGORIES	B/C	E/Y	REMARKS
BASSINETS	N/A	20 AC, 20 DE, 20 FG 20 HK, 50 DE, 50 FG	
MAXIMUM LEG ROOM	LIE FLAT SEATS	20 AC,DE,FG,HK 50 AC DE FG HK	
STRETCHER POSITIONS	N/A	61/62/63 HK	2 ND POSN 61/62/63 A/C
PWD	3D/G	21/22/23/24/25 GK 52/53/54/55/56/57/58 GK	
UM	N/A	21/22/23 AC	
PRISONERS	N/A	AFT CABIN	CENTRE SEAT WITH AN ESCORT
DEPORTEE/INAD PAX WITH AN ESCORT	N/A	62 E 63 E	NO AISLE SEATS
OVER WING	N/A	ROWS 23-37	
CABIN CREW REST	N/A	60/61/ 62 HK	MAY CHANGE IF STCR
FLIGHT CREW REST	3 HK	N/A	

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 125

2.35.4 A330 - ALL/M/N/O/P/Q/R (28J/269Y Configuration)

SEATING CATEGORIES	B/C	E/Y	REMARKS
BASSINETS	N/A	20 AC, 20 DE, 20 FG 20 HK, 50 DE, 50 FG	
MAXIMUM LEG ROOM	LIE FLAT SEATS	20/50 ACDEFGHK	
STRETCHER POSITIONS	N/A	63/64/65 HK	
PWD	ANY SEAT IN ROW 6/7	21/22/23/24/25 52/53/54/55/56/57/58 GK	
UM	N/A	21/22/23 AC	
PRISONERS	N/A	65 DFG	
DEPORTEE/INAD PAX	N/A	65 DFG	
OVER WING	N/A	23-37 AC 21-35 HK	
CABIN CREW REST	N/A	66/67 DFG	
FLIGHT CREW REST	7 K	N/A	

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 126

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 127

2.36 Documentation Section

Documents

Voyage Report	To be completed by the In Charge Crew Member
Pre Departure Safety/Security Checklist	To be completed by the PIC/In Charge Crew Member
Incident/ Accident/report	To be completed by the In Charge Crew Member
Illness Report	Concerned Crew Member/In Charge Crew Member
Air/Ground Safety Report	Concerned Crew Member
Final Warning	Authorised by PIC/ To be completed by the In Charge Crew Member - (Highlighted on VR)
Witness Report	Filed by the witness/ To be completed by the In Charge Crew Member - (Highlighted on VR)
Disruptive Passenger Incident Report	To be completed by the In Charge Crew Member
Cabin Crew member regulatory onboard assessment Form	To be completed by a Cabin Safety Instructor
Fatigue Report Form (FRF)	Concerned Crew Member

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 129

2.36.2 Pre Departure Safety/Security Checklist



Cabin Safety Training Pre-Departure Safety/Security Checklist A 320/A321/A330 Aircraft

FLIGHT NO: **DATE:**/...../..... **SECTOR/s:**

PIC to PURSER Briefings		PIC
❖ Communication & Secure Flight Deck Door Procedure – Confirmed with Purser		
❖ Enroute Weather*		
❖ Flying Time / Altitude*		
PURSER to PIC Briefings		PURSER
❖ Safety Equipment / Security checks carried out		
❖ Crew Names on General Declaration*		
❖ Passengers with Security/Assistance/Medical Alerts		
❖ Pre Flight-Safety Briefing Conducted to Cabin Crewmembers – Conducted		
❖ CCM's in Possession of Regulatory Documents – Verified		

(√) Indicates briefing carried out

*** Shall be Briefed for each Sector**

.....
Signature of PIC

.....
Signature of Purser

Effective Date: 01/03/2024
Revision: 00

CH/CST/03
Page 1 of 1

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 130

2.36.3 Incident/ Accident/report

	Cabin Safety
	INCIDENT / ACCIDENT REPORT

FLIGHT NO : **SECTOR/S:**..... **DATE:**.....

P.I.C:..... **PURSER:**.....

LOCATION/STATION/TIME:

.....

Incident Minor Injury/Damage		Accident Major Injury/Damage	
Passenger		Crew	

a. Details of Casualties, (NOTE: Separate Illness Reports to be filled for each casualty for medical prognosis)

CREW/PASSENGER NAME/S	STAFF NO/SEAT NO	GENDER	NATIONALITY	PASSPORT NUMBER	EMAIL/ ADDRESS CONTACT NUMBER
	Crew Only	To Be Filled For Passengers Only			
1.					
2					
3					
4					
5					

b. Other Details,

Details of Person/s Accompanying		Relationship to Casualty	Contact details
1			
2			
3			
4			
5			

c. Details in Brief,

Damage to equipment		Off loaded		Handed over to authorities in		On Medication/Intoxication	
Verbal warning given		Restrained		Aircraft Diverted to		Denied On ward Journey	

Other Reasons:

.....

d. Witness/s and details if Required, (Witness Reports to be filled by each witness)

- Name: Contact Details:
- Name:..... Contact Details:
- Name: Contact Details:
- Name: Contact Details:

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 131

	Cabin Safety
	INCIDENT / ACCIDENT REPORT

DESCRIPTION OF INCIDENT / ACCIDENT / PROGNOSIS

(The Following Information Must be Filled-Up with Details)

UTC/Local Time	
State the Incident/Accident/Illness	
UTC/Local Time	
How did it happen?	
UTC/Local Time	
What was the reason?	
UTC/Local Time	
CCM Actions	
UTC/Local Time	
How was the Emergency Services Contacted?	
UTC/Local Time	
How was the casualty Transported?	
UTC/Local Time	
Who accompanied the casualty?	
UTC/Local Time	
Who is responsible for the casualty?	

❖ **CCM PERMITTED TO CONTINUE FLIGHT DUTIES :** ☐ Y ☐ N

DOCTORS NAME:..... SIGNATURE:.....

ADDRESS:..... TELE:.....

: E MAIL:.....

PURSER'S SIGNATURE :

CORPORATE SAFETY – CABIN
Rev: 02

RP/CSC/03
Page 2 of 2

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 132

2.36.4 Illness Report



Cabin Safety
ILLNESS REPORT

Details of Casualty (To be filled by the person accompanying or Purser)

Name:.....

Address:.....

City:..... Country:..... Travelling To:.....

Age:.....Accompanied By:Seat Number.....

Was a Medical Practitioner Paged/Contacted: YES NO and available: YES NO/ Other.....

Details of the Medical Practitioner, Paramedic, Qualified Nurse (To be filled by the Medical Practitioner)

Name:..... Reg No:.....

Address:.....

City:..... Country:.....Travelling To:.....

E mail Address:..... Phone Number:.....

I wish to be contacted for further detail: YES / NO

Prognosis: (To be filled by Medical Practitioner, Cabin Crew member)

.....
.....
.....
.....
.....

Treatment, Medication Administered:

.....
.....
.....
.....

- ❖ If the casualty is a Cabin Crew member, permitted to continue operations: YES / NO
- ❖ Medical certificate attached: YES / NO

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 133



Cabin Safety
ILLNESS REPORT

Details to be filled by Purser; (All timings are local timings)

Category: ILLNESS

Flight No:..... **Date:**..... **Sector/s:**.....

PIC:..... **Station:**.....

- ❖ Time Illness reported:..... by a CCM / Passenger
- ❖ Illness reported: During Flight/ On Arrival / Boarding /Disembarking/Other.....
- ❖ PIC informed at (Time) by Purser / Other CCM
- ❖ Aircraft Diverted to: N/A,
- ❖ Assistance called up by: PIC / Airport Staff/ Other:.....
- ❖ A 10 First Aid kit used: YES / NO
- ❖ CPR administered by: YES / NO
- ❖ Automated External Defibrillator used: YES / NO
- ❖ Ground staff available to take over: YES / NO
- ❖ Airport / Company Medical Practitioner Available: YES / NO
- ❖ Patient transported by: Ambulance / Stretcher / Wheel Chair/ Other.....
- ❖ Patient transferred to: Medical Centre/ Hospital / Other:.....
- ❖ Responsibility Handed over to; Station Staff/Airport Medical Staff/ Other:.....
- ❖ Indicate the contact details of person responsible:
Name:..... Contact No:.....

Purser Name:..... Staff No:..... Sig:.....

Company Medical Officer Comments.....

Signature.....

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

Srilankan

CORPORATE SAFETY
REV: 00

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 135



Corporate Safety
AIR/GROUND SAFETY REPORT (AGSR)

Contact
corporate.safety@srilankan.com

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 136

2.36.6 Final Warning



Cabin Safety

FINAL WARNING DOCUMENT

THIS IS THE FINAL WARNING REGARDING YOUR UNACCEPTABLE BEHAVIOUR ON BOARD THIS AIRCRAFT.

Name:
Accompanied by:
Flight No:..... Sector:..... Seat No:..... Date:..... Time:.....

Dear Sir/Madam

You have failed to observe the instructions and warnings given by Srilankan Airlines and its officers. In addition your behaviour is a cause of grave concern to Srilankan Airlines, its officers & passengers and may be in violation of the law. Srilankan Airlines requires you to immediately adhere to the following until you disembark / removed from this aircraft.

- ☐ **Refrain from consuming any more alcohol**
- ☐ **Hand over all alcohol in your possession to the officer of SRILANKAN AIRLINES. The alcohol will be returned to you or the relevant authority when you disembark/removed from the aircraft.**
- ☐ **Desist from behaving in a manner interfering with the safe operation of this flight / or creating a disturbance affecting flight safety.**
- ☐ **Adhere to and comply with all instructions / requests made by SRILANKAN AIRLINES and its officers**
- ☐ **Refrain from smoking in all areas of the airplane**

Your immediate cooperation is required if you wish to avoid restraint, prosecution and /or removal from the aircraft at the next point of arrival. Srilankan Airlines may also invalidate your ticket for further travel, report your actions to the relevant authorities and subject you to pay costs for any unscheduled stops.


This notice is given by the **PILOT IN COMMAND**.

Pilot in Command's signature:.....

Pilot in Command's Name:.....

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

Page 137

	Cabin Safety
	WITNESS REPORT FORM

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 138

2.36.8 Disruptive Passenger Incident Report

	Cabin Safety
	DISRUPTIVE PASSENGER INCIDENT REPORT

Flight No:..... **Date:**..... **Sector/s:**.....

PIC:.....

- ❖ **Category:** Incident / Accident
- ❖ **Location:** On Board, Disembarking, Boarding, Transit
- ❖ **Occurred Due To:** Intoxication, Verbal Abuse,
Other:.....
- ❖ **Verbal warning given:** YES / NO, By:.....
- ❖ **Final Warning given:** YES / NO, By:.....
- ❖ **Restraints used with permission:** YES / NO, By:.....
- ❖ **Buddy appointed:** YES / NO, If YES, was Buddy briefed: YES / NO
- ❖ **Witness Reports filled:** YES / NO, If YES indicate Number:.....
- ❖ **Aircraft Diverted:** YES / NO, If YES Indicate Airport:.....
- ❖ **Authority in charge:** Airport Security, Airport Police,
Other:.....
- ❖ **Station staff present on arrival:** YES / No
- ❖ **Original documents handed over to authority:** YES / NO
- ❖ **Duplicate documents handed over to authority:** YES / NO
- ❖ **Cabin Crew Summoned to give statement:** YES / NO,
If YES indicate place:.....
- ❖ **CCM's require further assistance from company:** YES / NO
State Requirement/s:
.....
.....
.....

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

2.36.9 Cabin Crew member regulatory onboard assessment Form

	Cabin Safety Training			
	CABIN CREWMEMBER ONBOARD REGULATORY LINE ASSESSMENT			
DESIGNATION	Purser ☐	Cabin Supervisor ☐	Flight Steward ☐	Flight Stewardess ☐
CCM Name:.....		Staff No:.....		
Sector:.....		Flight No:.....		Date:/...../.....
Aircraft Registration :		Aircraft Type :		Work Position:.....
Assessed By:.....		Assessment Number:		

RESPONSIBILITIES FOR ALL CABIN CREW MEMBERS		S	N/S
OBSERVATION Based	1. Carrying out pre departure safety checks using QRC/Security checks and signing of VR		
	2. Following of refueling procedures		
	3. Handling of passengers with alerts (preflight briefings/seating)		
	4. Cabin/Galley preparations for takeoff and landing		
	5. Executing onboard duties as per SOPs with SMS awareness		
	6. Following of routine door operation procedures		
	7. In uniform during takeoff and landing		
	8. Identifying defective service equipment and address them as per procedures		
	9. Announcements: Clarity of announcements / as per SOPs <i>(Only if announcements were made by CCM)</i>		
FOR CABIN SUPERVISORS ONLY		S	N/S
OBSERVATION Based	10. Ensuring CCMs carried out the designated safety and security checks and signed VR		
	11. Ensuring relevant briefings for passengers with alerts were carried out on time		
	12. Required level of supervision carried out to ensure SOPs are followed throughout the flight		
	13. Ensuring cabin preparations completed for takeoff / landing and conveying to Purser on time		
FOR PURSERS ONLY		S	N/S
OBSERVATION Based	14. Conducted a relevant and effective safety briefing		
	15. Ensured VR signed by all crew members prior to passenger boarding		
	16. PSSCL completed, PIC/Purser briefing carried out and CCMs briefed accordingly		
	17. Ensured safety regulations are adhered to by all CCMs during flight		

❖ **NOTE:** Numbers 1 to 9 applicable for all crew members, numbers 10 – 17 to be assessed as specified.

Additional Comments: *(please indicate reason if marked N/S)*

Effective Date: 01/07/2024
Revision: 02

FO/CST/01
Page 1 of 2

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

KNOWLEDGE BASED ASSESSMENT

SAFETY & EMERGENCY PROCEDURES	S	S/B	N/S
• Possession of latest SEP manual/CSIs/CSNs			
• Familiar with the contents of current CSIs/CSNs and revisions to the SEP manual			
• Safety Equipment: station specific			
• Flight Deck Procedures			
• Emergency Communication			
• Land Evacuation: Prepared / Unprepared			
• Water Evacuation : Prepared / Unprepared			
• In-Flight Fires			
• Decompression			
• Awareness of Safety related documentation			
A 320/A 321 AIRCRAFT <i>(Only if operated on the type)</i>			
• A 320:type "III" exit operation /briefing			
• A 320 NEO: systems			
• A 320/21 : launching the portable raft			
• A 321 : type "C" door operation			
• A 321 NEO systems			

AVIATION FIRST AID	S	S/B	N/S
• Body temp / pulse / breathing rate			
• Suspected Communicable Disease: symptoms and handling procedure			
• Location and usage of UPK			
• Pax choking / nose bleed / fainting			
• Handling a collapsed passenger			
• Administering oxygen			
• Administering CPR			
• Usage of AED, AMBU bag			

AVIATION SECURITY	S	S/B	N/S
• Aware of hijack alert for the flight			
• Hijack situation: CCM action			
• Bomb search procedure			
• LRBL and preparation			
• Disruptive pax threat levels			
• Disruptive pax handling procedure			

DANGEROUS GOODS REGULATIONS	S	S/B	N/S
• Hazard classes and examples			
• 2.3A table updates			
• PED fire on board			
• Procedure for mis-declared/undeclared DG			
• DG leakage or spillage / powder spillage			

Ratings	A	B	C
❖ SEP			
❖ DGR			
❖ Aviation First Aid			
❖ Aviation Security			

KEYS:

- ❖ S = Satisfactory
- ❖ S/B = Satisfactory after briefing
- ❖ N/S = Non Satisfactory

RATINGS

- A=Satisfactory performance**
- B=Satisfactory after briefing**
- C=Recommended for refresher training**

Crewmember:

I have understood the feedback on the observations and the de-briefed areas.

Signature:.....

Comments of Assessor:

Signature:.....

Comments of Cabin Safety Training Manager:

Signature:.....

Effective Date: 01/07/2024
Revision: 02

FO/CST/01
Page 2 of 2

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 142

2.37 Briefing Fatigue Report Form (FRF)



Corporate Safety
FATIGUE REPORT FORM (FRF)

PART A – General details		
All voluntary reporting is treated confidential. However, actioning of Fatigue report is made easier if reporter agrees to share details with relevant personnel for corrective action.		
If in agreement to share the report, please tick		
<i>*ICAO definition of Fatigue: A physiological state of reduced mental or physical performance capability resulting from sleep loss or extended wakefulness, circadian phase, or workload (mental and/or physical activity) that can impair a crew member's alertness and ability to safely operate an aircraft or perform safety-related duties.</i>		
Name:	Staff No:	Pilot/ CCM [circle] Other [specify]:
Date	Flight No:	Duty description: [Roster pattern]
Sector:	STD/ STA: ____ / ____	ATD/ATA: ____ / ____
Number of crew [Flight/ Cabin]: ____ / ____		AC type:
PART B- When did it happen [Fatigue]		
Local report date:	Time of event:	____ UTC/ ____ Local
Sector on which fatigue occurred:	From:	To:
Hours from report time to when fatigue occurred:		
Commander's discretion used for exceeding the duty time:		____ hrs/ ____ min
PART C- What happened		
Describe how you felt [or what you observed]		
Please indicate how you felt		
1. Fully alert, wide awake	5. Moderately let down, tired	
2. Very lively, somewhat responsive, but not to peak	6. Extremely tired, very difficult to concentrate	
3. OK, somewhat fresh	7. Completely exhausted, unable to function effectively	
4. A little tired, less than fresh		
Please mark the line below with an "X" at the point that indicates how you felt;		
Alert Drowsy		

CORPORATE SAFETY
REV: 00

RP/CS/05
Page 1 of 2

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 143



Corporate Safety
FATIGUE REPORT FORM (FRF)

PART D- Why did it happen [The cause of Fatigue]	
YES NO Fatigue prior to duty? Hotel Home Duty itself Inflight rest Disrupt Personal	How long have you been awake when the event happened: _____ hrs _____ min How much sleep did you have in the 24hrs before the event: _____ hrs _____ min How much sleep did you have in the 72hrs before the event: _____ hrs _____ min Inflight rest? Yes No If yes, when _____ start _____ end Other comments [If any]:
How many days or hours of rest you had from the last duty	_____ hrs / _____ min
What is the next roster pattern after this flight	UL_____ / Date _____
The number of days off until the next flight	
PART E- What did you do? Actions taken to manage or reduce fatigue:	
PART F- What could be done? Suggested corrective action/s:	
<u>Contact</u> corporate.safety@srilankan.com	

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 144

2.38 Hatch/Exit/PWD/Stretcher(Briefing for a escort)

Briefing Type	Dialogue
Hatch/Exit briefing	• “Greet the passenger” • “My Name is” • “Are you aware that you are seated next to an emergency exit?” (Point at hatches on both sides /point at door) • “Are you willing to assist in case of an emergency”? • “Thank you very much.” • “The door must be opened only on command.” • “The steps to open the door are shown on the door (point to decals) and in the safety card. Please take a few minutes to go through it before take-off.” • “Do you have any questions? Thank you once again for your willingness to help us.”
PWD briefing (Reassurance Briefing)	• “Greet the passenger” • “My name is” • “If there is any emergency situation, please remain seated until I or any of my colleagues come to assist you. • (If cane/crutch are used) Don’t try to take down your cane/crutch. We cannot use it during an emergency because it might block other passengers. Do you have any questions?”
Stretcher passenger <u>Briefing for an escort accompanying a stretcher passenger</u> • M - How to evacuate (MOVE) passenger without the stretcher • O - the escort should don the Oxygen mask prior to donning the mask on the stretcher passenger in case of a decompression • V - remain in the Vicinity at all times • E - discuss Exits and alternate Exits	• “Greet the passenger” • “I need to give you a briefing on what to do in case there is an emergency situation”. • “In an evacuation, we will only evacuate the passenger without the stretcher. • “In case of a decompression, when you see the oxygen masks falling down, Wear a mask first and then put a mask on the passenger”. • “Please stay in the vicinity of the passenger at all times during flight.” • “If an evacuation is needed, The closest exit is behind you. Please stay with the passenger until a colleague or I come to assist you.” • “Do you have any question Sir/Madam? “

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 145

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	GENERAL PROCEDURES	Chapter 02
		Page 146

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 1

CHAPTER 03 **SAFETY EQUIPMENT**

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 2

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 3

Contents

3.0 Safety Equipment	7
3.0.1 Introduction	7
3.0.2 Pre-Flight Checks/Serviceability checks	7
3.1 Fire fighting Equipment.....	8
3.1.1 Halon - KIDDE	8
3.1.2 Halon - Maip	8
3.1.3 Halon - Airtotal	9
3.1.4 BCF	10
3.1.5 Halotron (Halon Free extinguisher)	11
3.1.6 Waste Bin Fire Extinguisher	13
3.1.7 Protective Breathing Equipment	13
3.1.7.1 PBE (Oxy crew)	13
3.1.7.2 Air Liquide	15
3.1.7.3 Scott Protective Breathing Equipment	16
3.1.8 Fire Protection Gloves	17
3.1.9 Fire/Crash Axe	18
3.2 Signalling Equipment	18
3.2.1 ELT ADT 406 AP.....	18
3.2.2 ELT Kannad 406 AS.....	19
3.2.3 ELT Rescue – 406S	20
3.2.4 Heliograph (Signaling Mirror)	22
3.2.5 Sea Dye marker.....	22
3.2.6 Whistle	23
3.2.7 Orion Sky blazer – Aerial Flare	23
3.2.8 Mini Flare	24
3.3 Emergency Torch.....	24
3.4 Power Megaphone.....	25
3.5 Restraints – Seat Belts	28
3.5.1 Passenger Seat Belts.....	28
3.5.2 Cabin Crewmember Seat Belt/Shoulder Harness	28
3.5.3 Infant Seat Belt (kangaroo-belt)	29
3.5.4 Extension Seat Belt	29
3.6 Portable Oxygen System	30

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 4

3.6.1 Ex En-Route Station Minimums- 8 bottles	31
3.6.2 Procedure to secure a bottle of Oxygen during administration.....	32
3.6.3 BC Seats/Stretcher Passenger.....	32
3.7 Manual Release Tool - (MRT).....	33
3.8 Floatation Equipment	33
3.8.1 Adult / Child Life Vest	33
3.8.2 Infant Life Vest.....	35
3.8.3 Survival Cots - Infant	36
3.8.4 The Slide/Raft	38
3.8.5 Slide/Raft Variance	39
3.8.6 Survival Equipment (Survival Kit).....	39
3.8.7 Supplementary Raft Accessory Kit (SRAK)	40
3.8.8 Reverse Osmosis Pump	40
3.9 No Exit Cards	40
3.10 Emergency Response Kit	41
3.11 Restraint Tie kit.....	41
3.12 Aisle Chair.....	42
3.13 Cabin Defects Log Book.....	43
3.14 First Aid Kits.....	43
3.14.1 First Aid Kit	43
3.14.2 Emergency Medical Kit (A10).....	44
3.14.3 Automated External Defibrillator (AED)	44
3.14.4 Resuscitator Vent Aid Kit (RVAK).....	45
3.14.5 AMBU Resuscitator.....	45
3.15 Cabin Safety Minimum Equipment List.....	46
3.15.1 Portable O2 bottles	47
3.15.2 Hand Set (With the PA system functioning)	47
3.15.3 Master Minimum Equipment List (MMEL)	47
3.15.4 Minimum Equipment List (MEL)	48
3.16 Reference Codes on Location Charts.....	50
3.17 A330 - ALT Safety Equipment Location Chart	51
3.17.1 A330 ALT Safety Equipment Location Diagram.....	52
3.18 A330 - ALH Safety Equipment Location Chart	53
3.18.1 A330 - ALH Safety Equipment Location Diagram.....	54

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 5

3.19 A330 - ALL/M/N/O/P/Q/R Safety Equipment Location Chart.....	55
3.19.1 A330 - ALL/M/N/O/P/Q/R Safety Equipment Location Diagram	56
3.20 A330 - ALS Safety Equipment Location Chart	57
3.20.1 A330 - ALS Safety Equipment Location Diagram.....	58
3.21 Flight Deck Equipment	59
3.22 Specific Equipment Locations	59
3.23 Aisle Chair	60
3.24 Quick Reference	60

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 6

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 7

3.0 Safety Equipment

3.0.1 Introduction

Safety equipment carried on Sri Lankan airlines aircraft shall conform to the Air-Navigation Regulations of Sri Lanka and as a requirement by SLCAIS 15. This chapter describes all general items of portable safety equipment provided for use on Sri Lankan airlines aircraft. The pre-flight check of safety equipment is a mandatory duty of every CCM. If there is any discrepancy, CCMs shall inform the Purser who will notify the PIC and Ground Engineer/Maintenance staff and/or carry out an entry in the Cabin Defects Log book. Specific information shall be entered in the Cabin Defects log book for the Engineer to confirm the airworthiness of the aircraft. The Purser shall ensure the replacements are (if required) received prior to departure.

CCMs shall use the **Quick Reference Card (QRC)** for guidance for checking of safety equipment in the relevant area.

3.0.2 Pre-Flight Checks/Serviceability checks

CCMs shall carry out a pre-flight serviceability check and confirm by signing the Voyage Report when:

1. Boarding an aircraft for duty,
2. In the event of a crew change,
3. An aircraft has been left unattended,
4. On completion of maintenance work carried out in the cabin.

When carrying out the above checks, CCMs shall ensure,
Correct location/correct number/correctly secured/ clear of obstruction.

Pre-Flight Checks/Serviceability checks shall be carried out on, but not limited to,

1. All safety equipment
2. Demonstration equipment
3. Passenger seats/ belts/life vest
4. Crew seat-belt and harness/life vest
5. PA/Interphone system
6. Lavatories-smoke detectors/ waste bin door and the flap/extinguishers/ call lights
7. Safety cards (relevant to the operating aircraft)/ passenger information leaflet
8. Emergency exit signs/doors
9. All restraining devices- locking and latching

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL


	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	SAFETY EQUIPMENT		Chapter 03
			Page 8

3.1 Fire fighting Equipment

3.1.1 Halon - KIDDE

Pre Flight Check/Serviceability Checks


1. Correct location/ correct number/correctly secured/clear of obstruction
2. Needle on the pressure gauge is in the green zone
3. Safety pin is placed through the handle and lever/not bent or damaged
4. Seal intact

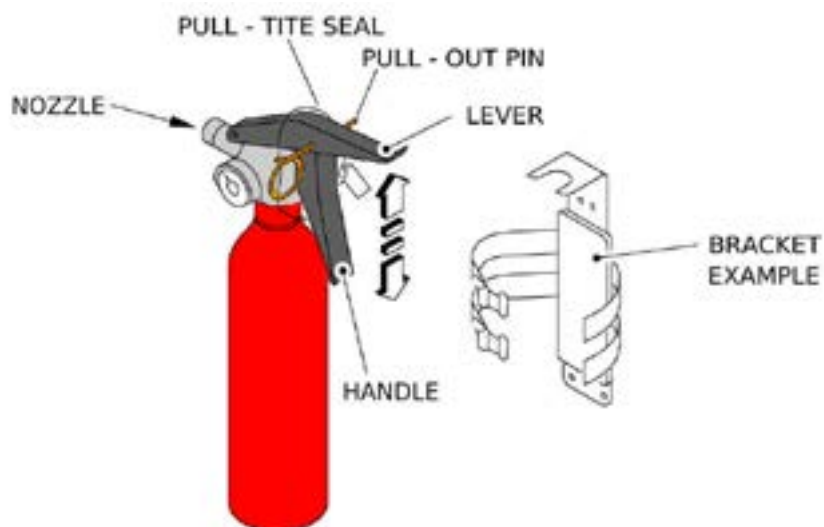

Precautions - Do not tilt more than 45° (this will stop the flow)/do not discharge at a person.

Operation - Break the seal/pull the safety pin/hold the extinguisher upright and aim the nozzle at the base of the fire/squeeze both levers together.

Limitations - Used on all types of fires/ the effective range is 10 ft. and the duration is 9 seconds.

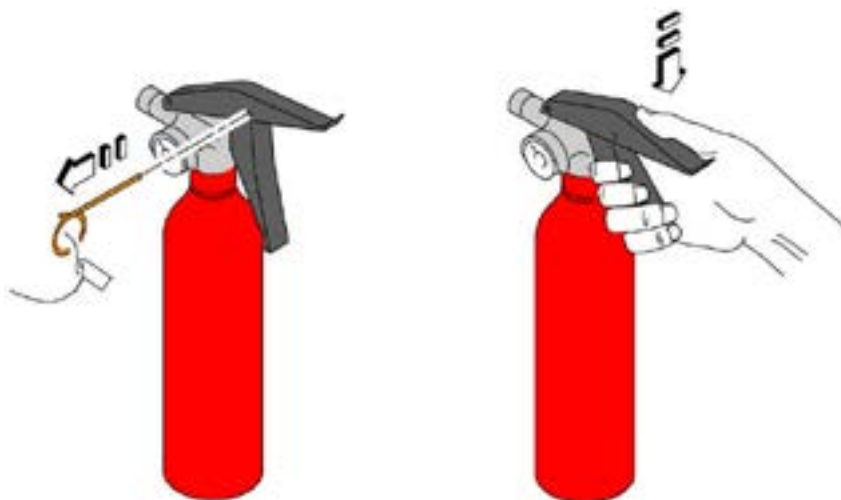

3.1.2 Halon - Maip


Refer 3.1.1



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	SAFETY EQUIPMENT		Chapter 03
			Page 9

3.1.3 Halon - Airtotal

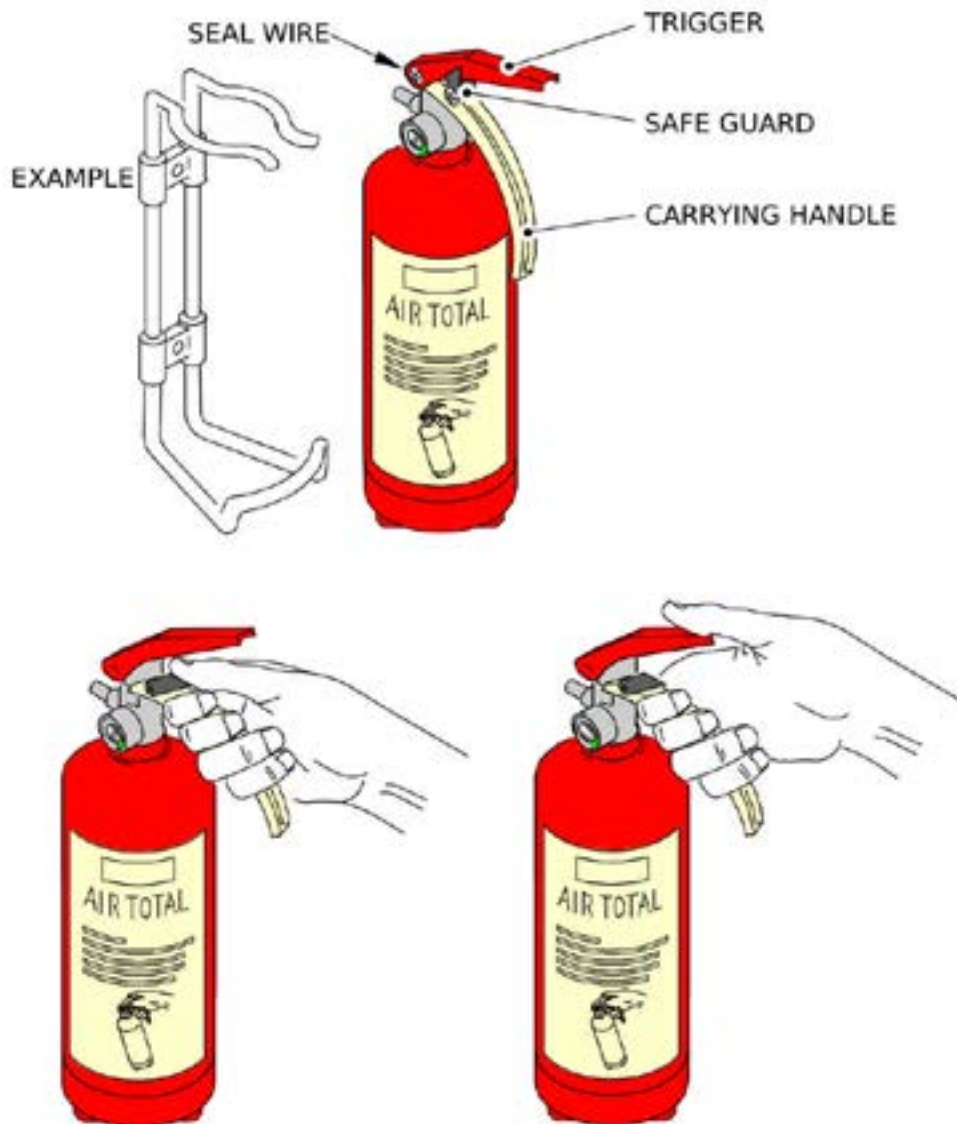

Pre-flight Check/Serviceability Checks

1. Correct location/correct number/correctly secured/clear of obstruction
2. Needle on the pressure gauge is in the green zone
3. Safety catch is in the lock position (up position)
4. Seal is intact

Precautions - Do not tilt more than 45° (this will stop the flow)/do not discharge at a person.

Operation - Break the seal/push the safety catch down/hold extinguisher upright and aim the nozzle at the base of the fire/squeeze both levers together.

Limitations - Used on all types of fires/effective range is 10 ft. and the duration is 9 seconds.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 10

3.1.4 BCF



Colour of Extinguishers – Red or Green

Pre Flight Check/Serviceability checks

1. Correct location/correct number/correctly secured/clear of obstruction
2. RED Disk marked 'FULL' intact
3. Needle on the pressure gauge at the bottom of the extinguisher is in the green zone.(On certain extinguishers only)

Precaution - Do not tilt more than 45° (this will stop the flow) do not discharge at a person.

Operation - Flip the red safety catch up/hold the extinguisher upright and aim the nozzle at the base of the fire/squeeze the palm lever. As BCF is heavier than air, it is capable of seeping and penetrating through small openings and cracks.

Limitations - Used on all types of fires/effective range is 10 ft. and the duration is 9 seconds.


Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	SAFETY EQUIPMENT		Chapter 03
			Page 11

3.1.5 Halotron (Halon Free extinguisher)

Is a proven clean fire extinguishing agent designed for streaming applications in portable and handheld fire extinguishers. It is the world's most widely distributed halocarbon-based clean fire extinguishing agent for such applications.

Gross weight 2.3 kg with the bracket.

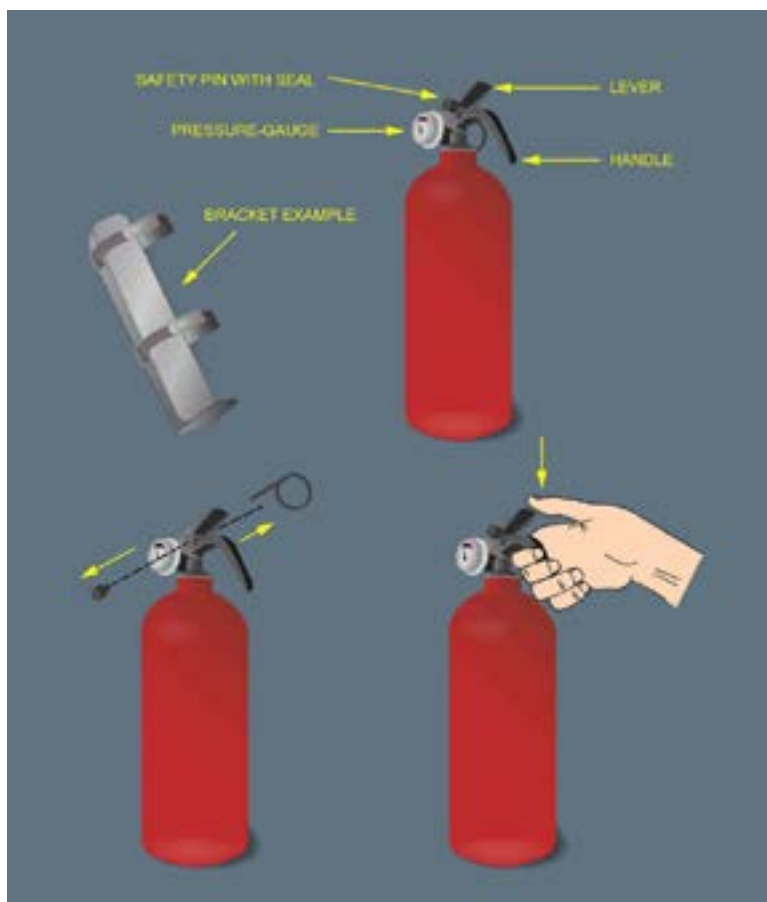

Pre Flight Check/Serviceability Checks

Correct location/correct number/correctly secured/clear of obstruction

1. Needle on the pressure gauge is in the green zone
2. Safety pin is placed through the handle and lever/not bent or damaged
3. Seal/Collar intact

Precautions - Do not tilt more than 45° (this will stop the flow)/do not discharge at a person.

Operation - pull the safety pin to release the seal/hold the extinguisher upright and aim the nozzle at the base of the fire/squeeze both levers together.

Limitations - Used on all types of fires/the effective range is 10 ft and the duration is 9 seconds.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 12

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed


	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	SAFETY EQUIPMENT		Chapter 03
			Page 13

3.1.6 Waste Bin Fire Extinguisher

Description - An automatic fire extinguisher containing 120 grams of Halon/Freon gas is installed in the compartment below the sink /adjacent to the waste bin. When exposed to heat in excess of approximately 77° C, the Halon/Freon gas is discharged within 60 seconds through a single nozzle into the waste bin below.

Pre Flight Check/Serviceability Checks

1. Clear of obstructions.
2. The needle of the pressure gauge is in the green zone

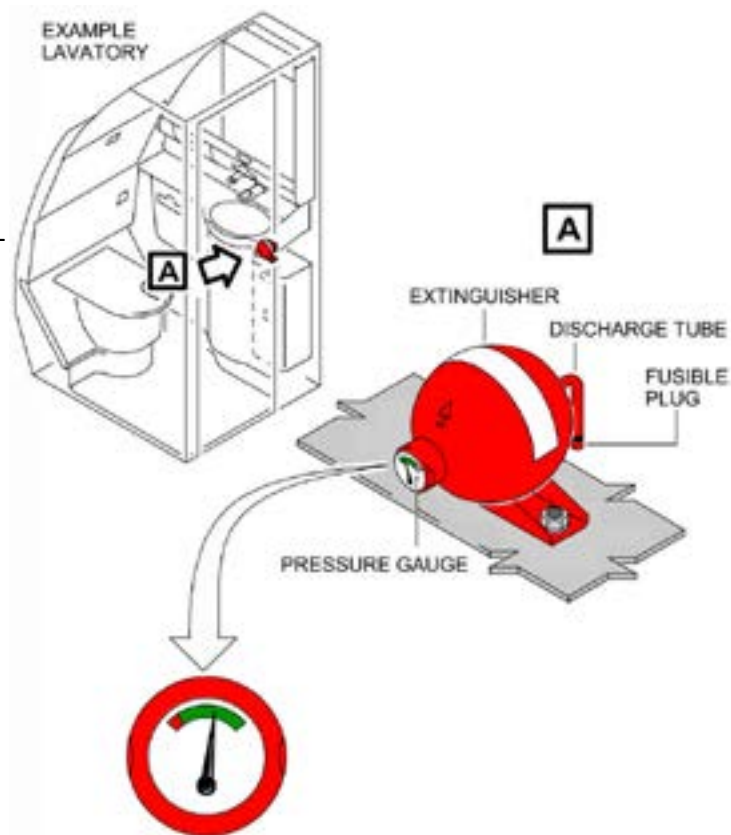

3.1.7 Protective Breathing Equipment

3.1.7.1 PBE (Oxy crew)

Description - Each CCMs seat location shall be provided with a PBE. A chemical reaction generates oxygen and the process releases heat. While supplying oxygen, it's capable of protecting the fire fighter from the fire and heat.

If inhalation resistance increases, it may be depleted source of oxygen or defective equipment. Breathing will still be possible for a short while.

The mask is equipped with a speech diaphragm and a body belt.



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 14

Pre Flight Check/Serviceability Checks

1. Correct location/correct number/correctly secured/clear of obstruction
2. White security seal on the locking clamp is intact
3. Yellow serviceability sticker on the foil bag is not broken (visible through the viewing window)
4. Box is not damaged
5. Foil bag is not pressed against the viewing window

Precautions

Remove all makeup

Remove sharp objects-(Chains and earrings)

Neck seal should be air tight (Long hair pushed into the hood/ neck seal not damaged)

Ensure oxygen is flowing before tying the body belt.

Note: Do not smoke or expose self to fire or flames after removing the PBE as hair may be saturated with oxygen

Operation

Open the container by pushing up the locking clamp

Remove the foil bag, tear open by using the red tear strip


Take the smoke hood out

Insert both hands through the neck seal into the hood and widen using the back of your hands and Pull the hood over the head from back to forward (do not remove the hands until the neck seal is secure), Adjust the inner mask to fit over the nose and mouth

Pull the activation tab in front to activate the generator and take 4-5 deep breaths to ensure oxygen is flowing

Fasten the body belt around the waist and tie a knot on to a side, breathe normally

If resistance in breathing is experienced remove the PBE immediately and inform Purser of the location of PBE.

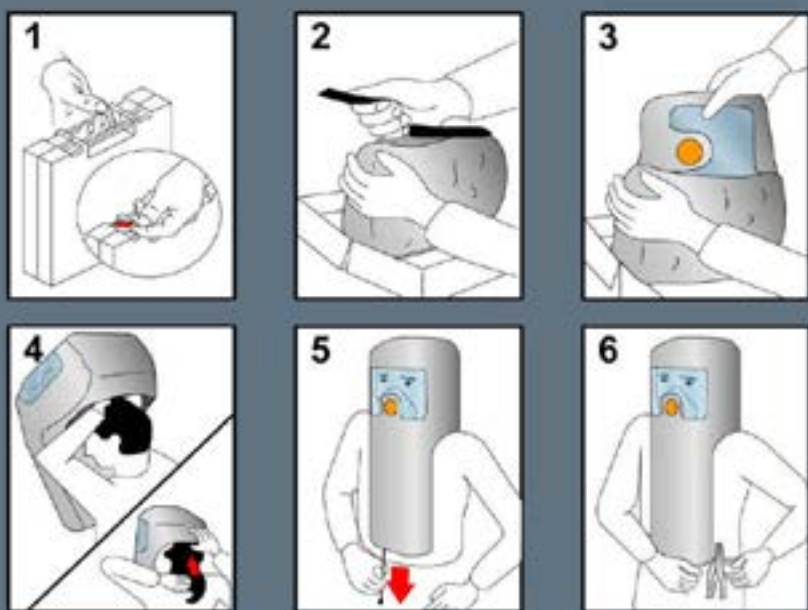

After Use

1. Release the body belt
2. Seize the top of the hood and pull it off the head

Revision No	02	Revision Date	15 August 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 15

- Place/store in safe area away from heat as the chemical reaction heats up the generator

Limitations – Provides oxygen for approximately for 15 Minutes

Note: If the inner mask does not fit the nose and mouth, CO2 exhaled will be inhaled again causing dizziness to the user.

3.1.7.2 Air Liquide

Description- It protects the head and supplies gaseous oxygen stowed in a cylinder at the neck seal. The visor is treated with an anti-fogging compound. The internal hood is manufactured with self-extinguishing material.

Pre Flight Check/Serviceability Checks

- Correct location/correct number/correctly secured/clear of obstruction
- Security seal is intact
- The green condition indicator disc is visible

Precautions

- Remove all makeup
- Remove sharp objects-(Chains and earrings)
- Neck seal should be air tight (Long hair pushed into the hood/ neck seal not damaged)
- Ensure oxygen is flowing by breathing comfortably, if not replace with another

Operation

- Hold the box handle in one hand and with the other hand firmly pull the grey part of the lid marked "PULL": the stick breaks, the lid opens. Hold the vacuum-packed hood in one hand hold in position by the two yellow squares then take it out of the packing box by pulling it towards you.



- Or Hold the case in one hand and with the other lift the part of the green security latch marked "SEAL" to break it, Push sharply on the part of the cover marked "PUSH" to open the cover. Hold the vacuum-packed hood in one hand (held in position by the two yellow clips) and take it out of the packing box by pulling it.




- Remove the foil bag and pull on the red tear tab, the cover tears easily. Take out the hood pulling on the compressed oxygen container (do not insert the hand in the packaging to pull the

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 16

hood by the fabric or the sealing collar. this can damage the oxygen activation system and affect its operation)

4. With the orange marks visible and towards you, place your hands on the orange marks and using your thumbs, open the black neck seal at the base of the hood, Don the hood from rear to front and ensure the neck seal is not damaged (you must only grab the black neck seal and not internal components or the white fabric, if you grab the white fabric or the internal components, you can damage the activation of the oxygen system)
5. Holding the oxygen container tightly with both hands with the black neck seal open, flick the hood down in a sharp movement to deploy it

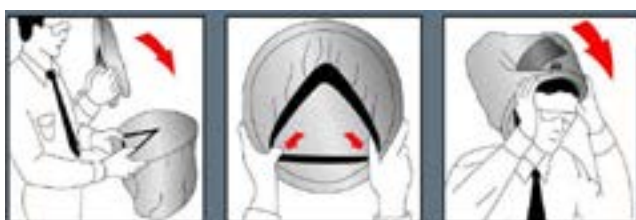

6. Put the hood over your head, from back to front. After donning the hood, you will hear a slight click caused by the activation of the oxygen system. You will then hear a noise caused by the oxygen flow in the PBE.

After Use

1. To remove the mask - Insert both thumbs into the neck seal at the front of the hood and remove the hood backwards.
2. Store in a dry, fire protected area, away from heat.
3. Inform Purser of the location after use.

Limitation - Oxygen supply will last for approximately 15 Minutes

WARNING: WHEN DONNING THE PBE OR DURING ITS FIRST SECONDS OF USE, IF YOU DO NOT HEAR THE NOISE PRODUCED BY THE OXYGEN FLOW, OR EXPERIENCE BREATHING RESISTANCE, YOU MUST IMMEDIATELY REMOVE THE PBE AND EQUIP WITH ANOTHER PBE.

Note: Do not smoke or expose self to fire or flames after removing the PBE as hair may be saturated with oxygen

3.1.7.3 Scott Protective Breathing Equipment

Description - The Scott PBE (Protective Breathing Equipment) is a portable, self-contained, personal smoke hood designed to safeguard cabin crewmembers from the effects of smoke, carbon dioxide, harmful gases and oxygen deficiency while managing in-flight fire, smoke or fume emergencies.

Pre Flight Checks/Serviceability Checks

1. Correct location/correct number/correctly secured/clear of obstruction
2. Check if the humidity indicator is blue in colour (If pink the unit is unserviceable)
3. The box should not be damaged

Operation

1. Remove the unit from the fixture and open the container after lifting the catch marked lift.
2. Open the container and remove the transparent bag
3. Tear open the transparent bag by using the red strip
4. Remove the PBE and unfold
5. Activate the oxygen flow by pulling the red pull tab on the life support pack in the direction indi-

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 17

- cated (hissing sound indicates the flow of oxygen, if not do not use, replace with another unit)
6. Insert both hands in to the neck seal and enlarge ensuring the life support pack fits at the back of the head
 7. Bend forward and don the PBE front to the back and ensure the neck seal is not damaged
 8. Stay up-right and pull the mask down until the head band inside the hood fits firmly on the forehead
 9. Insert two finger in to the neck seal and check it is free of obstructions and pull the hood down fully to cover the neck seal completely



Limitations

The oxygen flow shall last for 15 Mins

WARNING: IF BREATHING RESISTANCE IS EXPERIENCED, REMOVE THE HOOD IMMEDIATELY. DO NOT TOUCH THE LIFE SUPPORT PACK DUE TO HEATING WHEN IN USE

Note: Do not smoke or expose self to fire or flames after removing the BPE as hair may be saturated with oxygen.

3.1.8 Fire Protection Gloves

Description/Use - Protective gloves are used to grasp hot or burning parts and smother minor fires.

Pre Flight Check/Serviceability Checks

1. Correct location/correct number
2. Stowed in a sealed transparent cover
3. Not damaged or torn



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 18

3.1.9 Fire/Crash Axe

The Crash Axe is available in the flight deck and/or galley compartment. It is used in an emergency, especially when fighting an onboard fire.



Pre Flight-Checks

Correct location/correct number /correctly secured/clear of obstructions

Description/Use

Cutting Edge – Used to open panels and cutting the fuselage or other obstructions during a fire or emergency. It is also used to enlarge an opening or to cut electrical wiring up to 24,000 volts.

Pointed Edge – Used to start an opening on panels during a fire to insert the nozzle of the extinguisher. It is also used to disperse embers during a fire.

3.2 Signalling Equipment

3.2.1 ELT ADT 406 AP

Description - The ADT 406 AP is a bright coloured water sealed /compact/ buoyant/ manually activated transmitter, secured to a metal bracket with a Velcro strap.

A wire harness is attached (optional) to the metal bracket. It's equipped with a lanyard for attachment in a ditching. The toggle switch has ARM/OFF/ON positions.

The beacon transmits distress signals on three frequencies simultaneously:

- 121.5 MHz (civil distress frequency)
- 243 MHz (military distress frequency)
- 406.025 MHz (COSPAS-SARSAT frequency).



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 19

Pre Flight Check/Serviceability Checks

1. Correct location/correct number/correctly secured/clear of obstruction.
2. The toggle switch is in the OFF position.
3. Testing of the ELT shall be carried out by the Engineering staff.

Operation

On Land

- Unfasten the Velcro straps to remove the ELT from its bracket.
- Pull firmly to break the wire harness(optional feature).
- Take it to a high elevation clear of obstructions, remove transparent cover and erect the flexible antenna manually and move the toggle switch to the “ON” position (lift and slide the switch).

In Water -

- All of the above.
- Tie it to the lifeline diagonally opposite the sea anchor using the lanyard.
- Place the transmitter in water and ensure the transmitter floats away from the raft. Transmission begins with a visual and aural indicator.
- To stop transmission, move the toggle switch to the OFF position.

Limitations

Civil/Military	60 hours
Satellite	24 hours

3.2.2 ELT Kannad 406 AS

Description - KANNAD 406 AS is yellow in colour and the housing is made of aluminium alloy coated with paint. It is a compact buoyant transmitter and has to be activated manually. A toggle switch with three positions is located on top of the ELT. (ARM/ON/OFF) An antenna is fastened to the ELT. It's equipped with a lanyard for attachment in a ditching.

The beacon transmits distress signals on three frequencies simultaneously:

- 121.5 MHz (civil distress frequency)
- 243 MHz (military distress frequency)
- 406.025 MHz (COSPAS-SARSAT frequency).

Pre Flight Check/Serviceability Checks

1. Correct location/correct number/correctly secured and clear of obstruction
2. The toggle switch is in the “OFF” position
3. Testing of the ELT shall be carried out by the Engineering staff.

Operation


On Land -

- Unfasten the Velcro strap to remove the ELT from its bracket.
- Take it to an elevation clear of obstruction.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	SAFETY EQUIPMENT		Chapter 03
			Page 20

- Erect the antenna, move the toggle switch to the “ON” position.

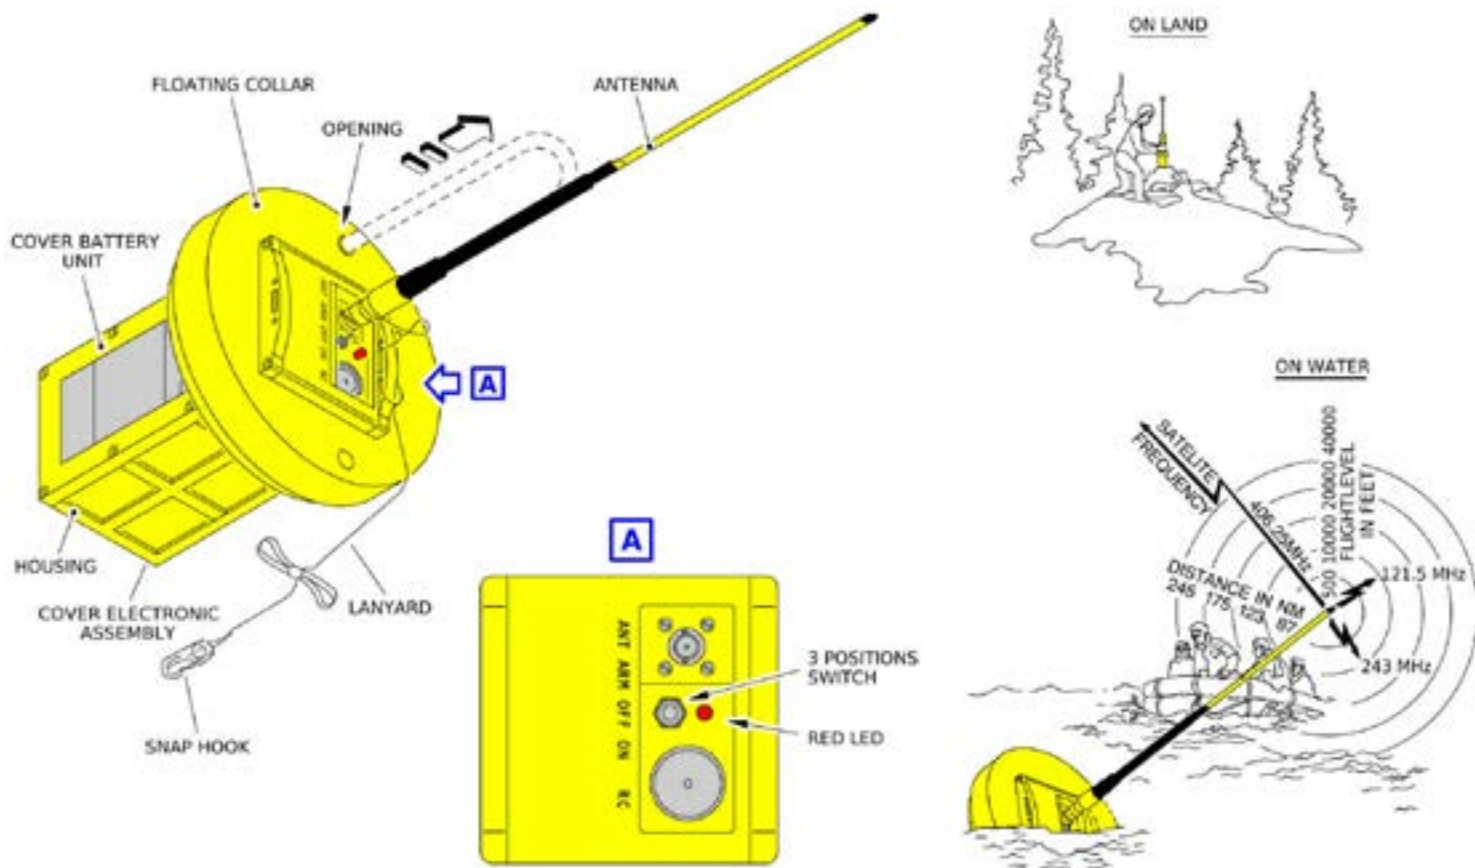

In Water -

- All of the above.
- Tie it to the life line diagonally opposite the sea anchor using the lanyard.
- Place the transmitter in water and ensure the transmitter floats away from the raft.

Transmission begins with a visual and aural indicator as given below

- To stop transmission move the toggle switch to the “OFF” position.

Limitations

Civil/Military	48 hours -
Satellite	24 hours -

3.2.3 ELT Rescue – 406S

Description - The Rescue 406 S is a portable Emergency Locator Transmitter which is powered by a water activated battery. A pouch of salt is provided to be dissolved to create an electrolyte solution for enhanced activation when used on land.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 21

The beacon transmits distress signals on three frequencies simultaneously:

121.5 MHz (civil distress frequency)

243 MHz (military distress frequency)

406.025 MHz (COSPAS-SARSAT frequency).

Pre-flight Check/Serviceability Check


1. Correct location/correct number/correctly secured/clear of obstructions
2. Stowed in a sealed transparent cover and the pouch of salt is available

Precautions - Do not tilt the transmitter more than 60° as transmission may be suspended by draining the liquid out from the vent holes.

Operation

On land -

- Remove from quick release bracket and take it out of the aircraft to a higher elevation free of obstructions.
- Erect the antenna manually and unwind the lanyard to remove the plastic bag.
- Fill the plastic bag with a liquid up to the indicated line (do not use alcohol/oil).
- Empty the pouch of salt in to the liquid and immerse the transmitter until the liquid penetrates the vent openings.

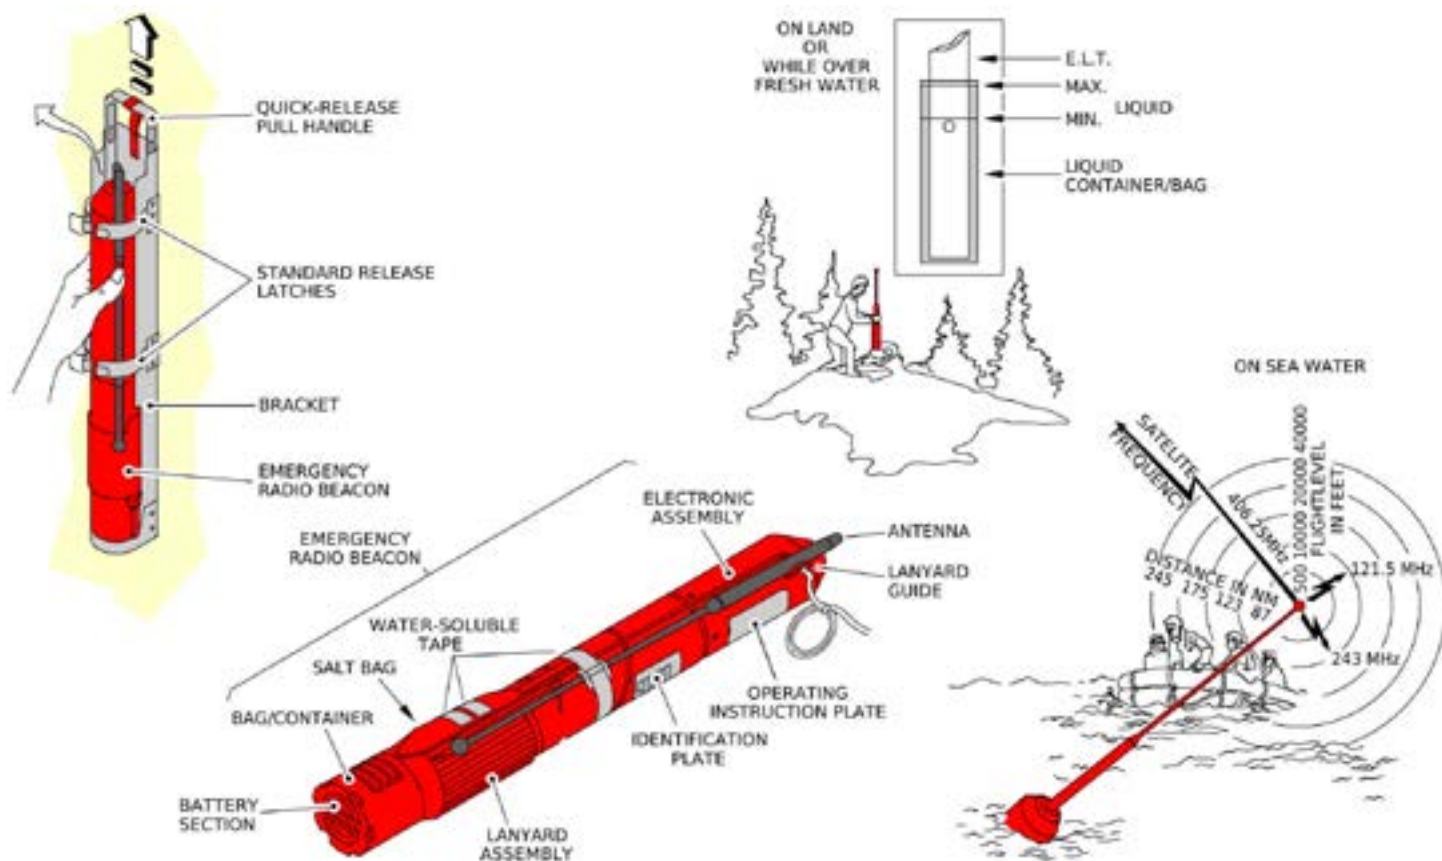

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 22

In water -

- Unroll the free end of the cord at the top of the beacon.
- tie the cord to the life line of the raft diagonally opposite to the sea anchor.
- place the transmitter in water and ensure the transmitter floats away from the raft.

Transmission could be stopped by

- Draining the liquid from the transmitter/by holding it horizontally.
- By folding the antenna.
- Immersing the transmitter under water.

Limitations


Civil/Military	48 hours
Satellite	24 hours

Note: It is recommended to operate one ELT at a time as direction trading on one transmitter produces better results.

3.2.4 Heliograph (Signaling Mirror)

Description- Is a reflective plate which has a high capability of reflection and has an opening in the centre.

Operation- The mirror should be held a few inches away from the face against the sun and point a finger towards the object. Look through the opening and direct the reflection on to the object.

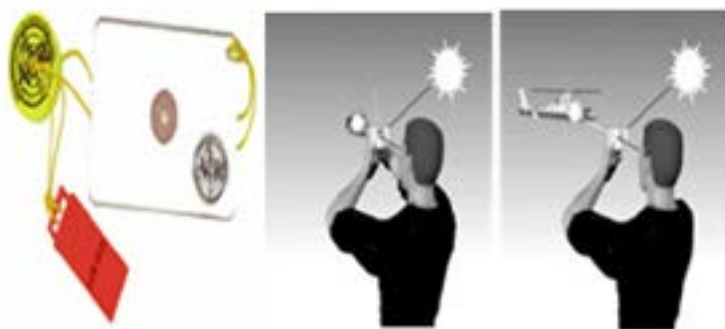

Precautions - Do not continue to flash the mirror at passing aircraft after response by performing the roll action.

3.2.5 Sea Dye marker

Description- It is a water-soluble luminous dye that is packed in a pouch with an attachment cord to be dropped into the water. The trail is visible during the day and in the night when searchlights are used. The sea dye marker is stowed in the survival pack of the slide raft.

Operation - Tear open one pack/tie to the trailing edge of the lifeline and throw it over board. Same side of the sea anchor.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	SAFETY EQUIPMENT		Chapter 03
			Page 23



Limitations - The duration is approximately 30 to 40 minutes. If the dye is used in rough waters the trail may be displaced.

3.2.6 Whistle

Description/Use - It is brightly coloured and used to attract attention



3.2.7 Orion Sky blazer – Aerial Flare



Description – It is a cylindrical plastic canister signalling device used to attract attention when Search and Rescue (SAR) are seen or heard.

Operation –


- Hold the flare by the arrow facing upwards.
- Press the top centre down, the flare tube will drop.
- Pull the centre tube down until locked in position.
- Unscrew the bottom part to expose the metal chain.
- Hold upright and pull the metal chain firmly downwards.
- The flare fires a red torch which rises up and lasts for 10 seconds.

Precautions - If the flare fails to ignite do not examine but cool by dipping in water and dispose.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 24

3.2.8 Mini Flare

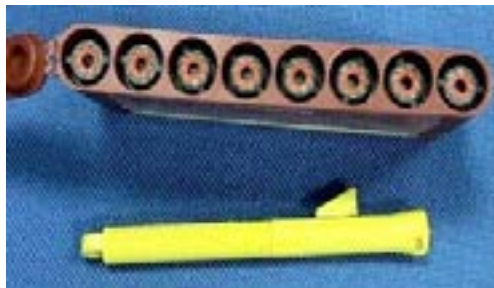

Description - It is a water-resistant light weight signalling device. The pack stows eight flare stars and a penjector with a trigger mechanism.

Operation -

- Open the flap on the pouch to expose the flare stars.
- Remove the penjector and engage a flare by inserting and turning clockwise.
- Pull the flare from the pouch.
- Hold at arm's length at 45°.
- Pull the trigger and fire the flare into the sky.
- Dip the used flare in water to cool.
- Remove and dispose the used flare.
- Stow the penjector in the pouch for reuse.

Limitations - Each flare will burn for approximately 6 seconds at 3000 candlelight.

Precautions - If the flare fails to ignite do not examine but cool by dipping in water and dispose. Both types of flares can be used during day and night.

3.3 Emergency Torch

Type 1



Description - It is water resistant, equipped with a battery and a lanyard. A magnetic switch is activated when the flashlight is removed from the bracket. There is no ON/OFF switch, and the light can be turned off by unscrewing and disconnecting the base. A torch shall be located within reach at every crew seat.

Pre Flight Check/Serviceability Checks

Correct location/correct number /correctly secured/clear of obstruction
Secured with a plastic security seal.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 25

The red light flashing every 4 to 6 seconds.

Operation -

Pull the torch to break the plastic strap the light will illuminate automatically

To Switch off place it back into the retention basket.

To prolong usage, unscrew the bottom cover and disconnect the wire harness.

Limitations- The battery power would last for 04 hours.

Emergency Torch

Type 2 (ALS Aircraft)



Is a normal battery-operated device. Secure strap is not available

Pre-Flight / Serviceable checks –

Pull it from the bracket, Slide the switch to ON position and check illumination.

Operation- Pull it from the bracket, Slide the switch to ON position

3.4 Power Megaphone

A megaphone is voice amplifying device.

The purpose of the megaphone

For crew to give instructions to passengers during an emergency or as emergency means of communication inside the aircraft if the PA system fails.

Type 1



Description - It is equipped with a microphone/press to talk switch. It is powered by self-contained batteries.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL


	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	SAFETY EQUIPMENT		Chapter 03
			Page 26

Pre Flight-Check/Serviceability Checks

Correct location/correct number /correctly secured/clear of obstruction.

Use the press to talk switch to check serviceability, a click sound will be heard.

Type 2

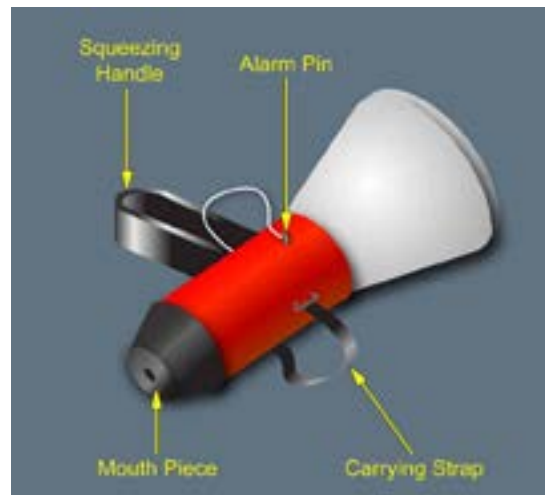

Operation -

Press to talk and speak into the microphone.

Description -

It is equipped with a microphone/squeeze handle / volume control / alarm pin and powered by self-contained batteries.

Pre Flight-Check/Serviceability Checks

Correct location/correct number /correctly secured/clear of obstruction.

Squeeze the handle to check serviceability after increasing the volume, a click sound will be heard, and a flashing green light is visible.

Operation:

Squeeze the handle and speak into the microphone.

Adjust volume accordingly.

Precaution - Avoid dropping in water as this would short circuit the batteries.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 27

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 28

3.5 Restraints – Seat Belts

3.5.1 Passenger Seat Belts

Description- It is attached to the seat structure with an adjustable metal buckle on one side and a metal fitting on the other.

Pre Flight Check/Serviceability Checks

1. Correct location /correct number/correctly secured/clear of obstruction
2. Both ends of the seat belts are available and can be fastened

Ref: 2.25.4

Operation - To open the seat belt lift the upper portion of the buckle.

Precautions - Ensure straps are not twisted or damaged.

Limitation - Only one passenger shall be secured by a seat belt.

NOTE: On certain aircraft “Y” seat belts are available at bulkhead row seats with double attachment points to the seats.



3.5.2 Cabin Crewmember Seat Belt/Shoulder Harness

Description - The Cabin crew seats are equipped with a lap strap and a shoulder harness. The seat-belt and the self-locking shoulder harness have a single point release. The base of the self folding seat pan, a cavity is located to stow the lap strap. It is mandatory for CCMs to use the seat belt and shoulder harness during taxi/take-off/turbulence/ landing and when instructed by the PIC.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 29

Pre Flight Check/Serviceability Checks

1. Serviceability of the locking device
2. Lap strap can be adjusted
3. The self-locking device on the shoulder harness is functioning
4. The straps are not twisted or damaged
5. The base of the seat pan is self-folding

Operation - Place the lap straps first and insert the metal fitting of the shoulder harness and adjust. The seat belt can be opened from the single point release. The seat belt once removed must be stowed in the cavity at the back of the seat pan.

NOTE: On the A 330-300 aircraft the crew seat belts needs to be fastened when not in use.

Precautions - Ensure straps are not twisted or damaged. The lap strap should be locked and adjusted and the buckle should be positioned under the abdomen and above the hips.

Limitation - CCM shall occupy only a fully functional crew seat.

3.5.3 Infant Seat Belt (kangaroo-belt)

Description - It is equipped with a loop in the centre To secure lap carried infants.



Pre Flight Check/Serviceability Checks

Correct location/correct number/correctly secured/clear of obstruction.

Usage – Pass the passenger seat belt through the loop of the kangaroo belt. Secure the infant seatbelt around the waist of the infant.

NOTE: For Seat belt equipped with an airbag, the loop on the kangaroo belt should be inserted on to the side that does not contain the airbag.

3.5.4 Extension Seat Belt

Description - A kangaroo belt may be used as an extension seat belt.

Pre Flight Check/Serviceability Checks

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 30


Correct location/correct number/ correctly secured/clear of obstruction.

Usage - It is used to restrain expectant mothers, obese passengers, cargo in passenger seats and when securing medical oxygen cylinders.

NOTE: For seat belts equipped with airbags special extension seat belts are available




3.6 Portable Oxygen System

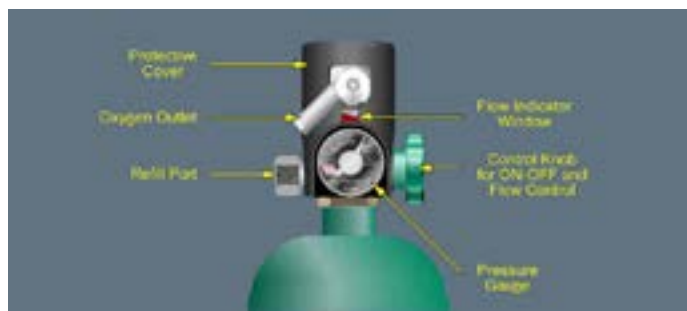


Single outlet

Dual Outlet

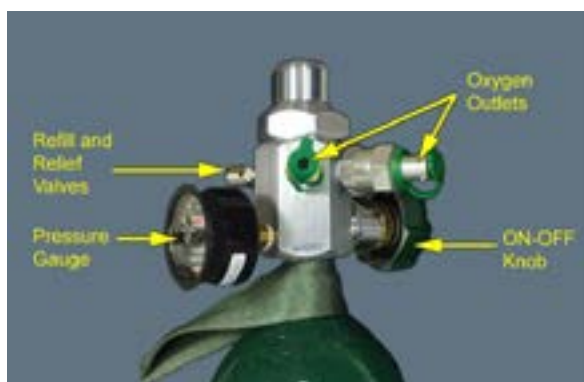

Single outlet with flow selector

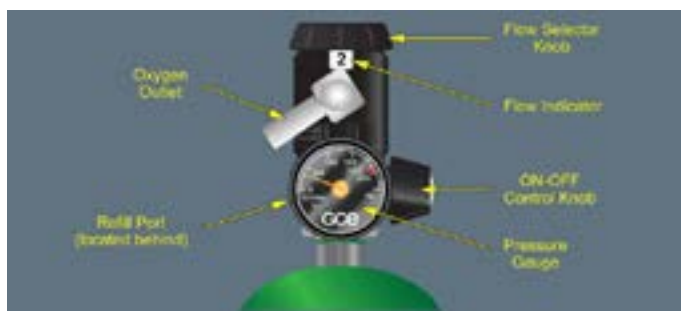

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 31

Description -

Green coloured cylinders and contains 310 litres of oxygen. It is equipped with a pressure gauge/refill-valve/carry strap/ON/OFF rotator knob and a safety valve.

It has a flexible mask with an elastic strap and a re-breather bag connected to a tube. The re-breather bag has a green indicator, indicating inflation.

Three types of 310 Litre oxygen bottles are available on board.

1. **Single outlet.- Rate of Flow 4 Litres for 75 Minutes.**
2. **Dual outlets. - Rate of Flow 2 Litres for 150 mins/4 Litres for 75 Minutes.**
3. **Single outlet with a flow selector on top of the bottle. - Rate of Flow 2 Litres for 150 mins/4 Litres for 75 Minutes.**

Pre-Flight Checks/Serviceability Checks

1. Correct location/correct number/ correctly secured/clear of obstruction
2. All bottles shall be over 1500 PSI ex-base
3. Mask shall be fitted to the high outlet and in a pouch
4. Tubing is not damaged

Operation

1. Remove mask from plastic bag
2. Ensure mask and tubing is attached to the high outlet
3. Open valve by turning ON/OFF knob anti- clockwise
4. Check for the flow of oxygen by pinching mask end of the re-breather bag
5. Place mask over nose and mouth and adjust elastic band
6. Secure bottle on the safety bar using two kangaroo belts
7. Remove mask when the gauge reaches 500/250 PSI

After Use

1. Close the valve by turning ON/OFF knob clockwise
2. Disconnect the tube from the bottle
3. Re-stow bottle of oxygen

Precautions - After use, the tubing and mask shall be disconnected as a precautionary measure to stop the leakage of oxygen.

3.6.1 Ex En-Route Station Minimums- 8 bottles

- 6 bottles - at 1000 PSI
- 2 bottles - at 500 PSI

Limitations - Bottles above the minimum requirement for dispatch may be used for first Aid to a minimum of 250 PSI.

En-route if an aircraft is dispatched with the minimum requirement of bottles and oxygen is to be administered as first aid, the bottles with a 1000 PSI can be used up to 500 PSI. Administering of additional oxygen above this shall be at the discretion of the PIC

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 32

3.6.2 Procedure to secure a bottle of Oxygen during administration

EY Seats

1. The bottle of Oxygen shall be secured as shown below with the two kangaroo belts on to the seat frame. (crew shall ensure the belts are tight around the bottle and the tubing is free from obstruction)
2. The standard procedure shall be followed to administer Oxygen.
3. Preferred location to secure the bottle of Oxygen, is an aisle seat.
4. The procedure may be applied during cruise and TTOL.
5. The procedure for securing shall be the same for stretcher passengers.



3.6.3 BC Seats/Stretcher Passenger

The preferred location is in an over head bin above an aisle seat.

The bottle shall be stowed in the over head bin that can be locked and latched.

The bottle of oxygen shall be stowed as shown below.

A cabin bag shall be placed to ensure the bottle does not move for TTOL

The tubing to be taken down between the separation of two over head bins.

Open the valve and ensure the tubing is not crushed and the Oxygen is flowing

The standard procedure shall be followed to administer Oxygen.



Medical Centre shall inform Engineering department of the requirements of additional MEDA oxygen on flight, copying ground handling department who in turn will inform the Purser and the PIC. The duty Engineer will inform the Purser regarding the number of bottles and the location.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 33

Crew Usage in post decompression

Place the carry strap around neck and shoulder. The bottle should not obstruct CCM from assisting passengers. During post decompression, oxygen from all bottles may be used until the gauge reads zero.

Administering procedure, Ref 9.3

NOTE: In the event MEDA oxygen is pre-requested, CCMs to ensure spare oxygen masks shall be provided.

3.7 Manual Release Tool - (MRT)

Used to release the cabin oxygen system door



Description

The manual release tool is so designed that it has a flat end and a pin type end. The flat end is slightly curved and the pin end is folded inwards which requires to be rotated outward for use.

Pre Flight Checks/Serviceability Checks

Correct location/correct number/ correctly secured/clear of obstruction

Operation - The MRT is used to open the oxygen stowage compartment door manually. The pointed end is inserted into the pin hole to release the oxygen stowage compartment door lock (oxygen stowage compartment). If the oxygen stowage compartment door is stuck the flat edge is used to release the door.

3.8 Floatation Equipment

3.8.1 Adult / Child Life Vest

Description

Every seat on the aircraft shall be equipped with a life vest easily accessible from the individual seating position.

The life vest is made up of two separate buoyancy chambers. Two carbon dioxide cartridges are installed for inflation. This can be activated by pulling the red tabs.

- **Pre Flight Checks/Serviceability Checks – Crew life vest**

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 34

Crew required to check on their personal life vest under each crew seat and if the overhauled due date is not expired.

- **Pre Flight Checks/Serviceability Checks - Infants and passenger**

The infant life vest and the spare adult life vest -

Correct location/correct number/ correctly secured/clear of obstruction


A random check shall be carried out on the passenger life vest in the cabin

Operation - Adult

1. Slip the life vests over the head and bring the strap around the waist.
2. Attach the buckle and pull strap to tighten.
3. Pull the red tabs downwards sharply to inflate.
4. To manually inflate the vest, blow into the rubber tubes located on the side of the vest.
5. The protective plugs of the battery must be pulled to activate the locator light powered by a water activated battery. - last for 08 hours.
6. A whistle is available to attract attention.

Precautions -

Sharp objects should be removed prior to donning and precautions should be taken not to over tighten buckle or keep it too loose.

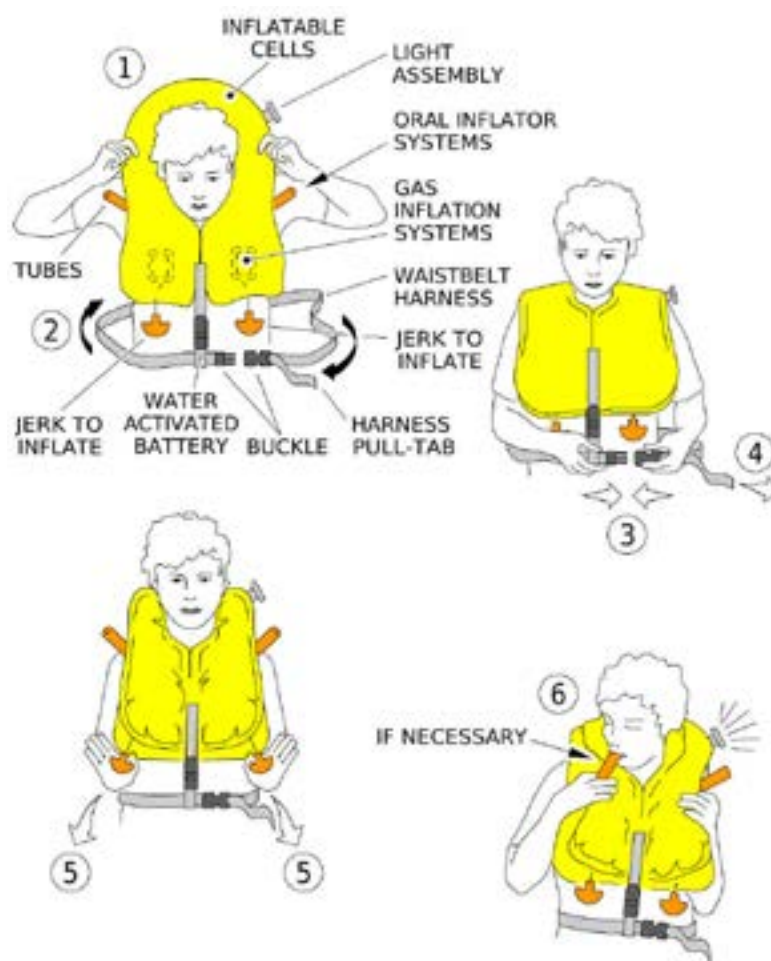

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 35

Fitting an Adult Life Vest to a Child


1. Slip the life vest over the child's head.
2. Pass the strap around the waist and secure using the buckle.
3. Pull the strap to tighten and secure the vest.
4. Inflate one chamber of the life vest by blowing in to the rubber tubes.

NOTE: Child life vests shall be fitted and inflated during Phase II

3.8.2 Infant Life Vest

Every infant on board shall be provided with a flotation device designed for them.

The neck size is reduced when inflated to ensure the infant does not pass through. A lifting tape with a lifeline is attached to grasp and secure the infant to the adult.

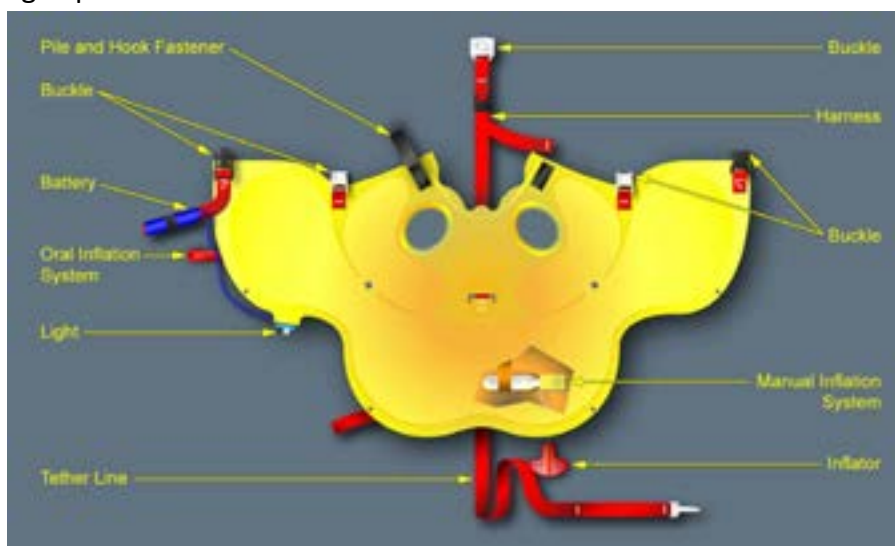

Description –

The infant life vest is a single chamber flotation device. When activated the chamber inflates around the waist of the infant. A life line is attached for securing purpose. It consists of a manual inflation system by pulling the tab and an oral inflation tube for increase or decrease of pressure. A battery is connected to a light which activates when immersed in water.

Light System Assembly:

The system consists of a light and a battery attached to the harness. The light is automatically activated when the battery is immersed in water.

Harness Assembly:

The harness assembly consists of a harness and a buckle. The harness assembly secures the life vest to the wearer.

Oral Inflation System:

The oral inflation system has a tube connected to the buoyancy cell. The end of the tube is fitted with a valve. The oral inflation system is used to add or remove pressure as necessary.

Manual Inflation System:

The manual inflation system consists of a carbon dioxide cylinder attached to an inflator mechanism and the inflator tag. When activated the compressed carbon dioxide gas is released and fills the chamber.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 36

Operation

1. Remove the life vest from its pouch.
2. Place the hands through the openings.
3. Don the life vest around the infant's chest.
4. Put the harness through the infant legs.
5. Close the three locking points of the buckle at the back of the infant.
6. Secure the life vest by the harness.
7. To adjust the harness pull on the loose end.
8. Pull the red inflator tag to inflate the life vest at the door sill.

Use the oral inflation system if more or less pressure in the life vest is necessary:

1. Blow into the tube to inflate
2. Press the valve to deflate the life vest.

Note: Oral inflation prior to gas inflation will cause excessive pressure which may burst the life vest.



Infant



Infant



Infant

Limitations - The infant life vest will support an infant up to approximately 16 KGS.

3.8.3 Survival Cots - Infant

Description –

The baby-survival cot are for babies:

1. from 07 days to 18 months
2. up to a length of 838 mm.
3. up to a weight of 16.0 kgs.

The baby-survival cots have these main components:

1. Buoyancy and arch assembly.
2. Restrainer with 2 air apertures and 4 transparent windows.

The cover part of the restrainer is opened/closed with a sliding fastener across the middle from one side to the other side. The sliding fastener is covered by strips of clear PVC to make it water resistant, With the following features,

1. Strap with whistle and tether 3 meters.
2. Thermal waistcoat.
3. Gas inflation system (CO₂ cylinder).

Revision No	01	Revision Date	01 April 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 37

4. Oral inflation system is available to inflate the cot.
5. A water-activated light that is powered by a battery is attached to the cover of the restrainer.
6. When the baby-survival cot is in the water, the water pocket fills with water to give the cot more stability and float upright.

Pre Flight Checks/Serviceability Checks

Correct location/correct number/ correctly secured/clear of obstruction.

Operation -

Each baby-survival cot shows the instruction for its use:

1. Carefully remove the baby-survival cot from its fabric container, then unroll it. Get access to the inflation system.
2. Pull the red tab to inflate, this inflates the buoyancy chambers with gas from the attached inflation system.

CAUTION: ORAL INFLATION PRIOR TO GAS INFLATION WILL CAUSE EXCESSIVE PRESSURE AND MAY BURST THE COT.

3. If more or less pressure in the cot is necessary, use the oral inflation system.
4. If necessary, inflate the floor of the cot with the attached oral inflation tube, to give the baby more protection.
5. Lay the baby on its side with its head at the air aperture in the waistcoat.
6. Make sure that the baby lays correctly in the waistcoat and close the waistcoat.
7. Carefully tighten the adjustable strap and secure the buckle.
8. Close the cover of the restrainer with the sliding fastener.
9. Make sure that the strips cover the sliding fastener. This makes the sliding fastener water resistant.
10. Place the cot on the floor with infants head pointing AFT.
11. To prevent the cot from moving pass the adults feet through the carrying strap.
12. Use the strap to carry the cot by hand or over the shoulder.
13. Carry the cot to the exit and use the life line to lower the cot into the water.

Note: The life line of the Survival Cot/infant life jacket can be tied around the waist of an adult once out side the aircraft

Ground Evacuation-

It provides maximum protection when sent down the slide.


Ditching -

The infant has a better chance of survival in a floatation cot, than any other standard floatation device on board.


Precautions -

The cot should be inflated out of sight of the passengers. Ensure it is not damaged and fully inflated and rigid prior placing the infant

Revision No	01	Revision Date	01 April 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

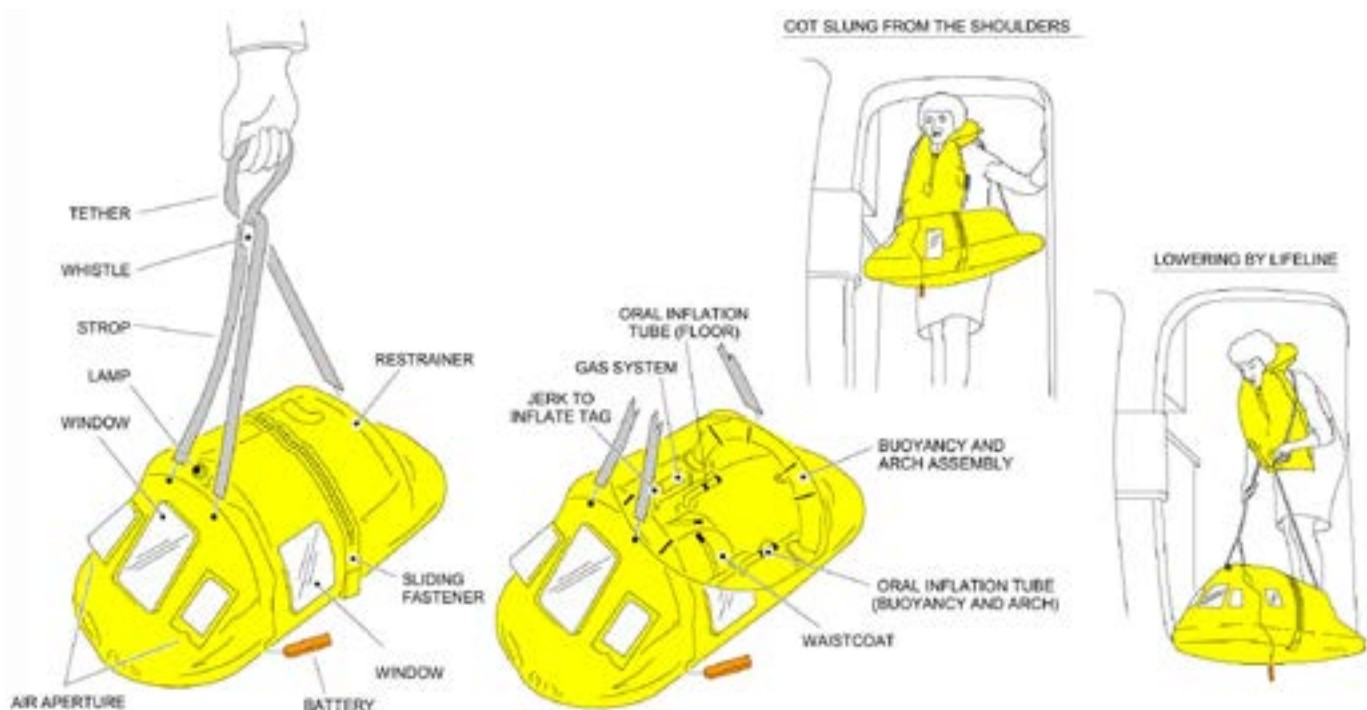

3.8.4 The Slide/Raft

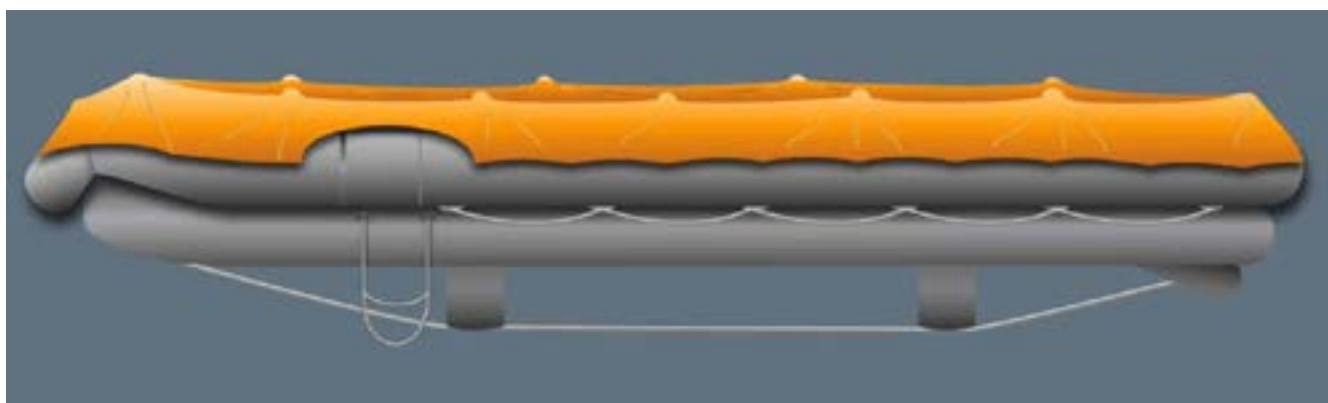

Description -

The Slide/Raft is a floating device which is designed for protection under extreme conditions. It inflates automatically when the door is opened in the ARMED mode.

The Slide/Raft includes,

- **Boarding Handle** - The boarding handles support passengers to climb into the slide raft.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 39

- **Boarding Ladder** - The boarding ladder is installed for passengers to climb into the slide raft.
- **Life Line** - Is a tape located above the water level between the two buoyancy tubes of the Slide/Raft. It continues lengthwise on both sides and provides assistance for survivors to hold on. It also could be used as an attachment point for signalling devices.
- **Heaving line/Ring** - A cord with a rubber ring attached used to retrieve survivors from the water. The line may be used to secure rafts together.
- **Ditching line/Re-Entry Strap** - It is also referred as the mooring line and avoids free fall of the slide when disconnected from the aircraft and its is attached to one of the upper tubes It can be used as a re-entry strap in the event of a land evacuation.
- **Manual inflation handle** - A red handle located at the right side at floor level, used for manual inflation of the slide raft.
- **Release handle** - A white handle located at the centre of the girt bar used to detach the slide raft from the door sill.
- **Safety Hook Knife** - A sharp metal device used to cut the ditching line when disconnecting the raft from the aircraft. Located in a pouch on the top buoyancy chamber.
- **No Fail Handles** - Four brightly coloured canvas tape handles located at the bottom of the slide raft. It shall be used to hold the raft to evacuate passengers when used as a hand held slide.
- **Lighting strip** - Is a strip illuminated to hi-light the sliding path located along the sliding path on both sides. It activates when the slide raft is deployed and would last as long as emergency lights last and the power line remains connected to the aircraft.
- **Locator lights** - Located on top of the canopy support tubes and powered by water activated batteries. It illuminates automatically when the raft is in contact with water and last for 8 hours.
- **Top up/off Valve** - It is a screw type valve located on both chambers to connect the hand pump.
- **Sea Anchor** - Made of nylon fabric attached with a cord and is located in a pouch at the doorsill end between the two buoyancy tubes. It minimizes the drift and improves raft stability. The length could be adjusted for stability and manoeuvring.

3.8.5 Slide/Raft Variance

The slide rafts at L2 /R2 are equipped with a boarding ramp to angle away from the aircraft engines.

3.8.6 Survival Equipment (Survival Kit)

Description -

It is a bright coloured zipper type canvas container installed in each slide-raft. The contents are as follows:

Mirror/Heliograph	Bailing bucket	First aid kit
Whistle	Sponge	Desalting kits
Signals/Mini flares	Hand pump	Food rations
Sea dye markers	Repair plugs	Plastic water bags
Flash light	Canopy	Survival Manual
Center Masts		

Revision No	01	Revision Date	01 April 2024
Prepared By	Cabin Safety Training	Approved By	CAASL


	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 40

3.8.7 Supplementary Raft Accessory Kit (SRAC)

Description - It is a bright yellow coloured bag. Contents as follows:

Water Storage Bag	05
Reverse Osmosis Pump	01
Flashlight (Alkaline)	01
Flares	04
Emergency Rations (2000 Calories)	05

3.8.8 Reverse Osmosis Pump

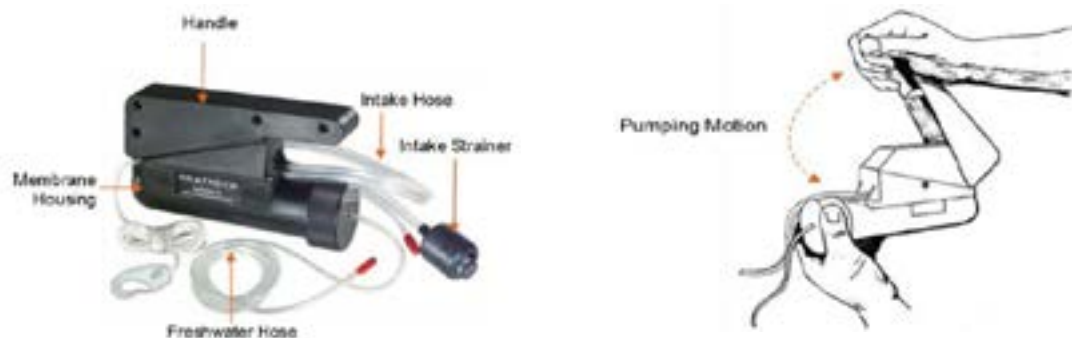

Is a simple hand activated fresh water-supplier with a suction and pump action. There are two tubes attached. The inlet tube is for salt water and outlet tube is for fresh water. It is able to convert over six gallons of sea water to drinking water.

Operation -

1. Pull back intake strainer, and attach the double hose.
2. Lower the strainer tube fully into the saltwater and place one hand under the end of the cap, the other hand over the end of the handle.
3. Pump up and down as far as it will go in each direction at a speed of 40 strokes per minute.

3.9 No Exit Cards

Description -

It is a self-adhesive sign with red luminous lettering.

Pre Flight Checks/Serviceability Checks

Correct number/correct location/correctly secured/clear of obstructions.

Operation -

1. 04 'NO EXIT' cards are provided and should be pasted as follows,
2. On the inoperative door
3. On the EXIT sign above the inoperative door

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 41

- On all EXIT signs leading to the inoperative door

3.10 Emergency Response Kit

Description -

It is used to handle a dangerous goods incident on board and contains,
A sponge/thick plastic bag/rubber bands/protective rubber gloves/blotting paper.

Pre Flight Checks/Serviceability Checks

Correct location/correct number/correctly secured/clear of obstructions.

Operation- Ref 10.18.4

3.11 Restraint Tie kit

Restraint Ties kit

- 2 thick restrain straps
- 4 thin restrain straps
- 1 pair of scissors

Description

(thick strap) two items. It is a hard plastic tape with a serrated side and a smooth side



Operation - (thick strap)

- Place one hand through the loop up to the wrist and draw down the thick strap.
- Take the arms behind the passenger and insert the other hand and tighten.
- The straps are self-locking and have to be cut for removal.
- Care should be taken when tightening and removing to prevent injury.

Description - (thin strap)

- four items. It is a hard plastic type with a serrated side and a smooth side.

Pre Flight Checks/Serviceability Checks

Correct number/correct location/correctly secured/clear of obstructions and the scissors included.
Precautions- Do not use the ties as a tourniquet. Once restraint straps are drawn down they cannot be loosened.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 42

Usage

1. The pair of thick restraints to be used to secure the hands behind (seat belt to be fastened making the passenger further unmovable)
2. The other restraints could be used for legs if necessary
3. It may be required to obtain assistance from an able bodied passenger when restraining an unruly passenger.

CAUTION : DO NOT USE THE TIES AS A TOURNIQUET. ONCE RESTRAINT STRAPS ARE DRAWN DOWN, THEY CANNOT BE LOOSENEED

Location - A330 R4 Stowage Compartment

3.12 Aisle Chair

Description -

It is a foldable wheel chair which can be manoeuvred in the aisle to transport a person to the lavatory or to an exit during boarding/disembarking.



TYPE "A" - OPERATION

1. Pull the chair upright until locked in position
2. Adjust the foot rest
3. Two braking devices are located at the rear of the aisle chair
4. To Stow the aisle chair
5. Pull the black release cord across at the bottom of the chair



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 43

TYPE “B” - OPERATION

1. Pull the chair upright until locked, if not push the orange handle located at the bottom of the chair
2. Adjust the foot rest and secure seat belts
3. Two braking device are located above the rear wheels
4. To Stow the aisle chair,
5. Pull the orange pull handle until the chair collapses

3.13 Cabin Defects Log Book

Description -

Cabin Defects Log book is retained on board to record unserviceable/used or missing equipment in the aircraft cabin, galleys and lavatories but not limited to.

Above observations shall be recorded/signed and dated in the cabin defects log book by the CCMs. All CCMs are responsible to inform the Purser of any observations that are detected pre-flight, during flight and post flight.

Discrepancies on the quantity as per the MEL, of safety and survival equipment shall also be recorded as soon as observed. The Engineer on duty shall comment on all entries prior to signing of the aircraft for airworthiness.

Differed Defects (D/D) -

D/D is when a defect is permitted to be differed and the aircraft is permitted to fly with the defect for a pre-determined period.

Procedure for entering cabin defects log

The Purser shall record all cabin defects with the date and signature.

Entries shall be precise with the nature of the defect, factual and detailed information shall be stated when making an entry.

Engineers shall review the cabin defects log at the end of each flight in order to rectify the defect.

Those defects classified in the MEL as “NO GO” shall be rectified prior to departure.

Whenever safety equipment is used it shall be logged in the cabin defects log with details and location for replacements.

When the cabin defects log book is changed, the new log book shall carry forward the pending defects.

3.14 First Aid Kits

3.14.1 First Aid Kit

Description -

Carried on the aircraft for First Aid and minor medical ailments.

Requirement - 01 First Aid kit for every 100 passengers

Pre-Flight Check/Serviceability Checks

Correct location/correct number/correctly secured/clear of obstructions/seal intact.

Contents Ref 9.14

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 44

3.14.2 Emergency Medical Kit (A10)

Description -

Carried on the aircraft for Major Medical Emergencies and is under the purview of the PIC. It can be used only by a qualified, Medical Practitioner/Paramedic or a Nurse.

Contents Ref 9.15

3.14.3 Automated External Defibrillator (AED)



Description –

Carried on the aircraft to revive persons with a cardiac arrest.

A battery operated electronic defibrillator with an automated voice command for usage .

Pre-Flight Check

Correct location/correctly secured/clear of obstruction.

Serviceability Checks

Check on the status indicator - flashing (hour glass) or Green LED flashing

Items included.

1. AED battery / 01
2. AED memory card / 01
3. Heart pad adult / 01
4. Heart pad child & infant / 01
5. ECG leads (03 cables) / 01 set
6. ECG electrodes / 03 / 01 set
7. Red box

Precautions

Ensure the patient is placed on a dry surface and no part of the first aider is in contact with the patient when the shock is delivered.

Operation Ref 9.12

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 45

3.14.4 Resuscitator Vent Aid Kit (RVAK)

Description -

It is designed for mouth-to mask ventilation for adult/child or infant. It is a heart shaped flexible transparent mask designed to fit the nose and mouth. It has a detachable one-way valve and should be used by a trained person.

A pair of rubber gloves are stowed with it.

Pre Flight Checks/Serviceability Checks

1. Correct location/correct number/correctly secured/clear of obstructions.
2. Instructions leaflet placed in the packing.

Operation- Administering procedure, Ref 9.4



3.14.5 AMBU Resuscitator

Air-Shields Manual Breathing Unit/Resuscitator (Ambu Bag)



Description –

The Ambu bag is a F/Aid equipment held and operated by hand to provide continuous oxygen to a person. It is a hollow bag with a transparent re-breather bag. A detachable mask and oxygen tubing with one free end attached to the Ambu bag.

Pre Flight Checks/Serviceability Checks

correct location/correct number/correctly secured/clear of obstructions

Precaution

- Page for a medical practitioner
- Don protective gloves

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 46

- Ensure the face mask is connected to the bag and the bag is connected to the oxygen tube.
- If patient vomits, remove mask and clear patient's airway
- Clear the mask assembly of foreign material
- Re-apply mask to the patient and continue ventilation.

Operation- Administering procedure, Ref 9.5

3.15 Cabin Safety Minimum Equipment List

Operator Policy

The following shall be maintained as Srilankan Airlines policy for the safety equipment to be carried in the aircraft.

A330	NUMBER INSTALLED	MINIMUM FOR DISPATCH/ EX OTHER STATIONS
Oxygen	14	08
Extinguishers	08	05
Pbe	13/11- 4R ALH	08
Elt	02	02
Megaphones	02	02
First Aid Kit	04	04
Emergency Medical Kit (A10)	01	01
Axe	02	02
Protective Gloves	02 Pairs	
Infant L/V	20 (3 At each exit L/H -- 2 at each exit R/H)	For every infant
Kangaroo Belts	20	For every infant
Spare S/Belt	01	
Survival Cots	04	
Torches	1 each at each CAS	08
Adlt/Child L/V	05	
Srak/Survival Packs	06/08	
Ambu Bag	01	
Aed	01	
Erk	01	01

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 47

3.15.1 Portable O2 bottles

4 litres per minute for 75 min - 2ltrs per minute for 150 min

Number required to dispatch an air craft ex- base – 14 bottles at 1500 PSI

Number required for dispatching an air craft ex-en route stations

6 bottles at 1000 PSI /2 bottles at 500 PSI

EX base - the minimum required bottles of Oxygen shall be 14 (wide body)

3.15.2 Hand Set (With the PA system functioning)

Required for dispatch 8 - One each at every exits.

One or more hand sets may be inoperative provided that one hand set is operative at each pair of exit doors. Alternate, normal and emergency procedures shall be established in consultation with the PIC for the use of one hand set per pair of exits if required. In the event L1 PA system is inoperative – The Purser shall define the hand set used when required and communicate to the PIC/ Cabin crew and document same.



CAUTION : DO NOT TWIST THE CORD, NOR EXTEND THE CORD MORE THAN ONE METER. THIS MAY DAMAGE THE CORD AND RESULT IN HANDSET MALFUNCTION.

3.15.3 Master Minimum Equipment List (MMEL)

Established by the aircraft manufacturer for the specific aircraft type. A list established for a particular aircraft type by the manufacturer with the approval of the state of manufacturer containing items, which is permitted to be unserviceable at the commencement of a flight. The MMEL may be associated with special operating conditions, limitations or procedures. The MMEL is located in the flight deck. In the event an item/s on the MMEL malfunctions or not limited to, during flight the PIC shall be informed for guidance.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 48

3.15.4 Minimum Equipment List (MEL)

MEL provides information for the operation of an aircraft, subject to specified conditions with particular equipment inoperative. It is compiled by the operator and approved by CAASL (Authority) in conformity with or more restrictive than the MMEL.

The MEL contains the items or components, the repair category, the quantity per aircraft, the dispatch minimum, the qualifying conditions and the operational procedure.

The PIC shall use the MEL when required to confirm the dispatching minimum, the qualifying conditions and operating procedures.

The PIC may over ride the minimums depicted in the CCM SEP Manual for dispatch guided by the MEL within the regulatory requirements.

The MEL is located in the flight deck.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 49

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 50

3.16 Reference Codes on Location Charts


C 1 L	Refer to LH coat closet
C 1 R	Refer to RH coat closet
Galley G8/G7	Refer to galley number
VCC b/h	Video control centre / bulk head
G2R b/h	RH galley G2 / bulk head
C2C	Compartment – reference to the compartment number
C2C-02	Compartment – reference to the compartment number
C2C-13	Compartment – reference to the compartment number
CAS	Cabin Attendant Seat

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

3.17 A330 - ALT Safety Equipment Location Chart

Portable Oxygen (14)			Emergency Torch (11)			First Aid Kits (04)			
L1	Stowage compartment	01	L1	Compart. under the crew seat	01	R1	Stowage compartment	01	
L1	Stowage compart. Next to L1 Seat	02	L1A	Compart. under the crew seat	01	R2	Over Head Compart. 21HK	01	
R1	Stowage compartment	01	R1	Compart. under the crew seat	01	R3	Over Head Compart. 39HK	01	
L2	Overhead Compart. 21DE	02	L2	Compart. under the crew seat	01	R4	Over Head Compart. 51HK	01	
R2	Overhead Compart. 21FG	02	L2A	Compart. under the crew seat	01	Survival Kits (06)			
L3	Top of Doghouse 38AC	01	R2	Compart. under the crew seat	01	L1/R1	Stowage compartment	01 each	
R3	Top of Doghouse 38HK	01	R2A	Compart. under the crew seat	01	L2/R2	Over Head Compart, 21AC, 21HK	01 each	
L4	Stowage compartment	02	L3	Compart. under the crew seat	01	L4/R4	Over Head Compart. 51AC, 51HK	01 each	
R4	Stowage compartment	02	R3	Compart. under the crew seat	01	Heat Resistant Gloves (02)			
Protective Breathing Equipment (PBE) (11)			L4	Compart. under the crew seat	01	L1	Stowage compartment	01	
L1	Adjacent to crew seat	01	R4	Compart. under the crew seat	01	R4	Over Head Compart. 52EG	01	
L1A	Above the crew seat	01	Megaphone (02)			Manual Release Tools (11)			
R1	Above the crew seat	01	L1	Mounted to the wall at L1	01	Compart. under the crew seat		01each	
L2	Above the crew seat	01	L4	Stowage compartment	01	AMBU Bag/RVAK (01+01)			
L2A	Above the crew seat	01	Crash Axe (01			L3	Over Head Compart. 39AC	01 each	
R2	Above the crew seat	01	R4	Storage Compartment	01	Spare Seat Belts			
R2A	Above the crew seat	01				R1	Stowage compartment	02	
L3	Adjacent to crew seat	01	Kangaroo belts (20)			L4	Over Head Compart. 52DE	03	
R3	Adjacent to crew seat	01	L2	Over Head Compartment 21AC	10	Emergency Response Kit (01)			
L4	Above the crew seat	01	L4	Over Head Compartment 52DE	10	R2	Overhead Compart. 21HK	01	
R4	Above the crew seat	01	Spare Adults Life Vest (05)			Demo Kits (08)			
Extinguishers (08)			R4	Over Head Compartment 52EG	05	L1/R1	Stowage compartment	01 each	
L1A	Compart. under the crew seat	01				L2/R2	Overhead Compart, 21DE, 21FG	01 each	
R1	Compart. under the crew seat	01				L3/R3	Overhead Compart. 39DE, 39FG	01 each	
L2	Compart. under the crew seat	01	Emergency locator Transmitter (02)			L4/R4	Stowage compartment	01 each	
R2	Compart. under the crew seat	01	R1	Narrow compt. oppsite R1	01	NO EXIT/LAV INOP Stickers (4+2)			
L3	Compart. under the crew seat	01	L4	Stowage compartment	01	L1	Stowage compartment	04/02	
R3	Compart. under the crew seat	01	Baby Survival Cot (04)			Restraint Kit			
L4	Compart. under the crew seat	01	L3	Over Head Compartment 39AC	02	R4	Stowage compartment	01	
R4	Compart. under the crew seat	01	R3	Over Head Compartment 39HK	02	Infants Life Vest (20)			
						L1	Stowage compartment	03	
Flight Deck Equipment						R1	Stowage compartment	02	
Quick Donning Mask		04	AED (coat closet)			01	L2	Overhead Compart. 21AC	03
Extinguisher (behind PIC seat)		01	Emergency Medical Kit (A10) (coat closet)			01	R2	Overhead Compart. 21HK	02
Crew life jackets		04	AXE (Coat Closet)			01	L3	Overhead Compart. 39AC	03
PBE (behind Capt. seat)		02	Heat Res. Gloves (behind FO)			01	R3	Overhead Compart. 39HK	02
Emergency Flash Light (Next to Seat)		03	ESCAPE ROPE Each above (PIC & FO seat)			02	L4	Stowage compartment	03
							R4	Stowage compartment	02

3.17.1 A330 ALT Safety Equipment Location Diagram

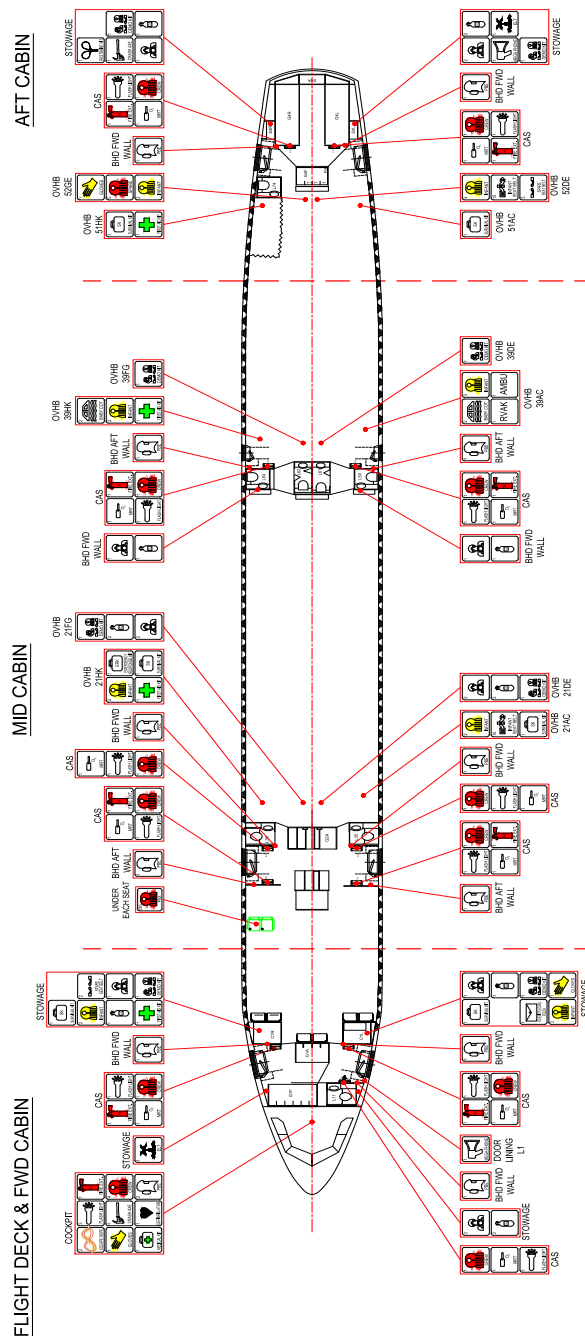

NOTES

- ONE LIFE/JACKET TO BE INSTALLED AT EACH PAX SEAT PLACE INSIDE THE PROVIDED LOCATION
- ONE SAFETY INSTRUCTION CARD TO BE INSTALLED AT EACH PAX SEAT PLACE INSIDE THE PROVIDED LOCATION
- PORTABLE OXYGEN BOTTLE EACH TO HAVE TWO MASK ATTACHED. ONE MASK TO BE CONNECTED TO BOTTLE AND ANOTHER ONE MUST STOWED IN STOWAGE BAG
- EACH DEMO KIT CONTAIN
 - 1 DEMO LIFE VESTS
 - 1 DEMO OXYGEN MASKS
 - 1 DEMO SAFETY BELT
- NO EXIT PLACARD POUCH CONTAINS QTY 04 "NO EXIT" PLACARDS / THE INSTALLATION DRAWING & QTY 02 OF "DO NOT OCCUPY" PLACARD


SYMBOL	DESCRIPTION
	DEFIBRILLATOR KIT
	RESTRAINT KIT
	NO EXIT PLACARD
	ESCAPE ROPE
	FIRST AID KIT
	RESUSCITATOR VENT AID KIT
	AMBU POUCH
	EMERGENCY RESPONSE KIT
	SURVIVAL KIT
	MEDICAL KIT
	MEGAPHONE
	PROTECTIVE BREATHING EQUIP.
	PORTABLE ELT - ELTA
	MANUAL RELEASE TOOL
	FLASHLIGHT
	BABY SURVIVAL COT
	DEMO KIT
	FIRE GLOVES
	CRASH AXE
	PORTABLE FIRE EXTINGUISHER
	OXYGEN BOTTLE & MASK
	OXYGEN MASK
	CREW LIFE VEST
	PAX LIFE VEST
	SPARE LIFE VEST
	INFANT LIFE VEST
	SPARE SEAT BELT
	INFANT SEAT BELT

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

3.18 A330 - ALH Safety Equipment Location Chart

Protective Breathing Equipment (PBE) (11)			Supplementary Raft Accessory Kits (08)			Passenger Life Jackets (Cabin)		
R1	Over Head Compartment (1HK)	03	L1 /R1	Overhead compartment	02	BC	Compartment at the center	01
L2	Above the crew seat	01	L2 /R2	Overhead compartment	02	EY	In a pouch under each seat	01
R2	Above the crew seat	01	L3/R3	Overhead compartment	02	Crew Life Jackets (11)		
L3	Over Head Compartment	01	L4/R4	Overhead compartment	02	Compartment under crew seat		
R3	Over Head Compartment	01	Restraint kit (01)			Kangaroo Belts (20)		
L4	Stowage compartment	02	R4	Stowage compartment	01pac	L2	Overhead compartment	10
R4	Stowage Compartment	02	Emergency Flashlight (11)			L4	Overhead compartment	10
Portable Oxygen (14)			L1	Side wall adjacent to crew seat	02	Baby Survival Cots (04)		
L1	Compartment next to crew seat	02	R1	Compartment under crew seat	01	L3	Overhead compartment	02
L2	Doghouse (3D)	02	L2 /R2	Compartment under crew seat	02	R3	Overhead compartment	02
R2	Doghouse (3G)	02	L3/R3	Compartment under crew seat	02	Emergency locator Transmitter (02)		
L3	Doghouse (38DE)	02	L4/R4	Compartment under crew seat	04	L1	Overhead compartment	01
R3	Doghouse (38FG)	02	Manual Release Tools (11)			L4	Overhead compartment	01
L4	Doghouse (63AC)	02	Compartment under each crew seat			Resuscitator Vent Aid Kit and AMBU Bag		
R4	Doghouse (63HK)	02	First Aid Kits (04)			L3	Narrow overhead compartment	01
Extinguishers (08)			R1	Overhead stowage compart	01	Crash Axe (01)		
L1	Compartment under the C/Seat	01	R2	Overhead stowage compart	01	R4	Stowage compartment	01
R1	Compartment under the C/Seat	01	R3	Overhead stowage compart	01	Megaphone (02)		
L2	Compartment under the C/Seat	01	R4	Overhead stowage compart	01	L1	Sidewall adjacent to crew seat	01
R2	Compartment under the C/Seat	01	Infant Life Jackets (20)			L4	Overhead compartment	01
L3	Compartment under the C/Seat	01	L1/L2/L3/L4 Overhead compartment 3 each			NO EXIT/LAV INOP Stickers (4+4)		
R3	Compartment under the C/Seat	01	R1/R2/R3/R4 Overhead compartment 2 each			L1	Overhead compartment (1AC)	04
L4	Compartment under the C/Seat	01	Adult Life Jackets (05)			Heat Resistant Gloves (02)		
R4	Compartment under the C/Seat	01	R4	Stowage compartment	05			
Spare seat belt (01)			Emergency Response Kit (ERK) (01)			R1	Compartment under crew seat	01
L4	Overhead compartment (63AC)	01	R2	Overhead compartment	01	R4	Compartment under crew seat	01
			Flight Deck Equipment					
			Quick Donning Mask			04	Defibrillator (AED)(coat closet)	01
Demo Kits (08)			Axe (behind 2nd observer seat)			01	Emergency Medical Kit (A10) (coat closet)	01
L1/R1	Overhead compart. 01 each	02	Extinguisher (behind PIC seat)			01	Escape Rope	02
L2/R2	Overhead compart. 01 each	02	Extinguisher (Avionics Bay)			01	Heat: Resistance Gloves	01
L3/R3	Overhead compart. 01 each	02	PBE (behind PIC seat)			02	Emergency Flashlight	02
L4/R4	Overhead compart. 01 each	02	Crew Life Jackets			04		

3.18.1 A330 - ALH Safety Equipment Location Diagram

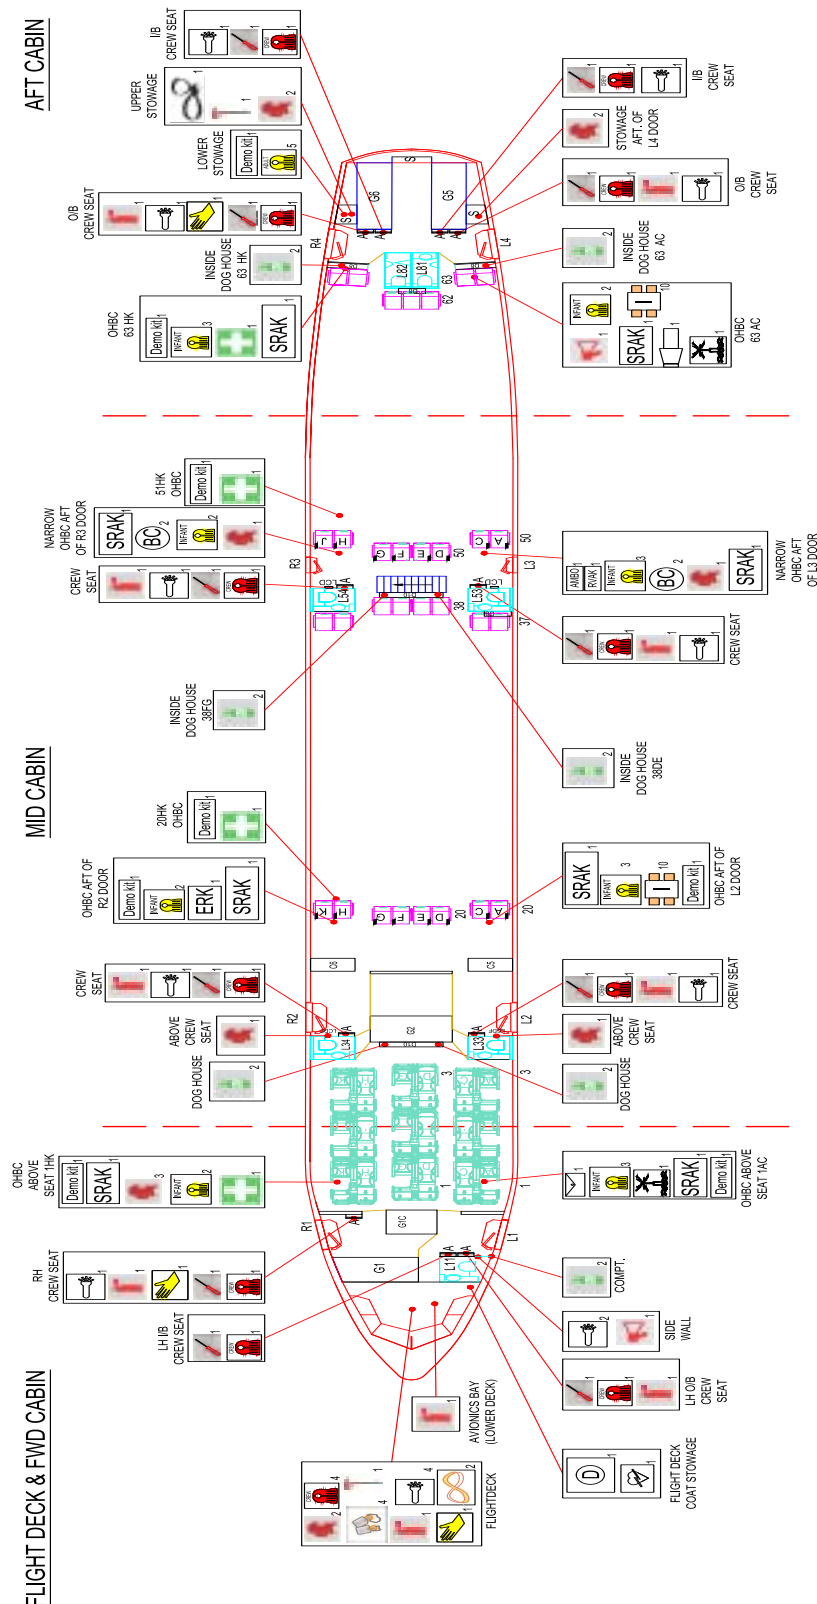

SYMBOL	DESCRIPTION
	BABy SURVIVAL COTS
	EMERGENCY RESPONSE KIT
	DOCTORS/MEDICAL KIT
	SUPPLEMENTARY RAFT ACCESSORY KIT
	DEFIBRILLATOR
	INFANT LIFE JACKET
	OXYGEN BOTTLE
	NO EXIT PLACARD POUCH
	ELT
	INFANT SEAT BELT
	MEGAPHONE
	MANUAL RELEASE TOOL
	DEMO KIT
	FIRST AID KIT
	RESUSCITATOR VENT AID KIT & AMBO
	RESTRAINT KIT
	CREW LIFE JACKET
	FIRE PROOF GLOVES PAIR
	SPARE LIFE JACKET
	EMERGENCY FLASH LIGHT
	SPARE SEAT BELT
	ESCAPE ROPE
	QUICK DONNING MASK
	EMERGENCY CRASH AXE
	BCF EXTINGUISHER
	SMOKE HOOD
	RESUSCITATOR VENT AID KIT

NOTES


- ONE LIFE/JACKET TO BE INSTALLED AT EACH PAX SEAT PLACE INSIDE THE PROVISIONED LOCATION
- ONE SAFETY INSTRUCTION CARD TO BE INSTALLED AT EACH PAX SEAT PLACE INSIDE THE PROVISIONED LOCATION
- OXYGEN BOTTLE EACH TO HAVE MASK ATTACHED
- EACH DEMO KIT CONTAIN
 - * 1 DEMO LIFE VESTS
 - * 1 DEMO OXYGEN MASKS
 - * 1 DEMO SEAT BELTS
- NO EXIT PLACARD POUCH CONTAINS QTY 04 "NO EXIT" PLACARDS

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

3.19 A330 - ALL/M/N/O/P/Q/R Safety Equipment Location Chart

Protective Breathing Equipment (PBE) 13			Extinguishers 08			Adult Life Jackets 05		
L1	Stowage compart S1 L	02	L1	Compartment under crew seat	01	R4	Overhead compartment 65HK	05
L1B	Above crew seat	01	R1	Compartment under crew seat	01	Passenger Life Jackets		
R1	Above the c/seat	01	L2	Compartment under crew seat	01	BC	Compartment at each seat	01
L2	Above the FWD c/seat	01	R2	Compartment under crew seat	01	EY	In a pouch under each seat	01
L2B	By The Side of crew seat	01	L3/R3	Compartment under crew seat	02	Crew Life Jackets 13		
R2	Above the c/seat	01	R4/R4	Compartment under crew seat	02	Compartment under each c/seat		
L3	By The Side of crew seat	01	Emergency Flashlights 13					
R3	By The Side of crew seat	01	L1	Mounted on the wall adj. to c/seat	02	Kangaroo Belts 20		
L4	Above the c/seat	02	L1B	Above the c/seat AFT	01	L2	Overhead compartment above 20AC	10
R4	Above the c/seat	02	R1	Above c/seat	01	L4	Stow age compart S4L	10
Portable Oxygen 14			L2A	Above the AFT c/seat	01			
L1	Stowage compart S1 L2	02	L2/R2	Above FWD c/seat	02	Baby Survival Cots 04		
R1	Stowage compart S1 R	02	L3/R3	Above the c/seat	02	L3	Overhead compartment above 50AC	
L2	Overhead compartment above 20AC	02	L4/R4	Above the c/seat	02	R3	Overhead compartment above 50HK	
R2	Overhead compartment above 20HK	02	L4A/R4A	Above the c/seat	02	Emergency Locator Transmitter (ELT) 02		
L3	Overhead compartment above 50AC	01	Manual Release Tools 13			L1	Stow age compart S1L2	01
R3	Overhead compartment above 50HK	01	Compartment under each crew seat			L4	Stow age compart S4L	01
L4	Doghouse fwd of S4L	02	Infant life Jackets 20					
R4	Doghouse fwd of S4R	02	L1	Stowage compart S1	03	RVAK (01)/AMBU (01)		
First Aid Kits 04			R1	Stowage compart S1	02	L3	Overhead compartment above seat	01
R1	Stowage compart S1R	01	L2	Overhead compartment above 20AC	03			
R2	Overhead compartment 21HK	01	R2	Overhead compartment above 20HK	02	Megaphones 02		
R3	Overhead compartment 50HK	01	L3	Overhead compartment above 50AC	03	L1	Side wall adjacent to c/seat FWD	01
R4	Overhead compartment 65HK	01	R3	Overhead compartment above 50HK	02	L4	Stow age compart S4L	01
Supplementary Raft Accessory Kits 08			L4	Stowage compart S4L	03			
L1	Stowage compart S1 L2	01	R4	Overhead compartment 65HK	02	NO EXIT Placards (in a pouch)		
R1	Stowage compart S1R	01	Crash Axe 01			L1	Stowage compart S1 L2	04
L2	Overhead compartment above 20AC	01	R4	Stowage compart AFT door R4	01	Spare seat belt 3		
R2	Overhead compartment above 20HK	01	Seat belt extensions 03			L4	Overhead compartment S4L(Reg belt)	01
L3	Overhead compartment above 37AC	01	R1	Stowage compart S1R	03	L4	Overhead compartment S4L (Y belt) LH/RH	01/01
R3	Overhead compartment above 35HK	01	Restraint kit (01)			Emergency Response Kit (ERK) 01		
L4	Stowage compart S4L	01	R4	Stowage compart	01 pac	R2	Over Head Compart 21HK	01
R4	Overhead compartment above 65HK	01						
Heat Resistant Gloves 02								
R1	Compartment under the c/seat	01	Flight Deck Equipment					
R4	Compartment under the c/seat	01	Quick Donning Mask			04	AED (coat closet)	01
Demo Kits 08			Extinguisher (behind Capt. seat)			01	Emergency Medical Kit (A10) (coat closet)	01
L1/R1	Stowage compart S1	01 each	Extinguisher (Avionics Bay)			01	AXE (behind 1st officer seat)	01
L2/R2	Overhead compartment	01 each	PBE (behind Capt. seat)			01	Heat Res Gloves (behind PIC)	01
L3/R3	Overhead compartment	01 each	PBE (behind 1ST officer seat)			01	Emergency Flashlights (side console)	02
L4	Stowage compart	01	Crew life jackets			04	ESCAPE ROPE	02
R4	Overhead compartment	01					01 each above Capt. & F/O seat.	

3.19.1 A330 - ALL/M/N/O/P/Q/R Safety Equipment Location Diagram

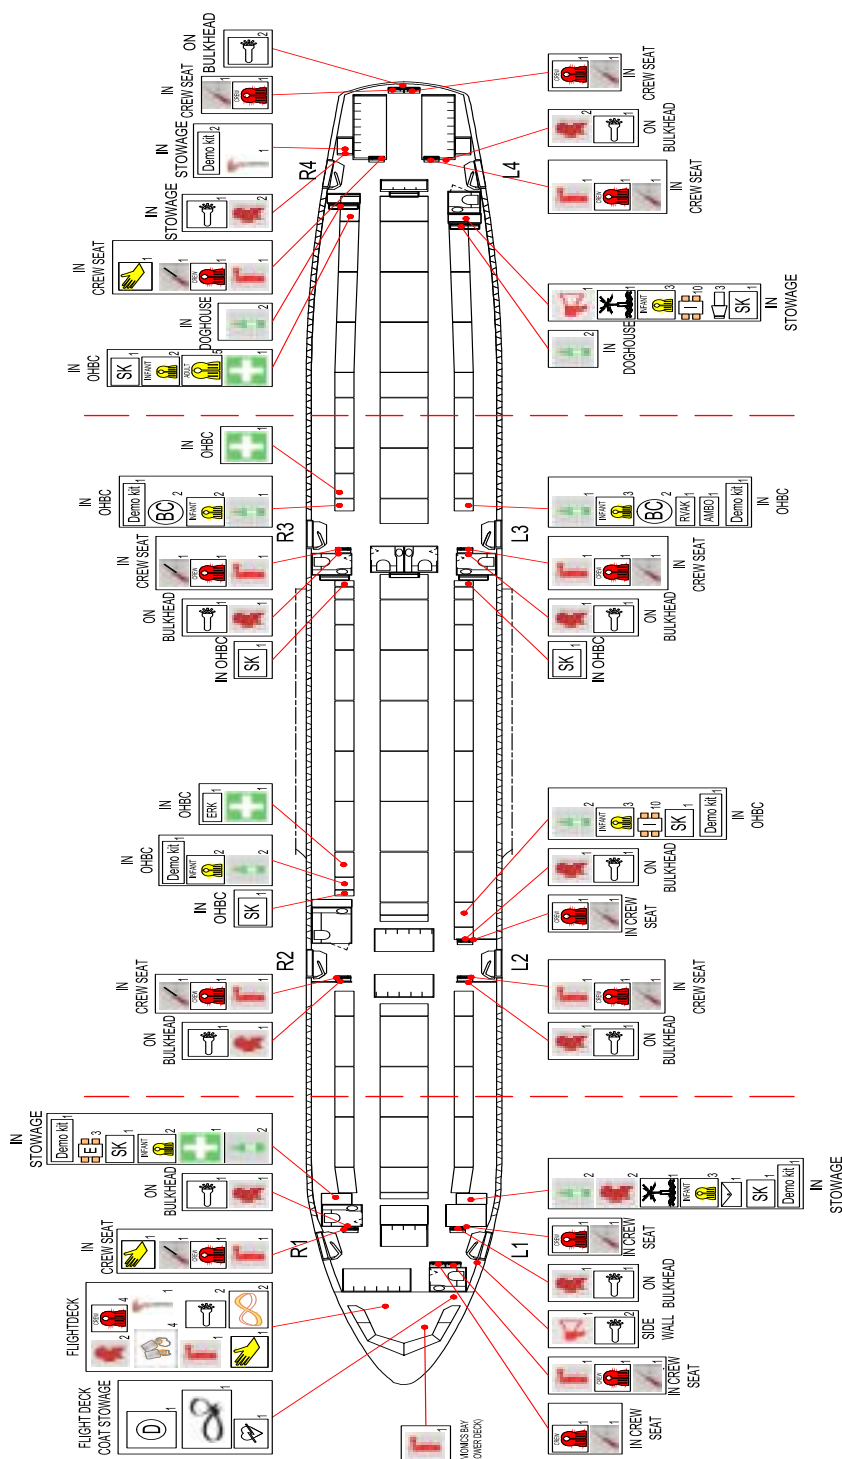

SYMBOL	DESCRIPTION
	BABY SURVIVAL COTS
	EMERGENCY RESPONSE KIT
	DOCTORS/MEDICAL KIT
	SURVIVAL KIT
	DEFIBRILLATOR
SYMBOL	DESCRIPTION
	INFANT LIFE JACKET
	OXYGEN BOTTLE
	NO EXIT PLACARD POUCH
	ELT
	INFANT SEAT BELT
	SEAT BELT EXTENSIONS
SYMBOL	DESCRIPTION
	MEGAPHONE
	MANUAL RELEASE TOOL
	DEMO KIT
	FIRST AID KIT
	AMBO POUCH
SYMBOL	DESCRIPTION
	RESTRAINT KIT
	CREW LIFE JACKET
	FIRE PROOF GLOVES PAIR
	SPARE LIFE JACKET
	EMERGENCY FLASH LIGHT
	SPARE SEAT BELT
SYMBOL	DESCRIPTION
	ESCAPE ROPE
	QUICK DONNING MASK
	EMERGENCY CRASH AXE
	BCF EXTINGUISHER
	SMOKE HOOD
	RESUSCITATOR VENT AID KIT

NOTES

- ONE LIFEJACKET TO BE INSTALLED AT EACH PAX SEAT PLACE INSIDE THE PROVIDED LOCATION
- ONE SAFETY INSTRUCTION CARD TO BE INSTALLED AT EACH PAX SEAT PLACE, INSIDE THE PROVIDED LOCATION
- OXYGEN BOTTLE EACH TO HAVE MASK ATTACHED
- EACH DEMO KIT CONTAIN
 - * 1 DEMO LIFE VESTS
 - * 1 DEMO OXYGEN MASKS
 - * 1 DEMO SEAT BELTS
- NO EXIT PLACARD POUCH CONTAINS QTY 04 "NO EXIT" PLACARDS

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

3.20 A330 - ALS Safety Equipment Location Chart

Portable Oxygen (14)			Emergency Torch (12)			First Aid Kits (04)		
L1	Stowage compart (Coat Closet)	02	L1	Compartment under the crew	01	R1	Over Head Compartment	01
R1	Stowage compart (Coat Closet)	02	L1A	Compartment under the crew	01	R2	Over Head Compartment	01
L2	Top Stowage compartment	02	L1B	Next To Crew Seat	01	R3	Over Head Compartment	01
R2	Top Stowage compartment	02	R1	Next To Crew Seat	01	R4	Over Head Compartment	01
L3	Over Head Compart at 37A/C	01	L2	Compartment under the crew	01	Supplementary Raft Accessory Kits (08)		
R3	Over Head Compart ay 37H/K	01	R2	Compartment under the crew	01	L1/R1	Over Head Compartment	01
L4	Top Stowage compartment	02	L3	Compartment under the crew	01	L2/R2	Over Head Compartment	01
R4	Top Stowage compartment	02	R3	Compartment under the crew	01	L3/R3	Over Head Compart 37A/C 37H/K	01
Protective Breathing Equipment (PBE) (12)			L4	Compartment under the crew	01	L4/R4	Over Head Compartment	01
L1	Compart Next to L1 Crew Seat	02	R4	Compartment under the crew	01	Heat Resistant Gloves (02)		
L1B	Above the crew seat	01	L4A	Compartment under the crew	01	R1	Compartment under the crew	01
R1	Above the crew seat	01	R4A	Compartment under the crew	01	R4	Compartment under the crew	01
L2	Above the crew seat	01	Megaphone (02)			Manual Release Tools (12)		
R2	Above the crew seat	01	L1	Mounted to the wall at L1	01	Compartment under the crew		
L3	Above the crew seat	01	L4	Over Head Compartment	01	AMBU Bag/RVAK (01+01)		
R3	Above the crew seat	01	Infants Life Vest (20)			L3	Over Head Compartment	01
L4	Storage Compartment	01	L1/L2/L3/L4 Overhead compartments			Spare Seat belts (02)		
L4	Above the crew seat	01	R1/R2/R3/R4 Overhead compartments			L4	Over Head Compartment	02
R4	Storage Compartment	01	Kangaroo belts (20)			Emergency Response Kit (01)		
R4	Above the crew seat	01	L2	Over Head Compartment	10	R2	Overhead Compartment	01
Extinguishers (08)			L4	Over Head Compartment	10	Demo Kits (08)		
L1A	Compartment under the crew	01	Spare Adults Life Vest (05)			L1/R1	Overhead Compartment	01 each
R1	Compart Next to the wastebin	01	R4	Storage Compartment	05	L2/R2	Overhead Compartment	01 each
L2	Compartment under the crew	01	Emergency locator Transmitter (02)			L3/R3	Overhead Compartment	01 each
R2	Compartment under the crew	01	L1	Over Head Compartment	01	L4/R4	Overhead Compartment	01 each
L3	Compartment under the crew	01	L4	Over Head Compartment	01			
R3	Compartment under the crew	01	Baby Survival Cot			NO EXIT/LAV INOP Stickers (4+4)		
L4	Compartment under the crew	01	L3	Over Head Compartment 37A/C	02	L1	Over Head Compartment	04
R4	Compartment under the crew	01	R3	Over Head Compartment 37H/K	02	Restraining Ties (02+04)		
						R4	Storage Compartment	01
Flight Deck Equipment								
Quick Donning Mask	04		AED (coat closet)	01		Crash Axe (01)		
Extinguisher (behind PIC seat)	01		Emergency Medical Kit (A10) (coat closet)	01	R4	Storage Compartment	01	
Crew life jackets	04		AXE (Coat Closet)	01				
PBE (behind Capt. seat)	02		Heat Res Gloves (behind FO)	01				
Emergency Flash Light (Next to Seat)			ESCAPE ROPE	02				
			01 Each above (PIC & FO Seat)					

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 59

3.21 Flight Deck Equipment

No available	Item	Location
01	Extinguisher	Behind the PIC seat
01	Protective Breathing Equipment	Mounted behind the PIC seat
01	Crash Axe	Mounted on bulk head behind F/O seat
01	Emergency Medical Kit (A10)	Flight deck coat closet
01	AED	Flight deck coat closet
Pair	Heat resistant gloves	Behind the PIC seat
01	Automated External Defibrillator	Flight deck coat closet

3.22 Specific Equipment Locations

CCMs Designated Portable Bottles of Oxygen

CCM	ALH	A330 - 300	ALS	ALT
L1	Compart adjacent to L1 crew seat	Stowage Compartment S1L2	L1 Coat Closet	Compartment adjacent to the L1 crew seat
R1	Compart adjacent to L1 crew seat	Stowage Compartment S1R	R1 Coat Closet	Stowage Compartment
L2	3 D Dog House	L2 Over Head Compartment	L2 Coat Closet	Overhead compartment 21DE
R2	3 G Dog House	R2 Over Head Compartment	R2 Coat Closet	Overhead compartment 21FG
L3	38 DE Dog House	L3 Over Head Compartment	L3 Overhead Comp: over 37 A/C	Above doghouse 38AC
R3	38 FG Dog House	R3 Over Head Compartment	R3 Overhead Comp: over 37 H/K	Above doghouse 38AC
L4	63 AC Dog House	Doghouse FWD of S4L	L4 Storage Compartment	Stowage Compartment
R4	63 HK Dog House	Doghouse FWD of S4R	R4 Upper - Storage Compartment	Stowage Compartment
S1	3G Dog House	Stowage Compartment S1R	L1 Coat Closet	51H - Compartment adjacent to the L1
S2	3 D Dog House	Stowage Compartment S1L2	R1 Coat Closet	Compartment adjacent to the L1 crew seat
S3	38 G Dog House	R2 Over Head Compartment	R2 Coat Closet	Overhead compartment 21FG
S4	38 D Dog House	L2 Over Head Compartment	L2 Coat Closet	Overhead compartment 21DE

Revision No	01	Revision Date	01 April 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 60

3.23 Aisle Chair

AIRCRAFT	LOCATION
ALH	Stowage compartment in front of Lavatory L54
A330-300	Aft of R2 door coat closet (Floor Level)
ALS	R2 Coat closet
ALT	L1 Stowage Compartment (Lower)

3.24 Quick Reference

Extinguishers	Range	Time	Fire	Checks
Halon	10 Feet	9 sec	all	seal/ pin yellow needle in green zone
BCF	10 Feet	9 sec	all	red-disc marked full intact
Helatron	10 Feet	9 sec	all	Plastic seal/Collar on the pin/yellow needle in green zone
signalling	time			remarks
ELT- 406S	civil/military-48hrs/ satel- lite-24hrs			As per safety equipment location chart
ELT- ADT 406 AP	civil/military-60hrs/ satel- lite-24hrs			As per safety equipment location chart manual activation switch
ELT- Kannad 406 AS	civil/military-48hrs satellite-24hrs			As per safety equipment location chart
Sea dye maker	30-40 mins			Survival kit
Flares				1 Orion flares 2 Mini flares
Dragger Smoke hood	15 mins			Seal's intact/mask not pressing against the win- dow/ box not damage
Air liquide' Smoke hood	15 mins			Green disc visible, security seal intac
SCOTT Smoke hood	15 mins			Humidity indicator luminous blue
Torches	4 hrs			LED -flashes every 4-6 sec's. security strap in- tact.
QRC	Under each Primary seat			Back up in the L 1 OHB

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 61

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SAFETY EQUIPMENT	Chapter 03
		Page 62

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 1

CHAPTER 04 **EMERGENCY PROCEDURES**

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 2

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 3

Contents

4.0 Emergency Procedures.....	11
4.1 Turbulent Weather.....	11
4.1.1 Light Turbulent Weather	11
4.1.2 Moderate Turbulent Weather	12
4.1.3 Severe Turbulent Weather	13
4.1.4 Unanticipated Severe Turbulent Weather	13
4.1.5 Anticipated Turbulence Weather Procedures.....	14
4.2 Cabin Pressurization/Oxygen System	14
4.2.1 Cabin/Galley/Lavatories - Fixed Oxygen System	14
4.2.2 Oxygen Masks Deployment	16
4.2.3 Activation of the Oxygen Flow.....	16
4.2.4 Inadvertent Deployment of Oxygen Masks	17
4.2.5 Flight Deck Oxygen System.....	17
4.3 Decompression	20
4.3.1 Types of Decompression	20
4.3.2 Slow Decompression	20
4.3.3 Rapid Decompression.....	20
4.3.4 Precautions.....	20
4.3.5 Announcements during a Decompression	21
4.3.6 Announcements Post Decompression.....	21
4.3.6.1 Oxygen mask not deployed.....	21
4.3.6.2 Oxygen mask deployed	21
4.3.7 Procedures during Slow Decompression	21
4.3.7.1 Emergency Descents	21
4.3.8 Post Slow Decompression Duties	22
4.3.8.1 The PIC Announcement	22
4.3.8.2 Purser/CCM Responsibilities	22
4.3.9 Procedures during Rapid Decompression.....	22
4.3.9.1 Emergency Descent.....	22
4.3.9.2 Oxygen Mask Deployed.....	23
4.3.10 Post Rapid Decompression Duties	23
4.3.10.1 Purser/CCM Responsibilities	23

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 4

4.3.11 Hypoxia and Its Effects.....	24
4.3.12 Time of Useful Consciousness (TUC)	24
4.4 Fire	25
4.4.1 Elements of Fire	25
4.4.2 Classes of Fire	25
4.4.3 Prevention of fire	26
4.4.3.1 Prevention of Cabin Fire	26
4.4.3.2 Prevention of Galley Fire	26
4.4.3.3 Prevention of Lavatory Fire	26
4.4.4 Fire Fighting Procedures and Techniques	26
4.4.4.1 Identifying a Fire	27
4.4.5 Fire Drill	27
4.4.5.1 Fire-fighting equipment	27
4.4.5.2 Fire Fighter	27
4.4.5.3 Communicator	27
4.4.5.4 Coordinator/s.....	28
4.4.5.5 Post-Fire Procedures	28
4.4.5.6 Types of Flash Fire.....	28
4.4.5.7 Cabin Smoke	28
4.4.6 Management of Specific Fires	28
4.4.6.1 Fire on a Person	28
4.4.6.2 Oven Fires	29
4.4.6.3 Waste Bin Fires	29
4.4.6.4 Seat upholstery (cushion) Fire.....	29
4.4.6.5 Seat Motor and IFE Fires	29
4.4.6.6 Curtain Fire	29
4.4.6.7 Carpet Fire	29
4.4.6.8 Electrical Panel/Light Fixtures Smoke	29
4.4.6.9 Cabin Baggage Fire.....	30
4.4.6.10 Cargo Compartment Fire.....	30
4.4.6.11 Electrical Fire.....	30
4.4.6.12 Lavatory Fire.....	30
4.4.6.13 Overhead Bin Fires	31
4.4.6.14 Hidden Fire/Inaccessible Fire	31
4.4.6.15 Engine Torching.....	32

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 5

4.4.6.15.1 Engine Fire	32
4.4.6.16 Auxiliary Power Unit Fire (APU)	32
4.4.6.17 Fuel Spills/Fires	32
4.4.6.18 Flight Deck Fires	32
4.5 Fuelling with Passengers	32
4.5.1 Flight Crew/Ground Engineer Responsibilities	32
4.5.2 Flight Dispatchers Responsibilities	32
4.5.3 Cabin Crew Responsibilities	32
4.5.4 Fuel Jettison (Dumping).....	32
4.6 Evacuation	33
4.6.1 Types of Evacuation	33
4.6.1.1 Prepared.....	33
4.6.1.2 Unprepared	33
4.6.2 Silent Thirty Second Review (STS).....	34
4.6.3 Land Evacuation at an Aerodrome	34
4.6.3.1 Away From an Aerodrome	34
4.6.4 Water Evacuation	34
4.6.4.1 Tidal Flats	34
4.6.5 Initiating an Evacuation	34
4.6.5.1 Initiation from the Flight Deck	35
4.6.5.2 Initiated From the Cabin (FAP) or AAP (If Availabe)	35
4.6.5.3 Initiated From Any CCM Station	36
4.6.5.4 Silencing the EVAC Command	36
4.6.5.5 Accidental Activation of an EVAC Command.....	36
4.7 Gate/Apron Emergencies	36
4.7.1 Conditions to Evacuate/ De-plane	36
4.7.2 Nose Gear Collapse	37
4.7.3 Main/Total Gear Collapse	37
4.8 Evacuation Commands.....	38
4.8.1 Emergency Landing	38
4.8.2 Inflated and Deflated Slide	38
4.8.3 Blocked Exit	39
4.8.4 Ditching	39
4.9 Prepared/Unprepared Emergency	39
4.9.1 Impending Emergency/Pilot Incapacitation	39

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 6

4.9.2 NITS Briefing	40
4.9.2.1 Following NITS Briefing	40
4.9.2.2 Cabin Crew Procedures Following The PIC's Call.....	40
4.9.3 Emergency Communication.....	40
4.9.3.1 Cabin to Flight Deck	41
4.9.3.2 Purser to CCMs.....	41
4.9.3.3 Effective Communication Skills	41
4.10 Preparation for an Emergency Landing	41
4.10.1 PIC- Emergency Landing Announcement	41
4.10.2 Emergency Preparation - Phase 1.....	42
4.10.2.1 Demonstration Announcement – Ground	43
4.10.2.2 Purser Announcement to Clear the Cabin	44
4.10.3 Emergency Preparation - Phase 2.....	44
4.10.3.1 Passenger Preparation	44
4.10.3.2 Responsibilities of Cabin Clearance.....	44
4.10.3.3. Selecting/Briefing ABPs - Prepared Emergency Landing.....	45
4.10.3.4 Selecting/Briefing ABPs- Unprepared Emergency Landing	46
4.10.3.5 Selecting/Briefing of Buddies – Prepared Emergency Landing	46
4.10.3.6 Re-Seating Of Passengers.....	46
4.10.3.7 Restrained Passengers.....	46
4.10.3.8 Cabin Preparation	47
4.10.3.9 Galley Preparation.....	47
4.10.4 Emergency Preparation - Phase 3	47
4.10.5 Commands Prior To Impact	47
4.10.6 Command for Evacuation	48
4.10.6.1 The Cabin Evacuation Process.....	48
4.10.7 Emergency Landing CCM Responsibilities	48
4.10.7.1 Prepared Emergency Landing Flight Crew Check List.....	49
4.10.7.2 Unprepared Emergency Landing Flight Crew Checklist.....	50
4.10.7.3 Prepared Emergency Landing Door Primary Checklist.....	50
4.10.7.4 Assessing Outside Conditions	51
4.10.7.5 Unprepared Emergency Landing Door Primary Checklist	52
4.10.7.6 Prepared/Unprepared Emergency Landing Door Assist Check List.....	52
4.10.8 Crowd Control.....	52
4.10.9 Use Of The Assist Space.....	52

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 7

4.10.10 Restrained Passengers	52
4.10.11 Post Evacuation CCM Responsibilities away from an aerodrome	52
4.10.12 Techniques to Slide	53
4.10.13 Evacuation of a stretcher passenger	53
4.10.13.1 Evacuation Techniques	53
4.11 Preparation for an Emergency Ditching	54
4.11.1 PIC's Emergency Ditching Announcement	54
4.11.2 Emergency Preparation - Phase 1	54
4.11.2.2 Purser Announcement to Clear the Cabin	56
4.11.3 Emergency Preparation - Phase 2	56
4.11.3.1 Passenger Preparation	56
4.11.3.2 Cabin Clearance Responsibilities	56
4.11.3.3 Selecting/Briefing ABPs – Prepared Ditching	57
4.11.3.4 Selecting/Briefing ABPs - Unprepared Ditching	57
4.11.3.5 Selection/Briefing Buddies - Prepared Ditching	57
4.11.3.6 Re-Seating Of Passengers	58
4.11.3.7 Restrained Passengers	58
4.11.3.8 Cabin Preparation	58
4.11.3.9 Galley Preparation	58
4.11.4 Emergency Preparation - Phase 3	58
4.11.5 Commands Prior To Impact	58
4.11.6 Emergency Ditching CCM Responsibilities	59
4.11.6.1 Prepared Ditching Flight Crew Check list	60
4.11.6.2 Unprepared Ditching Flight Crew Checklist	60
4.11.6.3 Prepared Ditching Door Primary Checklist	61
4.11.6.4 Prepared Ditching Door Primary Checklist Type '1' Door	63
4.11.6.6 Ditching Assess Outside Conditions:	64
4.11.6.7 Unprepared Ditching Door Assist Checklist	65
4.11.7 Crowd Control	65
4.11.8 Restrained Passengers	65
4.11.9 Post Ditching CCM Responsibilities	66
4.11.9.1 Raft Duties Sequence	66
4.11.9.2 Detaching and Disconnecting the Raft from the Door-sill	66
4.11.9.3 Moving Away From the Aircraft	66
4.11.9.4 Deploy Sea Anchor	66

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 8

4.11.9.5 Deploy ELT	67
4.11.9.6 Retrieve Survival kit.....	67
4.11.9.7 Deploy Sea Dye Marker.....	67
4.11.9.8 Tie the Rafts together	67
4.11.9.9 Erecting the Canopy	67
4.11.9.10 CCM Responsibilities in the Raft	67
4.12 Bracing.....	68
4.12.1 Forward-facing cabin crewmember seat,	68
4.12.2 Rearward-facing cabin crewmember seats	68
4.12.3 Passenger Bracing Position	69
4.12.3.1 Passengers Facing Forward	69
4.12.3.2 Bracing Position-Pregnant Women	70
4.12.3.3 Bracing with Lap Held Infants - Options at standards seats	70
4.12.3.4 Bracing with an infant at the bulk head seats/Business Class Seat.....	71
4.12.3.5 Bracing Position – Children	71
4.12.4 Brace Signals (Prepared/ Unprepared Emergency)	72
4.12.5 Brace Commands to Passengers.....	72
4.12.5.1 Emergency Commands from the Flight Deck.....	72
4.12.6 Signals/Indications in the Cabin	73
4.13 Equipment to Be Carried By Each CCM	73
4.14 Post Evacuation Survival	73
4.14.1 Basic Survival Factors	74
4.14.2 Hazards	77
4.14.3 Survival And signalling Equipment	79
4.14.3.1 Ground to Air visual Signal codes.....	79
4.15 Missed Approach	81
4.16 Rejected - Take Off	81
4.16.1 Flight Deck Communication.....	81
4.16.2 Cabin Crew Member Procedures.....	81
4.17 Incapacitated Crew Member	81
4.17.1 Incapacitated Flight Crew Member	81
4.17.2 Incapacitated Cabin Crew Member	82
4.18 Phonetic Alphabet	83
4.19 Quick References	83
4.19.1 Chimes and Indications.....	83

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 9

4.19.2 Fire.....	84
4.19.3 Turbulence.....	85
4.19.4 Emergency Communication	87
4.19.5 Routine Communications from the Flight Deck.....	89
4.19.6 Doors/Slides/Rafts/Fire/Systems/Emergencies.....	89
4.19.7 Emergency Lights	89
4.19.8 Oxygen Systems.....	89
4.19.9 STS	89
4.19.10 NITS briefing	90
4.19.11 Pre Recorded Announcements	90
4.19.12 Emergency Preparation Phases 1, 2, 3.....	90

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 10

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	EMERGENCY PROCEDURES		Chapter 04
			Page 11

4.0 Emergency Procedures

4.1 Turbulent Weather

Definition

Turbulence is the result of atmospheric and environmental effects, which can result in, light/moderate or severe turbulence. A rapid change in altitude usually causes large airspeed fluctuations resulting in undetected clear air turbulence.

Flight Crew Responsibilities

Flight Crew shall inform the Purser the type of forecast turbulence and the estimated duration Flight crew should switch on the Fasten Seat Belt sign during turbulence

Purser/CCMs Responsibilities

During turbulence, CCMs shall ensure passengers adhere to the fastening seatbelt regulation. When carrying out duties during turbulence, CCMs are advised to be cautious and avoid placing self in danger. In case of injury to crew, passengers or damage to property the PIC should be informed and a detailed Incident/ Accident report shall be forwarded to the cabin safety section.

If carrying out a service/part of a service which may contribute to a safety hazard, the Purser may cancel the service or part of the service.

Service during Turbulence

When the seat belt sign is turned on due to turbulence and If meal service is underway during this time, the purser shall communicate with the PIC to determine if it's safe to continue with the service. In the event it requires for the crew to be seated immediately during a meal service, CCMs shall lock the carts and be seated. Hot beverages shall not be served while the seat belt sign is switched on to prevent potential spills and burns.

Passenger Announcement

The following PA announcement shall be initiated by CCMs:

“LADIES AND GENTLEMEN,

AS THE CAPTAIN HAS SWITCHED ON THE SEAT BELT SIGN, PLEASE REMAIN SEATED AND FASTEN YOUR SEAT BELTS. PLEASE REFRAIN FROM USING THE TOILETS DURING THIS PERIOD. THANK YOU”.

4.1.1 Light Turbulent Weather

Signs

- Liquids in open containers may shake but might not splash
- Carts could be wheeled with slight difficulty
- Passengers might feel a strain against the seat belt

Purser/CCM Responsibilities

1. Initiate the turbulent weather announcement. Ref 4.1
2. Maintain cabin lights intensity at “Dim 1”
3. Secure carts/containers in the galleys
4. Latch/lock all loose equipment in galley

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 12

5. Secure the cabin
6. Check lavatories for passengers
7. Remove infants from bassinets and secure with a kangaroo belt
8. Cabin Supervisors shall report secured cabin/galleys to the Purser
9. Remain secured as required/advised

Post Light Turbulent Weather

The PIC shall inform CCMs when turbulence is cleared by switching off the “Fasten” seat belt sign.

4.1.2 Moderate Turbulent Weather

Signs

- Items could fall or be lifted off the floor
- Liquids might splash out of open containers
- Unsecured items could be tossed about
- Difficulty in being steady
- Manoeuvring the carts would be difficult
- Definite strain against the seatbelt

PIC Announcement

“CABIN CREW, BE SEATED”.

Purser/CCM Responsibilities

1. Initiate the turbulent weather announcement. Ref 4.1
2. Maintain cabin lights at full intensity
3. On the way to the crew seat, check that all passengers are seated with their seat belts securely fastened
4. Secure carts/containers in galleys
5. Latch/lock all loose equipment in the galleys
6. Secure the cabin
7. Remove infants from bassinets and secure with a kangaroo belt
8. Check lavatories for passengers
9. Cabin Supervisors shall report secured cabin/galleys to the Purser
10. Curtains/class dividers should be opened and secured
11. Remain secured until advised by the PIC

Post Moderate Turbulent Weather

The PIC informs CCMs when the aircraft is clear of turbulence by switching off the “fasten seat belt sign”. Purser should initiate an announcement for CCMs to proceed with their duties.

“CREW YOU MAY PROCEED WITH YOUR DUTIES”

As a precautionary measure, CCMs shall check on crew and passengers in lavatories/galleys/cabin and administer first aid/assistance as required. Any injuries shall be reported to the PIC.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 13

4.1.3 Severe Turbulent Weather

Signs

- Items could fall or be lifted off the floor
- Liquids would splash out of open containers
- Unsecured items would be tossed about
- Walking might be impossible
- Definite strain against the seatbelt

PIC announcement

“CABIN CREW, BE SEATED”.

Purser/CCM Responsibilities

1. Initiate the turbulent weather announcement. Ref 4.1
2. Do not attempt to check passenger compliance
3. If there are trolleys in the cabin, set the brakes on in their current location Put jugs/pots of hot beverages on the floor
4. Sit down immediately, in the nearest available seat (this includes passenger seats) and fasten seat belt/harness
5. Remain secured until advised by the PIC

Post Severe Turbulence

The PIC informs CCMs when the aircraft is clear of turbulence by switching off the fasten seat belt sign. Purser should initiate an announcement for CCMs to proceed with their duties

“CREW YOU MAY PROCEED WITH YOUR DUTIES”.

CCMs should check on crew and passengers in lavatories/galleys/cabin and administer first aid/assistance as required. Any injuries should be reported to the PIC.

The Purser shall ensure detailed Incident/Accident and or Illness reports are filed as required.

WARNING : CABIN CREW SHALL NOT COMPROMISE PERSONAL SAFETY WITH SERVICE RELATED DUTIES DURING SEVERE TURBULENCE. THE PERSONAL SAFETY OF THE CABIN CREW IS THE PRIORITY.

4.1.4 Unanticipated Severe Turbulent Weather

Clear air turbulence at high altitudes is potentially hazardous to the safety of the aircraft as its presence cannot be detected prior to encountering.

PIC announcement

“CABIN CREW, BE SEATED”.

Purser/CCM Responsibilities

1. Initiate the turbulent weather announcement. Ref 4.1

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 14

2. Do not attempt to check passenger compliance
3. If there are trolleys in the cabin, set the brakes on in their current location Put jugs/pots of hot beverages on the floor
4. Sit down immediately, in the nearest available seat (this includes passenger seats) and fasten seat belt/harness
5. Remain secured until advised by the PIC

Post Unanticipated Severe Turbulence

The PIC informs CCMs when clear of turbulence by switching off the fasten seat belt sign. Purser should initiate an announcement for CCMs to proceed with their duties.

“CREW YOU MAY PROCEED WITH YOUR DUTIES”.

CCMs should check on crew and passengers in lavatories/galleys/cabin and administer first aid/assistance as required. Any injuries shall be reported to the PIC.

The Purser shall ensure detailed Incident/Accident and or Illness reports are filed as required.

4.1.5 Anticipated Turbulence Weather Procedures

Anticipated turbulent weather shall be conveyed during the PIC/Purser preflight briefing, allowing cabin crew to complete cabin/gally securing procedures and secure themselves.

Purser/CCM Responsibilities

Ref 4.1.1

Post Anticipated Turbulent Weather

Ref 4.1.1

4.2 Cabin Pressurization/Oxygen System

The aircraft cabin is pressurized between **6000’ to 8000’** feet altitude. However, failure of the pressurization system would result in loss of cabin pressure and supplementary oxygen is necessary for survival. The aircraft is equipped with two independent fixed oxygen systems.

1. Cabin/Galley/Lavatories/CCM stations – Chemical Oxygen
2. Flight deck – Gaseous Oxygen

The supplementary oxygen in the cabin is produced through chemical reaction. When activated the generator casing can reach a temperature of 285° C (545 ° F). The area exposed to the passengers doesn’t exceed 66° C (150 ° F). The flow of oxygen to the mask is indicated by the inflation of the green portion of the reservoir bag.


4.2.1 Cabin/Galley/Lavatories - Fixed Oxygen System

Oxygen generators are installed in the oxygen stowage compartment above each row of seats. Each unit

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	EMERGENCY PROCEDURES		Chapter 04
			Page 15

contains a Sodium Chlorate oxygen generator with two or more continuous flow masks with breathing bags and a state indicator.

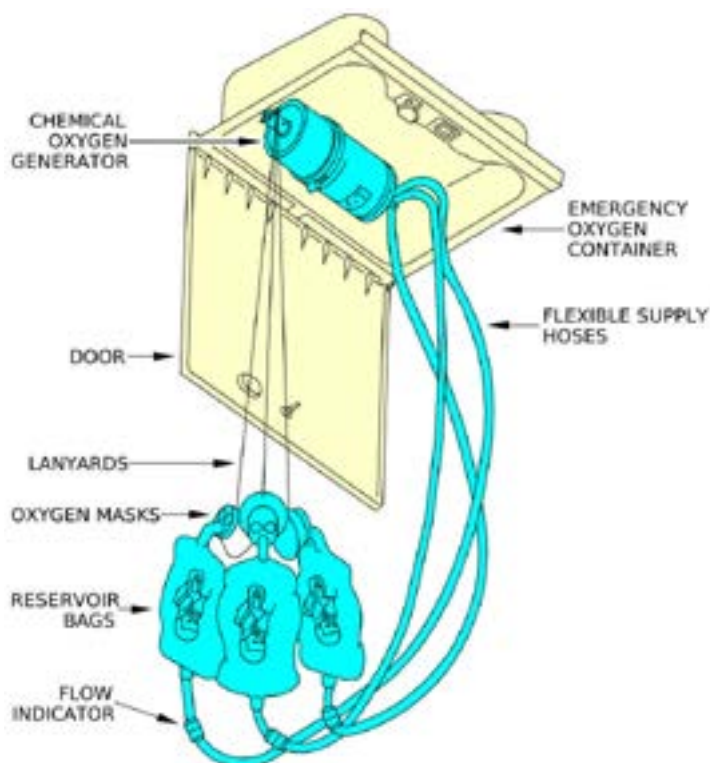


Locations

Masks are located in the cabin/galley/lavatories/CCM stations. The system when activated will supply continuous flow of oxygen for approximately 22 minutes.

Spare Masks

Spare oxygen masks are installed at each bassinet position, each lavatory, at every set of seats in the Cabin and at CCM stations.

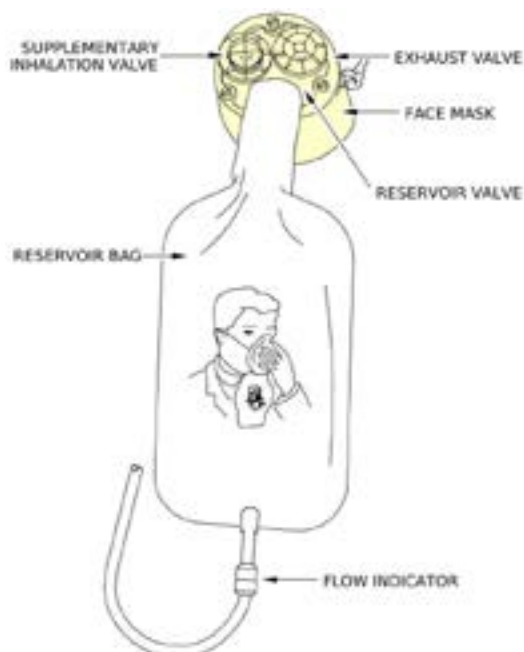

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL


	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 16

4.2.2 Oxygen Masks Deployment

The oxygen stowage compartment doors could be electronically opened from the flight deck or manually at each unit by using the manual release tool (MRT) Located under each crew seat.

In the event of a loss of cabin pressure, oxygen masks will automatically deploy at 14000 (±500) feet cabin altitude. The power supply to the compartment door release mechanism automatically switches off after 30 seconds (to avoid risk of fire).

Oxygen masks are engineered to deploy automatically in the event of cabin depressurization. This activation is controlled by an independent cabin pressure switch that continuously monitors cabin altitude. It is essential to understand that this switch functions independently from the Cabin Pressure Controllers (CPCs) located in the flight deck, which are responsible for triggering the CAB PR EXCESS CAB ALT alert. When ALL oxygen masks deploy, Cabin Crew must immediately inform the Flight Crew. This is a vital cue for the Flight Crew to identify a possible depressurization event and initiate emergency procedures, including an emergency descent. However, this should be considered when ALL oxygen masks deploy and not in the case of partial deployment of the oxygen masks. Partial deployment of oxygen masks in the cabin is due to mechanical failures and not depressurization. In such instances, Cabin Crew shall follow standard fault reporting procedures and notify the Flight Crew accordingly.

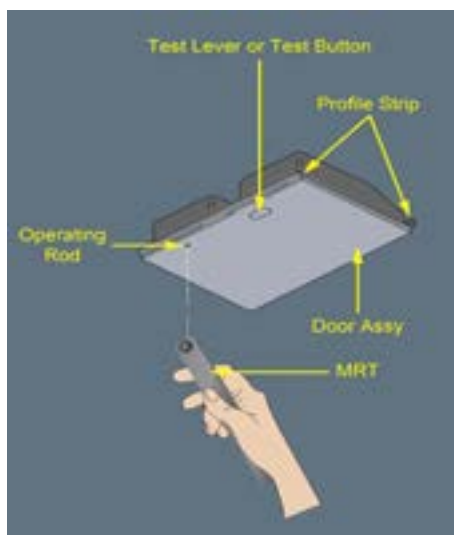

Note: The number of masks in each unit is indicated on the door stopper.

4.2.3 Activation of the Oxygen Flow

One drop down mask has to be pulled to activate the oxygen flow. Pulling the mask releases the safety pin attached to the generator by a cord initiating a chemical reaction.

Passenger Announcement

Purser may initiate a PA announcement, explaining the possibility of the burning odour.

***“LADIES AND GENTLEMEN,
YOU MIGHT EXPERIENCE A BURNING ODOUR DUE TO THE OXYGEN GENERATORS FUNCTIONING.
PLEASE DO NOT HESITATE TO DRAW ANY FURTHER CONCERNS TO THE IMMEDIATE ATTENTION OF
THE CABIN CREW”.***

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 17

Note: Once activated, the oxygen generation cannot be stopped.

4.2.4 Inadvertent Deployment of Oxygen Masks

Although the situation is not dangerous, the inadvertent deployment of oxygen mask could be an unpleasant and a frightening experience.

The following procedure should be adhered to:

Purser/CCM Responsibilities

Mask Deployed - O2 Generator Activated

1. Inform Flight Crew
2. Leave the oxygen compartment door opened and do not attempt to close it as the supply of oxygen and the activation of the power switch mechanism is a potential combination for a fire hazard
3. Try to relocate passengers and the masks should be removed by cutting it close to the generator.
4. In the event alternate seats are not available, CCMs shall brief passengers of the location/s a spare oxygen mask available in the vicinity by checking the door stoppers on the oxygen compartments. The PIC shall be kept informed.
5. Purser shall make a log entry in the cabin defects log book.

Mask Deployed - O2 Generator Not Activated

1. Inform Flight Crew
2. Leave the oxygen compartment door opened
3. Advise passengers not to pull or stow the masks
4. Relocate passengers if possible
5. Do not remove the masks or cut the tubing
6. Purser shall make a log entry in the cabin defects log book.

Note: Generator state indicator band is yellow prior to activation and will turn black after use due to the heat.

4.2.5 Flight Deck Oxygen System

The flight deck oxygen system supplies gaseous oxygen. It has an optional adjustable facility of oxygen flow with ambient air or 100% oxygen on a continuous flow.


Oxygen masks are stowed in a readily accessible console adjacent to each seat. The mask has a clear lens visor/microphone and a flow type adjuster.

Donning the Flight Deck Oxygen Mask

Could be worn using one hand:

1. Squeeze the red clips toward each other and pull the mask out of its box.
2. The harness inflates, oxygen flow starts, and the mask microphone is active.
3. Don the mask covering the nose and mouth and release the red grips.
4. The harness deflates hugging the head.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

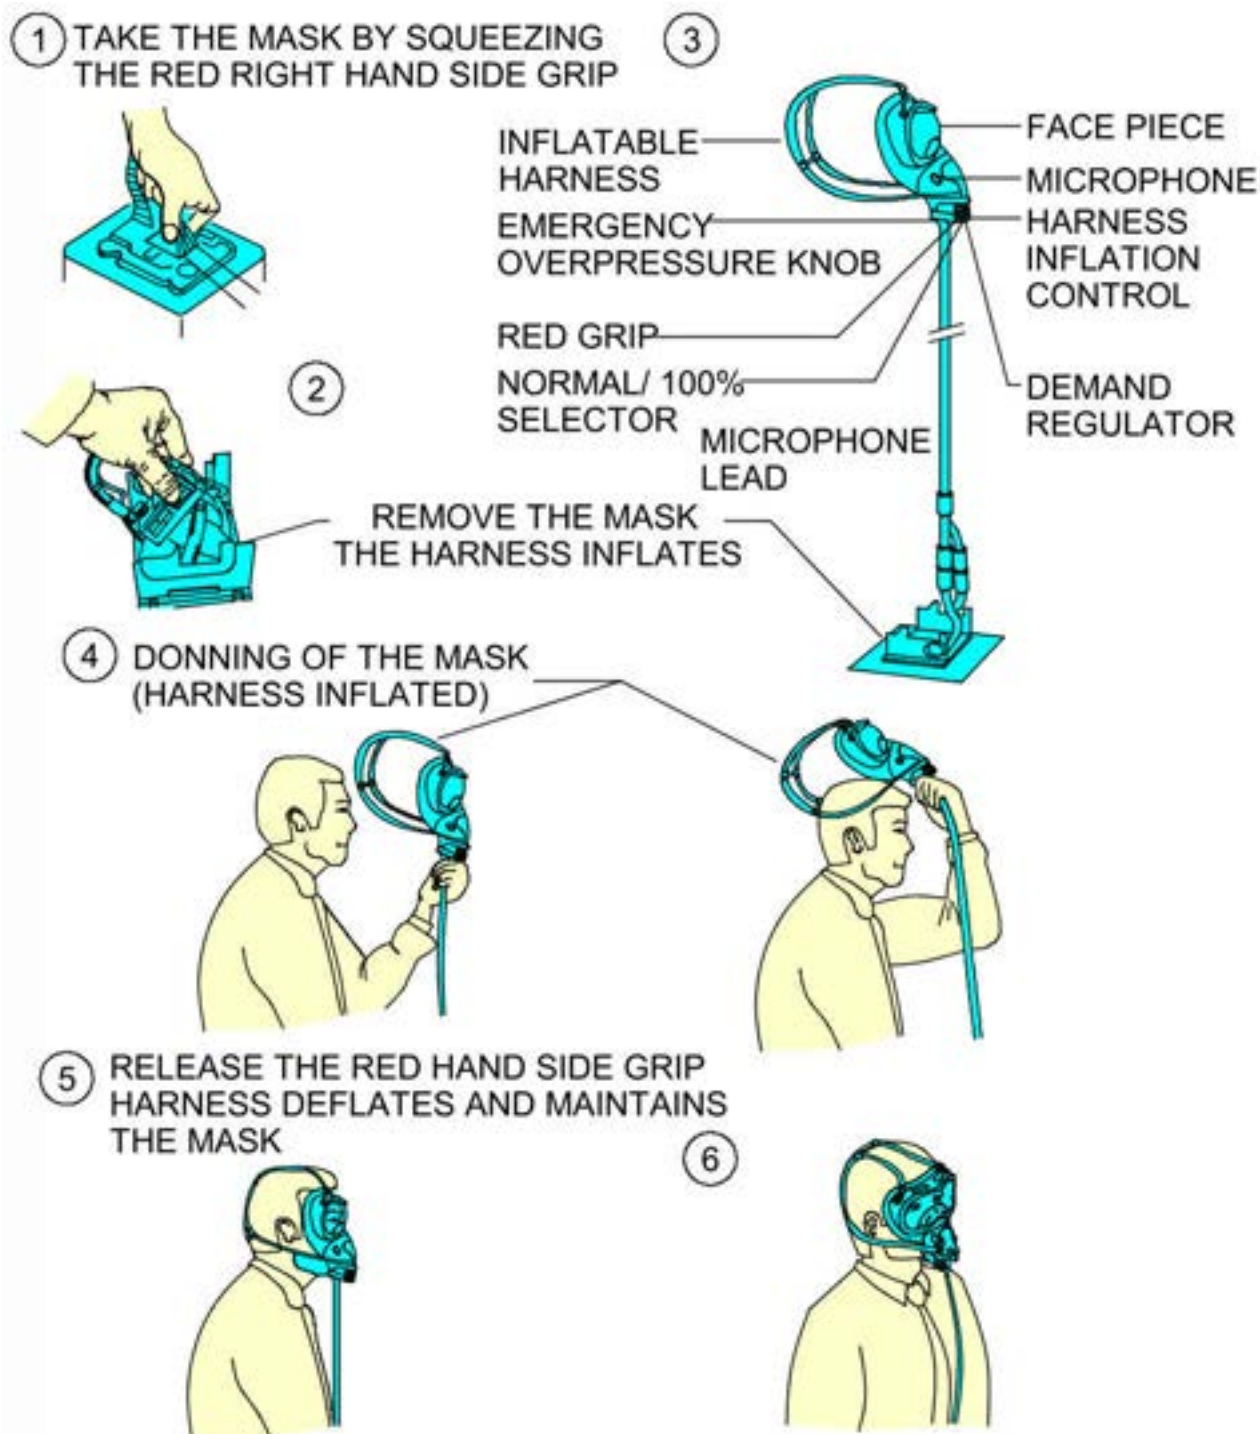

100% / Normal Selector

When the flight crew selects the "N" position (normal position), the system supplies the mask with a mixture of ambient air and pure oxygen. When the flight crew selects the "100%" position, the oxygen system supplies the mask with 100% pure oxygen.



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 19

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 20

4.3 Decompression

Definition

Commercial aircraft operates economically at high altitudes. An additional advantage of cruising at high altitude is avoidance of bad weather and turbulence. As altitude increases, the density of air and the pressure decreases. To breathe comfortably, the pressurization system of the aircraft creates a denser atmosphere within the cabin. There is always a possibility of loss of cabin pressure in any pressurized aircraft through a rupture in the aircraft's structure. The rate of decompression depends on the **cabin volume/size of the opening/altitude/Pressure difference** and is categorized as slow or rapid decompression.

When decompression occurs, pressurized air escapes from the cabin. The remaining air will be cold/thin and moisture will condense in the form of a fine mist. When carrying out duties during decompression, CCMs are advised to be cautious and avoid placing themselves in danger.

4.3.1 Types of Decompression

4.3.2 Slow Decompression

A pressure leak due to a cracked/leaking window or door/malfunctioning of the pressurization system can cause a slow decompression.

4.3.3 Rapid Decompression

Loss/damage to a window/door or a rupture in the fuselage could cause rapid decompression and require an immediate emergency descent. Sudden loss of cabin pressure would trigger the cabin drop down oxygen system to operate automatically when the cabin pressure reaches 14,000 feet approximately.

--

4.3.4 Precautions

Even though Flight Crew is trained to detect/deal with any signs of decompression at its earliest stage, CCMs should be vigilant during flight for any signs of dizziness or difficulty in breathing etc. and report to the PIC immediately. If the drop down oxygen masks deploy during flight, the following would take place.

1. Cabin lights would be on full intensity
2. The ordinance signs would illuminate
3. Automatic announcement (when cabin altitude reaches approximately 14000 feet) **Ref 4.3.5 (a)**
4. The PIC announcement **Ref 4.3.5 (b)**
5. The aircraft commences descending

If the above does not occur, it may be due to an accidental mask deployment and the PIC would initiate an announcement. However, if such an announcement is not initiated or any of the above points does not occur or the aircraft continues to ascend or cruise, the situation is considered as Code Red and the Purser shall immediately enter the flight deck by using the emergency mode. **Ref 5.7.3.3**

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 21

4.3.5 Announcements during a Decompression

- If the aircraft cabin pressure altitude reaches 14000 feet an automatic announcement shall be heard on all aircraft.

***“ATTENTION, ATTENTION, THIS IS AN EMERGENCY, THIS IS AN EMERGENCY.
THE CABIN AIR PRESSURE SYSTEM HAS FAILED.
RETURN TO YOUR SEAT AT ONCE. FASTEN YOUR SEAT BELTS. STOP SMOKING. PULL THE MASK IN
FRONT OF YOU. COVER YOUR NOSE & MOUTH. BREATHE NORMALLY. PULL THE ELASTIC BAND OVER
YOUR HEAD TO HOLD THE MASK IN PLACE.
PUT ON YOUR MASK FIRST, AND THEN HELP ANY CHILDREN OR ELDERLY PEOPLE NEXT TO YOU”.***

- The PIC shall initiate the following announcement only once the aircraft is safely established on the emergency descent.

“ATTENTION CABIN CREW WE ARE ON AN UNSCHEDULED DESCENT”.

4.3.6 Announcements Post Decompression

4.3.6.1 Oxygen mask not deployed

“CABIN CREW PROCEED WITH YOUR DUTIES”

4.3.6.2 Oxygen mask deployed

***“LADIES AND GENTLEMEN, THIS IS YOUR CAPTAIN
THE USE OF OXYGEN IS NO LONGER REQUIRED. CABIN CREW PROCEED WITH YOUR DUTIES”.***

4.3.7 Procedures during Slow Decompression

Signs

A formation of mist and prominent sound from the leak would be heard. The cabin would get cold and uncomfortable.

- PIC shall brief the Purser on the situation/course of action and commence descent
- Purser shall brief CCMs on the situation/course of action
- The PIC may depending on the situation initiate a PA announcement

Purser shall initiate a PA announcement:

***“LADIES AND GENTLEMEN,
REMAIN SEATED AND FASTEN YOUR SEAT BELTS IMMEDIATELY”.***

4.3.7.1 Emergency Descents

PIC shall carry out a PA announcement informing that the aircraft is performing an emergency descent.

Ref 4.3.5 (a)

The drop down oxygen may be activated manually by the PIC. In the event the oxygen masks are deployed, CCMs shall be guided by the following **Ref 4.3.9.2**

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	EMERGENCY PROCEDURES		Chapter 04
			Page 22

4.3.8 Post Slow Decompression Duties

4.3.8.1 The PIC Announcement

Oxygen mask not deployed Ref 4.3.6.1

Oxygen mask deployed Ref 4.3.6.2

4.3.8.2 Purser/CCM Responsibilities

Oxygen mask not deployed

1. Ensure no smoking
2. Check - immediate CCMs/lavatories/flight deck etc.
3. Check - passengers with an alert/ Infants **Ref 2.24.3/4/5**
4. Administer first aid/Oxygen if required **Ref 9.3**
5. Report injuries to the PIC

Oxygen Mask Deployed Ref 4.3.10.1

4.3.9 Procedures during Rapid Decompression

Objective and Subjective Signs

1. A loud noise at the opening/air rushing out
2. A rapid drop in temperature/fog in the cabin
3. Debris and loose objects flying around the cabin
4. Ordinance signs will be illuminated
5. Cabin lights will be on to full intensity
6. Difficulty in breathing as air is sucked out of the lungs
7. Sinuses and ears momentarily feel full /cold sensation/difficulty in speaking

There would be no time for the PIC to brief the Purser regarding the intentions. CCM shall be vigilant and respond.

4.3.9.1 Emergency Descent

PIC may initiate an emergency descent under the following conditions but not limited to;

Rapid or Slow decompression/Smoke or Fire/Bomb Threat

Crew may experience a steep descent with vibration due to the rapid descent, Ordinance signs together with the exit signs will illuminate.

PIC shall initiate an announcement informing, that the aircraft is performing an emergency descent.

Ref 4.3.5 (a)

Crew Shall immediately secure themselves and await further instructions from the flight deck, if in the cabin by wedging between seats. Communication would be impossible. CCM shall not place themselves in danger.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 23

4.3.9.2 Oxygen Mask Deployed

Activation of the Flow of Oxygen

The PSU doors would open/ oxygen masks will drop and hang from the lanyards.

1. To activate the flow, pull on one of the masks (cord)
2. Inflation of the green section on the breather bag indicates the flow of oxygen
3. Place the mask over the nose and mouth, elastic strap should be placed around the head and tightened to fit the mask, breathe normally



CAUTION: ADULTS SHOULD DON THE DROP DOWN MASK BEFORE ASSISTING DEPENDANTS.

CCMs if in the cabin shall don an extra drop-down mask and remain secured until further directives are given by the PIC. CCMs shall Speak through drop down mask or use gestures to demonstrate the donning of masks.

CAUTION: IT IS OF PARAMOUNT IMPORTANCE THAT CCMS REMAIN SECURED UNTIL ADVISED BY THE PIC

4.3.10 Post Rapid Decompression Duties

PIC should initiate the applicable PA announcement **Ref 4.3.6**

4.3.10.1 Purser/CCM Responsibilities

CCMs shall be on oxygen (portable) prior to commencing post decompression duties. If restrained in the cabin the spare drop down oxygen masks may be used to reach the designated bottles of oxygen.

Purser to carry out the announcement regarding the oxygen generators' **Ref 4.2.3**

1. Ensure no smoking
2. Be on oxygen from the designated bottles
3. Check - immediate CCMs/lavatories/flight deck etc.
4. Move passengers from the area the fuselage was damaged
5. Check - passengers with alerts and infants **Ref 2.24**
6. Administer first aid/Oxygen if required **Ref 9.3**
7. Inform PIC of any passengers or crew injuries and cabin status.
8. Stow all drop down masks in the overhead bins before landing.

Note: Post decompression, Oxygen from all bottles may be used until the gauge reaches zero. Crew shall not use personal bottle of oxygen to administer oxygen to a passenger post decompression and if a passenger requires oxygen it shall administered using the drop down oxygen mask.

Revision No	01	Revision Date	01 April 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

4.3.11 Hypoxia and Its Effects

The deficiency of oxygen to the brain is called hypoxia. The greatest danger during a decompression is Hypoxia. To prevent becoming significantly impaired or incapacitated, CCMs must continuously observe passengers and Crew for signs and symptoms of hypoxia. It is important for the CCMs to realize that even in mild hypoxia, though not fatal, can have fatal results as hypoxia can significantly reduce the ability to perform and consequently lead to fatal errors. Hypoxia causes a subtle decrease in individual performance, followed by incapacitation; the symptoms may not be identified until it is too late. The most common type of aviation hypoxia is “hypoxic hypoxia”, that occurs due to low partial pressure of oxygen in the arterial blood. If oxygen is not administered immediately in hypoxia cases, it is possible that occupants become incapacitated and lose consciousness in a very short time. The table below indicates the effects of hypoxia on a person at different altitudes.

SEA-LEVEL	NORMAL
10,000 feet	Head ache/fatigue on long expo sure
14,000 feet	Sleepiness/headache/dizziness/impaired vision/personality changes/ loss of muscular co-ordination/Cyanosis (bluing of fingernails).
18,000 feet	All of the above in a more serious condition.
22,000 feet	Convulsions/collapse and coma in approximately 3 minutes.

4.3.12 Time of Useful Consciousness (TUC)

The TUC refers to the time available to individuals to perform their tasks after they have been deprived of oxygen, but are still aware of their environment and capable of controlling their actions. It is important for the cabin crew to realize that the time of useful consciousness is different for each individual, and depends on the:

1. Altitude
2. Duration at Altitude
3. Temperature
4. Physical Exertion
5. Emotional State
6. Amount of activity.

The cabin crew must remember that in cases of continued physical activity, the time of useful consciousness is significantly reduced.

Time of Useful Consciousness		
ALTITUDE (FEET)	MODERATE ACTIVITY	SITTING QUIETLY
22,000	05 Minutes	10 Minutes
25,000	02 Minutes	03 Minutes
28,000	01 Minutes	01 Minutes 30 Seconds
30,000	45 Seconds	01 Minutes 15 Seconds
35,000	30 Seconds	45 Seconds
40,000	18 Seconds	30 Seconds

It is important to emphasize that this table is only a guideline, and provides average values that can increase or decrease, depending on the skills needed to accomplish a task, on the individual's health, and on the amount of activity. For example, the time of useful consciousness for cabin crew involved in moderate activity is significantly less compared to a passenger that is sitting quietly

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 25

4.4 Fire

General Description

A fire is the most dangerous hazard during flight and could be frightening. As it creates panic, in such situations CCMs should maintain a calm and positive attitude.

In any type of fire, the PIC shall be informed immediately and other CCMs communicated to extinguish the fire as soon as possible. The flight deck door shall remain closed and monitored for security reasons during the entire fire drill.

Removing one of the elements from the fire triangle should extinguish a fire.

Assessing the situation and deciding the correct course of action is of prime importance when dealing with fire. The type of fire will determine the method of fighting it. Cabin fires could also be extinguished with materials readily at hand, such as blankets/cold towels or non-alcoholic beverages. Based on the severity of the fire, the fire fighting method may require the use of a fire extinguisher and a PBE. Precaution should be taken to protect oneself when opening closed doors and creating an opening to fight a fire. Once the fire is extinguished, the Purser shall coordinate with the station staff to retain and dispatch possible evidence to base for a root cause analysis.

Purser shall carry out an entry in the cabin defects log book for follow up action.

4.4.1 Elements of Fire

Fire Triangle



4.4.2 Classes of Fire

Class A Fires - Combustibles fire, such as cloth/paper and wood. Such fires could be extinguished by using a fire extinguisher or the area should be cooled with water or any non-flammable liquid.

CAUTION: DO NOT USE FLAMMABLE LIQUIDS

Class B Fires - Flammable liquids fire, such as /hydraulic fluids or chemicals (Petrol/Oil) These fires are best extinguished by smothering or by using an extinguisher.

CAUTION: DO NOT USE LIQUIDS AS IT INCREASES AND SPREADS, RATHER THAN EXTINGUISHING THE FIRE.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 26

Class C Fires - Electrical fire, electrical equipment and wiring. Switch off and disconnect the power supply as a priority and use an extinguisher

CAUTION: DO NOT USE LIQUIDS AS IT CONDUCTS ELECTRICITY.

Class D Fires – Metals fire such as lithium batteries, use an extinguisher to extinguish the fire and douse in water to prevent reignition.

CAUTION: DO NOT USE WET ICE CUBES TO COOL, AS THIS MAY FORM A CRUST OVER THE FIRE

4.4.3 Prevention of fire

Always be alert for potential fire hazards. Galley electrical faults are a potential source of danger. If a circuit breaker (CB) has popped out, do not to reset it. Such defects should be reported to the PIC and entered in the cabin defects log book.

4.4.3.1 Prevention of Cabin Fire

1. Be vigilant
2. Lookout for passengers smoking while embarking or disembarking
3. Do not place paper, plastic or any foreign material to cover lights that cannot be switched off

4.4.3.2 Prevention of Galley Fire

1. Be vigilant
2. Do not store items in bun warmers/hot cups or ovens
3. Check ovens prior to switching it on/switch off ovens after use
4. Do not switch on ovens without inserts
5. Ensure hot cups contain liquid prior to switching them on
6. In the event water supply to a heater element is shut off, ensure the power to the devices are switched off immediately

Note: The galley shall not be left unattended when any electrical equipment is in use

4.4.3.3 Prevention of Lavatory Fire

1. Be vigilant
2. Check for serviceability of the fire extinguisher
3. Check for obstructions of the smoke detector
4. Ensure waste bin is not filled up/flaps are spring loaded/ doors are lockable
5. Water shut off valve shall be in the OPEN position
6. Carry out regular checks during flight

4.4.4 Fire Fighting Procedures and Techniques

There are a limited number of extinguishers on board the aircraft and usage should be maximized. An extinguisher can be used on all types of fire. Back up extinguishers should be available when fighting a fire and ensure the correct technique is adopted. As a precaution, always monitor the area after fighting a fire

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 27

1. Remove the fuel to starve the fire
2. Remove the Oxygen to smother the fire
3. Remove the heat to cool the fire

4.4.4.1 Identifying a Fire

1. The fire fighter should assess the fire before reacting
2. In a hidden fire, be cautious when opening the panel/door
3. Use the back of the palm against the panel/door to detect the heat

Once the location/source and the type of fire is determined, the most effective method should be adopted. When fighting a fire, the extinguisher should be held firmly/directed at the near edge of the base of the flames and progress forward or upward. The discharge nozzle should be moved rapidly with a side-to-side sweeping motion.

4.4.5 Fire Drill

The fire-fighting drill involves a fire fighter/a communicator and a coordinator.

4.4.5.1 Fire-fighting equipment

Fire-Fighting equipment shall consist of the following but not limited to,
Fire extinguisher/Heat resistance gloves/ PBE/ Crash axe.

In the event an extinguisher is used to fight a fire, it is mandatory wear the protective equipment.

4.4.5.2 Fire Fighter

The CCM, who discovers or is informed of the fire, shall be the fire fighter

The duties shall be:

1. Identify the type and source of the fire
2. Switch off all electrics as appropriate
3. Communicate to CCM who will become the Communicator
4. Obtain Fire-Fighting equipment
5. Wear the smoke hood/Heat resistant gloves (as appropriate)
6. Fight the fire

4.4.5.3 Communicator

The CCM the fire fighter communicated with shall be the communicator and should locate self at the most appropriate interphone with a clear view of the fire/smoke to keep the PIC updated.

Communication Guidelines

1. Should be focused not panic and speak clearly
2. Identify self and location and be precise regarding the details
3. Inform the location of the smoke or fire
4. Listen to the questions asked by the PIC and answer one question at a time
5. If not sure of the question, clarify
6. Inform the reaction of the passengers
7. Inform the type/source of the fire if it has been established

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 28

8. Provide specific details/any other vital information such as but not limited to:
9. Disconnected power sources/number of extinguishers used/colour of the smoke/source/etc.

CAUTION: DO NOT IDENTIFY ANY LAVATORY TO THE FLIGHT CREW BY ITS ASSIGNED NUMBER. IDENTIFY THE LAVATORY BY ITS SPECIFIC LOCATION.

4.4.5.4 Coordinator/s

The third CCM involved in the Fire-Fighting procedure is the coordinator. The responsibility of the coordinator is as follows:

1. Make available back-up Fire-Fighting equipment
2. Move passengers away from smoke/ toxic fumes with the permission of the PIC
3. Remove portable oxygen from the area
4. Remove passenger baggage from the area to avoid contributory factors
5. Distribute wet towels to passengers to cover their nose and mouth
6. Advise passengers to stay low and cover nose and mouth
7. Delegate a CCM to man the flight deck door.
8. Standby to take over from the fire fighter.

4.4.5.5 Post-Fire Procedures

After fighting a fire monitor the area for re-ignition. Retain the evidence of the fire for investigation purposes.

WARNING: TOXIC GASES EMITTED BY BURNING SEATS/CARPET AND OTHER PARTS OF THE CABIN COULD INCAPACITATE CREW AND PASSENGERS.

4.4.5.6 Types of Flash Fire

Flash fire

Fire that can grow rapidly by heating combustible materials on the path, as burning materials become a new source of ignition. Combustible material in an enclosed area could produce sufficient heat for flammable vapour to spread the fire rapidly.

Flash back fire

A fire in a confined area which could spread rapidly towards an opening due to the inflow of oxygen.

Flash over Fire

Combustible gases accumulated at ceiling level which will ignite with a mild explosion

4.4.5.7 Cabin Smoke

Smoke entering the cabin from the aircraft ventilation system.

1. Inform PIC
2. Don PBE
3. Distribute wet towels and inform passengers to stay low

4.4.6 Management of Specific Fires

4.4.6.1 Fire on a Person

1. Smother the flames using a coat or blanket
2. Do not fan the flames/Do not use an extinguisher

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 29

4.4.6.2 Oven Fires

1. Keep the Oven door closed (By keeping the oven door closed, the fire will usually extinguish itself)
2. Switch off oven electrics/Pull circuit breakers out
3. Communicate to PIC & other CCMs
4. Obtain fire-fighting equipment and monitor the situation
5. If fire is present, open oven door slightly and discharge fire extinguisher (4 to 5 bursts), Don PBE if required
6. Do not open the oven door until smoke has subsided
7. Monitor oven for re-ignition and repeat process if necessary
8. Check the surrounding area for signs of heat or fire
9. Do not use the affected oven for the duration of the flight

4.4.6.3 Waste Bin Fires

1. Open the waste bin flap and discharge extinguisher
2. Ensure that the discharge force does not scatter the contents outside the bin.
3. Saturate with non-flammable liquid

4.4.6.4 Seat upholstery (cushion) Fire

1. Smother with a blanket
2. Use water or any non-flammable liquids
3. Check for source of the fire as it may be connected to electric wires

4.4.6.5 Seat Motor and IFE Fires

1. Cut off the electrical power from CMT and Inform PIC
2. Use an extinguisher if required
3. If the source of the fire could not be determined consider it as a class C fire

4.4.6.6 Curtain Fire

1. Use extinguisher
2. Start at the bottom of the curtain and work up wards

4.4.6.7 Carpet Fire

Smother with blanket/use extinguisher/use water or any non-flammable liquid.

4.4.6.8 Electrical Panel/Light Fixtures Smoke

1. Switch off power/ Obtain Fire-Fighting equipment
2. Stand-by with an extinguisher
3. Monitor the area
4. Do not switch on the power for the rest of the flight

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 30

4.4.6.9 Cabin Baggage Fire

1. Precaution should be taken for items that could explode (compressed gas canisters, Lithium batteries)
2. Smother with a blanket or use an extinguisher

4.4.6.10 Cargo Compartment Fire

The aircraft system is equipped with a cargo compartment smoke/fire warning system. In the event of smoke/ fire, the extinguishing system is activated from the flight deck.

4.4.6.11 Electrical Fire

1. Switch off power
2. Pull circuit breakers out
3. Communicate with other CCMs
4. Obtain Fire-Fighting equipment and fight the fire

4.4.6.12 Lavatory Fire

1. Communicate with other CCMs
2. Assess the conditions
3. Carry out a tactile search

WARNING : DO NOT OPEN THE DOOR BEFORE CHECKING THE HEAT, MOVE THE BACK OF THE HAND ALONG THE DOOR (TACTILE SEARCH) TO EVALUATE THE PRESENCE/SEVERITY OF THE FIRE

If the door is Cool To the Touch

1. Obtain Fire-Fighting equipment
2. Stay low/open the lavatory door. Stand behind the door using the door as a shield (Be cautious of a “flash back” fire)
3. Enter the Lavatory with caution
4. Locate the source of the fire
5. Discharge the Extinguisher to the base of the fire
6. Check surrounding areas including panels for fire and heat
7. Cool embers with water if it's a class A fire

If the door is Hot To the Touch

1. Keep the door closed.
2. Communicate with other CCMs
3. Obtain Fire-Fighting equipment
4. Don the smoke hood/ heat resistant gloves
5. Stay low and open the door slightly / Stand behind the door using the door as a shield, insert the nozzle/fully discharge extinguisher
6. Immediately Close the door and monitor
7. Discharge a second extinguisher if required, ensure fire is completely extinguished
8. Enter lavatory with caution keep low below smoke levels for optimum visibility. Always don a

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 31

PBE to avoid breathing toxic fumes.

9. Cool embers with water if it's a class A fire
10. Monitor area for re-ignition
11. Placard as an inoperative lavatory for the rest of the flight
12. Cabin crew to monitor for re-ignition for the duration of the flight

4.4.6.13 Overhead Bin Fires

Smoke/fire in overhead bins may be caused by the contents in hand luggage (e.g. electronic devices, spare lithium batteries) or electrical malfunction in the Passenger Service Unit (PSU).

1. Move the passengers away from the area
2. Obtain Fire-Fighting equipment
3. Carry out a tactile search to locate the fire. (Using the back of the hand, feel the overhead bin to determine the temperature and presence of fire)

CAUTION : OPENING THE OVERHEAD BIN MORE THAN NECESSARY CAN CAUSE CONTAMINATION OF THE CABIN WITH SMOKE AND CAN RESULT IN SMOKE INHALATION.

If the Overhead Bin Cool To the Touch

1. Wear heat resistant gloves
2. Smother with a blanket
3. Move cabin baggage away, as the contents could be a contributory factor

If the Overhead Bin Hot To the Touch

1. Precautions should be taken when opening the overhead bin as items on fire could fall out
2. Don smoke hood/ Heat resistant gloves
3. Open the relevant overhead bin just enough to pass the nozzle of the fire extinguisher and discharge (Get on top of seat if necessary)
4. Protect against contents that may scatter due to the pressure of the extinguisher
5. Cabin crew to monitor for re-ignition for the duration of the flight

4.4.6.14 Hidden Fire/Inaccessible Fire

A fire behind a panelling can cause fumes or smoke to appear in a totally different part of the cabin. Locating the source of fire is important. This can be achieved by carrying out a tactile search for the hot spots behind the aircraft panels with the back of the hand.

1. Carry out a tactile search.
2. Locate the area hot to the touch (Hot spot)
3. Communicate to other CCMs
4. Obtain directives from the PIC to open a or create an opening above the hot spot to pass extinguisher nozzle
5. When opening panels with an axe precautions should be taken not to damage aircraft equipment and wiring
6. Discharge extinguisher.
7. Monitor area for re-ignition

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 32

4.4.6.15 Engine Torching

At the beginning of a flight an engine may exhaust fire and smoke upon start-up, due to residual fuel settling in the burner of the engine. When engine torching is observed CCMs should calm passengers and inform the PIC

4.4.6.15.1 Engine Fire

1. Inform Flight Crew or Engineer
2. Be alert for a possible evacuation

4.4.6.16 Auxiliary Power Unit Fire (APU)

1. Inform Flight Crew or Engineer
2. Be alert for a possible evacuation

4.4.6.17 Fuel Spills/Fires

1. Inform Flight Crew or Engineer
2. APU should be shut down and refuelling stopped
3. Switch off all electrical equipment immediately
4. Be alert for a possible evacuation
5. Standby with Fire-Fighting equipment until the airport emergency services arrive

4.4.6.18 Flight Deck Fires

1. Halon/BCF extinguisher shall be used, on any fire occurring in the flight deck
2. While using the fire extinguisher inside the flight deck, CCMs should wear a smoke hood, heat resistant gloves for their safety.
3. Extinguisher shall not be used on any crew member

Note: It's mandatory that Flight crew members have to don, their oxygen masks prior to CCMs discharging the extinguisher.

4.5 Fuelling with Passengers

4.5.1 Flight Crew/Ground Engineer Responsibilities

Ref 2.23.2/3

4.5.2 Flight Dispatchers Responsibilities

Ref 2.23.1

4.5.3 Cabin Crew Responsibilities

Ref 2.23.4

4.5.4 Fuel Jettison (Dumping)

Fuel jettisoning is carried out for quick reduction of aircraft weight. Flight Crew would liaise with the Purser and may carry out an announcement to the passengers. Jettisoning fuel may be visible from the cabin in the form of two vapour trails from the wings. CCMs should calm and reassure passengers.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 33



4.6 Evacuation

4.6.1 Types of Evacuation

Most emergencies occur during take-off and landing. CCMs shall prepare themselves for an emergency with no prior warning. Passenger /Cabin/galley preparations shall be carried out prior to every take-off and landing and CCMs shall observe STS when secured for a take-off and landing in anticipation for an emergency.

Evacuating an aircraft shall be determined by the situation depending at that moment and at present what it might lead to. Assessment and sound judgement shall be a key factor to arrive at a final decision. There is a significant difference of a rapid de-planing as a preventive measure and an evacuation after a disaster.

4.6.1.1 Prepared

The PIC has time to advise CCMs of the nature of the emergency and his intentions and the CCMs may have sufficient time to prepare the passengers/cabin and galleys prior to impact appropriately (phase 1/2/3). **Ref 4.10/11**

4.6.1.2 Unprepared

The PIC has minimum or no time available to advise CCMs of the nature of the emergency and his intention.

WARNING: IN AN EMERGENCY CCMS SHALL NOT PLACE THEMSELVES IN DANGER, BUT CALCULATED RISKS MAY BE TAKEN TO ACHIEVE THE PRIMARY OBJECTIVE OF SAVING LIFE

CCMs should be alert to react to any situation in the shortest possible time. Evacuating passengers from the aircraft shall be completed within 90 seconds with half the exits in operation.

The ability of CCMs to prevent an emergency developing into a disastrous situation depends upon their judgment and efficiency.

As with any unplanned impact, one of the first actions cabin crew need to take is to shout out, the commands to adopt the brace position. This will reduce the amount of injury to the passengers and give them a better chance of being able to evacuate the aircraft and survive. There maybe be more than one impact and everyone will need to remain in the brace position until the aircraft finally comes to a complete stop

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 34

4.6.2 Silent Thirty Second Review (STS)

When CCMs are secured for take-off and landing, each CCM shall silently review the five actions which relate to an emergency situation as follows:

- Brace for impact
- Door operation
- Evacuation commands
- Evacuation route
- Passenger control

4.6.3 Land Evacuation at an Aerodrome

An evacuation at an aerodrome is supported by emergency rescue teams such as fire rescue/medical aid/emergency response teams etc.

4.6.3.1 Away From an Aerodrome

An evacuation away from an aerodrome would result in unforeseen situations on impact and after an evacuation. CCMs would be faced with many challenges in medical and survival demands.

4.6.4 Water Evacuation

Serious injuries or fatalities during evacuations in water are due to deceleration forces and failure to board rafts. Floatation is the most important requirement for survival in water. The aircraft may float unless it is badly damaged, however, CCMs should evacuate all passengers in the shortest possible time, as it may be difficult to assess how long the aircraft will remain afloat.

4.6.4.1 Tidal Flats

Also known as mudflats as coastal wetlands that turning in areas when the (sea water meets the land) where sediment has been deposited by tides or rivers. Areas when sediment from rivers run off or inflows from tides, deposit mud or sand. Levels of walls built to prevent water reaching terrain on an air field. Tidal Flats is an external factor affecting an evacuation.

4.6.5 Initiating an Evacuation

An emergency evacuation command can be initiated from either the flight deck or the FAP/AAP or PA. The visual indicators are installed in the flight deck/FAP and AAPs. The audio (pulsating) horn is heard throughout the cabin. CCM shall begin evacuation immediately upon F/D Command. To initiate an evacuation, primarily the aircraft has to come to a complete stop. Ensure engines are not running before opening door directly forward or aft of an engine. Be prepared for more than one impact. Conditions for CCMs to initiate an evacuation without waiting for commands from Flight Deck are, but not limited to the the below life threatening situations:

1. Smoke
2. Fire
3. Structural damage
4. Abnormal condition of the aircraft
5. Threat to life

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Note - CCMs shall initiate an evacuation during a ditching after the aircraft has stopped, CCM shall immediately initiate evacuation after evaluating the outside conditions for water level or other hazards.

4.6.5.1 Initiation from the Flight Deck

PA announcement and or by pressing the EVAC command

Indications in the Cabin

CHIME	Pulsating horn throughout the cabin.
AIP	EVAC Alert with a flashing red-attention getter
FAP/AAPs	EVAC reset switch flashes red.
ACP	No Indications

When the PIC initiates an evacuation, he will be guided by the following order of priority:
Once the aircraft comes to a complete stop, command:

“ATTENTION CABIN CREW AT STATIONS”.

Carry out the check list. (Approximately 20 seconds), Ensure the engines are shut down.,Command:

“EVACUATE, EVACUATE EVACUATE”.

The Flight Crew is not required to inform the side or doors to be used for evacuation, Once the aircraft comes to a complete stop and if no command from the Flight Crew is initiated, CCMs shall take the responsibility to initiate an evacuation under conditions stipulated, Ref 4.6.5

4.6.5.2 Initiated From the Cabin (FAP) or AAP (If Available)

Initiate the PA announcement to evacuate and Press EVAC command on FAP



Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 36

Indications in the Flight Deck

A 3-seconds buzzer and the EVAC alert light will illuminate in the flight deck.

Indications in the Cabin

The EVAC CMD switch on the FAP will brighten. The indications are similar as when initiated from the flight deck. **Ref 4.6.5.1**

4.6.5.3 Initiated From Any CCM Station

Depending on cases which are life threatening, CCMs should use their best judgment to initiate an evacuation, but shall try to establish communication with the Flight Crew prior to initiating an evacuation.

Ref 4.6.5

CCMs could initiate an evacuation from any station through the PA system once the aircraft has come to a complete stop, the commands would be.

“EVACUATE, EVACUATE, EVACUATE”

4.6.5.4 Silencing the EVAC Command

Press ‘EVAC RESET’ prior to commencing an evacuation. It silences the EVAC alert horn on the FAP/AAPs area wise.

4.6.5.5 Accidental Activation of an EVAC Command

Press EVAC command switch at the originating station. A PA announcement shall be initiated immediately.

“ATTENTION CREW DISREGARD EVACUATION COMMAND”

4.7 Gate/Apron Emergencies

An emergency which could occur when the aircraft is parked with or without steps/aero-bridges being connected. To de-plane (depending on the situation) it is recommended to use the aero-bridge and/or stairs to minimize injuries. However in the event of an evacuation there is no restriction in deploying slides to evacuate.

CCMs shall ensure the slides are armed prior to opening the door and the ground area is clear of obstruction. In the event a passenger transport vehicle is used to de-plane passengers, care should be taken to ensure correct positioning steps /aero-bridges prior to commanding passengers to evacuate.

4.7.1 Conditions to Evacuate/ De-plane

Depending on the seriousness of the situation, there could be a call for an evacuation. CCMs may initiate an evacuation due to but not limited to, life threatening conditions.

The proximity of fire or wreckage could make a slide unusable. Extreme wind conditions could cause the slide to move or slides may deploy at an unexpected angle. CCMs should assess the situation prior to ordering passengers to evacuate.

The passengers may be de-planed as a preventive measure if the situation is not serious. **Ref 4.6.5**

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 37

4.7.2 Nose Gear Collapse

AFT Slides(L4/R4) should not be used for evacuation as the angle could be too steep and the slide may not reach the ground.



4.7.3 Main/Total Gear Collapse


All slides may be used for an evacuation.

Note - Main Gear Collapse L3, R3 ,L4, R4 and Total Gear Collapse all doors, the command shall be “Run down the slide”. This is due to the reduced angle of the slides.



Directing Passengers

The Passenger should be directed to move away from the aircraft after de-planing/evacuation. It is recommended to move the passengers up-wind to avoid the danger of embers which could be blown towards the passengers.

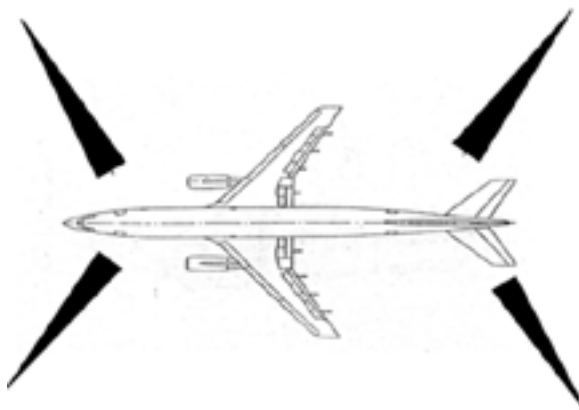

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 38

4.8 Evacuation Commands

General

CCMs shall be in uniform to be easily identifiable and for commanding passengers during an emergency. A high degree of authority and calmness should be maintained during an emergency.

Passengers with negative emotions should be dealt firmly. Passengers should be prevented from assuming leadership, as their directives may confuse and result in loss of life.

Commands to the passengers should be positive/relevant/timely and delivered in a firm authoritative manner. CCMs shall take a protective position at the exit by holding on to an assist handle and avoid obstructing the free flow of passengers.

Passengers should be prevented from sitting down on the door-sill. However, if they do sit down, do not bend down to assist them but use the foot or knee to guide them. If exits are congested passengers should be redirected to usable exits

4.8.1 Emergency Landing

Commands

PREPARED	UNPREPARED
<i>“OPEN SEAT BELTS/EXITS OVER HERE COME THIS WAY,”</i> <i>“YOU TWO STAY AT THE BOTTOM AND HELP “</i> (Pre-selected ABPs) <i>“MOVE FASTER, JUMP AND SLIDE”</i>	Preparation Commands <i>“REMOVE HIGH HEELED SHOES, LEAVE EVERYTHING BEHIND”</i> <i>“OPEN SEAT BELTS/EXITS OVER HERE YOU COME THIS WAY, YOU STAY AT THE BOTTOM AND HELP “</i> (Randomly selected of ABPs) <i>“MOVE FASTER, JUMP AND SLIDE”</i>
Commands at L2 / R2 Exits All of the above and as there is a ramp extended when the slide is deployed <i>“WALK JUMP AND SLIDE”</i>	

4.8.2 Inflated and Deflated Slide

If the inflated slide deflates, instruct four ABPs once evacuated from the aircraft to hold the no fail handles and direct one passenger at a time to evacuate.

Commands to ABPs

“STAY AT THE BOTTOM AND HELP”

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 39

4.8.3 Blocked Exit

Passengers should be directed to usable exits to expedite the evacuation.
CCM shall remain at the door and redirect passengers to usable exits. Inform in brief the reason the exit is blocked. Assess usability of other exits prior to re-directing passengers.

Commands

***“EXIT BLOCKED/FIRE OUTSIDE ,
GO BACK/GO FORWARD/CROSS OVER THE AISLE/CROSS THROUGH THE SEATS”***
etc

4.8.4 Ditching

Commands

PREPARED	UNPREPARED
<i>“OPEN SEAT BELTS/EXITS OVER HERE COME THIS WAY, INFLATE LIFE VESTS”</i> (At the door-sill) <i>“YOU TWO BOARD RAFT AND ASSIST OTHERS”</i> (Pre-selected ABPs) <i>“MOVE FASTER, STEP INTO THE RAFT/CRAWL TO THE FAR END”</i>	Preparation Commands <i>“LIFE VEST UNDER YOUR SEAT, TAKE IT OUT, PUT IT ON, REMOVE HIGH HEELED SHOES , LEAVE EVERYTHING BEHIND”</i>
	<i>“OPEN SEAT BELTS/EXITS OVER HERE COME THIS WAY, INFLATE LIFE VESTS “</i> (At the door-sill) <i>“BOARD RAFT AND ASSIST OTHERS”</i> (Randomly selected ABPs) <i>“MOVE FASTER, STEP INTO THE RAFT/CRAWL TO THE FAR END”</i>
Raft Commands <i>“REMAIN SEATED IN THE RAFT, CRAWL TO THE FAR END”</i>	Raft Commands <i>“REMAIN SEATED IN THE RAFT, CRAWL TO THE FAR END”</i>

4.9 Prepared/Unprepared Emergency

4.9.1 Impending Emergency/Pilot Incapacitation

Alert Signal from Flight Deck to Cabin

During a prepared emergency or pilot incapacitation the Flight Crew shall initiate the following announcement;

“PURSER TO THE FLIGHT DECK IMMEDIATELY”.

Note - in the event of an Abnormal or Emergency situation PIC shall brief the Purser on NITS

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 40

4.9.2 NITS Briefing

On hearing the alert signal, the Purser shall proceed to the flight deck immediately for instructions and a briefing from the PIC. The purser shall acknowledge the Commander's briefing by repeating the instructions given and clarify anything unclear. Synchronize the watches.

NITS BRIEFING		
	DEFINITION	EXAMPLES
NATURE	Actual situation/threat	Technical malfunction
INTENTIONS	Intentions of the PIC	Emergency landing or ditching or diversion
TIME	Time available before touchdown	Preparation/objectives and how to achieve it/order of priorities
SPECIAL INSTRUCTIONS	Specific instruction of the threat	Exits to be used, Specific instruction of the threat/ the plan for a safe evacuation

4.9.2.1 Following NITS Briefing

The Purser must take note of the time in order to manage the time available for the relay briefing. A certain amount of time is allocated to each task on each phase. The Purser will need to closely monitor the time in order to accomplish as many tasks as time permits

1. On receiving the NITS briefing, the Purser shall relay brief CCMs by initiating an all station call or conducting a face to face briefing in the forward galley
2. Cabin Crew shall in turn acknowledge clear understanding of all points correctly.

4.9.2.2 Cabin Crew Procedures Following The PIC's Call

Cabin crew upon hearing the command

"Purser to the flight deck immediately"

1. A senior CCM to make an announcement instructing passengers to return to their seats and to fasten the seat belts
2. Suspend service, stow and secure trolley/carts.
3. Secure galley and loose equipment.
4. All CCMs to take their stations and await an all station call.

4.9.3 Emergency Communication

Each emergency situation is unique and no procedure can include all possible types of emergency situations. Neither is it possible to dictate the exact procedure to follow in such situations. Emergencies could occur with no indications or warning in the flight deck, such as, Auxiliary power unit fire/refueling truck fire/cabin fire/smoke in the cabin/noise and vibrations from the aircraft etc.

Providing and receiving instructions should be clear and concise without ambiguity. CCMs receiving instructions should verify and ensure the directives are clearly understood. As appropriate, depending on the situation, CCMs should try to establish communication with the Flight Crew prior to initiating an

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 41

evacuation. However, in cases which are life threatening, CCMs shall use their own initiative to order an evacuation. **Ref 4.6.5**

4.9.3.1 Cabin to Flight Deck

Press **PRIO CAPT** on the hand set and await communication and response.

4.9.3.2 Purser to CCMs

On receiving the NITS briefing, the Purser should (relay) brief CCMs by initiating an all station call or by conducting a face to face briefing.

4.9.3.3 Effective Communication Skills

Crew shall use accepted and commonly used aviation phrases when the need arises to communicate mandatory information.

4.10 Preparation for an Emergency Landing

Phases of Preparation

Depending on the time available, phase 1, 2 and 3 should be carried out prior to impact. If time is restricted, completion of phase 1 is mandatory.

1. The Purser shall receive the NITS briefing. **Ref 4.9.2**
2. CCMs shall secure cabin/galleys and standby for the briefing.
3. Purser shall carry out the relay briefing.
4. The cabin lights should be maintained at full intensity.
5. PIC shall carry out a PA announcement regarding the emergency.
6. Purser shall initiate emergency preparation phase 1.
7. CCMs to carry out emergency preparation phase 1.
8. CCMs commence emergency preparation Phase 2.
9. Purser may call for volunteers as ABP/Buddies.
10. Door primaries shall brief ABPs.
11. CCMs shall brief Buddies and re-seat them.
12. CCMs commence emergency preparation Phase 3.
13. Secure self for impact.

4.10.1 PIC- Emergency Landing Announcement

An appropriate announcement shall be carried out by the PIC,

“LADIES & GENTLEMEN, THIS IS YOUR CAPTAIN

WE PLAN TO MAKE AN EMERGENCY LANDING IN ... MINUTES. IT MAY BE NECESSARY TO EVACUATE THE AIRCRAFT AFTER LANDING. PLEASE PAY ATTENTION TO THE CABIN CREW MEMBER’S INSTRUCTIONS & FOLLOW THEM AT ALL TIMES. YOUR CO-OPERATION IS ESSENTIAL.

THANK YOU”

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 42

4.10.2 Emergency Preparation - Phase 1

Demonstration


Before the emergency demonstration begins, the cabin crew shall ensure that:

- The class dividers are open
- The lighting is selected to full intensity.
- The entertainment system is switched off

The cabin crew shall carry out a manual demonstration in their assigned areas. In order to conduct an effective briefing, the cabin crew must not distract the passenger's attention.


1. Method to fasten/tighten and open seat belts
2. Bracing positions (The diagram should be pointed out on the safety card).
3. Point out the closest and alternate exits

Demonstration Positions A330-200

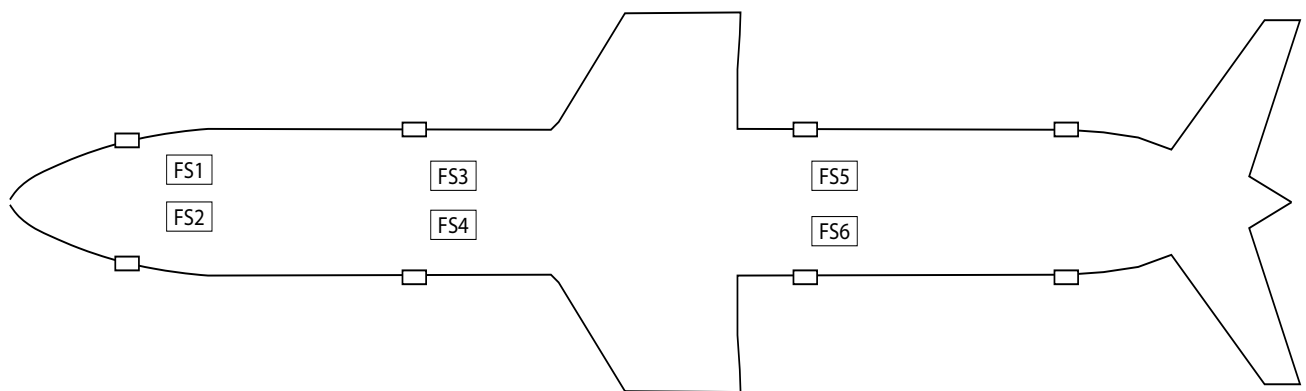

CS1 shall demonstrate if S1 is not detailed.

Demonstration Positions A330-300

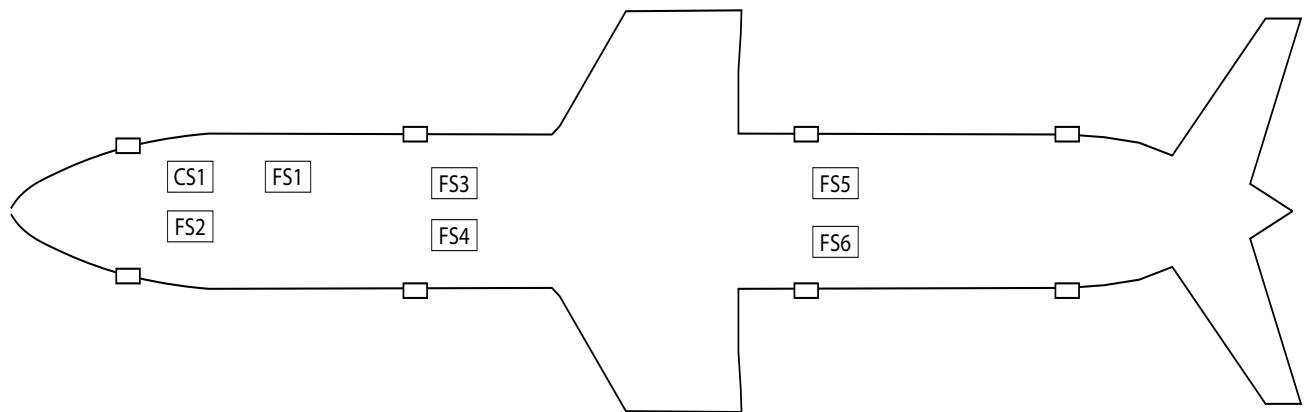

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 43

4.10.2.1 Demonstration Announcement – Ground

PURSER	CCM ACTIONS
<i>“CREW TO YOUR DEMONSTRATION POSITIONS”</i>	Demo positions: with seat belts/safety card.
<i>“LADIES AND GENTLEMEN, WE SHALL NOW GIVE YOU MORE DETAILED INFORMATION IN PREPARATION FOR AN ORDERLY AND SAFE EVACUATION. YOU MUST FOLLOW THE INSTRUCTIONS OF THE CREW AS THEY HAVE BEEN TRAINED TO EVACUATE YOU SAFELY.”</i>	
<i>“PLEASE RETURN TO YOUR SEATS, REMAIN CALM AND LISTEN CAREFULLY TO THE INSTRUCTIONS”</i>	Ensure all passengers are seated.
<i>“YOU ARE REMINDED THAT SMOKING IS PROHIBITED.”</i> (Pause)	
<i>“TO FASTEN YOUR SEAT BELT, INSERT THE METAL FITTING ON ONE STRAP INTO THE BUCKLE ON THE OTHER STRAP AND TIGHTEN. WHEN INSTRUCTED TO OPEN YOUR SEATBELT, LIFT THE UPPER PORTION OF THE BUCKLE. “</i> (Pause)	Demonstrate the fastening / tightening and opening of the seat belt.
<i>“THIS IS THE BRACING POSITION YOU HAVE TO ADOPT BEFORE IMPACT. WHEN YOU HEAR THE COMMAND TO BRACE, ADOPT THE BRACING POSITION AS SHOWN.”</i> (Pause)	Point to the bracing picture on the safety card and show the location of the safety card walk down a few rows.
<i>“THE EMERGENCY EXITS ARE LOCATED ON BOTH SIDES OF THE AIRCRAFT AND ARE INDICATED BY THE EXIT SIGNS AND FLOOR PATH MARKINGS ; THE CREW WILL NOW INDICATE THE NEAREST EXITS TO YOU. DO NOT CARRY YOUR BELONGINGS WITH YOU AS THIS MAY DELAY THE EVACUATION.”</i> (Pause)	Point to the floor path marking, Point to the exits in sequence, aft exits/right turn/show the closest/fwd exits.
<i>“PLEASE READ THE SAFETY INSTRUCTION CARD NOW.”</i> (Pause)	CCM holds up safety leaflets and shows both sides.
<i>“STOW HAND BAGS UNDER YOUR SEATS. PLACE YOUR SEAT BACK IN THE UPRIGHT POSITION, STOW YOUR TRAY TABLE AND FOOTREST, LEAVE THE HEAD SETS IN THE SEAT POCKET IN FRONT OF YOU. PLACE YOUR ARMREST DOWN. YOU’RE COOPERATION AND ASSISTANCE IS EXTREMELY IMPORTANT. AS THERE COULD BE MORE THAN ONE IMPACT, DO NOT OPEN YOUR SEAT BELTS UNTIL THE AIRCRAFT COMES TO A COMPLETE STOP.”</i>	
<i>“CREW PREPARE CABIN”.</i>	
<i>“LADIES AND GENTLEMAN, AIRLINE CREW, SHIPS CREW, MILITARY PERSONNEL OR OTHER PERSONNEL, WHO WISH TO ASSIST IN THE EVACUATION, PLEASE IDENTIFY YOUR-SELF TO A MEMBER OF THE CABIN CREW, THANK YOU!”</i>	

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 44

4.10.2.2 Purser Announcement to Clear the Cabin

***“LADIES AND GENTLEMEN,
WE WOULD BE CLEARING THE CABIN IN PREPARATION FOR IMPACT,
STOW YOUR SPECTACLES IN THE SEAT POCKET.
HIGH-HEELED SHOES TO BE HANDED OVER TO THE CREW, WE RECOMMEND FLAT SHOES IN PREPARATION FOR THE EVACUATION.
YOUR IMMEDIATE RESPONSE IS ESSENTIAL,
THANK YOU.”***

4.10.3 Emergency Preparation - Phase 2

Preparations are carried out to obtain the most effective protection against an impact.

1. Passenger preparation.
2. Cabin preparation.
3. Galley preparation.

4.10.3.1 Passenger Preparation

Passenger preparation should commence from the forward of each zone for a faster response and clearance.

While clearing the cabin, passengers should be requested to stow all cabin baggage/loose luggage/open all window blinds/stow chair tables/chair backs placed upright/ footrest stowed/ seat belts fastened. The cabin clearance should commence on completion of the demonstration using bags (sales/garbage). Spectacles/pens should be removed for impact and stored in the seat pocket. Ensure passengers stow hazardous items (if any) and loosen their ties and unbutton the collars. Females should remove high-heeled shoes in order to be able to brace for impact with feet firmly on the floor and to prevent the slide from being damaged when evacuating. High heel shoes should not be placed in seat pocket as there is a possibility that they may injure the passenger when adopting the bracing position. Passengers to be advised to wear a flat pair of shoes.

4.10.3.2 Responsibilities of Cabin Clearance

F/SS2/F/SS4	L1 to L2 and stow the items in the lavatory at L2. Continue L2 to L3 and stow the items in the lavatory at L3.
F/SS1/F/SS3	R1 to R2 and stow the items in the lavatory at R2 Continue R2 to R3 and stow the items in the lavatory at R3
F/SS6/G2	L3 to L4 and stow the items in the lavatory at L4 or L3.
F/SS5/CS3	R3 to R4 and stow the items in the lavatory at R4 or R3

The toilet bowl shall be closed and lavatories locked after checking the cabin

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 45

4.10.3.3. Selecting/Briefing ABPs - Prepared Emergency Landing

ABPs shall be profiled and selected during boarding by each CCM to be utilized only during an emergency.

Three ABPs per exit should be selected to assist CCMs during an evacuation and be briefed based on:

1. Willingness to help
2. Physically fit
3. Preferably traveling alone
4. Speaks and understands the language
5. Not nervous/not intoxicated
6. Be over the age of 18

Door Primaries should introduce self to the selected ABPs and brief them on the assistance required. The briefing should be carried out at the respective door primary exit and allocate seats for them closest to the exit where assistance is required.

Ensure the ABPs fully understood the instructions by requesting them to repeat the steps/question them to avoid misunderstanding and confusion. One ABP shall be briefed to take over the duties of the door primary in case of crew incapacitation. The other two ABPs shall hold back passengers during door operation, slide inflation and slide down to assist passengers at the bottom of the slide.

Preference to selection of ABP shall be given to the following passengers

Trained airline personnel/Armed forces/ship's crew etc.
First aiders/sports reps etc.
Traveling alone/volunteers

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 46

Given below is a guide to brief ABPs.

1. Wait until the aircraft comes to a complete stop
2. Await for command (Evacuate) and/or when other doors are been opened
3. Check outside for danger (Fire/Smoke/Obstructions)
4. Hold assist handle and lift the door handle fully up and push open the door, Pull the manual inflation handle (Bottom Right)
5. Check for correct slide inflation (Show safety card)
6. Send two ABPs to evacuate as soon as the slide is inflated to assist CCM/passengers
7. Remove incapacitated CCM and send down the slide
(Demonstrate the opening of seat belts)
8. Ensure passengers are evacuated, be forceful if required
9. Ensure a smooth flow of passengers
10. If the exit cannot be used, Block Exit & redirect PAX to usable exits.

4.10.3.4 Selecting/Briefing ABPs- Unprepared Emergency Landing

Identify ABPs whilst evacuating and brief them.

1. To slide down and assist at the bottom of the slide
2. Assist in crowd control
3. Help passengers who require special attention

4.10.3.5 Selecting/Briefing of Buddies – Prepared Emergency Landing

Buddies are required to assist passengers with medical and assistance alert. **Ref 2.24**

Selection should be on the same guide lines of selecting an ABP. **Ref 4.10.3.3**

Purser to ensure the following guidelines are followed when CCMs brief buddies

1. Introduce the dependent by name.
2. Explain the nature of assistance needed by the dependent.
3. Seat the buddy next to the dependent.
4. Inform the buddy to evacuate last to avoid any injury to the dependent (passengers with medical Alert)

4.10.3.6 Re-Seating Of Passengers

Passengers reseating shall be done with the authorization of the PIC. Reseating is required for better protection against impact by moving PAX from overloaded seats to empty seats. When possible, it is recommended to reseat two passengers in each triple row of seats.

Note : A seat row which is not fully occupied will withstand a higher impact force than a fully loaded row of seats.

4.10.3.7 Restrained Passengers

Passenger restrains (if used) should be removed during passenger preparation appropriately with the

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 47

authorization of the PIC.

4.10.3.8 Cabin Preparation

Loose equipment/objects as mentioned below but not restricted to, should as appropriate be removed /cleared /stowed /secured /latched/restrained/opened.

1. Bassinets
2. Individual video screens/drop-down monitors
3. Headsets
4. Overhead stowage compartments (maintain allowable weight as placarded).
5. Newspapers and magazines
6. Exits/aisles and cross aisles
7. Class divider curtains
8. Window blinds/blinds on doors
9. Un-used loose equipment

4.10.3.9 Galley Preparation

Loose objects/equipment as mentioned below but not restricted to, should be removed /cleared/ stowed/secured/latched/restrained/opened/closed.

1. Carts/trolleys/air ladders/Curtains
2. Waste carts/waste bins flap closed

Note : Crew shall remove personal items such as pens, name tags and pins

4.10.4 Emergency Preparation - Phase 3

Rechecking

Phase 3 is carried out when time permits to ensure clearance/preparation of phase 1 and 2 is satisfactorily completed. The re-check includes any other preparations not carried out in phase 1 and 2

Ref 4.10.2/3

1. The seatbelts are fastened and adjusted
2. Tray- tables stowed, seat back in the upright position
3. Window blinds opened
4. IVS stowed and strapped
5. Special passengers have understood their bracing positions
6. All dependants are seated with buddies
7. All Infants and children are seated with adults
8. Safety seating arrangements adhered to
9. CCMs report to the Purser that the assigned duties have been completed
10. Purser to confirm completion of preparation and seek update of situation / time remaining from PIC
11. Cabin lights adjusted accordingly to the outside conditions

4.10.5 Commands Prior To Impact

CCM shall be seated at their designated seats restrained and observe STS. **Ref 4.6.2**

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 48

“CABIN CREW TO BE SEATED FOR LANDING”.

Approximately **20 Seconds** prior to impact, the brace command shall be initiated by the PIC

“BRACE BRACE BRACE”.

CCMs shall adopt the brace position and continue to shout the below commands until the aircraft reaches a complete stop.

“HEADS DOWN, STAY DOWN”.

4.10.6 Command for Evacuation

If an evacuation is required the PIC shall initiate the EVAC command. **Ref 4.6.5.1**

“EVACUATE, EVACUATE, EVACUATE”.

Indications in the cabin : Ref 4.6.5.1

If the P.A is unserviceable, PIC and the Purser shall coordinate on a signal to be used.

4.10.6.1 The Cabin Evacuation Process

The evacuation must begin immediately upon receiving the evacuation signal. Positive, assertive action from the cabin crew will directly impact the rate and flow of passenger movement to the exits and down the slides. The commands used by the cabin crew are an essential part of the evacuation process. Commands should be:

1. Assertive
2. Short
3. Loud
4. Clear
5. Negative commands shall not be used

4.10.7 Emergency Landing CCM Responsibilities

Door Primary

AS DIRECTED BY PIC, COMMENCE EVACUATION COMMANDS
CHECK FOR OUTSIDE CONDITIONS. Ref 4.10.7.4
ENSURE THE LEVER IS IN THE ARMED POSITION
OPEN THE DOOR/CHECK FOR CORRECT INFLATION AND ANGLE OF SLIDE
IF SLIDE DOES NOT INFLATE, PULL THE MANUAL INFLATION HANDLE
ENSURE CORRECT SLIDE INFLATION
INSTRUCT 2 ABPs TO EVACUATE AND ASSIST AT THE BOTTOM OF THE SLIDE

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 49

ORDER EVACUATION/DIRECT PASSENGERS TO SLIDE
AFTER ALL HAVE EVACUATED CHECK YOUR AREA/ASSIST IN OTHER AREAS
WHEN ALL ASSISTANCE RENDERED, EVACUATE(WITH RELEVANT SAFETY EQUIPMENT)
ASSIST ON GROUND
Blocked Exit (Door Opened)
REMAIN AT THE EXIT
ATTACH RESTRAINING STRAP
SECURE SELF (HOLD ON TO AN ASSIST HANDLE)
REDIRECT PASSENGERS TO USEABLE EXITS
Blocked Exit (Door Closed)
REMAIN IN THE IMMEDIATE VICINITY OF THE EXIT
SECURE SELF(HOLD ON TO AN ASSIST HANDLE)
REDIRECT PASSENGERS TO USABLE EXITS

Door Assist

CHECK ON PRIMARY - IF INCAPACITATED TAKE OVER THE PRIMARY DUTIES
AS DIRECTED BY THE PIC, COMMENCE EVACUATION COMMANDS
ASSIST IN EVACUATION
DIRECT PASSENGERS TO SLIDE
ENSURE EVEN FLOW OF PASSENGERS
CHECK YOUR AREA, ASSIST IN OTHER AREAS
WHEN ALL ASSISTANCE RENDERED EVACUATE AND ASSIST ON GROUND

Use eye contact/positive commands/effective body language and if required physical force to ensure passengers safety. ABPs assistance may be used to block an exit.

4.10.7.1 Prepared Emergency Landing Flight Crew Check List

CREW	PRE-LANDING	POST-LANDING
PIC	1. EMER call to Purser/NITS briefing 2. Announcement to passengers 3. Command crew to be seated 4. Command to brace	1. Order/Activate EVAC command 2. Assist in evacuation 3. Evacuate (preferably R4 door)
F/O	1. Follow PIC instructions	1. Take Take the Emer. Medical Kit (A10)/assist in evacuation 2. Evacuate (preferably L4 Door)

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

4.10.7.2 Unprepared Emergency Landing Flight Crew Checklist

CREW	PRE-LANDING	POST-LANDING
PIC	1. Command to brace	2. Order/Activate EVAC command 3. Assist in evacuation 4. Evacuate (preferably R4 door)
F/O	5. Follow PIC instructions	6. Take the Emergency Medical Kit (A10)/assist in evacuation 7. Evacuate (preferably L4 Door)

4.10.7.3 Prepared Emergency Landing Door Primary Checklist

CREW	PRE-LANDING	POST-LANDING
L1	1. Receive NITS briefing 2. Brief CCMs 3. Carry out preparation phases 4. Report to PIC 5. Secure self/STS 6. Brace Position/Repeat command	1. Activate emergency lights 2. Order/Activate EVAC command (optional) 3. Silence EVAC horn 4. Check outside conditions/open L1 door 5. Expedite evacuation 6. Check your area/assist in other areas 7. Take ELT/Megaphone/Torch 8. Evacuate
R1	1. Secure galley (FWD) 2. Carry out/supervise preparations 3. Report to Purser 4. Secure self/STS 5. Brace Position/repeat command	1. Check outside conditions/open R1 door 2. Expedite evacuation 3. Check your area/assist in other areas 4. Take F/A kit & Torch 5. Evacuate
L2	1. Carry out/supervise preparations 2. Report to Purser 3. Secure self/STS 4. Brace Position/repeat command	1. Silence the EVAC horn 2. Check outside conditions/open L2 door 3. Expedite evacuation 4. Check your area, assist in other areas 5. Take Torch 6. Evacuate
R2	1. Secure galley (MID) 2. Carry out preparations 3. Report to CS2 4. Secure self/STS 5. Brace Position/repeat Command	1. Check outside conditions/open R2 door 2. Expedite evacuation 3. Check your area, assist in other areas 4. Take F/A kit & Torch 5. Evacuate

L3	1. Carry out preparations 2. Report to CS3 3. Secure self/STS 4. Brace Position/repeat command	1. Check outside condition/open L3 door 2. Expedite evacuation 3. Check your area/assist in other areas 4. Take Torch and AMBU 5. Evacuate
R3	1. Carry out preparations 2. Report to CS3 3. Secure self/STS 4. Brace Position/Repeat command	1. Check outside conditions/open R3 door 2. Expedite evacuation 3. Check your area/assist in other areas 4. Take Torch and F/A kit 5. Evacuate
L4	1. Secure galley (AFT) 2. Carry out preparations 3. Report to CS3 4. Secure self/STS 5. Brace Position/repeat command	1. Silence the EVAC Horn 2. Check outside conditions/open L4 door 3. Expedite evacuation 4. Check your area, assist in other areas 5. Take Torch and F/A Kit Evacuate
R4	1. Carry out/Supervise preparations 2. Report to Purser 3. Secure self/STS 4. Brace Position/repeat command	5. Check outside conditions/open R4 door 6. Expedite evacuation 7. Check your area/assist in other areas 8. Take Torch/Megaphone/ELT 9. Evacuate
Asst	10. Carry out preparations 11. Report to relevant CS 12. Secure self/STS 13. Brace Position/repeat command	14. Check on the door primary 15. If incapacitated take over duties 16. Assist in evacuation 17. Check your area/assist in other areas 18. Take torch 19. Evacuate

4.10.7.4 Assessing Outside Conditions

Before opening an exit, the cabin crew must check that the outside conditions are safe, and that the slide deployment area is clear of:

1. Fire
2. Smoke
3. Obstructions
4. Debris.

The cabin crew should open the exit, only if it safe to do so by holding on to the assist handle of the door frame. The cabin crew can use commands such as '**STAND BACK, STAND BACK**' to hold back passengers, during the exit opening and slide deployment sequence.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 52

4.10.7.5 Unprepared Emergency Landing Door Primary Checklist

The only warning from the flight deck prior to impact may be

“BRACE, BRACE, BRACE”

Ref 4.10.5

On command from the Flight Crew, CCMs shall assume brace positions and instruct passengers to brace by shouting out

“HEADS DOWN, STAY DOWN”

Commence evacuation preparation commands

***“REMOVE HIGH HEELED SHOES,
LEAVE EVERYTHING BEHIND”***

4.10.7.6 Prepared/Unprepared Emergency Landing Door Assist Check List

Door assist shall check on the door primary

If primary is incapacitated take over as door primary

1. Assist in evacuation
2. Control passengers
3. Ensure even flow of passengers
4. Coordinate with the door primary

4.10.8 Crowd Control

Successful evacuations have been achieved due to CCMs having control over the situation and passengers following instructions. Be assertive when commands and instructions are carried out to passengers as reactions of the passengers will vary. Such as,

1. Panic (screaming/crying/hysterical)
2. Negative panic (does not react to the situation)
3. No perception that danger exists
4. Exiting with carry-on baggage
5. Attempt to get ahead of the others

4.10.9 Use Of The Assist Space

Each aircraft has a dedicated assist space located on either side of the door. If possible, use the assist space facing most of the passengers. The cabin crew must firmly grasp the frame assist handle and position themselves correctly in the assist space. This will prevent the cabin crewmember being pushed out and obstructing the evacuating passengers.

4.10.10 Restrained Passengers

Passenger restrains (if used) should be removed during passenger preparation appropriately with the authorization of the PIC (Use scissors).

4.10.11 Post Evacuation CCM Responsibilities away from an aerodrome

1. Move all the passengers upwind to a safe distance from the aircraft
2. Direct passengers away from fuel, fire, rescue and service vehicles


Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 53

3. Carry out a headcount
4. Administer first aid
5. Activate signalling and Transmitting devices
6. If safe, CCM may enter the aircraft to retrieve items for survival
7. Make no comment directly to the Press

4.10.12 Techniques to Slide

As the slide raft is of rubber coated canvass, the naked skin in contact with the slide would be subject to friction and can cause burns to the skin while sliding down. Recommended precautionary methods to slide down protecting the hands are as follows,

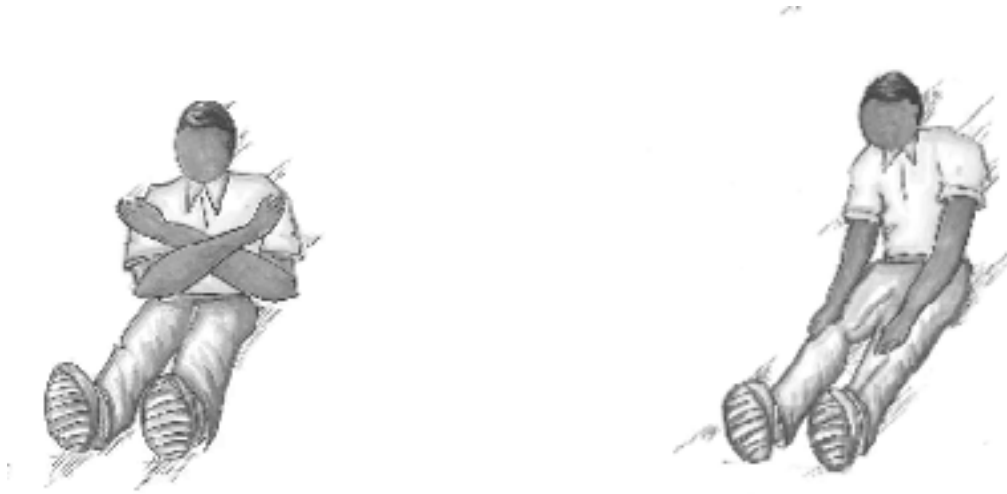

4.10.13 Evacuation of a stretcher passenger

Check with the accompanying medical practitioner regarding the stretcher passengers' special needs and lifting techniques during evacuation. In a prepared emergency when a stretcher passenger is on board, ABP's will be required to lift the passenger off a stretcher and carried to the exit.

4.10.13.1 Evacuation Techniques

1. Sit behind stretcher Passenger
2. Secure him with the arms around the chest area.
3. Secure the wrist from under the arms of the handicapped passenger to prevent friction burns on the hands as he slides down.
4. The patient will be positioned between the ABP's knees and they will slide down together (Toboggan style)

NOTE: The hand of the handicapped passenger should be folded

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 54

4.11 Preparation for an Emergency Ditching

Phases of Preparation

Depending on time available, Phase 1, 2 and 3 shall be carried out prior to impact. If time is restricted, completion of Phase 1 is mandatory. CCMs shall wear personal life vests for the demonstration.

1. The Purser shall be briefed by the PIC (NITS)
2. CCMs shall secure cabin and galleys and standby for the briefing
3. Purser shall carry out the relay briefing
4. The cabin lights shall be switched on to full intensity
5. PIC shall carry out a PA announcement regarding the impending emergency
6. Purser shall call for emergency preparation phase 1
7. Carry out or activate pre-recorded emergency landing announcement
8. Carry out emergency preparation phase 1
9. Commence emergency preparation Phase 2
10. Distribute infant's life vest
11. Purser may call for volunteers as ABP/Buddies
12. Door primaries shall brief ABPs
13. CCMs shall brief Buddies and re-seat them.
14. Commence emergency preparation Phase 3
15. Secure self for impact

4.11.1 PIC's Emergency Ditching Announcement

An appropriate announcement shall be carried out by the PIC, but in case of workload in the flight deck it may be delegated to the Purser

"PIC'S Emergency Ditching Announcement

"Ladies & Gentlemen

This is your captain

We plan to make an emergency landing on water inMinutes. Please pay attention to the cabin crew member's instructions & follow them at all times.

Your co-operation is essential."

4.11.2 Emergency Preparation - Phase 1

Demonstrate

1. How to fasten, tighten and open seat belts
2. How to wear the life vest (crew to use their personal life vests)
3. NOTE -passengers to follow the CCM and wear the life vest
4. Bracing positions, (The correct diagram should be pointed out on the safety card)
5. Point out the closest and alternate exits.

Demonstration Announcement - Ditching

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 55

<i>“CREW TO YOUR DEMONSTRATION POSITIONS”</i>	Demo positions : with seat belts/safety card/Personal life vest.
<i>“LADIES AND GENTLEMEN, WE SHALL NOW GIVE YOU MORE DETAILED INFORMATION IN PREPARATION FOR AN ORDERLY AND SAFE EVACUATION. YOU MUST FOLLOW THE INSTRUCTIONS OF THE CREW AS THEY HAVE BEEN TRAINED TO EVACUATE YOU SAFELY.”</i>	
<i>“PLEASE RETURN TO YOUR SEATS, REMAIN CALM AND LISTEN CAREFULLY TO THE INSTRUCTIONS”</i>	Ensure all passengers are seated.
<i>“YOU ARE REMINDED THAT SMOKING IS PROHIBITED.”</i> (Pause)	
<i>“TO FASTEN YOUR SEAT BELT, INSERT THE METAL FITTING ON ONE STRAP INTO THE BUCKLE ON THE OTHER STRAP AND TIGHTEN. WHEN INSTRUCTED TO OPEN YOUR SEATBELT, LIFT THE UPPER PORTION OF THE BUCKLE.”</i> (Pause)	Demonstrate the fastening / tightening and opening of the seat belt.

<i>“THIS IS YOUR LIFE VEST DEMONSTRATION, IN BUSINESS CLASS CABIN, THE LIFE VEST IS LOCATED”</i> (Indicate actual location) • <i>“BETWEEN THE SEATS AT FLOOR LEVEL”</i> • <i>“BY THE SIDE OF THE SEAT “</i> <i>“AND IN THE ECONOMY CABIN, THE LIFE VEST IS LOCATED UNDER THE SEAT TAKE IT OUT AND PUT IT ON. PASS THE STRAP ROUND YOUR WAIST, INSERT THE FITTING INTO THE BUCKLE AND TIGHTEN BY PULLING THE STRAP. WHEN STEPPING OUT OF THE AIRCRAFT INFLATE YOUR LIFE VEST BY PULLING THE RED TABS DOWNWARDS FIRMLY OR BLOW INTO THE RUBBER TUBES”</i>	Demonstrating how to wear the life vest has to be carried out with detail as the passengers would follow your demonstration. CCM should be cautious when pulling the red tabs before it is being announced, as passengers might inflate the life vests.
<i>“THIS IS THE BRACING POSITION YOU HAVE TO ADOPT BEFORE IMPACT. WHEN YOU HEAR THE COMMAND TO BRACE, ADOPT THE BRACING POSITION AS SHOWN.”</i> (Pause)	Point to the bracing picture on the safety card and show the location of the safety card walk down a few rows.
<i>“THE EMERGENCY EXITS ARE LOCATED ON BOTH SIDES OF THE AIRCRAFT AND ARE INDICATED BY THE EXIT SIGNS AND FLOOR PATH MARKINGS.; THE CREW WILL NOW INDICATE THE NEAREST EXITS TO YOU. DO NOT CARRY YOUR BELONGINGS WITH YOU AS THIS MAY DELAY THE EVACUATION”.</i> (Pause)	Point to the floor path marking, Point to the exits in sequence, aft exits/right turn/show the closest/ fwd exits.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 56

<i>"PLEASE READ THE SAFETY INSTRUCTION CARD NOW."</i> (Pause)	CCM holds up safety leaflets and shows both sides.
<i>"STOW HAND BAGS UNDER YOUR SEATS. PLACE YOUR SEAT BACK IN THE UPRIGHT POSITION, STOW YOUR TRAY TABLE AND FOOTREST, LEAVE THE HEAD SETS IN THE SEAT POCKET IN FRONT OF YOU. PLACE YOUR ARMREST DOWN. YOU'RE COOPERATION AND ASSISTANCE IS EXTREMELY IMPORTANT. AS THERE COULD BE MORE THAN ONE IMPACT, DO NOT OPEN YOUR SEAT BELTS UNTIL THE AIR-CRAFT COMES TO A COMPLETE STOP."</i>	
<i>"CREW PREPARE CABIN".</i>	
<i>"LADIES AND GENTLEMAN, AIRLINE CREW, SHIPS CREW, MILITARY PERSONNEL OR OTHER PERSONNEL, WHO WISH TO ASSIST IN THE EVACUATION, PLEASE IDENTIFY YOUR-SELF TO A MEMBER OF THE CABIN CREW, THANK YOU!"</i>	

4.11.2.2 Purser Announcement to Clear the Cabin

<i>"LADIES AND GENTLEMEN, WE WOULD BE CLEARING THE CABIN IN PREPARATION FOR IMPACT, STOW YOUR SPECTACLES IN THE SEAT POCKET. HIGH-HEELED SHOES TO BE HANDED OVER TO THE CREW, WE RECOMMEND FLAT SHOES IN PREPARATION FOR THE EVACUATION. YOUR IMMEDIATE RESPONSE IS ESSENTIAL, THANK YOU."</i>

4.11.3 Emergency Preparation - Phase 2

Preparations are carried out as follows to minimize injury and obtain the best protection against impact.

1. Passenger preparation
2. Cabin preparation
3. Galley preparation

4.11.3.1 Passenger Preparation

Ref 4.10.3.1

Inflation of Life Vest

Infant life Vest	To be Inflated at the door sill
Children	To be Inflated at the door sill
Adult life Vest	Inflate at the door sill just prior to leaving the aircraft

The infants may remain in the inflated and secured floatation cots for the impact.

Purser Announcement to Clear the Cabin. Ref 4.11.2.2

4.11.3.2 Cabin Clearance Responsibilities

Preparation should commence from the forward of each zone for a faster response/clearance by the following CCMs. Ref 4.10.3.2

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 57

The lavatories shall be locked as the items could fall out and block the aisles.

4.11.3.3 Selecting/Briefing ABPs – Prepared Ditching

Ref 4.10.3.3

The briefing depends on the category. Given below is a guide to brief ABPs.

1. Wait until the aircraft comes to a complete stop
2. Await for command (Evacuate) and/or when other doors are been opened
3. Check outside for danger (Water level, Oil fires, Debris)
4. Hold assist handle and lift the door handle fully up and push open the door, Pull the manual inflation handle (Bottom Right)
5. Check for correct slide inflation (Show safety card)
6. Send two ABPs to board raft as soon as the slide raft is inflated to assist CCM/passengers
7. Remove incapacitated CCM and place in the raft (Demonstrate the opening of seat belts)
8. Ensure passengers inflate life vest and board raft
9. If the exit cannot be used redirect passengers to usable exits.
10. Explain detaching and disconnecting the raft from the aircraft

4.11.3.4 Selecting/Briefing ABPs - Unprepared Ditching

Identify ABPs whilst evacuating and brief:

1. Advice two ABPs to board the raft
2. One ABP to control passengers at the far end
3. One ABP to remain at the board end and assist passengers in to the raft
4. Advice the third ABP to remain on-board and help passengers who require assistance (give out infant life vests/assist to inflate etc)

4.11.3.5 Selection/Briefing Buddies - Prepared Ditching

Buddies are required to assist passengers with medical/assistance alert. **Ref 2.24.4/5**

Buddies shall be selected on the same guide lines of an ABP.

Ref 4.10.3.3

In addition to above selection, preference should be passengers who are capable/ willing to assist in water. The Purser shall ensure the following guidelines are followed when CCMs brief buddies.

1. Introduce the dependent by name

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 58

2. Explain the nature of assistance needed by the dependent
3. Seat the buddy next to the dependent

4.11.3.6 Re-Seating Of Passengers

Ref 4.10.3.6

4.11.3.7 Restrained Passengers

Ref 4.10.3.7

4.11.3.8 Cabin Preparation

Ref 4.10.3.8

4.11.3.9 Galley Preparation

Ref 4.10.3.9

4.11.4 Emergency Preparation - Phase 3

Recheck

1. The seat-belts are fastened and adjusted proper
2. Tray- tables stowed, seat back in the upright position
3. Window blinds opened
4. IVS stowed and strapped
5. Special passengers have understood their bracing positions
6. All dependent are seated with buddies
7. All infants and children seated with adults
8. Floatation devices fitted on children/ infants
9. All passengers have fitted their life vests and adjusted properly
10. Safety seating arrangements adhered to
11. Purser to confirm completion of preparation and seek update of situation / time remaining from PIC
12. Cabin lights adjusted accordingly to the outside conditions

4.11.5 Commands Prior To Impact

The PIC shall carry out the following announcement

“CABIN CREW TO BE SEATED FOR LANDING”.

CCM shall be seated at their designated seats restrained and observe STS. **Ref 4.6.2**

Approximately **20 seconds** prior to impact, the brace command shall be initiated by the PIC.

“BRACE, BRACE BRACE”.

CCMs shall adopt the brace position and continue to shout the below commands until the aircraft reaches a complete stop.

Revision No	01	Revision Date	01 April 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 59

“HEADS DOWN, STAY DOWN”.

4.11.6 Emergency Ditching CCM Responsibilities

Door Primary

COMMENCE DITCHING COMMANDS, DON PERSONAL LIFE VEST
CHECK OUTSIDE CONDITIONS
ENSURE THE LEVER IN ARMED POSITION
OPEN THE DOOR AND CHECK FOR CORRECT RAFT INFLATION
IF RAFT DOES NOT INFLATE PULL THE MANUAL INFLATION HANDLE
ENSURE CORRECT RAFT INFLATION
INSTRUCT 2 ABPs INFLATE LIFE VEST BOARD RAFT FIRST AND ASSIST PASSENGERS. (One ABP AT THE DOOR-SILL, One ABP AT THE FAR END)
ORDER EVACUATION
AT THE DOOR SILL, COMMAND PASSENGERS TO INFLATE LIFE VEST
DIRECT PASSENGERS TO STEP IN TO THE RAFT
ONCE PASSENGERS HAVE EVACUATED CHECK YOUR AREA, ASSIST IN OTHER AREAS
AFTER ASSISTANCE RENDERED, BOARD RAFT(WITH RELEVANT SAFETY EQUIPMENT)
DETACH SLIDE RAFT FROM THE DOOR SILL
DISCONNECT SLIDE RAFT FROM THE AIRCRAFT
MOVE AWAY FROM THE AIRCRAFT
COMMAND / ASSIST IN THE RAFT
BLOCKED EXIT (DOOR OPENED)
REMAIN AT THE EXIT
ATTACH RESTRAINING STRAP
SECURE SELF (HOLD ON TO AN ASSIST HANDLE)
REDIRECT PASSENGERS TO USABLE EXITS
BLOCKED EXIT (DOOR CLOSED)
REMAIN IN THE IMMEDIATE VICINITY OF THE EXIT
SECURE SELF
REDIRECT PASSENGERS TO USABLE EXITS

Revision No	01	Revision Date	01 April 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 60

Note: Consider the raft capacities when directing passenger in to rafts.

DOOR ASSIST

COMMENCE DITCHING COMMANDS, DON PERSONAL LIFE VEST
CHECK ON PRIMARY IF INCAPACITATED TAKE OVER THE PRIMARY DUTIES
IF DOOR PRIMARY IS IN COMMAND, ASSIST TO LAUNCH RAFT
DIRECT PASSENGERS TO THE RAFT
ENSURE PASSENGERS HAVE INFLATED THEIR LIFE VEST BEFORE STEPPING OUT OF THE AIRCRAFT. ENSURE AN EVEN FLOW OF PASSENGERS
CHECK YOUR AREA, ASSIST IN OTHER AREAS
WHEN ALL ASSISTANCE RENDERED INFLATE LIFE VEST BOARD RAFT

4.11.6.1 Prepared Ditching Flight Crew Check list

CREW	PRE-DITCHING	POST-DITCHING
PIC	- Emergency call to the Purser - Brief Purser (NITS) - Wear life vest - Announcement to passengers - Command crew to be seated - Command to brace	- Order/Activate EVAC command - Assist in evacuation - Inflate life vest - Evacuate (preferably R4 door)
F/O	- Follow PIC, instructions - Wear life vest	- Take the Emer. Medical Kit (A10) - Assist in evacuation - Inflate life vest - Evacuate(preferably L4 door)

4.11.6.2 Unprepared Ditching Flight Crew Checklist

CREW	PRE-DITCHING	POST-DITCHING
PIC	Command to brace	- Order/Activate EVAC command - Don life vest - Assist in evacuation - Inflate life vest - Board available raft with torch
F/O	Follows PIC instructions	- Don life vest - Assist in evacuation - Inflate life vest - Board available raft, Take Emergency Medical Kit (A10) and torch

PIC and First Officer shall make every effort to evacuate from L4/R4 respectively. If unable they would

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 61

evacuate from wherever possible.

4.11.6.3 Prepared Ditching Door Primary Checklist

CREW	PRE-DITCHING	POST-DITCHING
L1	1. Receive NITS briefing 2. Brief CCMs 3. Carry out preparation phases 4. Wear life vest 5. Supervise preparations 6. Report to PIC 7. Secure self/STS 8. Brace Position 9. Repeat command	1. Activate emergency lights 2. Order/Activate EVAC Command (optional) 3. Silence EVAC Horn 4. Check outside conditions 5. Open L1 door 6. Expedite evacuation 7. Ensure passenger life vests are inflated 8. Check your area/assist other areas 9. Take ELT/Megaphone/Torch 10. Inflate life vest 11. Evacuate from L1 door/command raft
R1	1. Secure galley (FWD) 2. Carry out supervise preparations 3. Wear life vest 4. Report to Purser 5. Secure self/STS 6. Brace Position 7. Repeat command	1. Check outside conditions 2. Open R1 door 3. Expedite evacuation 4. Ensure passenger life vests are inflated 5. Check your area/assist other areas 6. Ensure Torch, First aid kit and SRAK is taken 7. Inflate life vest 8. Evacuate from R1 door/command raft
L2	1. Carry out supervise preparations 2. Wear life vest 3. Report to Purser 4. Secure self/STS 5. Brace Position 6. Repeat command	1. Silence the EVAC horn 2. Check outside conditions 3. Open L2 door 4. Expedite evacuation 5. Ensure passenger life vests are inflated 6. Check your area/assist other areas 7. Ensure Torch/SRAK is taken 8. Inflate life vest 9. Evacuate from L2 door/command Raft

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 62

R2	1. Secure galley (MID) 2. Carry out preparations 3. Report to CS2 4. Wear life vest 5. Secure self/STS 6. Brace position 7. Repeat command	1. Check outside conditions 2. Open R2 door 3. Expedite evacuation 4. Ensure passenger life vests are inflated 5. Check your area/assist other areas 6. Ensure Torch, First aid Kit and SRAK is taken 7. Inflate life vest 8. Evacuate from R2 door/command Raft
L3	1. Carry out preparations 2. Report to CS3 3. Wear life vest 4. Secure self/STS 5. Brace position 6. Repeat command	1. Check outside conditions 2. Open L3 door 3. Expedite evacuation 4. Ensure passenger life vests are inflated 5. Check your area, Assist in other areas 6. Ensure Torch, AMBU bag, RVAK and SRAK is taken 7. Inflate life vest 8. Evacuate from L3 door/Command L3 Raft
R3	1. Carry out preparations 2. Report to CS3 3. Wear life vest 4. Secure self/STS 5. Brace position 6. Repeat command	1. Check outside conditions 2. Open R3 door 3. Expedite evacuation 4. Ensure passenger life vests are inflated 5. Check your area, Assist in other areas 6. Ensure Torch, First aid Kit and SRAK is taken 7. Inflate life vest 8. Evacuate from R3 door/Command R3Raft

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

L4	1. Secure galley. (AFT) 2. Carry out preparations 3. Report to CS3 4. Wear life vest 5. Secure self/STS 6. Brace position 7. Repeat command	1. Silence the EVAC horn 2. Check outside conditions 3. Open L4 door 4. Expedite evacuation 5. Ensure passenger life vests are inflated 6. Check your area/assist in other areas 7. Ensure Torch, First aid Kit and SRAK is taken 8. Inflate life vest 9. Evacuate L4 door/Command raft
R4	1. Carry out supervise preparations 2. Wear life vest 3. Report to Purser 4. Secure self/STS 5. Brace Position 6. Repeat command	1. Check outside conditions 2. Open R4 door 3. Expedite evacuation 4. Ensure passenger life vests are inflated 5. Check your area/assist other areas 6. Ensure Torch/Megaphone/ELT/SRAK is taken 7. Inflate life vest 8. Evacuate from R4 door/Command raft

4.11.6.4 Prepared Ditching Door Primary Checklist Type '1' Door

L3	1. Carry out preparations 2. Report to CS3 3. Wear life vest 4. Secure self/STS 5. Brace position 6. Repeat command	1. Remain at door and block exit 2. Direct Passengers to usable exits 3. Ensure Torch/RVAK and AMBU is taken 4. Inflate life vest 5. Board available raft 6. If required open the door/detach and pull floatation device 7. Ensure passenger life vests are inflated 8. Command to jump in to the water and hold on to the life line 9. Direct passengers to board other rafts 10. Evacuate from L3 door
-----------	--	---

R3	1. Carry out preparations 2. Report to CS3 3. Wear life vest 4. Secure self/STS 5. Brace position 6. Repeat command	1. Remain at door and block exit 2. Direct Passengers to usable exits 3. Ensure Torch and F/A Kit is taken 4. Inflate life vest 5. Board available raft 6. If required open the door/detach and pull floatation device 7. Ensure passenger life vests are inflated 8. Command to jump in to the water and hold on to the life line 9. Direct passengers to board other rafts 10. Evacuate from R3 door
----	--	---

4.11.6.5 Unprepared Ditching Door Primary Checklist

The only warning from the flight deck prior to impact may be

“BRACE, BRACE, BRACE”

Ref 4.10.5

On command from the Flight Crew, CCMs shall assume brace positions and instruct passengers to brace by shouting out

“HEADS DOWN STAY DOWN”

Commence ditching preparation commands,
Ref 4.8.4

***“LIFE VEST UNDER YOUR SEAT, TAKE IT OUT, PUT IT ON,
REMOVE HIGH HEeled SHOES,
LEAVE EVERY THING BEHIND.”***

Don life vest
Ensure **S2 carries the SRAK for L1 exit**
Post ditching responsibilities
Ref 4.11.9

4.11.6.6 Ditching Assess Outside Conditions:

Before opening an exit, the cabin crew must check that the outside conditions for

1. Check for Water Level at Exits
2. Oil Fire
3. Debris

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 65

4.11.6.7 Unprepared Ditching Door Assist Checklist

COMMENCE DITCHING COMMANDS, DON PERSONAL LIFE VEST
CHECK ON PRIMARY IF INCAPACITATED TAKE OVER THE PRIMARY DUTIES
IF DOOR PRIMARY IS IN COMMAND, ASSIST TO LAUNCH RAFT
DIRECT PASSENGERS TO THE RAFT
ENSURE PASSENGERS HAVE INFLATED THEIR LIFE VEST BEFORE STEPPING OUT OF THE AIRCRAFT. ENSURE AN EVEN FLOW OF PASSENGERS
CHECK YOUR AREA, ASSIST IN OTHER AREAS
WHEN ALL ASSISTANCE RENDERED INFLATE LIFE VEST BOARD RAFT

NOTE: In the event an aircraft is equipped with SRAKs it is the responsibility of the door primary to ensure applicable SRAKs are taken out as survival equipment.

4.11.7 Crowd Control

Successful evacuations have been achieved due to CCMs taking control over the situation and passengers following instructions. Be assertive when commands and instructions are carried out to passengers. Passengers may not be familiar or comfortable with the sight of water and may be reluctant to evacuate. Physical force may be required to evacuate passengers with negative emotions.

Constraints in a ditching could be but not limited to:

1. Panic at the sight of water
2. Climatic conditions and extremely cold water
3. Panic (screaming/crying/hysterical)
4. Negative panic (does not react to the situation)
5. No perception that danger exists
6. Evacuating with carry-on baggage
7. Attempt to get ahead of the others

4.11.8 Restrained Passengers

Passenger restrains (if used) should be removed during passenger preparation appropriately with the authorization of the PIC (Use scissors).

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 66

4.11.9 Post Ditching CCM Responsibilities

If the raft is at an angle from the door-sill

1. Detach the raft from the door sill
2. Pull the raft towards the aircraft
3. Instruct passengers to inflate their life vests
4. Jump in to the water
5. Hold on to the life line and board raft

When in the raft

Instruct passengers to be seated on the floor with their backs to the buoyancy tubes.
Equally distribute the weight to avoid the raft from capsizing.

Rescue

Search for any passengers and crew near the ditching site, particularly in the direction of the waves as passengers may be unconscious and floating.

4.11.9.1 Raft Duties Sequence

1. Detach and Disconnect the raft from the aircraft
2. Move away from the aircraft - approximately 50 Meters
3. Deploy Sea Anchor
4. Deploy ELT (If applicable)
5. Retrieve survival pack
6. Deploy Sea Dye Marker
7. Tie the Rafts together
8. Erect the Canopy

4.11.9.2 Detaching and Disconnecting the Raft from the Door-sill

To detach, lift girt bar cover flap and pull the white release handle. If the pull handle gives way undo the white lacing manually. The raft would release from the door sill end but still remain connected to the aircraft by the Mooring line.

To disconnect, cut the Mooring line with the hook knife or Pull the manual release handle on the top buoyancy chamber at the door-sill end, The manual release handle is located in a pouch covered by a Velcro strip on the top buoyancy chamber

4.11.9.3 Moving Away From the Aircraft

Once the raft is released, move to a safe distance from the aircraft as it may sink (approximately 50 meters)

4.11.9.4 Deploy Sea Anchor

Ref 3.8.4

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 67

4.11.9.5 Deploy ELT

Ref 3.2.1/2/3

4.11.9.6 Retrieve Survival kit

Ref 3.8.6

4.11.9.7 Deploy Sea Dye Marker

Ref 3.2.5

4.11.9.8 Tie the Rafts together

Rafts should be tied together with the Heaving Ring line with slack on the line to prevent capsizing in rough waters.

1. For Safety - will be able to redistribute the loads.
2. Re unite family's and groups- There will be an opportunity to reunite Families who were separated during the evacuation.
3. Pooling Expertise - The ability to work out a coordinated plan of action based on a wider range of expertise and experience. "Look-outs" duties can be shared.
4. Centralize Treatment - The ability to assemble all the injuries and medical expertise in one area. Make the best use of the available medical supplies.
5. Increase Target for search and rescue -As two or more rafts are easier to locate as it forms a larger and more easily identifiable target.
6. Share Resource - The ability to share first aid Kit and survival equipment.

4.11.9.9 Erecting the Canopy

The canopy protects occupants from weather conditions. For installation be guided by the following:

1. Board End - This marking on the canopy should be at the door sill end of the raft
2. This side up – The luminous side should face the sky
3. Even numbers – Should be on the right hand side guided by the door sill end
4. Care should be taken when unrolling the canopy to avoid being blown away
5. Commence unrolling from the direction the wind is blowing toward you. Keep both ends of the canopy low until a few points are attached.

4.11.9.10 CCM Responsibilities in the Raft

1. The door primary should position himself closer to the sea anchor; it would enable him to manoeuvre and control the direction of the rafts away from fuel-saturated waters and also guard the raft against damage from sharp debris
2. A headcount should be carried out/administer first aid as required/set an order of priority and delegate responsibility
3. The commander of the raft should nominate and delegate work as movements are restricted. Keep all signalling devices in close proximity of the commander for quick use. Nominate one passenger for an inside watch and one passenger for an outside watch.

- **INSIDE WATCH**

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 68

1. Assign an ABP to monitor the condition of the passengers in the raft.
- **OUTSIDE WATCH**
1. Assign an ABP look out for persons in the water and for Search and Rescue operations (SAR).
2. These duties should be rotated every few hours to give people a sense of responsibility. Passengers should be reminded that cooperation is necessary to survive.
3. Keep the raft clean and dry to prevent illness and infection. Bail out water and wipe dry with fabric bailing bucket and sponges from Survival Kit.
4. Instruct passengers to be seated on the floor with their backs to the buoyancy tubes. Equally distribute the weight to avoid the raft from capsizing.
5. Reassure Passengers that help will arrive shortly.
6. Check buoyancy tubes for damage and proper inflation. Properly inflated tubes are firm but not drum tight. If punctures are found, repair with kit and instructions provided in the Survival Kit

4.12 Bracing

4.12.1 Forward-facing cabin crewmember seat,

In a forward-facing cabin crewmember seat, cabin crewmembers shall brace according to the following instructions, as shown in Figure below

1. Slide back in the seat as far as possible towards the backrest; ensuring that upper and lower back is against the backrest;
2. Securely fasten seat belt and shoulder harness:
 - Tighten firmly;
 - Seat belt and harness straps must not be twisted;
 - When tightening the shoulder harness, make sure that the seat belt (lap strap) remains low across the hips and that the buckle is positioned correctly, as per manufacturer instructions;
3. Place chin on chest;
4. Rest hands on thighs;
5. Place feet and legs slightly apart;
6. If there is no bulkhead within forward reach, keep feet flat on floor and stretch out legs as far as possible; or
7. If there is a bulkhead within forward reach, keep feet flat on floor and slide them forward until the tips of the toes touch the bulkhead (do no push feet against the bulkhead).



4.12.2 Rearward-facing cabin crewmember seats

Cabin crewmembers shall brace according to the following instructions, as shown in Figure below

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

1. Slide back in the seat as far as possible towards the backrest; ensuring that upper and lower back is against the backrest;
2. Securely fasten seat belt and shoulder harness:
 - Tighten firmly;
 - Seat belt and harness straps must not be twisted; and
 - When tightening the shoulder harness, make sure that the seat belt (lap strap) remains low across the hips and that the buckle is positioned correctly, as per manufacturer instructions;
3. Lean back and keep head against the backrest/headrest;
4. Cross arms in front of the chest (do not hold the shoulder harness straps);
5. Place feet and legs slightly apart;
6. Place feet flat on the floor; and
7. Keep knees bent at 90 degrees.



Note — there are currently no studies that have used double cabin crewmember seats. Therefore, no recommendations have been made in this document.

4.12.3 Passenger Bracing Position

4.12.3.1 Passengers Facing Forward

Seat belt should be securely fastened/seat back placed upright and the tray table stowed. Lean forward, place hands and arms on the seat back in front, one on top of the other. Fingers should not be inter-locked. Place the head on the hands resting on the front seat and feet placed firmly flat on the floor slightly forward.

Bracing position options for passengers



	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	EMERGENCY PROCEDURES		Chapter 04
			Page 70



Bracing positions for passengers are clearly illustrated on the safety card.

Cabin Seats - When seated at a location with a seat in front the adult shall lean forward and place the hands and arms against seat back.

Bulk head seats- The adult should lean forward arms tucked under the knees. Head facing down or The adult should sit upright and place chin on the chest and hold the seat firmly with both hand to prevent forward movement.

4.12.3.2 Bracing Position-Pregnant Women

The seat back shall be placed upright/tray table stowed. The seat belt should be securely fastened and placed low below the abdomen so that it applies its force to the pelvis.

Lean forward, place the hands on the seat pan for support. Pillows and blankets may be placed on the lap to rest the head. The feet placed flat on the floor slightly forward with knees together.



4.12.3.3 Bracing with Lap Held Infants - Options at standards seats



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 71

1. The seat back shall be placed upright/tray table stowed.
2. The seat belt should be securely fastened.
3. The feet placed flat on the floor slightly forward with knees together.
4. Place the infant facing the adult, a larger infant may need to straddle the adult's hips.
5. Lean forward and use one hand to support the back of the infant and hold the infants head facing out wards with the palm of the hand.
6. Place the other hand of the adult on the seat in front.
7. In the event the front seat cannot be reached by the adult, sit upright, chin on the chest, support the infant as above and use the other hand to hold and support the adults head by placing it on the upper back part of the head.

4.12.3.4 Bracing with an infant at the bulk head seats/Business Class Seat

1. This shall be applicable to an adult with an infant, seated where the bulk head cannot be reached to rest the head or the hands for protection.
2. The adult shall sit with the lumbar fully resting on the seat back.
3. Restrain the infant with the kangaroo belt as per the laid down procedure.
4. Place the infant facing the adult - the infants legs may be placed on to the two side of the adult if possible.
5. Place the infants head to a side allowing the infant to breath comfortably.
6. Place one hand of the adult along the infant's spine and hold on to the head of the infant for protection.
7. Place the other hand of the adult on the back of the adult's head.
8. Place the adult's legs firm together on the floor.
9. Place the adults chin on the chest for protection from whiplash.
10. Keep the body of the adult upright for the impact.



4.12.3.5 Bracing Position – Children



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 72

1. Children occupying passenger seats should adopt the same brace positions as adults. Due to their small stature, the flail envelope of children is smaller than that of adults, so they are less likely to suffer secondary impact with the interior of the aircraft.
2. The lap strap should be placed low on the child's torso, just above the legs at the hips. If the lap strap cannot be adjusted so that it is tight on a small child, the child may sit on a pillow or blanket in order to raise the child so that the lap strap will fit securely. The pillow should not be placed behind the child.
3. Children seated in a forward-facing seat should bend forward over the lap strap and rest their head on the seat cushion between their legs, or bend their head forward, over the edge of the cushion, as appropriate for their height. This is done to reduce head flailing.

4.12.4 Brace Signals (Prepared/ Unprepared Emergency)

The alert signal would be initiated by the flight crew 20 seconds (Approximately 200 feet) before impact.

"BRACE, BRACE, BRACE".

4.12.5 Brace Commands to Passengers

CCMs shall adopt the bracing position and follow the command from the PIC and shout,

"HEADS DOWN, STAY DOWN".

The commands should be synchronized for a louder and clearer tone to prevent passengers from raising their heads. The CCMs should continue to shout out the bracing commands till the aircraft comes to a complete stop.

WARNING: OPENING THE SEAT BELTS PREMATURELY COULD BE FATAL FOR CCMS AND PASSENGERS

4.12.5.1 Emergency Commands from the Flight Deck

Guide Lines for an Evacuation

CCMs should assert their authority in order to avoid delays in passenger flow and be prepared to use a certain amount of physical force if required.

Aircraft certifications require that all the passengers and crew should evacuate within 90 seconds with only half the exits in operation.

1. 20 Seconds before touch down

"BRACE, BRACE BRACE".

2. After landing

"ATTENTION CABIN CREW AT STATIONS".

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 73

3. If evacuation is required

“EVACUATE, EVACUATE, EVACUATE”.

4. If evacuation is not required

“CABIN CREW AND PASSENGERS REMAIN SEATED”.

4.12.6 Signals/Indications in the Cabin

1. Pulsating horn throughout the cabin
2. Red attention getter flashing on the AIP ‘EVAC ALERT’– text

Note: Evacuation will be carried out only when the aircraft comes to a complete stop and the engines are switched off. CCMs should be observant for any eventuality in the event the PIC announces the situation is under control.

Note : When the A/C comes to a complete stop, in the absence of any response from the Flight Crew, CCMs shall try to establish communication with the Flight Crew (if situation permits), failing which shall initiate an evacuation.

4.13 Equipment to Be Carried By Each CCM

EQUIPMENT	A-330
Torch	All crew
Megaphone	L1, R4
First Aid Kit	R1, R2, R3 & L4
Emergency Medical Kit (A10)	F/O
ELT	L1 & R4
Survival Kit/SRAK (For ditching only)	L1A, R1, L2, R2, L3, R3, L4, R4
RVAK /AMBU	L3

4.14 Post Evacuation Survival

There would be many unforeseen situations in an emergency and crew at all times should use their best judgment in order to save lives.

Immediate Action after Land Evacuation

Evacuate from the aircraft when it comes to a complete stop. If passengers are injured nominate other passengers to assist them. Carry as much water as you can. Move away from the aircraft until danger of fire has ceased.

Grouping

A group of people always have a better chance of survival than alone. For protection from fire and fumes CCMs should be aware of up/ down wind and move away from the air craft, to avoid any explosion. Set out an order of priorities.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 74

Assess the mental and physical condition of the passengers. Administer first aid as required

Check Emergency Equipment, Including Rations

Check the survival packs. Examine the other equipment in the aircraft e.g. fire axe etc. Drain off supplies of fuel and oil for signalling purposes, check available rations and water supplies. Institute Immediate Rationing No matter how much food and water is available, attempt to conserve it as long as possible by rationing.

4.14.1 Basic Survival Factors

Survival on Land

In order to survive and be rescued, certain basic principles should be followed. These must be applied in order of priority.

1. Protection, from the weather (heat, cold, wind, rain)
2. Water
3. First aid
4. Food
5. Rescue

Protection

Immediate steps must be taken by the survivors to protect themselves from the adverse effects of the environment, heat, cold, wind, rain, the chilling effect of wind on wet clothing, and extreme temperatures.

Water

Water is more important for survival than food. Take stock of emergency supplies of water and keep them for an emergency. Water found in holes will probably be muddy, filter it first, and then allow settling for a few hours, filter again and purify before drinking. If on the seashore dig a small hole a short distance above the high tide, and stop digging as soon as you find water. Water collected in this way should be fairly free from salt; fresh water floats on the top of salt water, hence don't dig too deep. Stagnant water is not necessarily infected, but as a precaution filter it and purify. Stagnant water may be found in small pools, amongst rocks, dead tree- stumps, etc.

First-Aid

Attend promptly to all injuries. Remove all injured personnel into the shade as soon as possible. Follow established first-aid practices.

Location

Having protected oneself from the wind and weather, the survivors must check and prepare all signalling equipment and have it ready for immediate use.

Food

Check on rations available, remembering that food should not be consumed unless there is sufficient water available for metabolism, and that proteins require more water than carbohydrates. Plant food alone is not likely to keep you alive indefinitely. It will, however, be a welcome addition to other food

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 75

and will keep starvation away for several days. There are a number of potential food plants to be found throughout the jungle. There is no need to worry unduly about the effects of poisonous plants, though a few might be considered highly dangerous, the greater number will most likely cause you to be indisposed for a matter of days. Should there be at any time, an uncertainty of the plant you wish to eat, the following points may be of guidance,

Eat strange plants sparingly, until you can be quite certain as to the reaction

6. Avoid plants which are unpleasant in taste, those which are bitter, or acid
7. Avoid plants, which give a milky or soapy sap
8. Monkey's eating habits would be a good guide to safe food if found

Desert Survival

The word "desert" invariably produces in one's mind a picture of large, dry, barren tracts of land, hot in the daytime and cool at night, where survival is most difficult. The temperature range in the extreme desert regions is considerable. Hot days may be followed by freezing nights; the temperature fluctuates by as much as – 50 to – 70 degrees Fahrenheit. The decision to stay or travel would be vital for survival and rescue. It would be advantageous to be in the vicinity of the crash site if possible as it would be easier to locate from the air than persons traveling. The aircraft provides you with shelter, signalling aids, and other useful emergency equipment and will avoid the difficulties and hazards of desert travel.

Shelter

The inside of the aircraft is unsuitable as shelter from extreme heat. CCMs need to be mindful of work during the day which would result in increased sweat rate and exertion.

Desert - First-Aid

Administer immediate first-aid to the slightest scratch as in hot and tropical climates the risk of poisoning from an open wound is possible.

Sources of Water

Water is the key to survival in the desert. Your life expectancy under emergency conditions is determined by the amount of water available and the degree to which you can protect your body from direct exposure to the sun and heat, thereby minimizing loss of body fluids through perspiration.

The following are some of the possible sources of water in desert regions:

Wells and Water Holes

They may be quite deep, with the water level below easy reach; it is advisable to carry a length of life line for lowering a can or some suitable container. Small water holes in dry stream beds are often kept covered with a flat rock or sand and require a careful search for their location. Edges of ancient water holes are built up above their surroundings by accumulations of excrement around them.

Dry Stream Beds and Gullies

By digging at the lowest point of the outside of a bend in the bed of a channel, or the lowest point between dunes, a source of water may be found. If wet sand or mud is found, put it in a cloth and wring out the water.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 76

Desert Plants

Some desert plants store water in their trunks, branches or roots. Such plants are found mainly along desert fringes in semi-arid terrain and near water holes. Avoid plants with milky sap - they are poisonous. The presence of vegetation is not always a sign that water is available. In the Middle East, for example, the palm is the only plant which indicates that water is close at hand.

Purification

Water obtained by any of the methods previously outlined, or water that may be tainted or suspect, should be purified before drinking by one of the following methods.

Desalting Tablets

Crush and dissolve one Hal zone tablet in each pint of water. Shake well and allow to stand for an hour before drinking. If this is insufficient to produce a distinct smell of chlorine, add more tablets until the odour is present.

Boiling

Boil the water for at least three minutes and allow any sediment to settle while cooling.

Iodine

Add two or three drops of iodine to each quart of water and allow to stand for 30 minutes.

Rain

During the rainy season, rain traps should be erected to catch as much water as possible. Any piece of tarpaulin or dinghy apron can be suspended between four stakes, allowing the water to drain down and accumulate in the centre. An inflated raft will also serve this purpose.

Condensation

During the cooler months some deserts are humid enough at night for dew to form. To collect this, scoop a shallow basin in the ground, and line it with canvas or raft material. Pile stones until the basin is filled. During the night the dew will collect on the stones and trickle down on to the lining. Metal parts of the aircraft will also collect dew. Dew should be collected at first light before it evaporates.

Food and Water

As far as surviving at sea is concerned, it is sufficient to follow three simple rules:

The quantity of the food and water rations must be varied in direct proportion to each other. If you have plenty of water you can increase the food ration, but as the water ration decreases the food ration must be decreased. Food containing protein, such as any raw fish/bird, or seaweed will require more water than your emergency rations.

Do not drink un-purified water; it will only lead to dysentery.

Do not drink alcohol - it will cause nausea and increase thirst. It is dangerous to drink alcohol under such conditions and may even bring about convulsions.

Do not drink urine - it is poisonous and will decrease your resistance and increase your thirst.

Immediate Actions - After Evacuation

1. Clear aircraft

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 77

2. Administer first aid
3. Put On warm clothing
4. Inflate rafts; disconnect slide-rafts and use for shelter.
5. Drain from engine sump to provide source of fuel for heating and cooking before the oil freezes
6. Place signalling equipment handy
7. Relax, read survival booklets (from first aid kits and raft survival packs)
8. Consider further action

Shelter

During summer the fuselage will provide adequate shelter. It should not be used as a shelter in winter, unless it is insulated. The metal is a good conductor of heat and will quickly dissipate any available heat. Consider using slides as shelter. Any rafts removed from the aircraft should be inflated as soon as possible before cylinders become chilled and less efficient. The raft fabric will also harden quickly due to the extreme cold. Canopy side curtains should be extended to provide protection against wind and cold.

Survival Hints

Maintain morale by good command and organize duties.

Protection from cold would be an immediate and constant problem as such. Check for frostbite.

Keep dry and warm. Carpets, upholstery, pillows can be used for extra clothing and foot protection. Wet clothes can be dried by removing and allowing them to freeze outside and beat the frozen moisture out of the article. The best policy for survivors is to stay in the vicinity of the crashed aircraft and await rescue rather than to travel to seek assistance. The aircraft is an easier target to spot from the air than people on the ground. Only if the surface of landing appears unsafe should a move to safer ground be considered. Do not touch metal with bare hands. This will damage skin and cause severe frostbite. Congealed oil/fuel can be used to make fires. During summer, use insect repellent and cover as much bare skin as possible with clothing. Baggage from holds can be used to shape distress signals visible to search aircraft. Do not cause the body to sweat when working. Perspiration and wets clothing decreases effective insulation and increases the chances of freezing. If necessary, remove outer clothing when working. For water, melt ice rather than snow. If snow is used, melt a little first, and keep adding as it melts. Do not attempt to suck ice or snow.

4.14.2 Hazards

Hypothermia

Hypothermia is the condition when the body temperature is below normal and can be recognized by decreasing resistance to cold. Cover the victim with waterproof or insulation material if available. The victim should be placed on a dry improvised bed, ensuring the buttocks, shoulders and feet are well insulated. If possible, change the victim into warm dry clothes or wring out wet clothing. Prevent heat loss and provide heat preferably by a warm person's body heat. Stimulation with hot drinks will help if the victim is conscious and does not vomit or cough.

Wind Chill

Wind increases heat loss by dispersing available heat. This heat loss increases with increase of wind speed. Survivors should take advantage of wind barriers e.g. side of crashed aircraft for shelter.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 78

Frostbite

Frostbite is the freezing of some part of the body and is a constant hazard in sub-zero conditions, particularly in strong winds. It usually affects the extremities and exposed parts of the body which have the least circulation e.g. the face, nose, ears, hands and feet.

The symptoms of frost-bite consist of small patches of white or cream coloured skin, stiff and firm to the touch. A prickling sensation may be felt. If the condition is allowed to become serious, tissues and bones may freeze and blood-cells clot. When the affected part is warmed, there will be a swelling and redness of the skin with accompanying pain depending on the degree of frost-bite.

Protection is obtained by keeping as warm and dry as possible, moving limbs, and exercising face muscles. Affected parts must not be rubbed or massaged, but warmed gently with breath, warm hands, or other warm parts of the body.

Place frostbitten hands under clothing against the chest, under the armpits or between the legs at the groin. Hold frostbitten foot against a companion's stomach or between his thighs. Never forcibly remove frozen shoes or gloves. Never rub a frostbitten area and never rub with snow.

Snow Blindness

Snow blindness is a temporary form of blindness caused by the exposure of the unprotected eye to glare or snow. It can occur even on cloudy days. Prevention is done by wearing dark glasses at all times when outside in daylight. A handy substitute is a piece of wood, leather or cloth with narrow eye slits cut in it. Symptoms are redness, pain, watering or sandy feeling in eyes, and headaches. Treatment is to get the victim to a dark place or place a dark, light bandage over the eyes.

Carbon Monoxide Poisoning

It's caused by a fire in an unventilated area. No symptoms.

Unconsciousness and death may occur without warning.

Prevention is by ensuring that the shelter has enough ventilation when a fire is lit.

Seasickness

The performance of duties requiring some concentration helps to ward off seasickness. Its treatment is to refrain from eating and drinking for some time, to lie still, and to maintain body warmth. Anti-sickness tablets are normally provided in the first- aid kits.

Immersion Foot

Exposure of feet to cold water for some time results in damage to the tissues. The affected part becomes red and painful and difficult to move. This is followed by swelling, the appearance of blisters and dark patches, and breaks in the skin. Prevention lies in keeping the feet as warm and dry as possible, and in ensuring that the floor of the raft is dry. The toes and feet should be moved frequently to assist blood circulation, and tightly fitting boots should be discarded. Remedial action is to remove footwear; wrap feet in loose dry articles of clothing; raise the feet clear of any water; and keep the body warm. The affected parts should not be rubbed.

Salt Water Sores

These are caused by prolonged exposure to salt water. Prevention is by keeping the body as dry as possible. The sores should be gently cleaned (but not squeezed), and antiseptic cream should be applied. Large sores should be covered with a dressing.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 79

Sore Eyes

Sore eyes result from excessive exposure to glare from the sky and water, and should be treated by applying antiseptic cream to the eyelids and bandaging lightly. Relief may also be obtained by the use of damp bandages alone.

Constipation or Difficulty in Urination

These complaints should not give cause for alarm, as they are to be expected with a shortage of food and fresh water.

4.14.3 Survival And signalling Equipment

Survival Kit

Supplementary Raft Accessory Kit (SRAK)

Emergency Locator Transmitter

Signalling Mirror/Heliograph

Sea Dye Marker

Whistle

Flares

Communication

If the aircraft radio equipment is intact, try and contact the outside world.

Prepare all Signalling devices for immediate Use.

The time for preparation of Signalling equipment is limited when a search and rescue team is sighted. Light up fires and position oil and fuel to create a dense column of smoke at short notice. Adding fuel/oil to the fire would create a rapid flare-up. Clear area for display of ground signals, or move to a clear area nearby. Spread out slides, keep polished aluminium panels for reflection.

Try and improvise Signalling methods which will show above the jungle top e.g. Smoke columns or raft material spread over the trees.

4.14.3.1 Ground to Air visual Signal codes

The following are examples on international ground to air distress signals. It should be used in clear terrain for search and rescue operations to identify from a distance.

The length of each indicator should be a minimum of 8 feet and the formation could be made of any visible materiel. e.g.; Rocks/Stones/Branches/Fabric.

Message	Code
Require Assistance	V
Require Medical Assistance	X
Negative (No)	N
Affirmative (Yes)	Y
Proceed in this direction	→

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 80

If the distress signal is identified, the Aircraft would go in to a roll (longitudinal movement of the aircraft).

Lack of the above signals indicates that the ground signals have not been met.

The following actions performed by an aircraft indicate the aircraft wishes to direct a surface craft towards an aircraft or a distress sight.

Circling the surface

Passing the air craft close at a low altitude.

At night flashing the landing lights or switching on/off the navigation lights.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	EMERGENCY PROCEDURES		Chapter 04
			Page 81

4.15 Missed Approach

Missed approach is when a landing has to be aborted on the final approach. There will no communication from the flight deck specifying a missed approach. CCM shall remain seated until advised.

4.16 Rejected - Take Off

Description

A rejected take-off is when a take-off is discontinued on the runway. The indications are rapid deceleration. In such situations CCMs should remain seated until further instructions are carried out by the PIC.

4.16.1 Flight Deck Communication

Pending a decision the PIC shall initiate a PA announcement:

“ATTENTION CABIN CREW AT STATIONS”.

4.16.2 Cabin Crew Member Procedures

After the initial command from the PIC, the CCMs should remain seated and await further instructions. In the event an evacuation is required follow evacuation procedures.

If evacuation not required the following announce

“CABIN CREW AND PASSENGERS REMAIN SEATED”.

CCMs should advise passengers to remain seated and remain alert for signs of fire/smoke or any abnormality should be informed to the PIC immediately etc.

4.17 Incapacitated Crew Member

4.17.1 Incapacitated Flight Crew Member

In case of an incapacitation of a Flight Crew member, the remaining Crew Member shall alert the CCM.

“PURSER TO THE FLIGHT DECK IMMEDIATELY”.

The Purser or any CCM in the vicinity shall proceed to the flight deck immediately.

The CCM should,

1. Fasten the shoulder harness to the lap strap/ manually lock and tighten
2. Move the hands off the controls
3. Pull the seat completely aft
4. Recline the seat back
5. Follow instructions from the remaining flight crew
6. Provide first aid /Assistance

It would take at least two people to move an unconscious person from the flight deck seat

Purser/CCM to Get instruction from the remaining flight crew such as:

1. To move the incapacitated flight crew member to the cabin or to keep him in the flight deck.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 82

2. Seek the assistance from a medically qualified passenger if available
3. Check discreetly for any Qualified Pilot, preferably from Srilankan airlines to replace the Incapacitated Pilot.

4.17.2 Incapacitated Cabin Crew Member

Ref 2.13.8

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

4.18 Phonetic Alphabet

LETTER	WORD		LETTER	WORD
A	Alpha		N	November
B	Bravo		O	Oscar
C	Charlie		P	Papa
D	Delta		Q	Quebec
E	Echo		R	Romeo
F	Foxtrot		S	Sierra
G	Golf		T	Tango
H	Hotel		U	Uniform
I	India		V	Victor
J	Juliet		W	Whiskey
K	Kilo		X	X-ray
L	Lima		Y	Yankee
M	Mike		Z	Zulu

4.19 Quick References

4.19.1 Chimes and Indications

CALL	CHIME	ACP	AIP	OTHER
EMERGENCY call from flight deck	3 X Hi Low chimes	All ACP's Flashing Red	Steady Red/Flashing Red Text 'CALL PRIO CAPT'	Has to be answered from all handsets to reset
EVAC command	Pulsating Horn	No indication	Flashing Red Text 'EVAC ALERT' on all AIP's	EVEC RESET (FAP, AAP's) buttons illuminate Red - Flashing Press to silence Horn
SMOKE LAV	3x Low chimes every 30 seconds	Flashing Amber relevant side	Flashing Red Text 'Lavatory number'	SMOKE RESET (FAP) and SMOKE LAV buttons illuminate Red Press to cancel Chime

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	EMERGENCY PROCEDURES		Chapter 04
			Page 84

4.19.2 Fire

FIRES	SMOTHER OR COVER	WATER OR NON-FLAMMA-BLE LIQUID	HALON	REMARKS
Ash tray	or	or	n/a	
carpet	or	or	do	
Overhead compartment	or	n/a	or	Close bin
Electrical panel/light fixture	n/a	n/a	do	Switch OFF electrical power
Electrical panel/light fixture smoke			standby	Switch OFF electrical power
Waste bin	n/a	or	or	Saturate with water
Seat monitor or IFE	n/a	n/a	do	Shut electrics pull Circuit Breakers Marked with yellow black band
Engine torching	n/a	n/a	n/a	Calm and assure passengers Inform PIC

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

4.19.3 Turbulence

	AIRCRAFT REACTION	CABIN CONDITION	UNANTICIPATED TURBULENCE	ANTICIPATED TURBULENCE
LIGHT TURBULENCE	Light turbulence momentarily Causes slight, rapid and rhythmic bumpiness without noticeable changes in the aircraft altitude or attitude	- Liquids are shaking but are not splashing out of cups - Trolleys can be maneuvered with little difficulty - Passengers may feel a slight strain against their seat belts.	Flight Crew - Switch ON the 'Fasten seatbelt' sign - Inform Purser on service restrictions Cabin Crew Actions when "Fasten seatbelt" Switch ON - Make a PA announcement to instruct the passengers to return to their seats and fasten their seat belts - Check that all passengers are seated with their seatbelts fastened. Infants must be removed from bassinets and secured with an infant seat belt. - Report 'Cabin Secure' - Continue service with caution - If advised by PIC, suspend hot beverage service	Flight Crew Pre-Flight Brief/during flight (Purser all cabin crew) on expected areas of turbulence during the flight. - Advise the cabin crew on the available time to secure the cabin, the level of turbulence and the expected duration Switch ON the 'Fasten seatbelt' sign Purser: - Brief the cabin crew Cabin Crew: - Make a PA announcement - Check that all passengers are seated with their seatbelts fastened. Infants must be removed from bassinets and secured with an infant seat belt. - Report 'Cabin Secure' - Continue service as per

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

MODERATE TURBULENCE	Moderate turbulence causes rapid bumps or jolts.	- Liquids splashing out of cups - Trolleys difficult to manoeuvre - Difficult to walk in the cabin - Difficult to stand without holding on to something - Passengers feel definite strain against their seat belts.	Flight Crew Actions: - Switch "Fasten seat-belt" sign ON - Make PA "Cabin Crew be seated" - If required, make a suitable PA to passengers Purser Action: - If the service is interrupted, make a PA announcement to explain the reason to the passengers	Flight Crew Pre-Flight Brief Purser (or all cabin crew) on expected areas of turbulence during the flight.
	Severe turbulence causes large abrupt changes in the aircraft altitude and attitude.	- Trolleys difficult to manoeuvre - Difficult to walk in the cabin - Liquids splashing out of cups. - Difficult to stand without holding on to something - Passengers feel definite Strain against their seat belts. - Items falling or lifting off the floor - Loose items are tossed about the cabin - Impossible to walk - Passengers are forced violently against their seat belts	Cabin Crew Actions On PICs PA announcement "Cabin Crew be seated": - The cabin crew must immediately sit down. Take the nearest seat. (Including passenger seat) - If in the Cabin with a meal cart, apply brakes and secure self, Place jugs/pots of hot beverages on the floor - Make PA Announcement	Flight Crew Pre-Flight/ Flight Crew during flight - Advise the cabin crew on the available time to secure the cabin, the level of turbulence and the expected duration - Switch ON the 'Fasten seatbelt' sign Purser Action: - If the service is interrupted, make a PA announcement to explain the reason to the passengers Cabin Crew Actions: - Suspend service - Secure cabin and galleys - Stow baby bassinets / Ensure that lavatories are vacant - Open & secure curtains, class dividers - Take crew seat, fasten seat belt/harness - Report 'Cabin Secure'

CABIN CREW MUST NOT RISK PERSONAL INJURY BY CONTINUING SERVICE DURING SEVERE TURBULENT CONDITIONS. THE PERSONAL SAFETY OF THE CABIN CREW IS THE PRIORITY

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	EMERGENCY PROCEDURES		Chapter 04
			Page 87

4.19.4 Emergency Communication

CALL	FROM	TO	COMMUNICATION METHOD	REPLY/REMARKS
Cabin Ready	Cabin	F/D	Press 'cabin ready' (FAP) if available or Purser calls flight deck-	Purser to make call after receiving cabin secure checks for takeoff or landing.
EMER Alert Signal for prepared emergency	F/D	Cabin	PA System "Purser to the Flight Deck immediately"	Crewmember / Purser must immediately proceed to the F/D
Pilot Incapacitation	F/D	Cabin	PA System "Purser to the Flight Deck immediately"	Purser/crewmember must immediately proceed to the F/D.
Emergency call	F/D	Cabin	Interphone. 'EMER CALL'.	Crew to lift handset identify self & STN
Unanticipated Emergency Pending an Evacuation	F/D	Cabin	"ATT cabin crew at stations"	Await further instructions
Unanticipated crash-landing (This might not necessarily mean an evacuation but the cabin crew must be prepared for an emergency evacuation) at 2000 feet	F/D	Cabin	"ATT cabin crew at stations"	CCMs to secure self for landing
Aborted Takeoff	F/D	Cabin	"ATT cabin crew at stations"	Await further instructions
Clear air / severe turbulence	F/D	Cabin	PA system: "Cabin Crew to be seated"	To be secured immediately
20 seconds prior to touchdown.	F/D	Cabin	PA System: "BRACE, BRACE"	Assume brace positions

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	EMERGENCY PROCEDURES		Chapter 04
			Page 88

EVAC CMD When A/C comes to a complete stop	F/D	Cabin	PA system: "EVACUATE, EVACUATE EVACUATE" Press EVAC command button	CCMs to reset EVAC alarm & initiate evacuation commands
EVAC not Required	F/D	Cabin	PA System: "Cabin Crew & Passengers remain seated"	Evacuation not required. CCMs to stand-by for further instructions
During an EMER descent (Rapid or Slow decompression/Smoke or Fire/Bomb Threat)	F/D	Cabin	PA system: "Attention Cabin Crew, we are on an unscheduled descent"	CCM secure themselves

CALL	FROM	TO	COMMUNICATION METHOD	REPLY/REMARKS
Oxygen mask not deployed, when safe altitude is reached after a decompression	F/D	Cabin	"Cabin Crew proceed with your duties"	CCM to follow SOPs
Oxygen mask deployed, When safe altitude is reached after a decompression	F/D	Cabin	PA system: "Ladies and Gentlemen, This is your Captain, The use of oxygen is no longer required, Cabin Crew proceed with your duties"	CCM to follow SOPs
Unlawful Interference	Cabin	F/D	As per the PIC briefing	CCMs to follow procedure

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

4.19.5 Routine Communications from the Flight Deck

CALL	FROM	TO	COMMUNICATION METHOD	REPLY/REMARKS
On top of descent approx 30 mts	F/D	Cabin	"Cabin Crew prepare the cabin for landing"	Commence safety preparation of passengers/ cabins/ galley for landing
On approach 8-10 mts	F/D	Cabin	"Cabin Crew be seated for landing"	CCMs to secure self for landing
Imminent take off.	F/D	Cabin	"Cabin Crew be seated for takeoff"	CCM to be secured for takeoff

4.19.6 Doors/Slides/Rafts/Fire/Systems/Emergencies

A330 - 200 ALT	A330 – 300 and ALH/S
L1R1 L2R2 L4R4 Type A doors dual lane slide L3R3 Type 1 door single lane slide	All type A Doors All dual lane slides
Raft Capacity L1R1 L4R4- 65-78 L2R2- 55-68 L3R3 - flotation device	Raft Capacity L1,R1,L4,R4,- 65-78 L2,R2- 55-68 L3,R3- 50-60

4.19.7 Emergency Lights

Duration -12 Minutes

4.19.8 Oxygen Systems

Cabin Duration - 22 Minutes (ALT lavatories 15 Minutes)

4.19.9 STS

B	Brace for impact
D	Door operation
E	Evac command
E	Evac route
P	Passenger control

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 90

4.19.10 NITS briefing

N	Nature Of Emergency	Actual technical problem
I	Intention	Crash landing ,ditching or Diver- sion
T	Time Available	Available time for passenger preparation
S	Specific Instruction	Relevant detail

4.19.11 Pre Recorded Announcements

Manual Emergency Safety Demonstration to be carried out on all aircraft

4.19.12 Emergency Preparation Phases 1, 2, 3

PHASE I
Fasten and opening of seat belt Bracing position (use safety card) Show closest and alternate exits Life vest (if ditching)
PHASE II
Cabin clearance/Remove high heel shoes Selection and briefing ABP Re seating passengers/ buddies / special passengers Ditching - infant/children- life vests and floatation cots – Don/ if applicable inflate Cabin, galley and flight deck clearance
PHASE III
Recheck Infants/children floatation devices fitted and if applicable inflated Passengers restrained. Tray table stored seat upright, life vests fitted Passengers have understood bracing position CCMs report to the CSs CSs report to the Purser Purser to confirm completion of preparation and seek update of situation / time remaining from PIC PIC Command “CABIN CREW TO BE SEATED FOR LANDING” PIC Command - (approx. 20 sec) “BRACE, BRACE, BRACE” CCMs Command - “HEADS DOWN, STAY DOWN” (continued)

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 91

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	EMERGENCY PROCEDURES	Chapter 04
		Page 92

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 1

CHAPTER 05 **AIRCRAFT SPECIFIC**

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 2

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 3

Contents

5.0 AIRCRAFT SPECIFIC.....	11
5.0.1 General Description.....	11
5.0.2 Abbreviations	11
5.0.3 Definitions	12
5.1 Aircraft type.....	12
5.1.1 A330	12
5.1.2 Specific Details	14
5.1.2.1 Flight Controls	14
5.1.2.2 Flight Control Surfaces	14
5.1.2.3 Cargo Compartments	14
5.2 Doors/Windows/Exits and Flight Deck Escape Routes	15
5.2.1 Cabin Windows.....	16
5.2.2 Doors	16
5.2.2.1 Doors Type “A”	16
5.2.2.2 Doors Type “1”	17
5.2.2.3 Safety Pin	18
5.2.2.4 Gust lock	18
5.2.2.5 Viewing Window	19
5.2.2.6 Door warning system	19
5.2.2.8 Normal door operation	19
5.2.2.9 Emergency door operation	19
5.2.2.10 Transparent cover	19
5.2.2.11 Door Restraint Strap (Door safety strap).....	20
5.2.2.12 Pressure Gauge	20
5.2.2.13 Door Status Indication System (on the door)	20
5.3 Opening Of Doors Externally / Internally.....	20
5.3.1 Personnel Authorized to Open a Door.....	20
5.3.2 Opening the Door Externally	21
5.3.2.1 Procedure / Precautions	21
5.3.3 Opening the Door Internally.....	21
5.3.3.1 Procedure/Precautions	21
5.4 Closing the Door – Externally/Internally.....	22

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 4

5.4.1 Personnel Authorized to Close a Door	22
5.4.2 Closing of the Door Externally	22
5.4.2.1 Procedure / Precautions	22
5.4.3 Closing the Door Internally	22
5.4.3.1 Procedure / Precautions	22
5.5 Slide Arming/Disarming/Cross Checking Procedures.....	23
5.5.1 CCM Responsibilities	23
5.5.1.1 Disarming	23
5.5.1.2 Cross Checking after arming the door.....	24
5.5.1.3 Cross Checking after disarming the door	24
5.5.2 Precautions.....	24
5.5.3 Inoperative Door or Slide Raft	24
5.6 Emergency Operation of Doors/Emergency Exits.....	25
5.6.1 Signals to Open Doors	25
5.6.2 Check Hazards	25
5.6.3 Attitude of the Aircraft/Gear Collapse.....	25
5.6.4 Opening a Door in an Emergency	25
5.6.5 Precautions.....	25
5.6.6 Escape Slides/Rafts	25
5.6.6.1 Raft Deployment	26
5.6.6.2 Side Deployment.....	26
5.6.6.3 Slide/Raft Deployment.....	27
5.6.6.4 Non-inflation of Slide/Raft	27
5.6.6.5 Slide/Raft Deployment (type “A” door)	28
5.6.6.6 Lighting Strips on Escape Slides	28
5.6.6.7 Raft deployed in abnormal Conditions.....	28
5.6.7 Detaching Slide/Raft.....	28
5.6.8 Detaching the Slide (L3/R3) - Type ‘1’ Doors	29
5.6.9 Disconnecting the Raft Type ‘A’ Doors.....	29
5.6.10 Disconnecting the Slide (L3/R3) – Type ‘1’ Doors.....	30
5.6.11 Survival kit attached to the Raft	30
5.6.12 Erecting the Canopy	30
5.6.12.1 Canopy Erection Instructions	30
5.6.12.2 Raft	31
5.7 Flight Deck.....	33

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 5

5.7.1 Escape Routes	33
5.7.1.1 Sliding Windows.....	33
5.7.1.2 Escape Rope	34
5.7.2 Secure Flight Deck Door	34
5.7.2.1 The Evacuation and Decompression Panel	35
5.7.2.2 Digital Key Pad.....	35
5.7.2.3 Controls on the Secure Flight Deck Door	36
5.7.3 Opening the Secure Flight Deck Door from the cabin	36
5.7.3.1 Normal Operation	36
5.7.3.2 Secondary Operation	37
5.7.3.3 Emergency Operation	37
5.7.4 Avionics Compartment	37
5.8 Flight Deck Seats	38
5.8.1 PIC's Seat	38
5.8.2 First Officer's Seat.....	38
5.8.3 The First Observer Seat	38
5.8.4 The Second Observer Seat.....	39
5.9 Cabin Crewmember Seats/Stations	40
5.9.1 A330 Aircraft Primary Crew Stations	41
5.10 Passenger Seat	44
5.10.1 BC - Seat Features.....	44
5.10.2 E/Y - Seat Features.....	44
5.11 Stowage Areas	45
5.11.1 Over Head Bins	45
5.11.2 Doghouses/Coat closets	45
5.12 Galleys	46
5.12.1 Galley Power	46
5.12.1.1 Circuit Breaker Panels (CB).....	46
5.12.2 Galley Sink	46
5.12.2.1 Water Shut Off/Supply Valves	46
5.12.3 Galley Locations/Diagram.....	47
5.12.3.1 Galley Equipment Pre-flight checks	48
5.13 Lavatories	48
5.13.1 Door Locking/ Unlocking Mechanism.....	49
5.13.2 Emergency unlocking of the Lavatory Door	49

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 6

5.13.2.1 Single Blade door A 330-300	49
5.13.2.2 Bi-folding doors	50
5.13.3 Lavatory features	50
5.13.3.1 Electrical Outlet	50
5.13.3.2 Water Heater Units	51
5.13.3.3 Lavatory Lighting	51
5.13.3.4 Lavatories with Diaper Changing Facility.....	51
5.13.3.5 Lavatories for PWD Use.....	51
5.13.3.6 Water Shut-Off Valve.....	52
5.13.3.7 Vacuum Release Valve.....	52
5.13.4 Waste Bin Fire Extinguisher	52
5.13.5 Lavatory Smoke Detector	53
5.13.5.1 Indication of Smoke/Fire in a Lavatory.....	53
5.13.5.2 Re-Setting the System	54
5.13.6 Inoperative Lavatory Smoke Detection Systems	55
5.13.7 Inoperative Lavatory Fire Extinguisher	55
5.13.8 Inoperative lavatory waste bin cover flap/waste bin access door	55
5.13.9 Communication System AIP/ACP	55
5.13.10 Attendant Indicator Panel - AIP	55
5.13.11 Area Call Panel - ACP	56
5.13.12 Communication System PA/Interphone	57
5.13.13 PA Priority	57
5.13.14 Function Keys on the hand set	57
5.13.14.1 Crew To Crew Call.....	57
5.13.14.2 Purser Call	58
5.13.14.3 All Attendant Call	58
5.13.14.4 Normal Call - Cabin to Flight Deck.....	58
5.13.15 Emergency calls	58
5.13.16 Unserviceable Handset	59
5.14 Communication and Passenger Service Unit (PSU)	61
5.14.1 Passenger Call from the Seat	61
5.14.2 Resetting a Passenger Call	61
5.14.3 Passenger Call from the Lavatory	61
5.14.4 Resetting a Passenger Call from the Lavatory.....	61
5.14.5 Passenger Service Units.....	62

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 7

5.15 Auxiliary Power Unit (APU)	62
5.15.1 Emergency Lighting systems/Duration	62
5.15.1.1 Interior Emergency Lights	63
5.15.1.2 Exit Lights	64
5.15.1.3 Emergency Lights in the Ceiling	64
5.15.1.4 Passenger Emergency Escape Path Lighting System (PEEPLS).....	65
5.15.1.5 Exterior Emergency Lighting	65
5.15.1.6 Cabin Lighting ALH	66
5.15.2 Lavatory Lighting	67
5.16 Ordinance Signs	67
5.17 FAP/AAP.....	68
5.17.1 Lighting Module-FAP	68
5.17.2 Miscellaneous Module-FAP	68
5.17.3 Programme and Indicator Panel (PIM)	69
5.17.4 Cabin Intercommunication Data System (CIDS).....	70
5.17.5 Systems Check	70
5.17.6 Cabin Temperature	70
5.17.7 Water Indicators	71
5.17.8 Lavatory Smoke Detector Check.....	71
5.17.9 Doors Status Indicator	71
5.17.10 Additional Attendant Panels.....	72
5.17.11 Water and Waste	72
5.17.12 Waste Water System.....	73
5.18 Curtains / Partitions	73
5.18.1 Procedures for Take-off and Landing	73
5.19 Quick Reference	74
5.20 ALH - AIRCRAFT DIFFERENCES	77
5.20.1 Configuration:.....	77
5.20.2 Doors and Slides	77
5.20.3 Cabin Crew Stations.....	77
5.20.4 Galleys	77
5.20.5 Emergency path Lighting	77
5.20.6 Other Information	77
5.21 A330 - 300 ALL/M/N/O/P/Q/R AIRCRAFT DIFFERENCES	80
5.21.1 Configuration:.....	80

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 8

5.21.2 Flight Deck	80
5.21.3 Doors and Slides	80
5.21.4 Cabin Crew Seats	80
5.21.5 Galleys	81
5.21.6 Floor Panel Heating	81
5.21.7 Emergency Path Lighting	82
5.21.8 Bassinets.....	82
5.21.9 Stretcher Positions.....	82
5.21.10 PWD Seats	83
5.21.10.1 UM Seats	83
5.21.11 Lavatories	83
5.21.12 Coat Closets:.....	83
5.21.13 Medical Outlets	83
5.21.14 Passenger seat	84
5.21.15 Business Class Seat	84
5.21.15.1 Manual Operation	85
5.21.15.2 Business class seat belt with Air Bag System	85
5.21.15.3 EY Seats	86
5.21.16 Forward Attendant Panel.....	86
5.21.16.1 Cabin Lighting.....	87
5.21.16.2 Cabin Ready Indication.....	87
5.21.16.3 Doors and Slides Indications	88
5.21.16.4 Cabin Temperature.....	88
5.21.16.5 Water and Waste Quantities	88
5.21.16.6 Smoke Detectors	88
5.21.16.7 Additional Attendant Panel	88
5.21.16.8 Microwave oven	88
5.21.17 Hot water boilers	88
5.21.18 Entertainment System	89
5.21.19 Floor path lighting	89
5.22 ALS Aircraft Differences	91
5.22.1 General Discription.....	91
5.22.2 Doors	91
5.22.3 Galleys	91
5.22.4 Lavatories	91

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 9

5.22.5 Additional attendant Panel	91
5.22.5.1 Drop down oxygen	91
5.22.6 Safety Equipment	91
5.22.6.1 Life Vest	91
5.22.6.2 Torch	91
5.22.6.3 Demo Kits Located at	92
5.22.6.4 Aisle Chair	92
5.22.7 Cabin Temperature:	92
5.22.8 High comfort cabin crew seats	92
5.22.9 Floor Panel Heating	92
5.22.10 FAP	92
5.22.11 High comfort cabin crew seats	92
5.22.12 BC Seat Manual Override	92
5.23 Specific details	94
5.23.1 Seating Configuration	94
5.23.2 Doors and Exits	94
5.23.3 Raft Capacity	94
5.23.4 B/C Manual Seat Adjustments	94
5.23.5 B/C Life Vest Locations	94
5.23.6 BC - Seat Feature Differences	94
5.23.7 Lap Top Charging Points	95
5.23.8 Water Shut Off/Supply Valves	95
5.23.9 Lavatory Water shut off valves	95
5.23.10 Vacuum Release Valve (Float Valve)	95
5.23.11 Resetting a passenger call	95
5.23.12 Lavatory Vacuum Reset	95
5.23.13 Aircraft Lavatory Locations	97
5.23.13.1 A330 - ALT Aircraft Lavatories	97
5.23.13.2 A330 - ALH Aircraft Lavatories	97
5.23.13.3 A330 - 300 Aircraft Lavatories	98
5.23.13.4 A330 - ALS Aircraft Lavatories	98
5.24 Seats blocked for an In-Operative Door	99
5.24.1 Applicable only on ALT	99
5.24.2 Applicable only on ALH	99
5.24.3 Applicable only on ALL/ALM/ALN/ALO/ALP/ALQ/ALR	100

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 10

5.24.4 Applicable only on ALS	100
5.25 ALT Aircraft Differences	102
5.25.1 General Description.....	102
5.25.2 Doors	102
5.25.3 Raft Capacity.....	102
5.25.4 Galley water shut off valves.....	102
5.25.5 Lavatories	102
5.25.6 Drop down oxygen.....	102
5.25.7 Forward Attendant Panel (FAP)	102
5.25.8 Additional Attendant Panel (AAP)	102
5.25.9 Aisle Chair	102
5.25.10 Demo Kits Location.....	103
5.25.11 Bassinet Points	103
5.25.12 BC Seat Manual Override	103
5.25.13 Mobile devices charging points.....	104
5.25.14 Lavatory Water shut off valves	104
5.25.15 Medical Outlet	104

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 11

5.0 AIRCRAFT SPECIFIC

5.0.1 General Description

This chapter provides descriptive information of the aircraft in its standard version, together with operating instructions for those items or equipment controlled by Cabin Crew on board the aircraft.

The chapter describes,

1. Aircraft type
2. Flight Deck
3. Doors and emergency exits
4. Seats
5. Cabin familiarization
6. Lavatories
7. Communication
8. Electrical system
9. Control Panels
10. Water and waste water system

5.0.2 Abbreviations

AAP	Additional Attendant Panel
ACP	Area Call Panel
AFT	Rear Of The Aircraft
AIP	Attendant Indication Panel
APU	Auxiliary Power Unit
CAM	Cabin Assignment Module
CAS	Cabin Attendant Seat
CIDS	Cabin Intercommunication Data System
DEU	Decoder Encored Unit
ECAM	Electronic Centralized Aircraft Monitoring
EL	Electro Luminescent
FAP	Forward Attendant Panel
FMGC	Flight Management Guidance Computer
PB	Push Button
PES	Passenger Entertainment System
PEEPL	Passenger Emergency Evacuation Path Lighting
PIM	Programming and Indicating Module
PSU	Passenger Service Unit
PRAM	Pre Recorded Announcement Module
LCD	Liquid Crystal Display
LSU	Lavatory Service Unit
MCDU	Multipurpose Control and Display Unit

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 12


TTOL	Taxi Take Off Landing
------	-----------------------

5.0.3 Definitions

Girt Bar	-A steel plate that locks the slide raft on to the aircraft
Board End	-The section of the slide raft which is connected to the aircraft
Gust Lock	-A spring-loaded locking device on the door support arm
Up Wind	-The wind blowing towards you
Down Wind	-The wind moving away from you

5.1 Aircraft type

5.1.1 A330

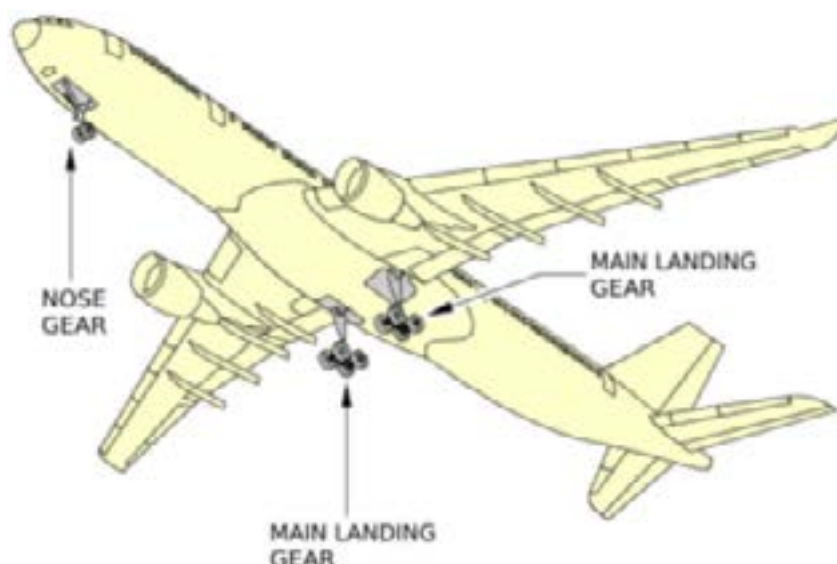

Description

The Airbus A-330 aircraft is a medium to long range, twin aisle subsonic transport aircraft, powered by two turbo-fan engines.

The fuselage has a circular cross section and is entirely pressurized with the exception of the nose cone, tail cone and the landing gear compartments.

The flight deck is equipped for a two-crew operation and accommodates two observers.

The passenger cabin-seating layout may vary to suit operator requirements.

Any combination of Cabin Attendant seats may be provided with a minimum of 8 primary seats.

The landing gear consists of

1. Two inboard retracting main gears
2. One forward retracting nose gear

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 13

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

5.1.2 Specific Details

The fuel is stowed in, inner and outer tanks in the wings, the centre section and Trimmable Horizontal Stabilizer.


5.1.2.1 Flight Controls

The flight control surfaces are;


1. Electrically controlled
2. Hydraulically activated

The stabilizer and rudder can be mechanically controlled.

The side sticks are used to fly the aircraft in pitch and roll and indirectly through turn coordination in yaw. (pitch refers to the up or down movement of an aircraft's nose. Roll refers to the tilting of an aircraft's wings up or down)

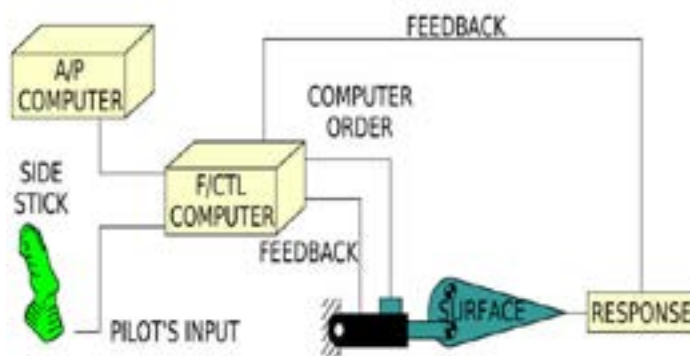

5.1.2.2 Flight Control Surfaces

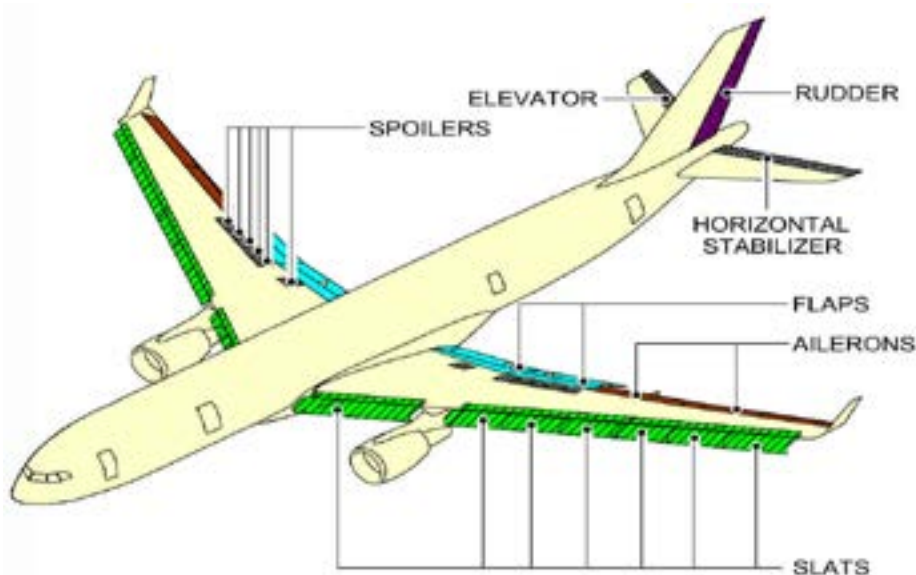


5.1.2.3 Cargo Compartments

There are three cargo compartments in the A-330 aircraft.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CSS/02
			ED 04/Jun 23
	AIRCRAFT SPECIFIC		Chapter 05
			Page 15

1. FWD cargo compartment (temperature controlled A330-300)
2. AFT cargo compartment
3. Bulk cargo compartment (temperature controlled to carry live or loose cargo)

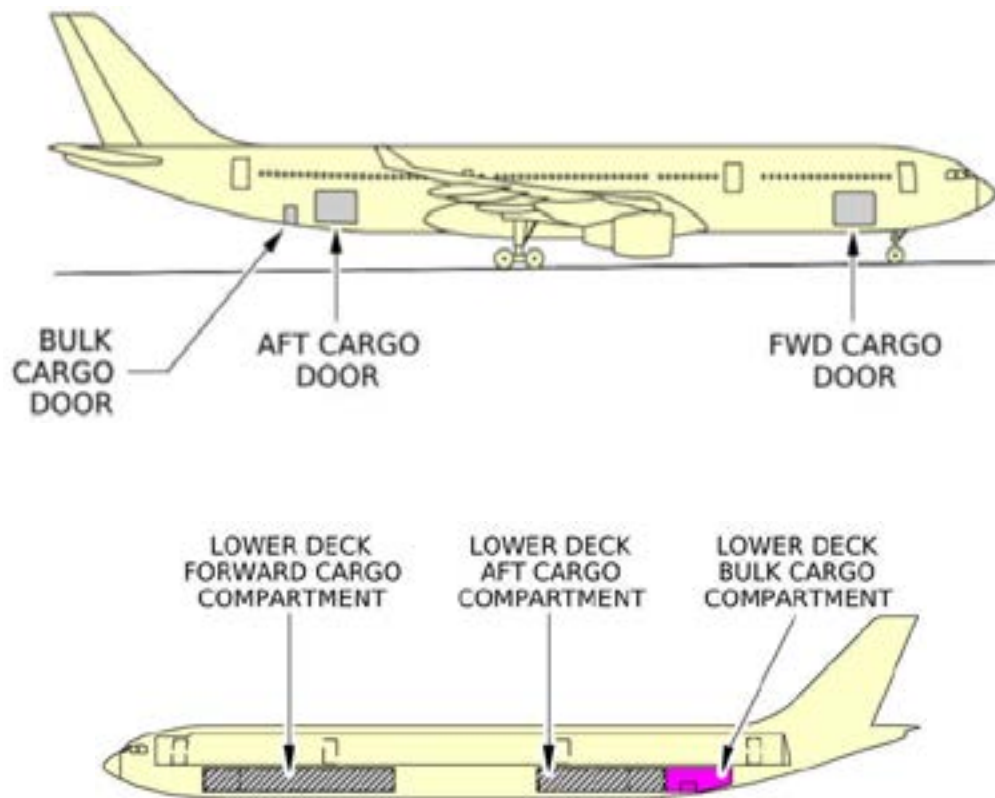

5.2 Doors/Windows/Exits and Flight Deck Escape Routes

Identifying and describing the location of each of the exits of the aircraft.,

Cabin


1. The **ALT** type aircrafts are equipped with 8 exits - 6 "TYPE A" & 2 "TYPE 1" exits.
2. Aircrafts **ALH/ALS** consists of - 8 "TYPE A" exits
3. The **A-330-300** type aircrafts are equipped with - 8 "TYPE A" exits

Flight Deck

1. Two sliding windows are located in the flight deck, one on each side, could be opened only from inside
2. An avionic compartment door is located in the flight deck (at floor level) which leads below the cabin floor

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 16

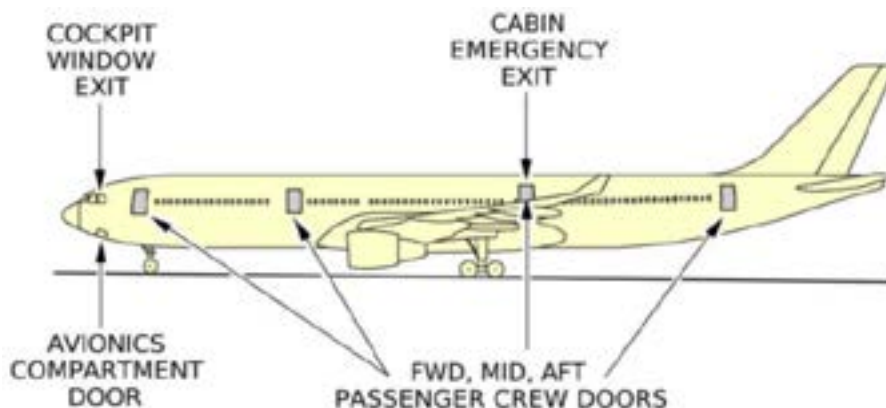

5.2.1 Cabin Windows

Passenger cabin windows are located at eye level mounted at intervals of 530 mm (20.9"). Each window has an outer, middle and inner pane.

The inner and outer panes are stressed to maintain cabin pressure. A small vent hole is found at the bottom of the middle pane to equalize the pressure between the inner and outer pane. The inner pane is equipped with a sun shade (Blind).

5.2.2 Doors

5.2.2.1 Doors Type "A"

A-330



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 17

Features


1. Support Arm
2. Gust Lock
3. Arming System with:
 - SLIDE ARMING LEVER
 - SAFETY PIN with a red streamer- TRANSPARENT COVER.
4. Door Locking Indication
5. Assist Handles
6. Observation Window with:
 - SLIDE ARMED indicator light
 - CABIN PRESSURE warning indicator light.
7. Door Control Handle
8. Slideraft Pressure Indicator
9. Slideraft Container

Pre-flight Check

1. Slide Arming Lever is in the DISARMED position
2. Safety pin is inserted in the disarmed socket and red streamer is displayed
3. Cover is closed
4. Purser to checks slide are DISARMED on all doors on FAP

5.2.2.2 Doors Type “1”

The type “1” doors are used only as emergency exits and are equipped with an emergency evacuation slide. The door operation is similar to the main doors (type A doors), it incorporates a similar slide arming system and door warning features. The door control handle has a protective cover and must be opened prior to door operations.

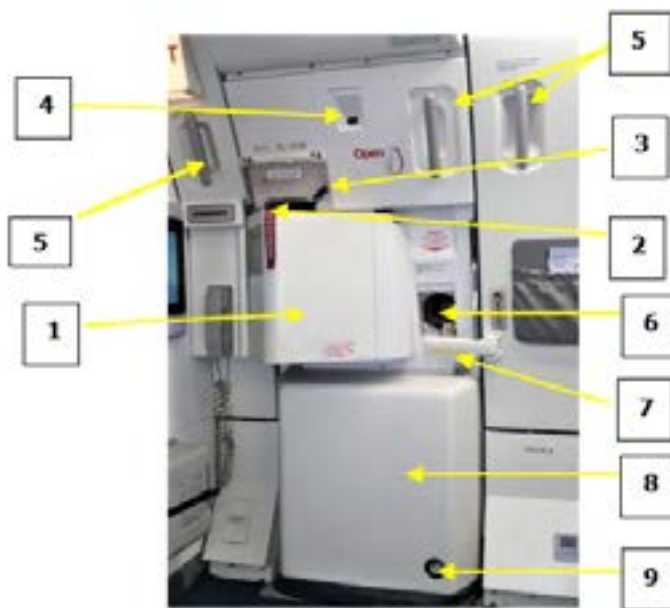

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 18

1. Support Arm
2. Gust Lock
3. Arming System with:
 - SLIDE ARMING LEVER
 - SAFETY PIN with a **RED STREAMER**
 - TRANSPARENT COVER.
4. Door Locking Indication
5. Assist Handles
6. Observation Window with:
 - SLIDE ARMED indicator light
 - CABIN PRESSURE warning indicator light.
7. Door Control Handle
8. Slideraft Container
9. Slideraft Pressure Indicator



5.2.2.3 Safety Pin

The safety Pin has an identifying **RED STREAMER** which is provided to prevent accidental movement of the Arming/Disarming lever. Stowage

Type 'A' Armed	Stowage on the door support arm
Type '1' Armed	Stowage on door frame /lower level
Type 'A/1' Disarmed	Inserted into the slot at the Arming /Disarming lever

5.2.2.4 Gust lock



A spring-loaded locking lever located on the support arm of the door. When the door is fully opened it automatically locks the door in the open position and prevents accidental movement of the door. To

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 19

release the door from the open position the Gust lock needs to be pushed down.

5.2.2.5 Viewing Window

The window should be clear to view outside conditions.

The blind shall be in the open position for taxi, take-off and landing.



5.2.2.6 Door warning system

A White slide armed warning light will illuminate steady to indicate that the door is being opened in the armed mode.

A Red cabin pressure warning light flashes if the cabin remains pressurized, when the engines are shut down and the slides are disarmed.

CAUTION : IF THE RED CABIN PRESSURE WARNING INDICATOR LIGHT IS FLASHING, DO NOT FORCE THE HANDLE TO OPEN THE DOOR, REPORT THE INDICATION TO THE COCKPIT CREW.

WARNING : IF A CABIN CREW MEMBER OPENS THE DOOR WHILE THE 'CABIN PRESSURE WARNING INDICATOR' LIGHT FLASHING, THERE IS A RISK THAT THE CABIN DOOR WILL OPEN VIOLENTLY BECAUSE THE CABIN IS NOT FULLY DEPRESSURIZED (ALL DOORS INCLUDING A320/A321 TYPE 'I' AND 'C')

5.2.2.7 Slide Arming /Disarming System

The slide gets connected to the doorsill by the girt bar when the slide-arming lever is moved to the armed position.

5.2.2.8 Normal door operation

The slide-arming lever must be in the disarmed position.

5.2.2.9 Emergency door operation

The slide arming lever must be in the armed position.

5.2.2.10 Transparent cover

A transparent cover over the arming/disarming lever eliminates the possibility of an accidental move-

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

ment of the lever.

5.2.2.11 Door Restraint Strap (Door safety strap)

The bright coloured self-reeling canvas strap is used to prevent accidents.

Whenever the aircraft is not being serviced from a particular door and remains opened, it must always be guarded with the door restraint strap.



WARNING - DO NOT LEAVE AN OPEN DOOR UNATTENDED AS THE SAFETY STRAP ACROSS THE DOOR WILL NOT PREVENT PASSENGERS/CREW MEMBERS FROM FALLING OUT.

Note: Door Restraint Strap rolls up automatically during removal procedure. The cabin crew must ensure that the safety strap is fully retracted into its recess before closing the door.

5.2.2.12 Pressure Gauge

If the door slide pressure indicator reads low on the FAP, the Purser shall bring it to the notice of the PIC and/or inform the Engineer on duty.

5.2.2.13 Door Status Indication System (on the door)

The status of each door would be displayed on the FAP.

1. Opened/Closed
2. Locked /Unlocked
3. Armed/Disarmed

The following colour indications of the relevant exits displays the status of the doors on the Forward Attendant Panel (FAP)

RED rectangle	Door Opened
AMBER rectangle	Door closed and disarmed
AMBER rectangle with text	Door armed but slide inflation pressure low
GREEN rectangle	Door closed and armed

5.3 Opening Of Doors Externally / Internally

5.3.1 Personnel Authorized to Open a Door

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 21

1. Cabin Crew
2. Flight Crew
3. Trained Ground Personnel
4. Ground Engineer/Technician

5.3.2 Opening the Door Externally

Authorized ground personnel could open the door



5.3.2.1 Procedure / Precautions

1. Check the cabin pressure warning red light is not flashing to ensure cabin is depressurized.
2. Push the flap and grasp the **DOOR CONTROL HANDLE**.
3. Lift the external the **DOOR CONTROL HANDLE** up to the horizontal position in line with the green mark.
4. Arming/disarming lever would automatically move to the disarmed mode.
5. Door shall be moved outwards and forwards until the gust lock engages.
6. Lower the **DOOR CONTROL HANDLE** into the recess.

5.3.3 Opening the Door Internally

During routine operation, the door shall be opened only by the designated door Primary. **Ref : 2.15.9**

5.3.3.1 Procedure/Precautions

After landing once the seat belt signs are switched off, Purser shall initiate the announcement to disarm the slides Door primary actions

Disarming of slides

1. Open the transparent cover
2. Remove safety Pin
3. Move the slide arming / disarming lever to the disarmed mode
4. Install the safety pin with the red streamer which is in the stowage

Purser shall confirm the disarming of slides by

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 22

1. Checking with door primaries through an 'all stations call'
2. The display on the FAP

Once the slides are disarmed the PIC shall give the confirmation by making the following announcement:

"CABIN CREW YOU MAY OPEN DOORS WHEN REQUIRED"

In the event the above command is not received, Purser shall check with PIC and advise CCMs accordingly

Opening the door

1. When directed to open the door
2. Check out side conditions
3. Hold on to the assist handle on the door frame
4. Lift the door control handle up fully
5. Push the door outwards and forward until the gust Lock engages

If the cabin pressure warning red light flashes when the door is disarmed, inform the PIC.

If the white slide armed indicator light illuminates steady when the control handle is lifted it indicates the slide is armed. Once a door is opened and is not used as an exit/entry point, the restraint strap should be installed, and the door manned by a CCM. An exit shall remain opened only if a step or aero-bridge is positioned

5.4 Closing the Door – Externally/Internally

5.4.1 Personnel Authorized to Close a Door

1. Cabin Crew
2. Flight Crew
3. Trained Ground personnel
4. Ground Engineer/Technician

5.4.2 Closing of the Door Externally

5.4.2.1 Procedure / Precautions

It is the responsibility of the authorized person to inform the Purser or subordinate prior to closing the door.

1. Ensure the door restraint strap is released and fully retracted
2. Release the door by pressing the gust lock and move the door towards the frame
3. Ensure the door is flushed against the frame
4. Lower the external control handle fully down until flushed against the fuselage.

5.4.3 Closing the Door Internally

5.4.3.1 Procedure / Precautions

Purser shall inform PIC when a door needs to be closed and call relevant station and inform the door primary to close the door

Revision No	01	Revision Date	01 April 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 23

1. Door primaries shall inform the Purser prior to closing the doors
2. Ensure the restraint strap is released and fully retracted
3. Grasp the assist handles on the door frame and press the gust lock down
4. Move the door rearwards, pull in and lower the control handle
5. Both DOOR LOCKING indicators change from **UNLOCK** to **LOCKED**

Confirmation - To ensure the door is locked

The door locking indicators, located on the upper part of the door, should display **“locked”** in green.

CAUTION: PRIOR TO LOWERING THE DOOR CONTROL HANDLE, ENSURE THE RED STREAMER OF THE SAFETY PIN IS DISPLAYED OUTSIDE THE SUPPORT ARM

NOTE: A closed door shall not be opened without prior approval from the PIC

5.5 Slide Arming/Disarming/Cross Checking Procedures

5.5.1 CCM Responsibilities

The Purser shall inform all door primaries to arm slides and cross check prior to every take off. Once the aircraft is parked the Purser should instruct the door primaries to disarm the slides, The PIC shall instruct to open doors when required.

The door primaries shall follow the commands and cross check when the slides are armed or disarmed.

Arming

1. Open the transparent cover
2. Remove the safety pin
3. Move the Arming / Disarming lever to the “ARMED” position
4. Stow the safety pin
5. Close the transparent cover
6. Cross check



5.5.1.1 Disarming

Once the aircraft is parked/chocks on and the seat belt sign is switched off, the Purser shall initiate a PA announcement for the door primaries to disarm slides, **The slides on the right shall be disarmed first.**

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 24

Prior to disarming the slides on the right, door primaries on the left shall cross over to the right. The following disarming procedure shall be carried out. (“PIN/LEVER/PIN” verbally stated by the CCM whilst disarming the slide) Primaries shall,

1. Open the transparent cover
2. Remove safety pin from the slot
3. Move the arming / disarming lever to the “DISARMED” position
4. Install the safety pin with the **RED STREAMER** exposed
5. Close the transparent cover
6. Cross check

The slides on the left shall be disarmed next,

Once the right side slides are disarmed, both door primaries shall cross over to the left and the left side door primary shall disarm the slide observed by the opposite door primary.



5.5.1.2 Cross Checking after arming the door

On command from the Purser the door primaries shall arm the slides and cross check with the opposite door primaries.

5.5.1.3 Cross Checking after disarming the door

Ref: 5.5.1.1

5.5.2 Precautions

If the status of the slide is not indicated in the flight deck,

1. The PIC would inform the Purser
2. The Purser shall re check with the relevant door primary
3. The door primary should recycle the procedure and confirm as per the instructions given by the Purser

5.5.3 Inoperative Door or Slide Raft

Ref: 2.32

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 25

FUNCTIONING DOORS AND EVACUATION SLIDE/RAFTS REQUIRED	
Number installed	08
Number required for dispatch	07

5.6 Emergency Operation of Doors/Emergency Exits

5.6.1 Signals to Open Doors

The PIC shall initiate an evacuation in an emergency. In the event the PIC does not initiate an evacuation a CCM shall try to establish communication with Flight Crew, failing, the CCM shall initiate the evacuation as appropriate. An emergency door opening is always power assisted.

5.6.2 Check Hazards

The proximity of fire or wreckage could render a slide unusable

Strong wind conditions could cause movement of the slide

At airports, congestion of vehicles/aircraft /movable/immovable structures could block the full extent of the slide

5.6.3 Attitude of the Aircraft/Gear Collapse

A CCM should be mindful when assessing the use of slides for unusual attitude of the aircraft which may restrict the use of escape slides

If sliding angle is reduced due to lower doorsill height, it is recommended that passengers be directed to run down the slides

5.6.4 Opening a Door in an Emergency

1. Check the slide arming lever is in the "ARMED" position
2. Lift the door control handle up fully and release
3. Door should open automatically
4. If the door does not open, manually push open the door
5. Check for correct slide inflation
6. If the slide does not inflate, pull manual inflation handle located on the right side at floor level

5.6.5 Precautions

1. Hold on to the assist handle on the door frame prior to opening the door
2. Check outside conditions for hazards
3. Hold passengers back, prior to pulling the manual inflation handle

WARNING : DO NOT ATTEMPT TO HOLD THE DOOR CLOSED WHEN THE AUTOMATIC DOOR OPENING HAS BEEN INITIATED

5.6.6 Escape Slides/Rafts

Type "A" door is equipped with a dual-lane slide.(can evacuate 2 passengers at a time) and can be used

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 26

as a raft in a ditching

Type “1” door is equipped with a single lane slide and cannot be used as a raft but as a flotation device in a ditching.

They are stowed in a container hinged on the lower part of the door.


When the door is opened in the “ARMED” mode, automatic slide/raft deployment and inflation will occur.

The disconnection procedure is clearly marked on the slide.


Doors L2/R 2 - the slide-rafts will deploy at an angle away from the engines.

Slide/ Raft Deployment

5.6.6.1 Raft Deployment

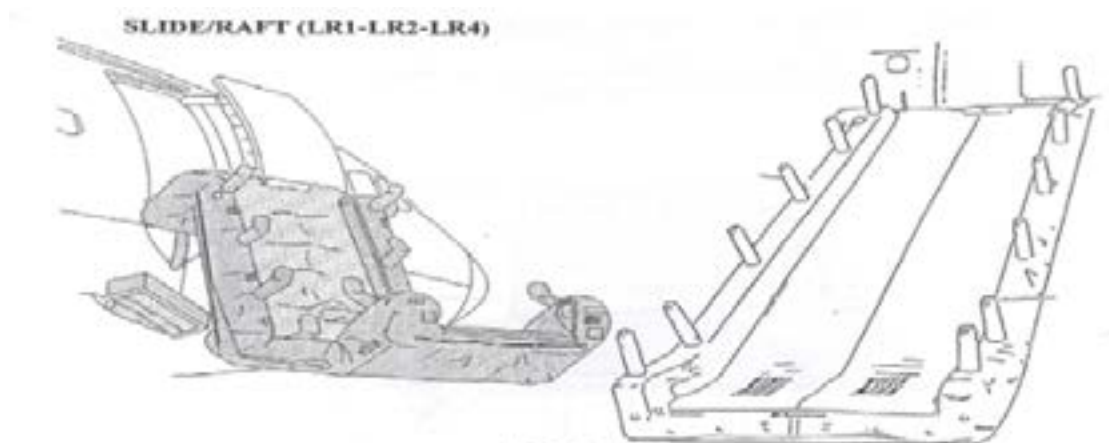


5.6.6.2 Side Deployment

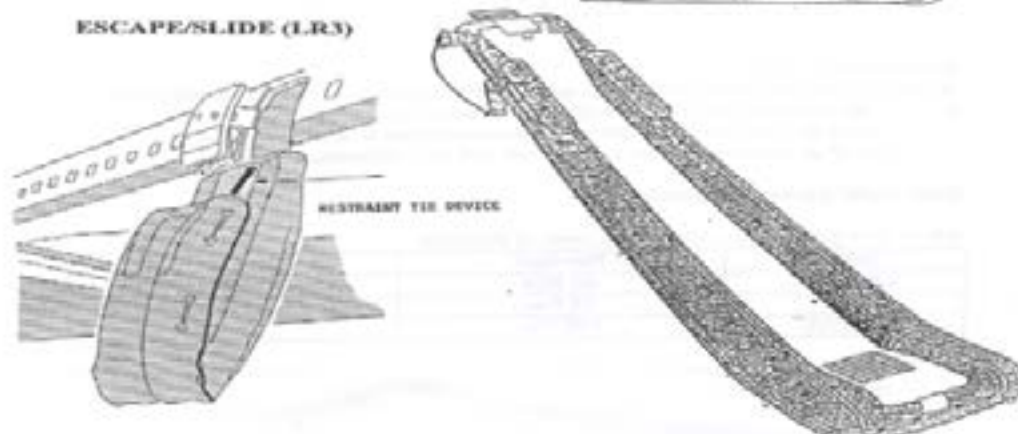

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CSS/02
			ED 04/Jun 23
	AIRCRAFT SPECIFIC		Chapter 05
			Page 27

5.6.6.3 Slide/Raft Deployment

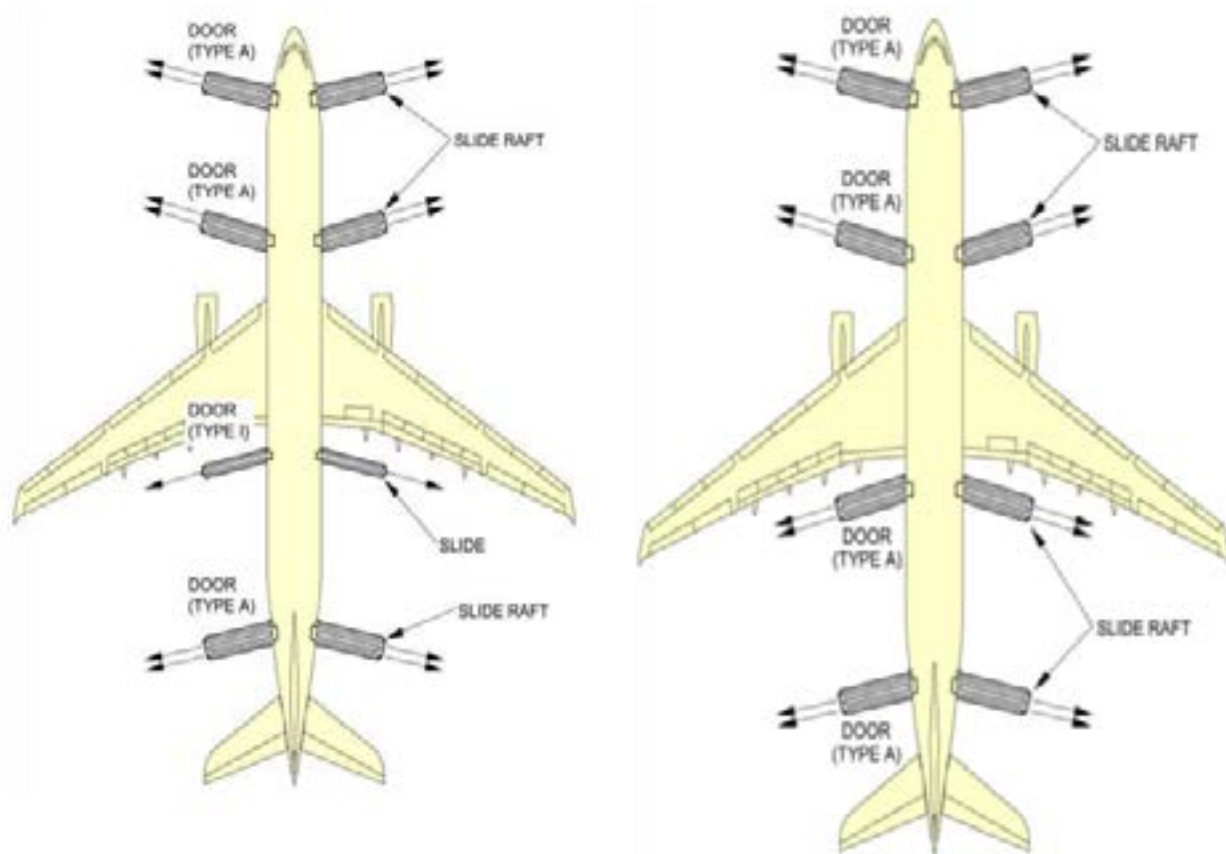

5.6.6.4 Non-inflation of Slide/Raft

If the slide/raft fails to inflate automatically, pull the manual inflation handle located on the right-side floor level, for manual inflation of slide/raft.




Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 28

5.6.6.5 Slide/Raft Deployment (type “A” door)

1. Doorsill End
 - The Doorsill end of the slide raft is attached to the girt bar.
2. Side and Center Tubes
 - The inflated tubes stabilize the slide raft structure. The center tube additionally separates the sliding lanes.
3. Sliding Surface
4. Deceleration Strips
 - There are deceleration strips at the end of the slid raft. These strips decrease the speed of evacuees, before ground contact.
5. Far End
 - The Far end of the slideraft touches the ground during on-ground evacuation.
6. LED Lights
 - The LED lights provide lighting to the sliding surface and at the far end of the slide raft.
 - They shall illuminate for approximately 12 min after slide raft deployment.

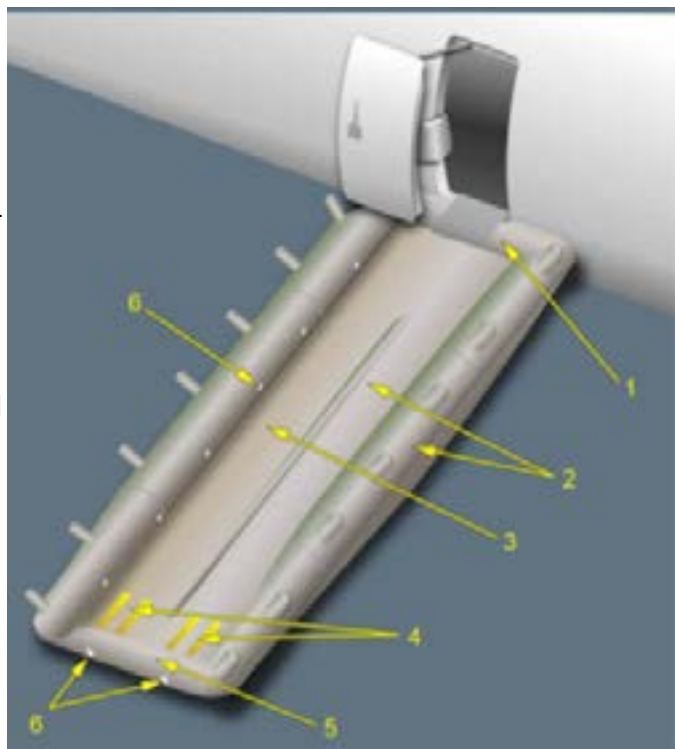

5.6.6.6 Lighting Strips on Escape Slides

Emergency path lighting strips are installed on all slides in the inner corners and at the end of the slide. It will activate when the slides are deployed and will last for approximately 12 minutes provided the power cable remains connected to the aircraft. Locator lights which are installed on the canopy support tubes shall last for 8 hrs powered by water activated batteries.

5.6.6.7 Raft deployed in abnormal Conditions

If the raft is not in a conducive angle or attitude for passengers to board (due to water level lower than the doorsill, rough waters), it should be detached and pulled towards the doorsill by the Mooring line. The passengers should be advised to inflate the life vest and board the raft or alternatively Inflate life vest, jump into the water and hold on to the life line and board raft.

5.6.7 Detaching Slide/Raft

The slide raft is held on to the doorsill girt bar, by a lacing referred to as a daisy chain. The daisy chain is covered by a Velcro flap.

1. Lift the Velcro flap to expose the daisy chain and the white pull handle.
2. Pull the white ‘PULL’ disconnect handle, attached to the lacing holding the raft to the girt bar.
3. If the pull handle fails, undo the lacing manually.
4. Once detached, the slide raft would still be connected to the aircraft by the Mooring line

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 29



FLAP



DISCONNECT HANDLE



To undo the daisy chain manually insert fingers into the stitch and pull loose

5.6.8 Detaching the Slide (L3/R3) - Type '1' Doors

The slides at L/R 3 type "I" doors (on selected aircraft) are only floatation devices. It should be detached from the aircraft and pulled towards the door using the Mooring line prior to evacuating passengers.

1. Undo the studs holding the Velcro flap at each end of the girt and lift flap up
2. Pull the white **"PULL"** handle to undo the lacing
3. If the pull handle fails, undo the lacing manually

Note: Once detached, the slide raft would still be connected to the aircraft by the Mooring line


5.6.9 Disconnecting the Raft Type 'A' Doors

1. Cut the Mooring line with the hook knife, The hook knife is located in a pouch 1/3rd away from the door-sill on top of the buoyancy chamber



Or

2. Pull the manual release handle on the top buoyancy chamber at the door-sill end, The manual release handle is located in a pouch covered by a Velcro strip on the top buoyancy chamber

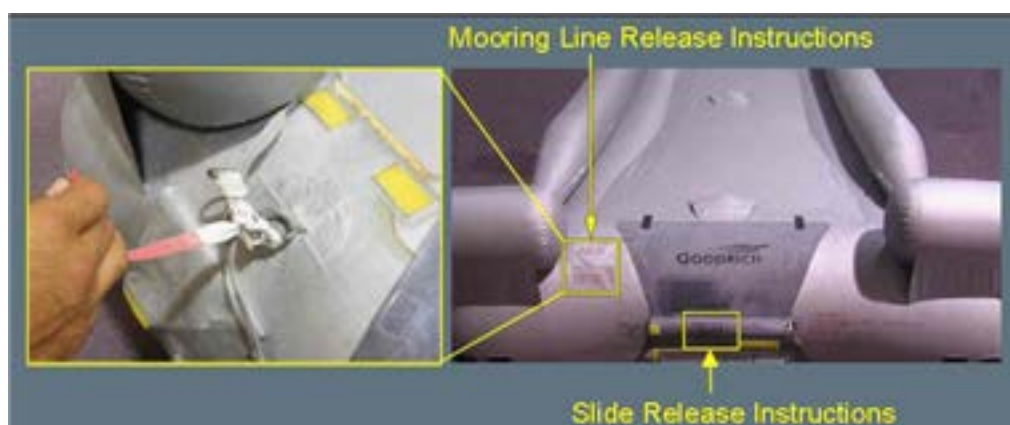

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 30

Or

- The Mooring line would release at its automatic release point of 375 Kg.

5.6.10 Disconnecting the Slide (L3/R3) – Type ‘1’ Doors

When the slide is used as a floatation device it should be disconnected from the aircraft after the passengers have evacuated. In the event the aircraft sinks prior to the disconnection, The Mooring line would release at its automatic release point of 375 Kg. Or pull the manual release handle on the top buoyancy chamber at the door-sill end, The manual release handle is located in a pouch covered by a Velcro strip on the top buoyancy chamber

No hook knife / heaving ring/survival kit or sea anchor is installed on the slides.


5.6.11 Survival kit attached to the Raft

The survival kit is attached to the raft along with a bellows hand pump to a retrieve line and has to be retrieved from the water once the raft is fully deployed.

The canopy & centre masts are located inside the survival

Kit. It is bright orange/red in colour to attract attention, is water proof / wind resistant.

Not available on Type ‘1’ doors (slides).

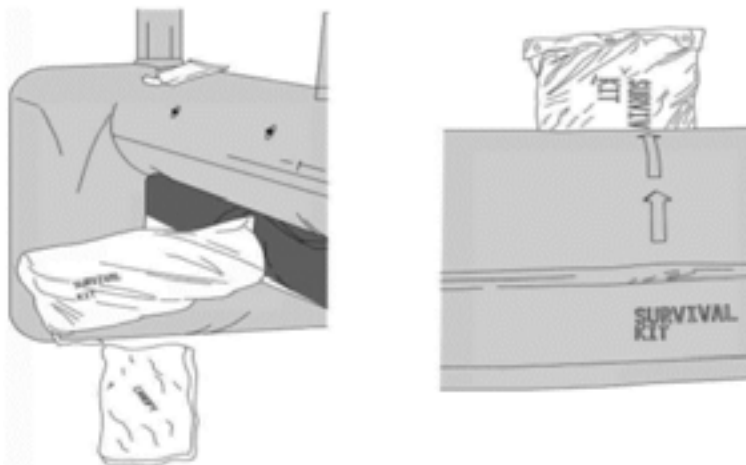

5.6.12 Erecting the Canopy

Side Masts

The side masts are mounted on the top buoyancy chamber of the raft and inflate along with the raft. At the doorsill end both side masts are taped down to prevent damage from the door.

The centre masts

The centre masts are manually inflated and secured at the Velcro attachment points located at the centre of the raft. Included in the survival pack. When erected, will keep the canopy raised.

Masts are not available at Type “1” doors (slides).

5.6.12.1 Canopy Erection Instructions

Canopy erection instructions are printed on the pouch in which the canopy is stowed.

- Remove canopy from the bag

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL


	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 31

2. Keep the canopy low to prevent it being blown away
3. Prevent occupants standing up in the raft to avoid capsizing
4. Open the canopy
5. Unfold the canopy keeping it low
6. The marking on the canopy 'BOARD END' should be next to the girt bar end
7. The marking 'THIS SIDE UP' should be on the outer part of the canopy
8. Release the two support tubes held down at the doorsill end
9. Spread canopy lengthwise on the slide raft
10. Canopy support tubes and canopy tie downs are numbered. Odd numbers for the left (when facing the door sill end) and even numbers for the right side and match the numbers accordingly
11. Align the canopy tie down string patches with the canopy support tubes
12. Raise the canopy, downwind first, over the canopy support tubes
13. Two attachment points are located for the canopy to be tied down One on the support tubes, and the other on the top buoyancy chamber For ventilation it should be attached on to the support tubes For maximum weather protection, attach the canopy on to the buoyancy chambers
14. Attach canopy tie down strings to the attachment points on the slide raft. Care should be taken to use easy release knots to tie canopy down, for quick release, to use the signalling devices
15. Manually inflate the centre mast and place them on the Velcro patches located along the centre of the slide
16. Certain canopies are equipped with an opening in the centre to collect rainwater. It is advisable to discard the first amount of rainwater collected as it will be salty. After collecting the required quantity of water, tie up the tube to prevent the interior of the slide raft from becoming wet.

Note: Canopy erection instructions are in the slide raft management guide, in the survival kit.

5.6.12.2 Raft

Raft Description


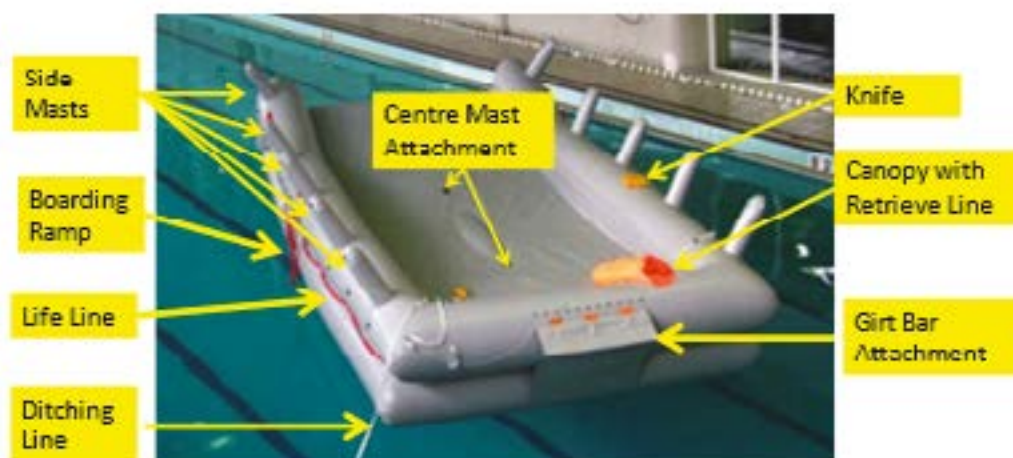


Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL


	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 32

The hook knife is located in a pouch on the top buoyancy chamber, on type “A” slide rafts. The manual release handle is located in a pouch covered by a Velcro strip on the top buoyancy chamber on the door sill end.


Wrap the canopy string around the rubber button on the canopy support tube.

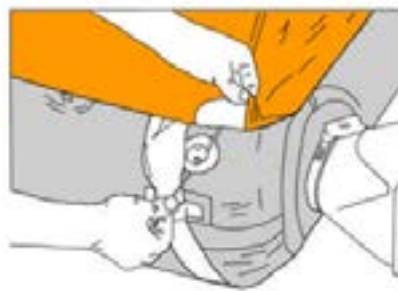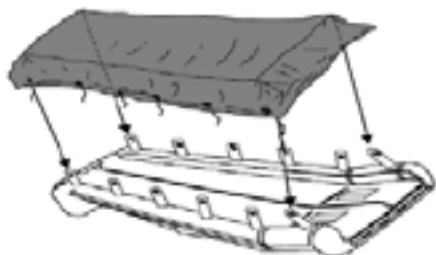

Care should be taken to use easy release knots to tie canopy down.

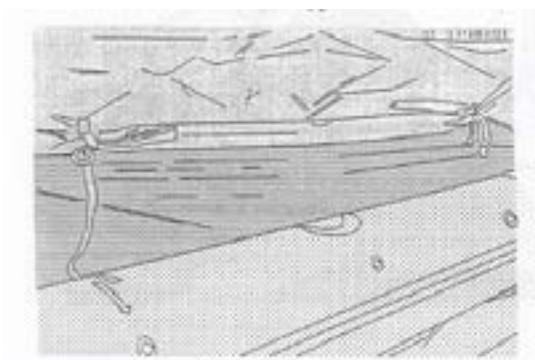

The canopy may be rolled up at the sides for ventilation if desired.

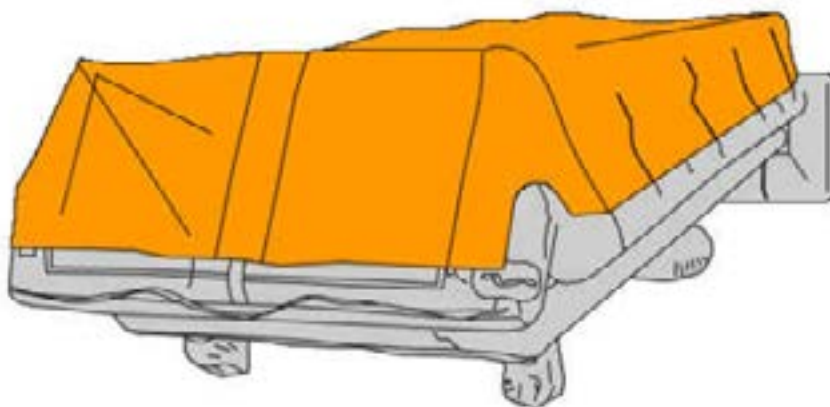


Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 33

Raft Inflation

Bellows hand pump shall be used to top-up the buoyancy chambers. Attachment points for the pump are located on the raft. Screw the hand pump on to the attachment point and inflate the relevant chamber.

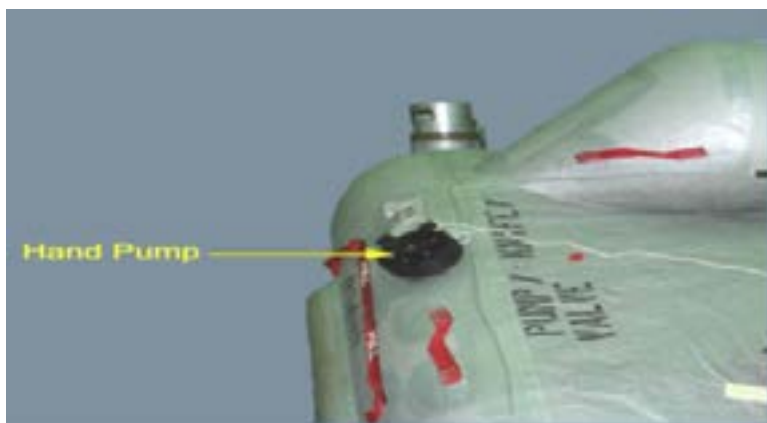

5.7 Flight Deck

5.7.1 Escape Routes

Escape routes from the flight deck are sliding windows and the secure flight deck door.

5.7.1.1 Sliding Windows

Two sliding windows are located in the flight deck, one on each side, and both could only be opened from inside. It's locked in position and a control handle is located to release it. An escape rope is positioned above the window in a cavity to lower one's self to ground level.

To Open

Press down the knob on the operating handle/rotate handle inwards and rearwards, for the window to slide back and lock itself in the open position.

To Close

Release the locking lever by pulling it towards the aft, slide the window forward and once in position rotate the control handle back to the locking position.


Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 34

5.7.1.2 Escape Rope


Two knotted descent escape ropes are installed in the flight deck one over each sliding window which can withstand a weight of 180 kg.

The Flight Crew may use the descent ropes to leave the flight deck through the opened sliding windows, descending facing the fuselage.

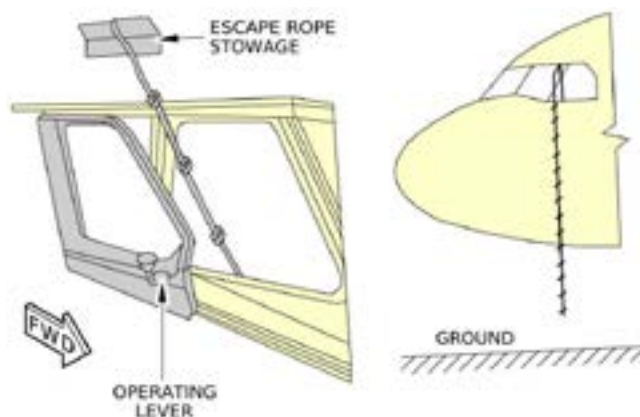

5.7.2 Secure Flight Deck Door

All SriLankan Airlines aircrafts are equipped with a secure flight deck door. It is a bullet proof door that separates the flight deck from the cabin. It is designed to resist penetration by small arms fire, grenade shrapnel and resist forcible intrusion by unauthorised persons. It is fully compliant with rapid decompression requirements. It has a digital keypad located on the door frame. It has an electrical control system, located in the flight deck. A evacuation and decompression panel is located on the lower part of the door. The secure flight deck door shall be closed before the last cabin door is closed, and remain closed until completion of flight leg. As the flight deck door is heavy care should be taken, to close the door gently.

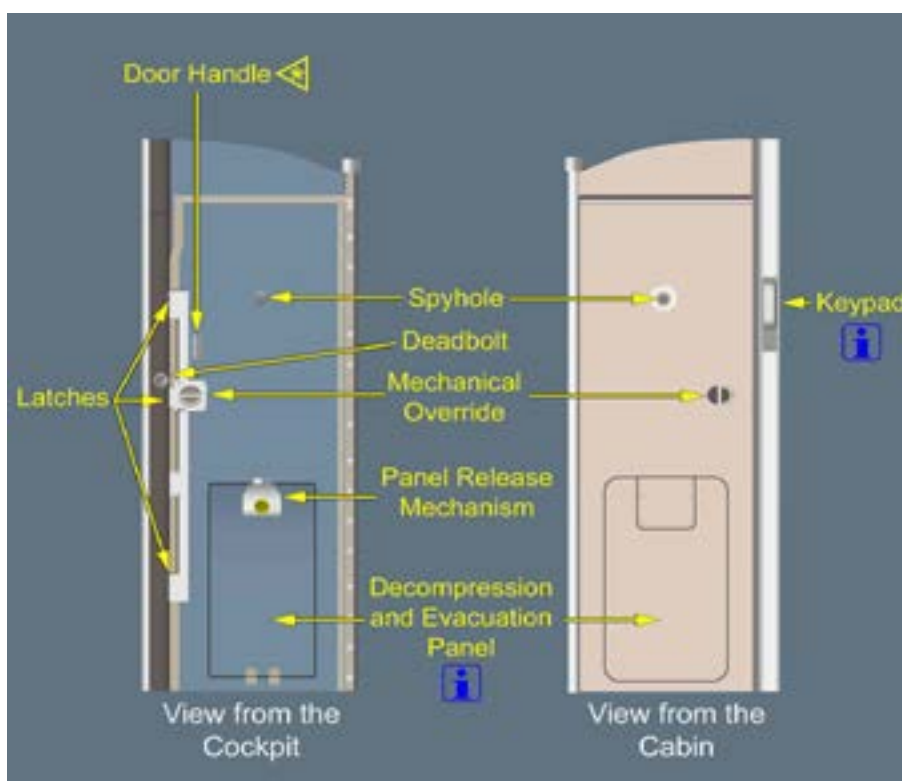

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 35


5.7.2.1 The Evacuation and Decompression Panel

The evacuation and decompression panel enables the flight crew to evacuate the flight deck in case of emergency when the secure flight deck door is jammed or stuck, The evacuation and decompression panel could be removed only from the flight deck

To remove the evacuation and decompression panel (A330-300,ALS)

- Rotating the handle cover in order to access the panel release handle.
- Pushing the panel release handle and turning it in any direction in order to unlock the panel and kicking the panel open.
- If the escape panel is unlocked, the locked indicator is red.

ALH - Kick the panel open

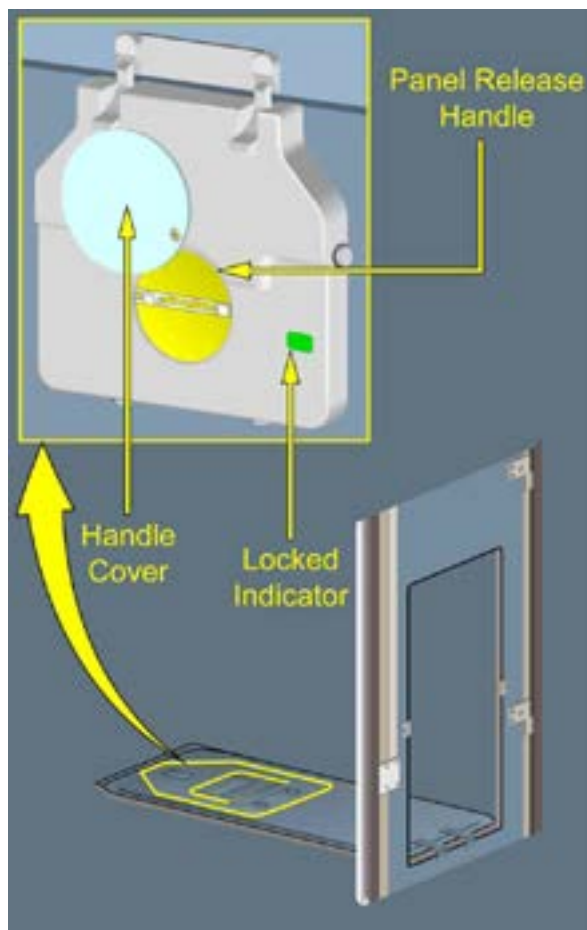

A330-300,ALS



ALH

5.7.2.2 Digital Key Pad

The keypad is located on the doorframe and equipped with two indicator lights (green and red) / numerical display. The keys are used to, request entry to the flight deck and the numbers are used to unlock the door. In case the key pad is unserviceable, the Purser shall discuss with the PIC an alternate flight deck entry procedure before departure.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 36



Key Pad Indicators

Green light – steady- Indicates the Flight Crew has unlocked the door and it remains unlocked for 5 seconds.

Red light - Steady - Indicates the Flight Crew has denied access, the door remains locked and the emergency access keypad is inhibited for a pre-selected time.

5.7.2.3 Controls on the Secure Flight Deck Door

The toggle switch located in the flight deck has three positions and an indicator light comes on when the door is opened.



5.7.3 Opening the Secure Flight Deck Door from the cabin

The door could be opened in,

1. Normal operation
2. Secondary operation
3. Emergency operation

5.7.3.1 Normal Operation

1. Press **“CALL CAPT”** on the handset
2. Establish contact with the Flight Crew and request access to the flight deck

If entry is authorized by the Flight Crew:

1. The Flight Crew unlocks the door
2. A green light illuminates steady on the keypad, and kept unlocked for 5 seconds CCM may gain entry by pushing open the door

If entry is not authorized:

1. The door will be locked and red light comes on steady on the keypad

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 37

2. The keypad is locked for a pre-selected time

5.7.3.2 Secondary Operation

1. Press 01 # on the key pad to request entry

If entry is authorized

1. The Flight Crew unlocks the door
2. A green light illuminates steady, and door will be unlocked for 5 seconds
3. CCM may gain entry by pushing open the door

5.7.3.3 Emergency Operation

PIC shall brief the Purser regarding the 2 to 7 digit secret code at the pre-flight safety briefing to be used in the event of an emergency. The code shall be referred to as **Code Red**. CCM shall adopt the following emergency procedure in the event of the Flight Crew does not respond to a call from the Cabin. Press "PRIO CAPT" on the handset to establish contact with the Flight Crew. If there is no response from the Flight Crew;

1. Enter **code red**
2. The green light on the key pad would start flashing
3. After a pre-selected time of (15 /120 seconds)
4. The door would unlock for 5 seconds/green light would illuminate steady
5. CCM shall gain entry by pushing open the door
6. Precautions

Note 1 : In the event of a power supply failure, the flight deck door automatically unlocks, but remains closed,

Note 2 : In case of a rapid cabin decompression the evacuation and decompression panel automatically opens towards the cabin. In case of rapid decompression in the flight deck, the flight deck door automatically opens

5.7.4 Avionics Compartment

The compartment is located behind the captain's seat directly under the flight deck and houses the electronic equipment of the aircraft, the internal entry door to the avionics compartment is located on the floor level. A ladder is installed under the floor to provide access to the avionics compartment.

Another door is installed at the bottom of the avionics compartment that can be opened from inside and outside to exit the aircraft

WARNING: THIS AREA IS NOT ACCESSED BY CABIN CREW.



Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL


	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 38

5.8 Flight Deck Seats

5.8.1 PIC's Seat

The seat has the following features,

1. Column mounted
2. Electrically operated, vertical and horizontal positions with a manual back up
3. Manually operated recline control
4. A shoulder harness/lap strap/ crotch strap with a locking lever for restraining and an adjustable lumbar support
5. The life vest is stowed at the back of the seat

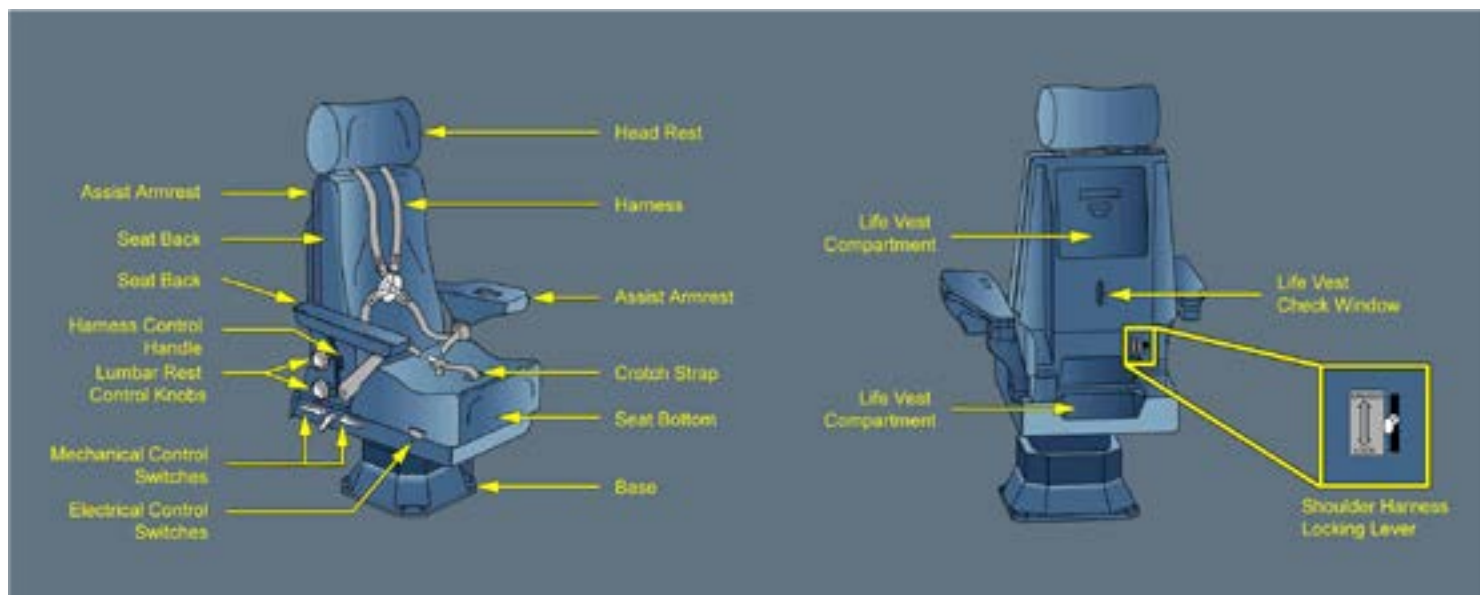

5.8.2 First Officer's Seat

Is identical to the PIC's seat, except, that the electrical and manual controls, are located on the left side.


5.8.3 The First Observer Seat

The seat has the following features,

1. Column mounted
2. A manually operated recline lever
3. A shoulder harness, lap strap/crotch strap with a locking lever for restraining
4. Seat rotation lever
5. The life vest is located behind the seat in a transparent compartment at floor level

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CSS/02
			ED 04/Jun 23
	AIRCRAFT SPECIFIC		Chapter 05
			Page 39

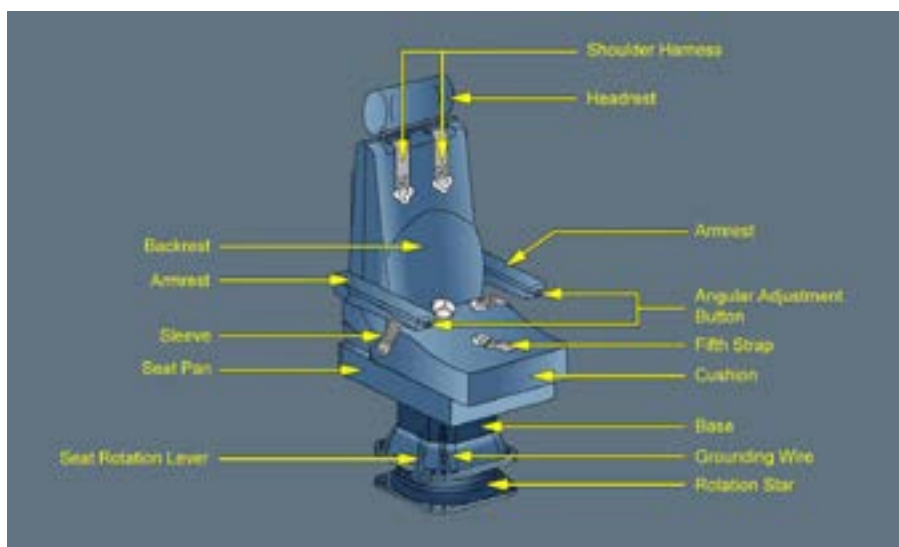

5.8.4 The Second Observer Seat


The seat has the following features,

A fixed seat with a shoulder harness/lap strap and a crotch strap with a single point release buckle

The life vest is located in a compartment under the seat



Overview of the flight deck seating

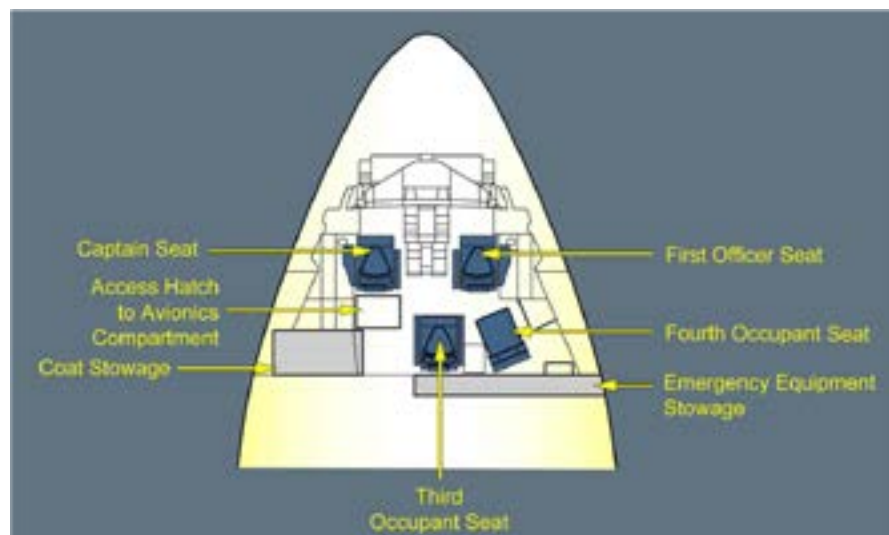

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 40

5.9 Cabin Crewmember Seats/Stations

The crew seats are categorized as Primary seats/Assist seats/High comfort seats/ Seats without seat belts



The Cabin Crewmember seats are equipped with the following features,

1. Service Unit with two oxygen masks each
2. Interphone adjacent to each CCM seat
3. Torch
4. Life vests located under each CCM seat
5. Reading light
6. Attendant Indicator Panel (AIP) adjacent to each crew seat
7. Area Call Panel (ACP)
8. Seat belt with a single point release device (adjustable pelvic restrain)
9. Shoulder harness (on auto locking reel)
10. Auto folding seat pan

Operation of Crew Seats


1. Place seat pan down
2. Retrieve lap straps which are stowed at the back of the seat pan and open
3. Sit, lock lap straps around the waist and tighten
4. Pull the harnesses over the shoulders, and insert the metal plate in to the buckle
5. The self-adjusting shoulder harness would reel back the extra slack
6. To extend the shoulder harness it has to be a smooth movement forwards
7. The shoulder harness would lock itself on a whip action
8. To release ,rotate the buckle 90°

When not in use the lap strap should be stowed in the cavity at the end of the seat pan

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 41

Hi comfort seat

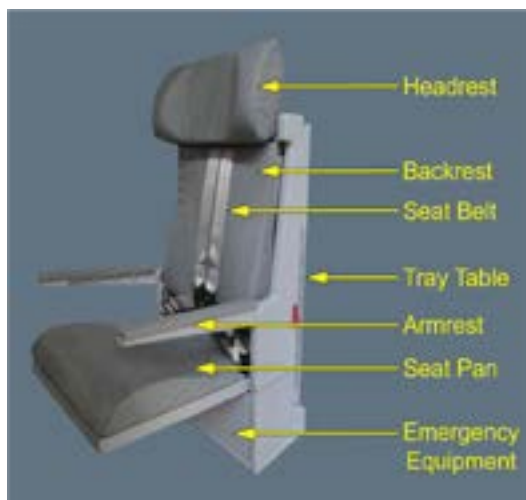

5.9.1 A330 Aircraft Primary Crew Stations



Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 42

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 43

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 44

5.10 Passenger Seat

5.10.1 BC - Seat Features

1. Seat row indicator
2. Seat belts
3. Electrically operated with manual back up seat adjustments
4. Lumbar support/Recline/ Adjustable leg rest
5. Manually adjustable head rest
6. Air vent
7. Individual reading light
8. Snake head adjustable reading light
9. A rotating tray table for easy exit
10. Hand set, hand held controls
11. Touch system screen
12. Movie screen with touch system and hand controls
13. Life vest for each seat



5.10.2 E/Y - Seat Features

1. Seat row indicator
2. Seat is 17.99" wide and reclines 14.9°
3. Seat belts
4. Manually operated Recline/ Lumbar support
5. Personal air vent
6. Individual reading light
7. Tray table stowed in front or on the side at bulkhead seats
8. Hand set, hand held controls
9. 6' inch Movie screen with touch system and hand controls
10. Life vest located under each seat



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 45

5.11 Stowage Areas


5.11.1 Over Head Bins

Overhead compartments are provided throughout the entire cabin. It's designed to hold a specified weight. The stowage compartment doors needs to be locked when not in use.



5.11.2 Doghouses/Coat closets

The doghouses and coat closets are located throughout the cabin. It is installed with a locking device. A doghouse is a smaller stowage compartment with a drawer, fixed on the aircraft floor

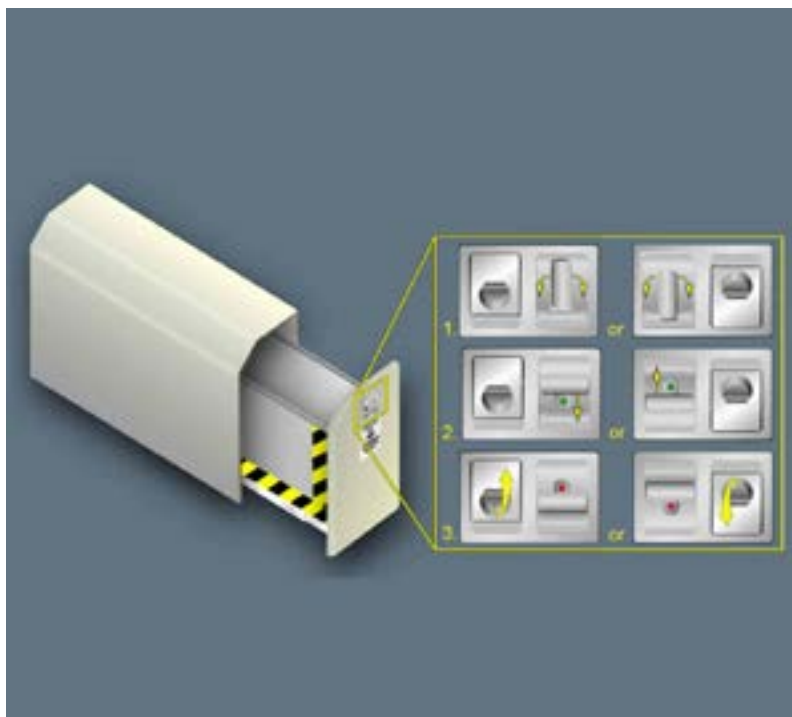

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 46

5.12 Galleys

A-330 Aircraft

5.12.1 Galley Power

When the aircraft is on ground, galley power is supplied from the APU. During flight power is generated from the aircraft engines. The galley power master switch is located and controlled from the flight deck and the individual power switches with circuit breakers are located in each galley. Malfunctions observed on any electrical equipment not limited to shall be brought to attention of the PIC and the power source switched off.

5.12.1.1 Circuit Breaker Panels (CB)

All electrically operated units such as Ovens/Coffee makers/Refrigerators are connected to the power source through individual CBs with a fuse to guard against any malfunction. The CBs are located on the appliance itself or on a CB panel in each galley. A CB once popped shall never be reset. The defect shall be entered in the cabin defects log book. In the event a CB shall be pulled out for resetting purposes, it shall be carried out only with the consent of the PIC. CCMs shall be aware of the corresponding CB panel in their respective working areas.



5.12.2 Galley Sink

Sinks are located in each galley of the A-330 aircraft. A spigot (Tap) is located above all sinks. A vacuum release knob located in the vicinity of every sink is pulled to drain water; it helps to releasing any trapped air from the sink drain pipes.

5.12.2.1 Water Shut Off/Supply Valves


The water shut off valves cuts off water to the spigots and the coffee makers in the respective galleys. In the event water supply is shutoff to a heater the power supply to the element shall be switched off as well.

Revision No	02	Revision Date	15 August 2024
Prepared By	Cabin Safety Training	Approved By	CAASL


	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CSS/02
			ED 04/Jun 23
	AIRCRAFT SPECIFIC		Chapter 05
			Page 47

5.12.3 Galley Locations/Diagram

A 330-300

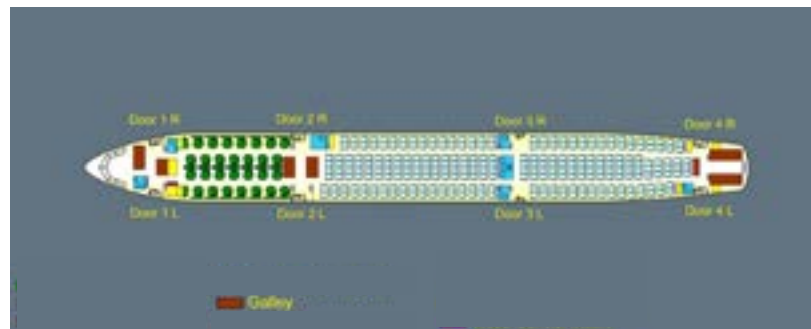

A 330-200 ALH/ALS

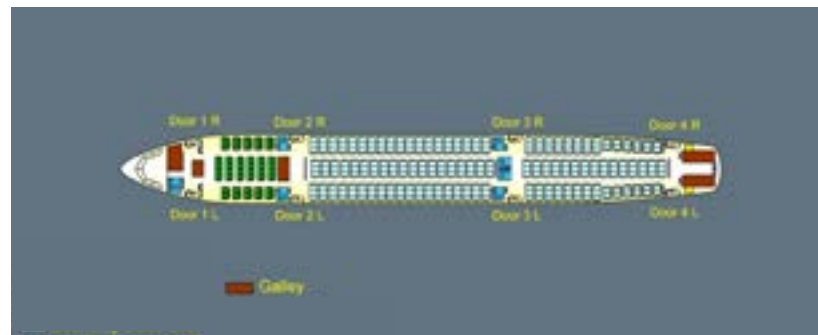

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 48

5.12.3.1 Galley Equipment Pre-flight checks

Shall consist of but not limited to ensure

1. Locking and latching devices are functioning
2. Circuit breakers are not popped out
3. Drain sinks are not blocked
4. Heaters and chillers functioning
5. If concerns are observed it shall be communicated to Purser and an entry made in the cabin defects log book.

5.13 Lavatories

Each Lavatory is equipped with the following,

Wash basin with hot & cold water

Lavatory bowl with a vacuum flush system

Air outlet/waste bin/water heater/water shut off valve

Bi-foldable or single door with occupied / vacant sign visible


Lavatory Service Unit with 110V Razor outlet,

Attendant Call Push Button / Return to Seat Pictogram

Oxygen Mask Container

Diaper changing board, Assist handle for PWD use in selected lavatories.

On selected lavatories an unlocking mechanism is installed

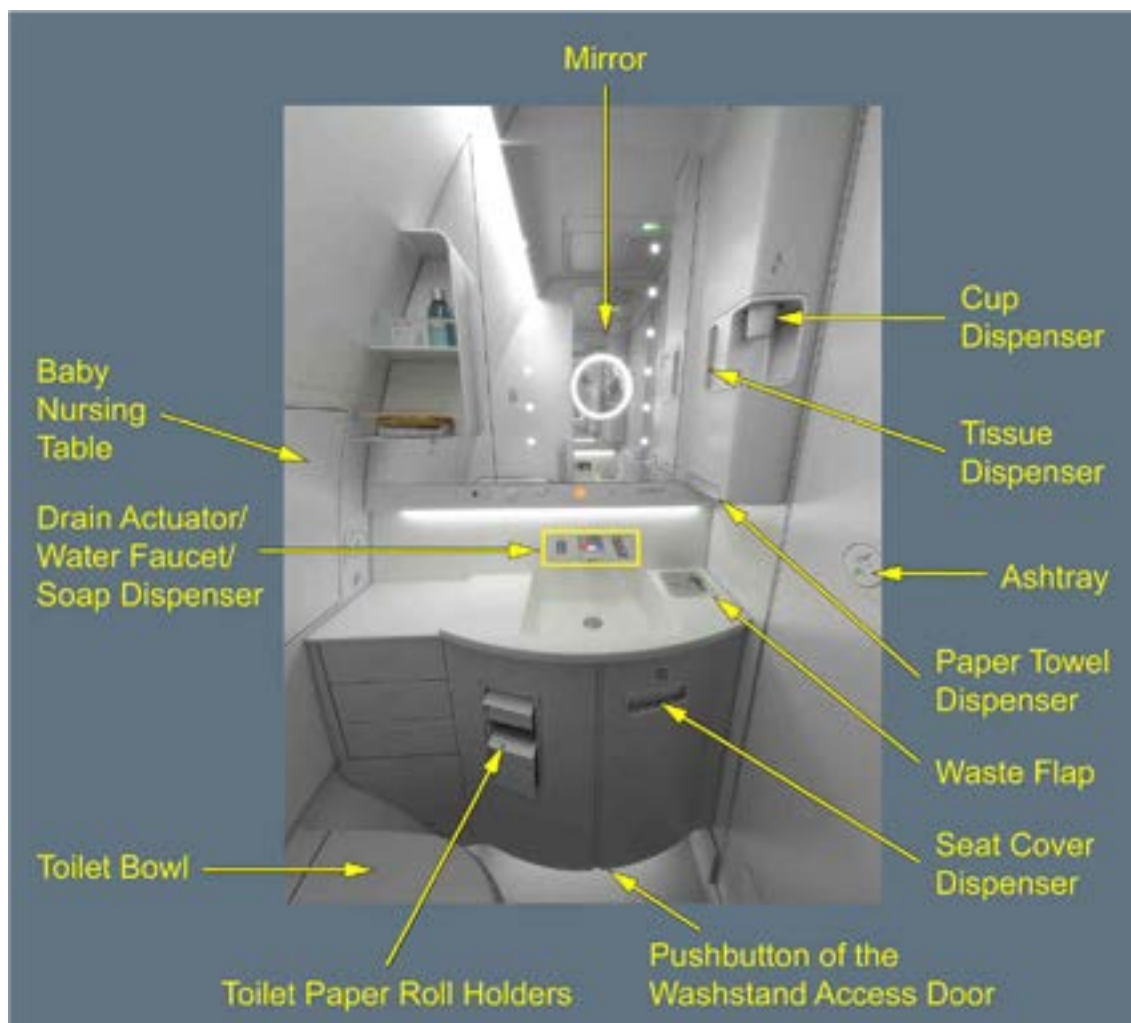


Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 49

5.13.1 Door Locking/ Unlocking Mechanism

(Internal)

To lock the door move the locking lever to the left and to unlock move the locking lever to the right.

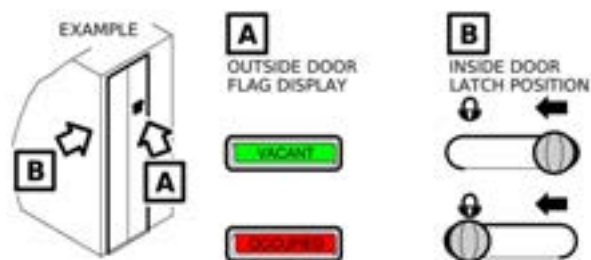


5.13.2 Emergency unlocking of the Lavatory Door

From outside

(External)

The door could be locked/unlocked from outside by lifting the “LAVATORY” sign cover plate and sliding the locking lever to occupied/vacant positions.

If the Lavatory is vacant it shall indicate in green.

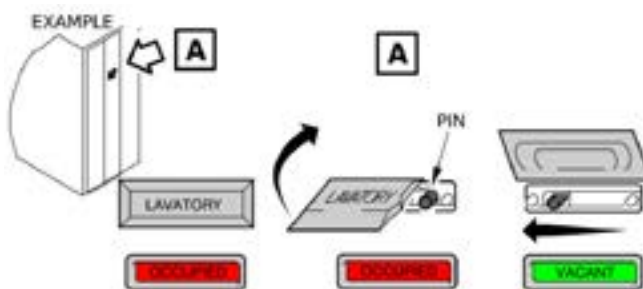


5.13.2.1 Single Blade door A 330-300

1. Lift up the spring loaded LAVATORY cover.
2. Slide the knob to the side until the indicator shows VACANT
3. Turn the lock-pin (located next to the door locking mechanism) a quarter turn from left to right to release the locking catch and open the lavatory door
4. To reset the locking mechanism, close the door turn the lock-pin push the locking catch back in to position and turn the locking pin to the left or right.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 50

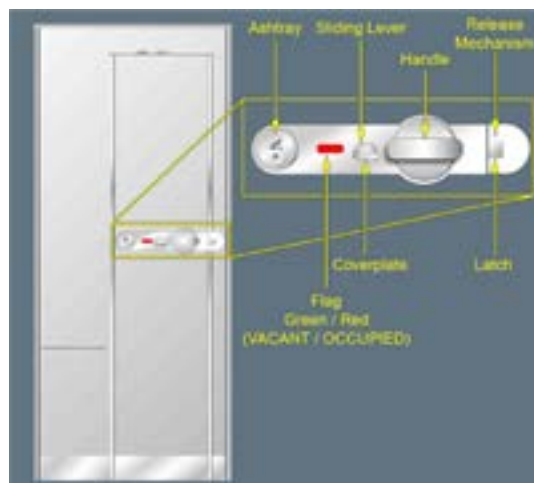

5.13.2.2 Bi-folding doors


1. Lift up the spring loaded LAVATORY cover.
2. Slide the knob to the side until indicator shows VACANT.
3. Push the lavatory door open and /or release the door latches and pull the lavatory door fully open outwards. or
4. Lower the two spring loaded door hinges located on the upper and lower part of the door frame and pull the door outwards.



5.13.3 Lavatory features

5.13.3.1 Electrical Outlet

Each lavatory is equipped with a power socket for electrical shavers (Voltage 110-115 Volts, 400 Hz)

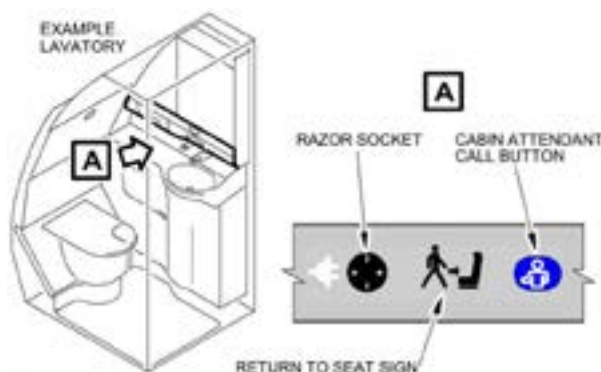


Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 51

5.13.3.2 Water Heater Units

The water heater has the capacity of 1.5 litres.

A thermal switch regulates the water temperature between 40°- 48°C. If the temperature reaches 90°C due to a malfunction the power supply is automatically cut off. The ON/OFF toggle switch is used for manual control. Amber light illuminates when the heater is switched ON. In the event the water supply to the heater has to be turned off, ensure the heater is switched off prior to do so.

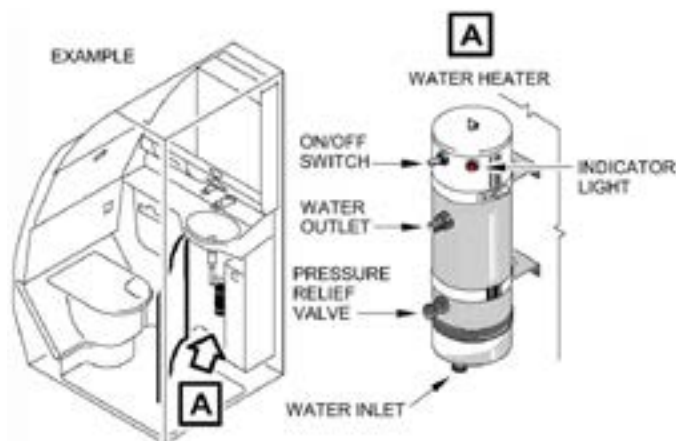


5.13.3.3 Lavatory Lighting

The lavatory lights are installed above the door of each lavatory and are controlled by a switch installed in the locking device.

The fluorescent lamps are on 50% intensity, when the lavatory door is closed/opened and unlocked. When the lavatory is locked the light brightens to 100% intensity and during a total power failure the emergency light in the lavatory illuminates along with other emergency lighting.

5.13.3.4 Lavatories with Diaper Changing Facility

5.13.3.5 Lavatories for PWD Use

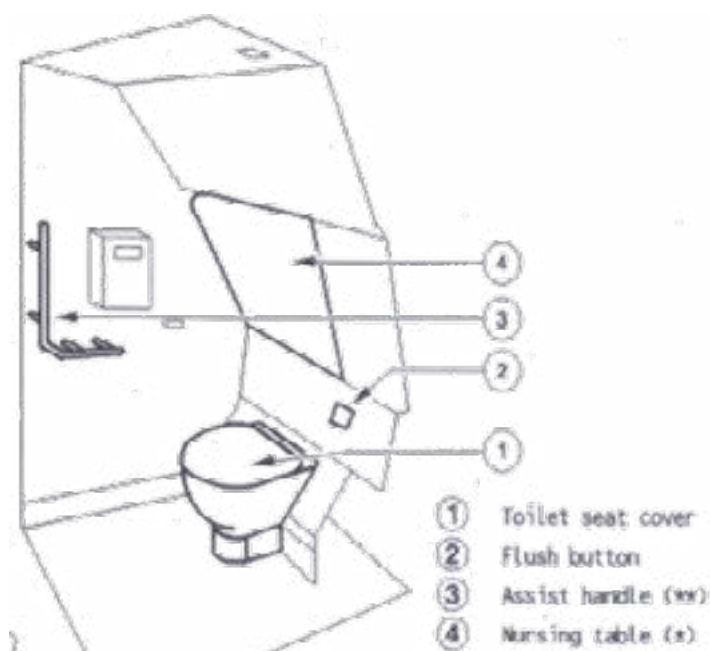


Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CSS/02
			ED 04/Jun 23
	AIRCRAFT SPECIFIC		Chapter 05
			Page 52

5.13.3.6 Water Shut-Off Valve


Each lavatory is equipped with a water shut off valve to shut off the water supply to the faucet and lavatory. The location may vary depending on the aircraft type. In the event the water supply to the heater has to be switched-off ensure water heater is switched –off prior to doing so.

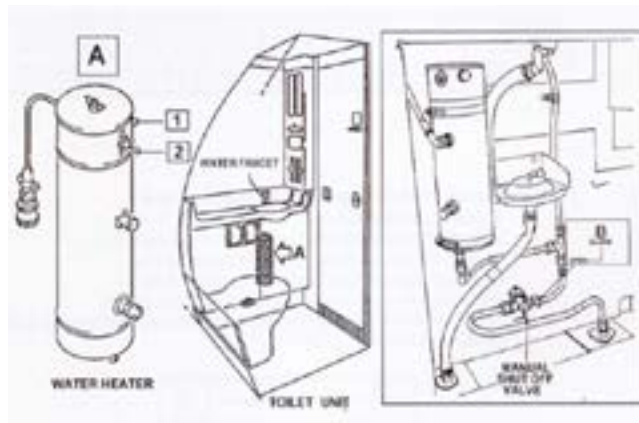

5.13.3.7 Vacuum Release Valve


(Float Valve)- In the lavatories.

Under each wash basin a float valve is installed. It prevents leakage of the cabin air pressure through the drain lines. The wash basin water could be drained by pulling the ring located at the top of the valve.

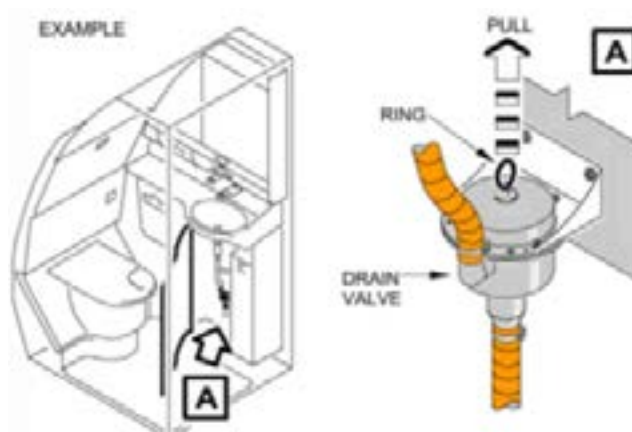

5.13.4 Waste Bin Fire Extinguisher

The automatic fire extinguisher containing 120 grams of Halon and Freon gas is installed in the compartment below the sink of each lavatory. When exposed to heat in excess of 77° C, the Halon Freon gas is discharged within 60 seconds through a single nozzle into the waste bin.

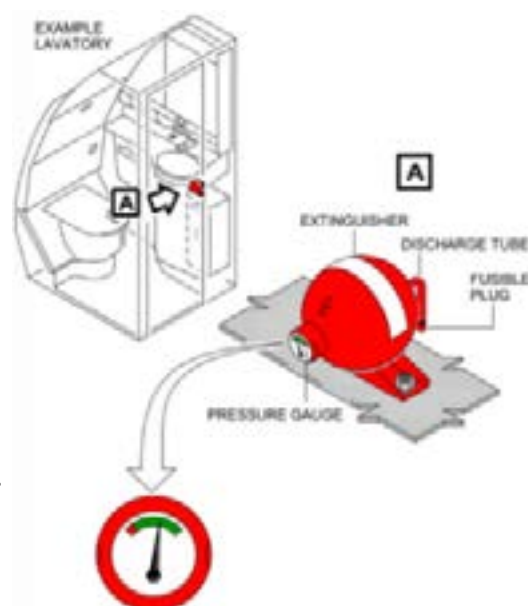

Pre-flight Check

The needle of the pressure gauge should be in the green zone.


Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 53

5.13.5 Lavatory Smoke Detector


Pre Flight Check

The Purser shall carry out the serviceability check of the smoke detector by pressing the '**system check**' key on FAP. Select systems check hard key to confirm that the smoke detector "<" symbol on the system check page is not flashing. Touchscreen FAP, on the smoke page check the serviceability of toilet, It is mandatory that CCMs inspect the lavatory smoke detectors for tampering prior to every departure and during flight.

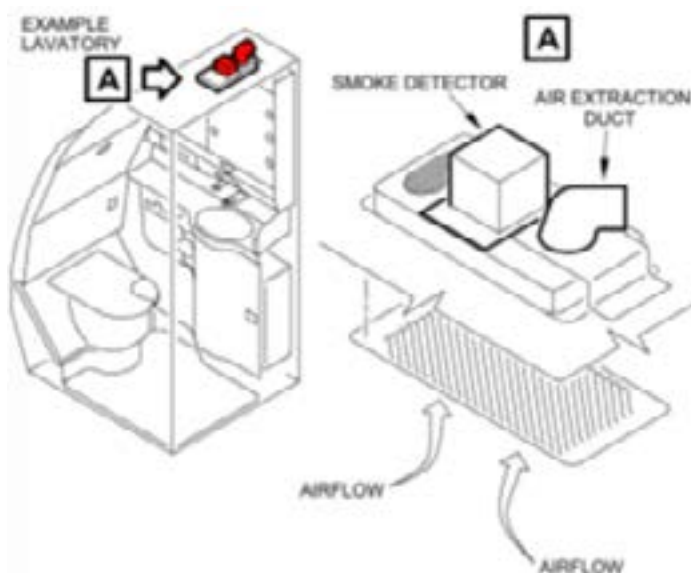


5.13.5.1 Indication of Smoke/Fire in a Lavatory

1. A repetitive triple low chime will sound every 30 seconds over the cabin loudspeakers
2. SMOKE PAGE on the FAP automatically comes on indicating the affected lavatory together with the location on aircrafts with touch screen FAPs
3. Red attention getter on all AIPs flashes, and text displaying the affected lavatory
4. The amber light will flash at the respective ACPs
5. The amber light mounted on the exterior of the affected lavatory would flash
6. A steady red SMOKE LAV button on the Forward Attendant Panel (FAP) and the Additional Attendant Panels (AAP) will illuminate

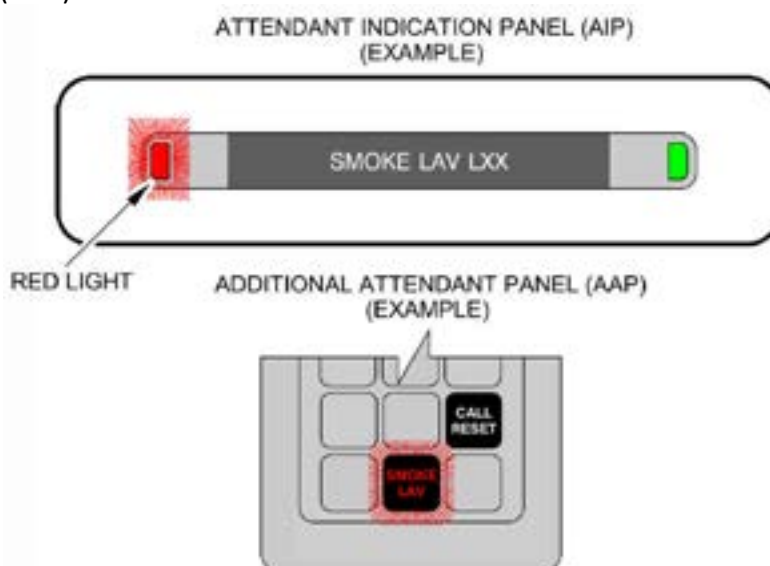

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

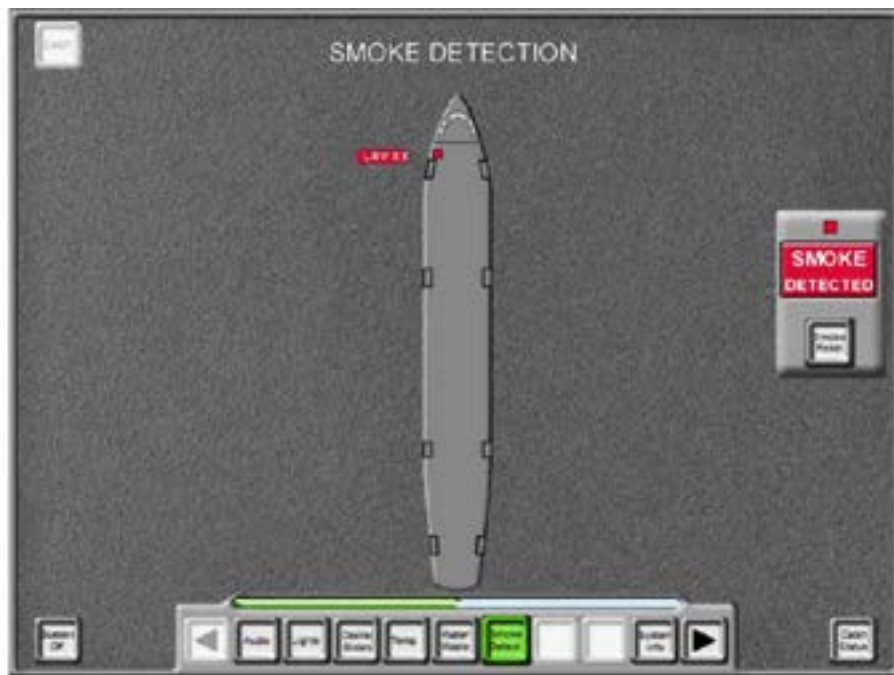

To reset the audio and visual alerts press “SMOKE LAV” on the FAP or AAP of the smoke alert zone.



5.13.5.2 Re-Setting the System

Once the smoke clears the system will reset automatically. By pressing the LAV SMOKE Indicator on the FAP or AAP’s audio and the visual signs on the AIP and ACP will be cancelled, but the following indications will remain on until the smoke clears

1. Amber flashing light on LAV exterior wall
2. SMOKE RESET (FAP) and SMOKE LAV (AAP) buttons illuminated red
3. On the touch screen FAP the smoke page indication

CAUTION: SPRAYING AEROSOL CANS IN THE VICINITY OF THE SMOKE DETECTOR MAY TRIGGER A SMOKE DETECTION EVENT.

Programming and Indicator Module (PIM) Systems check in sequence (If Available)

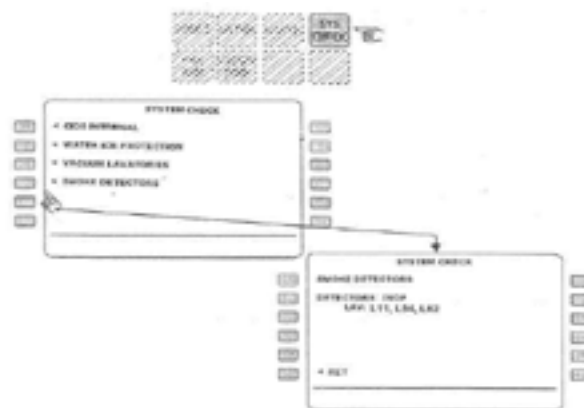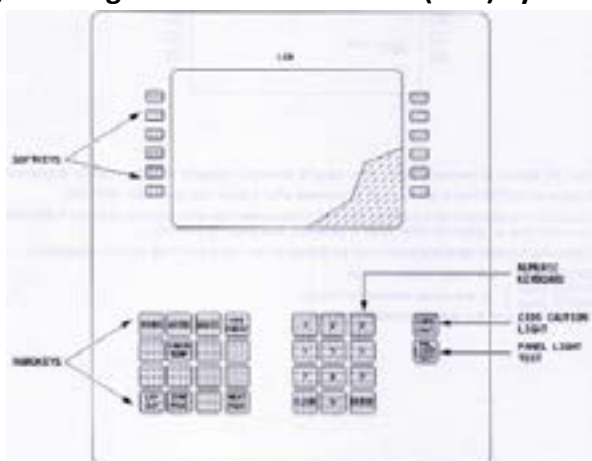

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 55

5.13.6 Inoperative Lavatory Smoke Detection Systems

An aircraft may be dispatched with an inoperative smoke detection system.

Lavatories may be used provided

1. The associated lavatory/s fire extinguishing system is operative
2. The lavatory/s is checked periodically every 15 minutes, for the absence of smoke/fire

5.13.7 Inoperative Lavatory Fire Extinguisher

Lavatories shall not to be used

The aircraft may be dispatched with inoperative lavatory fire extinguishing system/s provided,

1. The associated lavatory waste bin is empty
2. The associated lavatory door is closed /locked
3. The associated lavatory is placarded inoperative
4. The lavatory is checked periodically every 15 minutes for the absence of smoke/fire

5.13.8 Inoperative lavatory waste bin cover flap/waste bin access door


1. The associated lavatory shall not be used
2. The associated waste bin shall be empty
3. The waste bin door / cover flap shall be sealed
4. The lavatory door is closed / locked and placarded inoperative
5. The lavatory is checked periodically every 15 minutes for the absence of smoke/ fire

5.13.9 Communication System AIP/ACP

When faced with an emergency, which requires immediate attention the inter-phone system should be the preferred means of communication. The inter communication system is linked to audio and visual signs.

5.13.10 Attendant Indicator Panel - AIP

The AIPs are located in the galley areas to attract the attention of CCMs in the galleys. All visual signs on the AIPs are initiated with a low chime with the following attention getters.

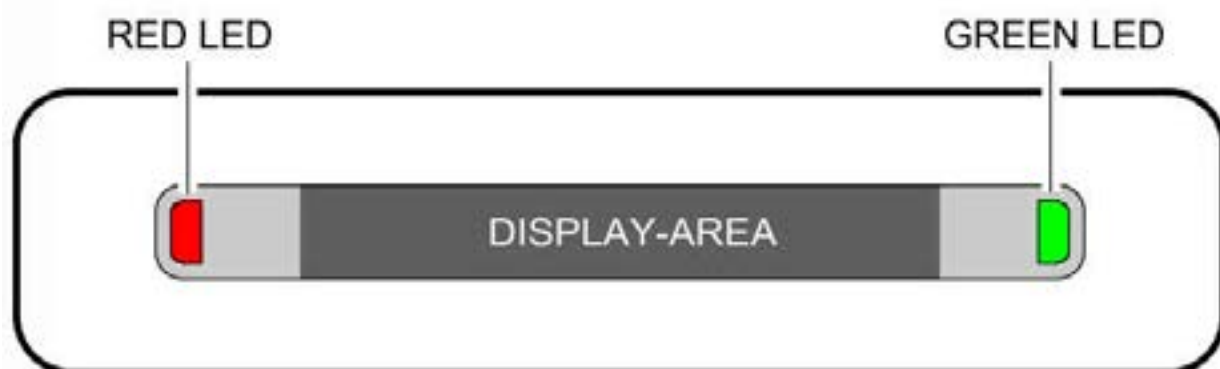

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

GREEN (steady)	General communication
RED (steady)	Warning alert
RED (flashing)	Emergency

Communication indication would appear in alpha numerical display on the AIP.
The caller locations appear on the top part of the screen and systems information is displayed on the bottom half of the screen.

The green and red attention getter lights are placed at the two ends of the AIP.


Systems warning on the AIP

The red attention getter light illuminates as steady or flashing.

If smoke is detected in a lavatory, the warning appears on all AIP's and the red attention getter flashes.

5.13.11 Area Call Panel - ACP

The area call panels are located in the main cabin areas to attract the attention of the CCMs in the cabin. All indications illuminate with a low chime. The lights on the ACP could illuminate steady or flashing.

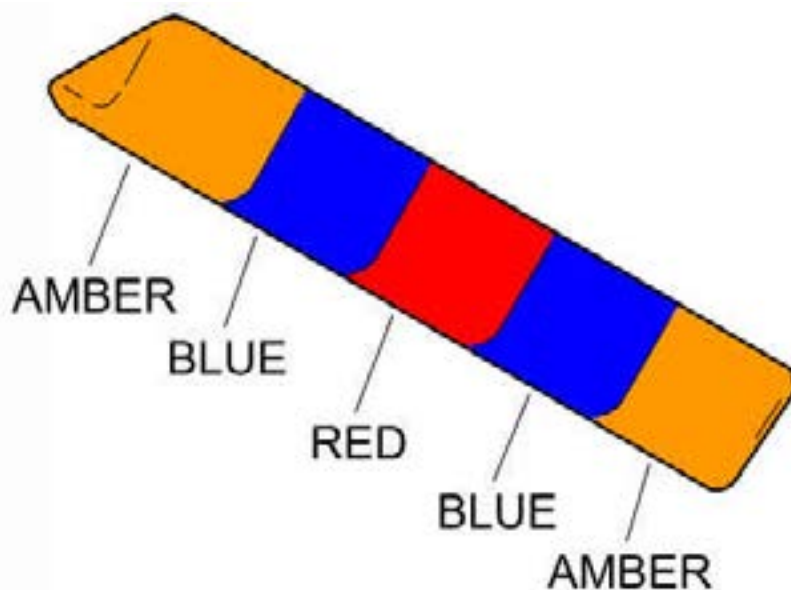

A 330

AMBER	(Steady)	Lavatory Call
AMBER	(Flashing)	Lavatory Smoke
BLUE	(Steady)	Passenger call
RED	(Flashing)	Crew call (From Flight deck)
RED	(Flashing)	Emergency crew call (From Flight Deck)
RED	(Steady)	Crew Call

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 57

5.13.12 Communication System PA/Interphone

An interphone handset with integral push buttons for passenger address and crew calls are provided at all crew seat locations. The handset is easily accessible to CCMs when secured onto a primary CCM seat.

The serviceability of the PA and the Inter phone system shall be checked prior to every departure.

1. The PA system provides adequate sound levels to each row of passenger seats through loud speakers
2. In addition, one loud speaker is installed in each lavatory and each galley

Usage

1. Remove the handset from the cradle
2. Press PA button
3. Press the “Push to Talk” (PTT) tabs on the handset and speak into the mouth piece

5.13.13 PA Priority

1. Flight deck
2. L1 station
3. Other cabin attendant stations
4. Pre-recorded announcements
5. Audio / video entertainment
6. Boarding music

5.13.14 Function Keys on the hand set

PTT - Pressed (Direct PA/Emergency PA)

The announcement could be heard in the flight deck, all cabins, galleys and lavatories. Direct PA function must not be used in a normal situation as it overrides normal PAs. The message DIRECT PA IN USE is displayed in all AIPs.

PA ALL and PTT

The announcement could be heard in all the cabins, galleys and lavatories.

PA 1 and PTT

The announcement could be heard in the B/C cabin only.

PA 2 and PTT

The Announcement could be heard in the E/Y cabin only.

The message on the AIP will show that the PA is in use, with the green light illuminated.

5.13.14.1 Crew To Crew Call

1. Remove the handset from the cradle
2. Press INT + desired station

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 58

3. A Hi-low chime will be transmitted at the station called
4. Calling station - The called station will be displayed E.g.; L4 ATTND
5. Called station- The green attention getter on the AIP will illuminate and the calling station will be displayed- E.g.; CALL L1 ATTND
6. Once answered the green attention getter and the word CALL will disappear
7. The red segment on the ACP will illuminate at the station called.

5.13.14.2 Purser Call

1. Remove the handset from the cradle
2. Press INT + Purser
3. A HI/Hi/Lo chime will be transmitted
4. Calling Station– PURSER text shall appear on the AIP
5. All other stations – AIP text ‘Purser Call’
6. All ACP’s shall display a steady red indicator
7. L1 Station - AIP Steady **Green** & Text Calling Station’
8. To answer at L1 station – Pick hand set and answer Other stations – Press PUR and answer
9. Purser call cannot be made from L1 station.

5.13.14.3 All Attendant Call

1. Remove the handset from the cradle
2. Press inter phone
3. Press All
4. A Hi-low chime will transmitted throughout the cabin
5. Calling station - The called station will be displayed E.g.; ALL ATTND
6. All other stations- The green attention getter on the AIP will illuminate and display- E.g.; CALL ALL ATTND
7. The red light will illuminate on all ACPs

5.13.14.4 Normal Call - Cabin to Flight Deck

1. Remove hand set from cradle
2. Press CAPT key
3. Press rest stow hand set

5.13.15 Emergency calls

Emergency calls can be initiated from F /deck to cabin and cabin to F/deck

Flight Deck to Cabin

1. Triple Hi/Lo chimes
2. All ACPs - Flashing Red
3. All AIPs - Steady red - text “CALL PRIO CAPT” / Flashing red on A 330-300 aircraft
4. CCMs shall answer and identify the station
5. Responding handsets would go into a conference call mode
6. Reset from each hand set after answering

Cabin to Flight Deck

1. Remove handset from the cradle

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 59

2. Select and press 'PRIO CAPT' on Interphone
3. Await response from the Flight Deck

5.13.16 Unserviceable Handset

Prior to departure all handsets shall be serviceable. If one hand set is unserviceable the adjoining hand set shall be serviceable for safe dispatch.

If the L1 hand set becomes unserviceable during flight the PIC shall be informed and the adjoining hand set shall be used.

In case both hands sets becomes unserviceable at L1/R1, the hand set in the flight deck shall be used after obtaining permission from the operating PIC, if not an alternate hand set shall be used and the procedure communicated to the PIC and other CCM's and the following procedure adopted,

- Purser to nominate a CS or CCM at a serviceable handset to carry out required announcements.

If the L1/R1 handsets become unserviceable during flight PIC and Purser to discuss and agree on flight deck entry procedure and hijack alert procedure and communicated to the rest of the crew.

CALL	CHIME	ACP	AIP	OTHER
EMER call from flight deck	3 x Hi low chimes	Flashing RED on all	Steady/Flashing RED and Call 'Prio Capt' on all AIPs	Has to be answered from all handsets to reset
EVAC Command	Pulsating horn	No indication	Flashing RED & EVAC ALERT on all	Flashing RED on FAP and all AAPs. reset horn area wise
SMOKE LAV	3x Low chimes every 30 seconds	Flashing AMBER	Flashing RED /lavatory number and 'LAV SMOKE'	Flashing AMBER outside the relevant lavatory and 'LAV SMOKE' on FAP/AAPs

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 60

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 61

5.14 Communication and Passenger Service Unit (PSU)

Passenger Service Unit

5.14.1 Passenger Call from the Seat

Initiating a passenger call

Press the call button on the relevant PSU or passenger hand set

Aircraft doors opened

1. Hi chime and flashing seat row indicator on the PSU
2. Steady blue indicator illuminated on the relevant ACPs
3. Seat number indicated on the AIP

Air craft doors closed

1. HI- chime and steady seat row indicator on the PSU
2. Steady blue indicator illuminated on the relevant ACP's
3. Seat number indicated on the AIP

INITIATED	AIP	ACP	AUDIO
Passenger call from PSU/ or hand held/touch screen control	Seat number will indicate	Steady blue light on respective ACP	Hi chime

5.14.2 Resetting a Passenger Call

Press the call button on the relevant PSU/passenger hand set or the reset button on the FAP/AAP panels on selected aircraft

5.14.3 Passenger Call from the Lavatory

Initiate by pressing the call button in the lavatory.

Indications

1. HI- chime and steady amber outside the lavatory
2. Steady amber indicator illuminated on the relevant ACPs
3. The lavatory number appears on all the AIP

INITIATED	AIP	ACP	AUDIO
Passenger call from the lavatory	Lavatory number will be indicated	Steady Amber light on respective ACPs Steady amber outside the lavatory	Hi Chime

5.14.4 Resetting a Passenger Call from the Lavatory

Press the Attendant call push button from the relevant lavatory or from the call reset button on the FAP/AAP's.


Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 62

5.14.5 Passenger Service Units

Passenger service units (PSU) are located above every passenger seat row. It comprises of,

1. Individual air vents
2. Individual reading lights
3. Attendant call push button
4. Speaker
5. Ordinance sign display
6. Seat row indicator

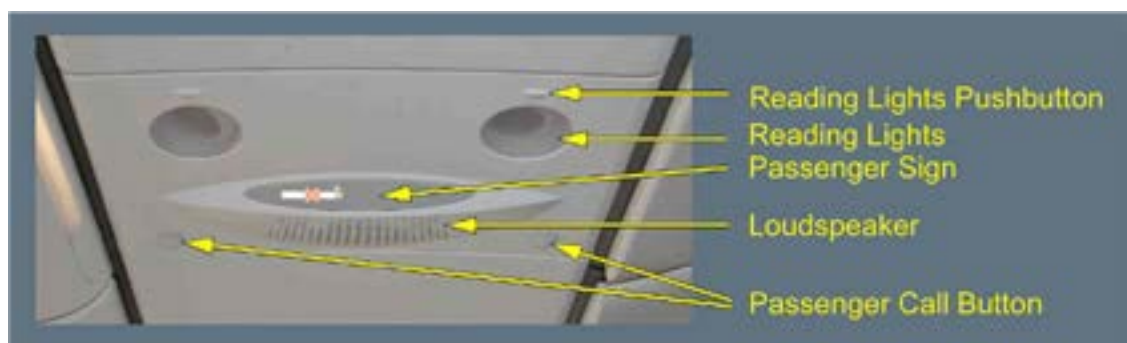

5.15 Auxiliary Power Unit (APU)

The Auxiliary Power Unit (APU) is a self-contained unit which makes the aircraft independent of external pneumatic and electrical power supply. Located at the rear of the aircraft. The basic element of the APU is a single shaft gas turbine which delivers mechanical shaft power.

On ground

It supplies bleed air for starting the engines/ for the air conditioning system.

It supplies electrical power to the electrical system.

During take off

It supplies bleed air for the air conditioning, thus avoiding a reduction in engine thrust caused by the use of engine bleed air for this purpose, when optimum aircraft performance is required.

In flight

It backs up the electrical system and the air conditioning and restarting the engines

The APU may obtain power for starting from the batteries specifically assigned to the APU or in combination with the external power, or from normal aircraft supply.

The Flight Crew uses the controls on the APU panel for routine shut down and for emergency shut-down.

The ground engineers can push the APU shut off push button on the panel under the nose fuselage.

5.15.1 Emergency Lighting systems/Duration

The emergency lighting system comprises of cabin emergency lighting (PEEPL, /overhead emergency lights/exit signs and escape slide lighting). It illuminates automatically if aircraft power is lost or turned off. The emergency lights can also be activated manually from the flight deck or the FAP and the duration is Minimum of **12 minutes**.

The toggle switch positions in the flight deck are OFF/ ARM/ON. The system is armed from the flight

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 63

deck by placing the toggle switch in the ARM position which enables the batteries to charge.

It could be manually activated by moving the toggle switch to the 'ON' position in the flight deck or by pressing on the EMER button on the FAP. The cabin crew can turn ON the emergency light regardless of the position of the cockpit control.

Emergency light setting in the flight deck



Note The EMER switch from the FAP has a protective cover against accidental operation.

Emergency Lights Switch On the FAP



The Emergency power will automatically activate in case of,

1. Electrical failure
2. Decompression

5.15.1.1 Interior Emergency Lights

Emergency Power Units are located in the ceiling will supply power for 12 minutes in the event of a power failure, It will illuminate the cabin and the exit areas as follows,

The exit locator lights/ exit marking signs above each exit/ exits lights at the floor level /the passenger emergency evacuation path lighting and in the lavatories as well.

The exit guidance lights in the cabin are,


- 8 EXIT lights located over each exit doorframe (door)
- 8 EXIT lights located in the exit areas ceiling (ceiling)
- 8 EXIT lights at the floor level (floor)
- 24 emergency ceiling lights over the aisles

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 64



5.15.1.2 Exit Lights

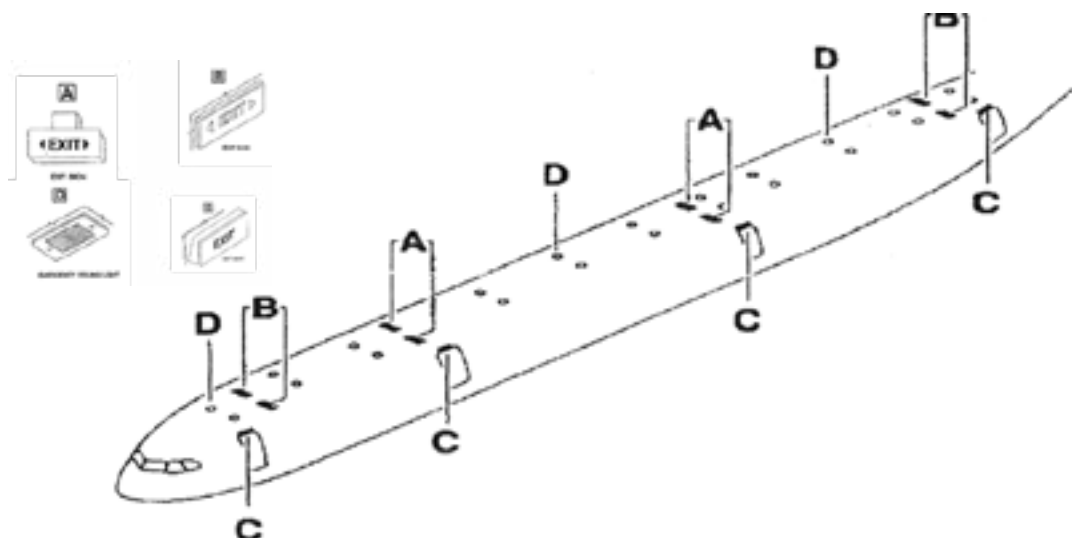

5.15.1.3 Emergency Lights in the Ceiling

Emergency lights are located in the ceiling throughout the cabin which is designed to provide downward lighting on to the aisles.



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL


	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 65

5.15.1.4 Passenger Emergency Escape Path Lighting System (PEEPLS)

Floor escape path marking system included exit markers which are located close to each exit at floor level.

Evacuation Path Lighting System

The escape path lighting is floor mounted strips. The system is photo luminescent and requires a minimum of 15 minutes of exposure to any lighting source to illuminate.

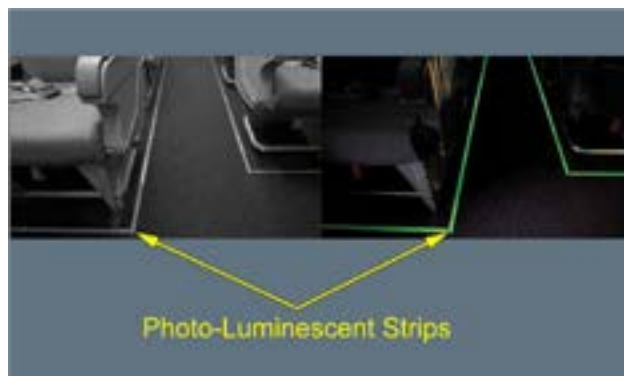


Note: In case of total power failure emergency lighting needs to be switched on manually if not activated.

5.15.1.5 Exterior Emergency Lighting

Marking Lights- Slide/Raft


Escape slide rafts are equipped with an emergency lighting system. The lights are automatically activated when the escape slides are inflated.

The slide rafts /escape slides are equipped with an integral lighting system which is along the longitudinal tubes and across the ground end of the slide.

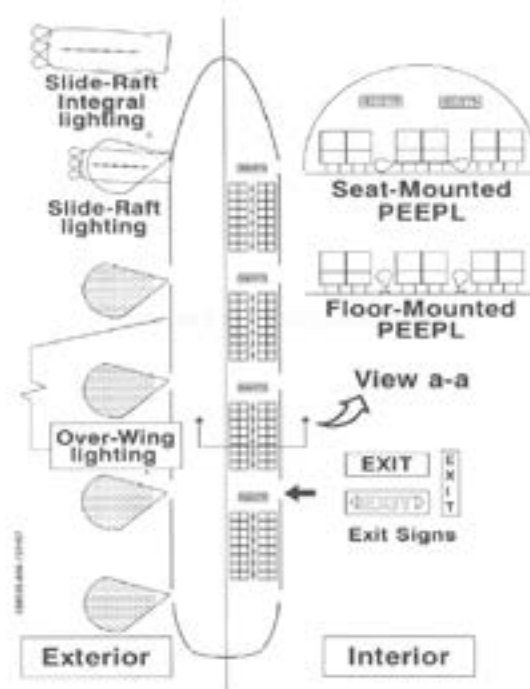

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

5.15.1.6 Cabin Lighting ALH

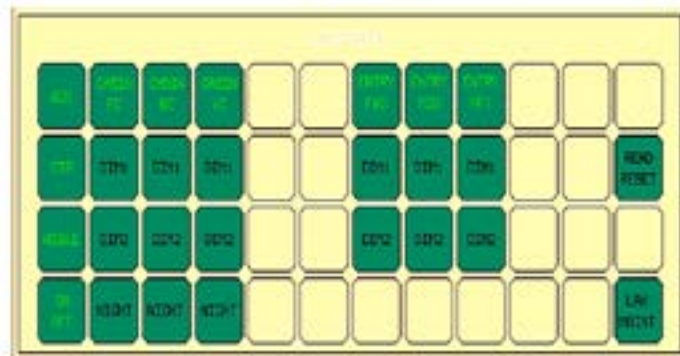

When a particular segment is selected the press button switch turns from amber to green to display which control is selected.

When a particular segment is selected the press button switch turns from amber to green to display which control is selected

ON / OFF	To switch ON/OFF the respective lights.
WDO	The ON/OFF switch for window lights for both cabins.
CTR	The ON/OFF switch for centre lights. Below the centre overhead bins
AISLE	The On/OFF switch for all aisle lights in both cabins.

CABIN BC	When selected the cabin lights in BC are at 100% intensity.
DIM 1	When selected the cabin lights in BC are at 50% intensity.
DIM 2	When selected the cabin lights in BC are at 10% intensity.
NIGHT	When selected the cabin lights in BC are switched off.
CABIN YC	When selected the cabin lights in E / Y are at 100% intensity.
DIM 1	When selected the cabin lights in E / Y are at 50% intensity.
DIM 2	When selected the cabin lights in E/Y cabin lights are at 10% intensity.
NIGHT	When selected the cabin lights in E/Y are switched OFF except the entry lights next to each galley and centre lavatory on each aisle illuminate at 10% intensity.
ENTRY FWD	Controls the entry lights at L1 door area.
ENTRY MID	Controls the entry lights at L2 door area.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 67

ENTRY AFT	Controls the entry lights at L4 door area.
G FWD	Controls the galley lights in the BC galley.
G MID	Controls the galley lights in the MID galley.
G AFT	Controls the galley lights in the AFT galley.
A-330 NIGHT	Only the aisle light near the exits will illuminate at 10%.

Note: All entry and galley lights when selected to DIM 1 or DIM 2 will illumination at 50% & 10% respectively.

5.15.2 Lavatory Lighting

The LAV maintenance lights could be activated only on ground. When activated the switch illuminates in green on the FAP. It lights up all lavatories at 100% illumination for cleaning and servicing purposes. Once cleaning is completed it shall be switched off.


Note: A switch pressed once to activate when depressed will switch off.

5.16 Ordinance Signs

Description

The ordinance signs are located in the passenger service units and the lavatory service units.

1. Controlled from the Flight Deck
2. Manual and auto function
3. The pictorial flashes for a few seconds prior to illuminating on steady
4. Both signs come on with a low chime

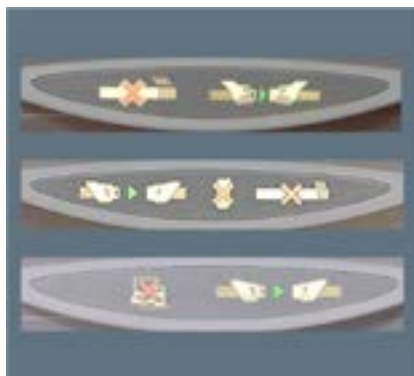

No Smoking Sign

Option setting in the flight deck ON / AUTO / OFF

Seat Belt Sign

Option settings in the flight deck ON / AUTO / OFF

The cabin ordinance signs are interconnected to the lavatory ordinance signs and activate simultaneously.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 69

Cabin Ready	Indication to the Flight Deck
Chime Inhibit	Silence the passenger calls
Evac Command	To initiate an evacuation
Evac Reset	To silence the EVAC horn area wise
Smoke LAV	To indicate a smoke in the Lavatories
EMER	Switch to manually activate the emergency lights
BGM	Boarding music
Call Reset	Passenger call reset

5.17.3 Programme and Indicator Panel (PIM)

Hard keys- Located below the LCD

1. Door status indicator
2. Water
3. Wastewater
4. Cabin Temperature
5. Pre-recorded - announcements
6. Panel Light Test

Activates On Ground Only

1. Cabin layout
2. Zone programming

Soft Keys - Located On the Sides of the LCD

12 soft keys are located on either side of the LCD

Press relevant hard key to check the status on the corresponding subject matter.

Pre-recorded announcements can be activated by manually entering the pre-determined number for the relevant announcement from the chart.

Cabin temperature can be adjusted by + or – of 2.50 c from the temperature set by the flight deck. There are three temperature zones and the temperature can be adjusted for each zone individually. CIDS – Flashing is an indication of a Systems failure, press on the systems check hard key for further details,

Features and Indication from the PIM


1. L C D
2. 12 Soft keys
3. 23 Hard keys
4. CIDS warning light (Flashing)
5. Panel light test
6. Numerical keys
7. Hyperlink keys

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 70

5.17.4 Cabin Intercommunication Data System (CIDS)

If a failure occurs, the CIDS CAUTION light flashes

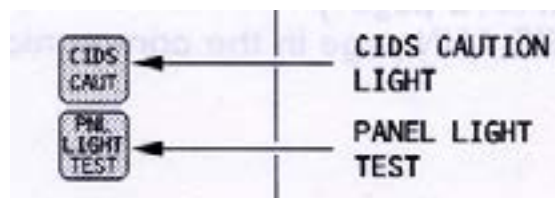

5.17.5 Systems Check

1. If a page is manually selected a message appears in amber in the information row

to select **SYSTEMS CHECK** press the hard key


2. If no page is selected, a page is opened with an indication of the failure

Or

SYSTEMS CHECK once selected will indicate the defect in amber- flashing indication

- CIDS Internal
- Water Ice Protection
- Vacuum Lavatories
- Smoke Detection

5.17.6 Cabin Temperature

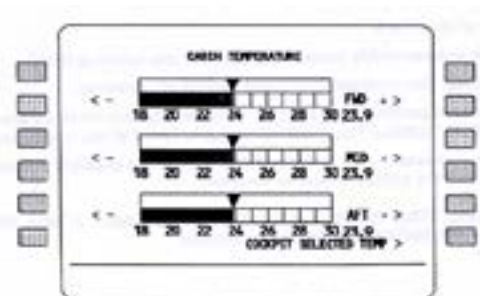

1. Select CABIN TEMP hard key
2. Adjust cabin temperature by using the soft keys 2.5°C from the flight deck selected temperature.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 71


5.17.7 Water Indicators

The quantity of water required can be pre-selected by using the soft keys on the right side.
The quantity of water available on board in each tank is indicated in FWD & AFT tanks.



Waste Quantity

Select waste hard key to display the waste water quantity in two tanks and the two indicators display the status on each side.
If one of the tanks is full the flushing system on the relevant side will be deactivated.

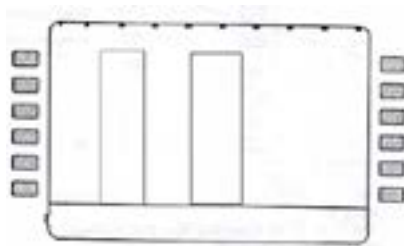

5.17.8 Lavatory Smoke Detector Check



Select SYSTEMS CHECK hard key and the following page will open. If a smoke detector is defective the SMOKE DETECTOR message will appear in amber.
By selecting the corresponding soft key the defective lavatory can be identified.

5.17.9 Doors Status Indicator

Select the DOOR hard key and the following page will open

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL


	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 72

RED rectangle	Door Opened
AMBER rectangle	Door closed and disarmed
AMBER rectangle with text	Door armed but slide inflation pressure low
GREEN rectangle	Door closed and armed

Slide inflation container pressure low indication – should be reported to the PIC/ Ground Engineer and entered in the Cabin Defects Log immediately.




5.17.10 Additional Attendant Panels

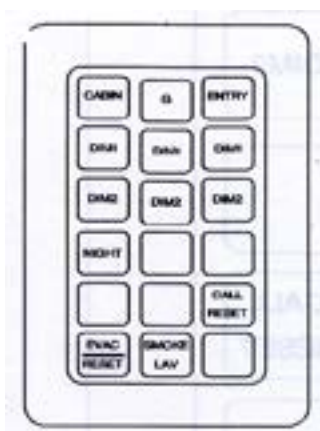

5.17.11 Water and Waste

Fresh water for lavatories and galleys are provided from two/three tank units located in the pressurized cargo section of the aircraft at the rear on the right side. Each tank has a capacity of 350 litres. (92 U.S. gallons)


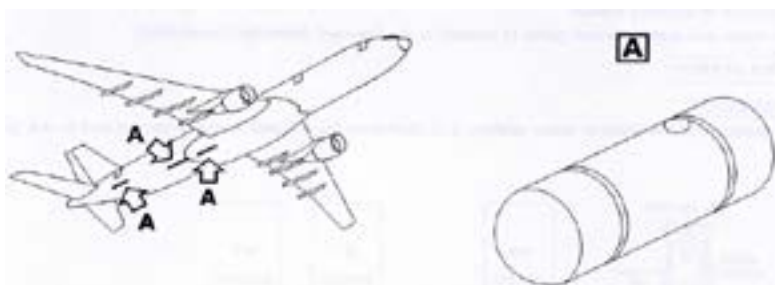


Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 73

5.17.12 Waste Water System

Waste water from the lavatory sinks and galleys are drained overboard via two heated drain masts. The water waste disposal is achieved by gravity on ground and by differential pressure in flight.

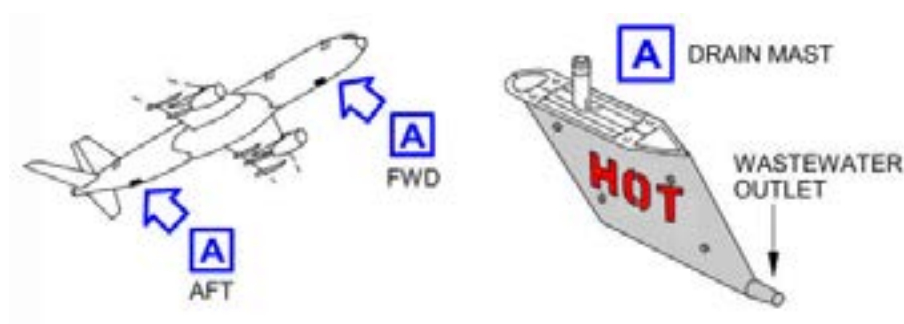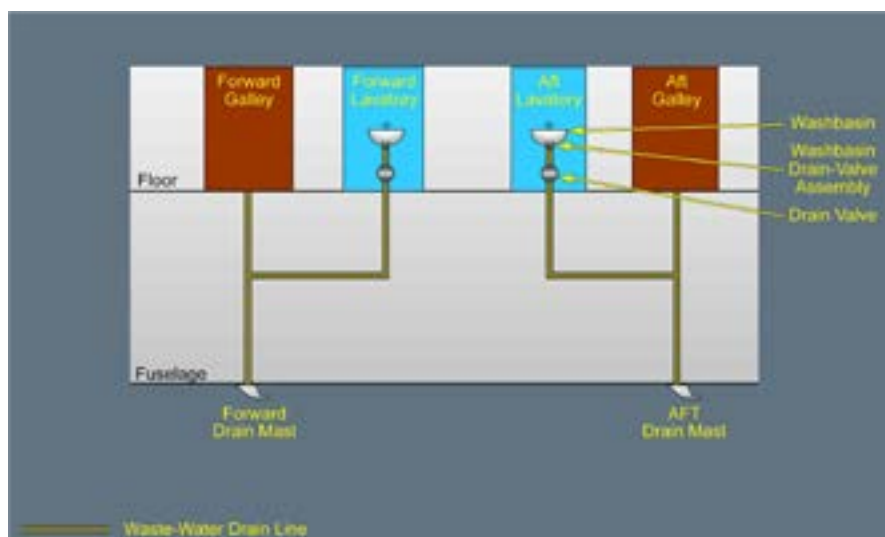

5.18 Curtains / Partitions

Features

Curtains are moveable partitions to keep passenger movement restricted.

Fixed partitions are non-moveable enclosures to enable items to be fixed on to it for passenger convenience and comfort.

Description

Curtains are a pull type for easy removal in an emergency, and made of non-flammable material.

5.18.1 Procedures for Take-off and Landing

All curtains have to be opened and secured for take-off and landing

For take-off the curtains will be opened & secured prior to taxiing

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 74

5.19 Quick Reference

CALL.	CHIME.	AIP	ACP
Passenger call	High	Steady GREEN	Steady BLUE
Lavatory call.	High	Steady GREEN	Steady AMBER
F/deck to Cabin	High/Low/High	Steady GREEN	Flashing RED
Purser call	High/High/Low	Steady GREEN (ONLY AT L1)	Steady RED
Crew to Crew	Hi / low	Steady GREEN	Steady RED
Emergency call from the Flight Deck	3 x High /Low Chimes.	Steady/Flashing RED	Flashing RED
Lavatory smoke.	3 x low chimes Pulsating every 30 sec	Flashing RED	Flashing AMBER
Evacuation Command.	Pulsating horn	Flashing RED	No indication

P.A PRIORITY
Flight Deck.
Purser Station.
Other Station.
Pre-recorded announcements.
Audio/Video
Boarding Music.

Call Reset form work stations
A-330 for passenger and lavatory calls on the FAP and AAPs

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 75

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 76

ALH AIRCRAFT

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 77

5.20 ALH - AIRCRAFT DIFFERENCES

5.20.1 Configuration:

Business Class -18 (flatbed seats)

Economy Class-252

5.20.2 Doors and Slides

Eight type “A” exits with dual lane slides

Operation and raft capacities as per current fleet

5.20.3 Cabin Crew Stations

11 Cabin Crew seats

One passenger seat (63C) shall be blocked for the 12th Crew member.

5.20.4 Galleys

FWD/ MID/ AFT

Water shut-off valves are located adjacent to the water sink

5.20.5 Emergency path Lighting

Floor mounted photo luminescent type.

5.20.6 Other Information

Stretcher Positions - 61HK, 62HK, 63HK

Cabin Crew Rest - 61HK, 62HK, 63HK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 78

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 79

A330 - 300 AIRCRAFT

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 80

5.21 A330 - 300 ALL/M/N/O/P/Q/R AIRCRAFT DIFFERENCES

5.21.1 Configuration:

BC - 28

EY – 269

Total -297

Business Class - Zodiac Cirrus Flat Bed Seats, seat belts equipped with airbags

Economy Class -Zodiac Seats

5.21.2 Flight Deck

Safety Equipment

PBE – 2 Air Liquid PBEs installed

- 1 behind the PIC seat
- 1 on the bulk head behind the F/O seat
- Extinguisher – By the side of the PIC's seat

A protective bar is installed in place to prevent persons from falling in when the avionic bay door is opened for maintenance.



5.21.3 Doors and Slides

Eight Type "A" doors equipped with dual lane slide rafts are installed

Raft capacities shall be as per the current fleet

5.21.4 Cabin Crew Seats

13 Cabin crew seats are located as follows,

(L1, L1A, L1B, R1) (L2, L2A, R2) (L3, R3) (L4, L4A, R4, R4A)

Seating

L1	PUR	L1A	S2	L1B	S1	R1	CS1
L2	CS2	L2A	S4/CLA			R2	G1
L3	S6					R3	S5
L4	G2	L4A	S4/CLA	R4A	S3	R4	CS3

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 81

Cabin crew rest seats – 66/67 DFG (center seats)

5.21.5 Galleys

BC (L1/R1) – Galleys 1 & 2 (Installed with a micro wave oven and a mini galley)

FWD (L2/R2) – Galleys 3 & 4

AFT (L4/R4) – Galleys 5, 6 & 7 (Installed with a micro wave oven and a mini galley)

Water	Water boilers are installed in each EY galley
Water shut off valve	The valves are located adjacent to each wet galley
Water failure indicators	Water dripping from the indicator pipe which is located above the sink will indicate a defect in the water supply.



Cart covering doors - An additional door safety lock is installed on all doors covering three or more carts. It shall be in place when the carts are stowed.



5.21.6 Floor Panel Heating

A floor heating facility is installed in all CCM stations. The temperature can be manually controlled from the panels mounted next to the R1, R2, R3, R4 door frames.

The master power switch is located at L1 mounted on the side wall.

The control for the aft rear most galley

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 82



A control panel is located in the aft galley adjacent to the L4A CCM seat to activate hot air supply to the aft galley Centre work area.

Controls are (ON/OFF) and (HI/LO). The air supply vents are located at floor level by the side of the CCM seats at L4A/R4A



5.21.7 Emergency Path Lighting

Photo Luminescent Markers are installed

5.21.8 Bassinets

Business Class: Not available

Economy Class: 6 Points (20 AC, 20 DE, 20 FG, 20 HK) (50 DE, 50 FG)

Bassinets are stowed, aft of seat row 37 AC - 35HK – L4 stowage compartment

5.21.9 Stretcher Positions

The stretcher position facility seats are located at 62, 63, and 64 – HK

The PSU is equipped with a medical power outlet

Stretcher loading - The doors on the upper part of the closet located at R4 could be folded to accommodate the loading of a stretcher.



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 83

5.21.10 PWD Seats

BC – 7 DG

EY - 21 to 25 GK as per the standard system wide


5.21.10.1 UM Seats

21 to 23 AC

5.21.11 Lavatories

8 Lavatories are located in the cabin as follows,

(L11, L14) (L36)(L53, L54, L61, L62,) (L73) , Lavatory with the ability to take the aisle wheel chair inside for PWD - L36 , Mobile phones shall not be permitted to be used in the lavatories.

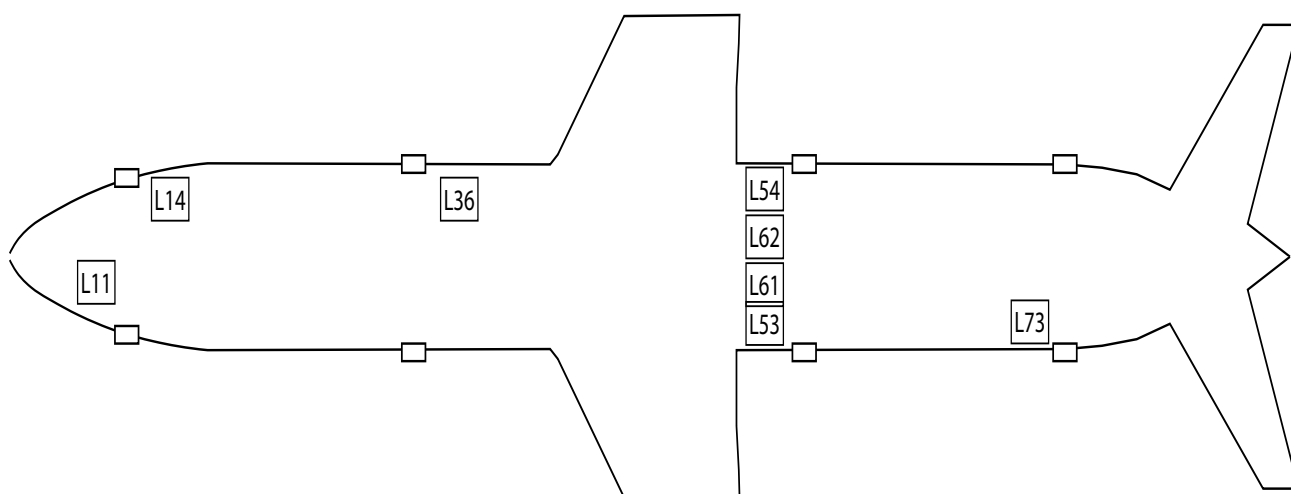

Dressing of Lavatories – Press buttons located above the lavatory waste bin flap (not visible), will release the mirror to stow paper amenities.



5.21.12 Coat Closets:

Business Class 3

Economy Class 2

5.21.13 Medical Outlets

Two Medical Outlets (power supply sockets) are located in the cabin PSU panel over row 7A & 64K.

A sharp object (E.g: Pen) is required to press on the button to release the panel cover to access the sockets. 2 power outlet sockets are available (230V and 115V) .Power (voltage) selector switch that has

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CSS/02
			ED 04/Jun 23
	AIRCRAFT SPECIFIC		Chapter 05
			Page 84


3 position (230v ON/OFF/115V ON) are located on the CB panels in the FWD/AFT Galleys. Only 01 outlet could be used at a time.

1. PSU
2. Sockets
3. CB Panel




5.21.14 Passenger seat

A330-300 (ALL/MNV/P/Q/R) Configuration 1 - (28 Business Class - Flat bed seats / 269 Economy Class - Reclining Seats) - 7 Long-haul Aircraft

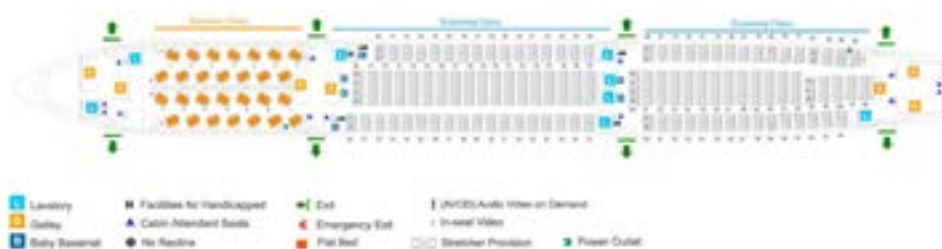

5.21.15 Business Class Seat

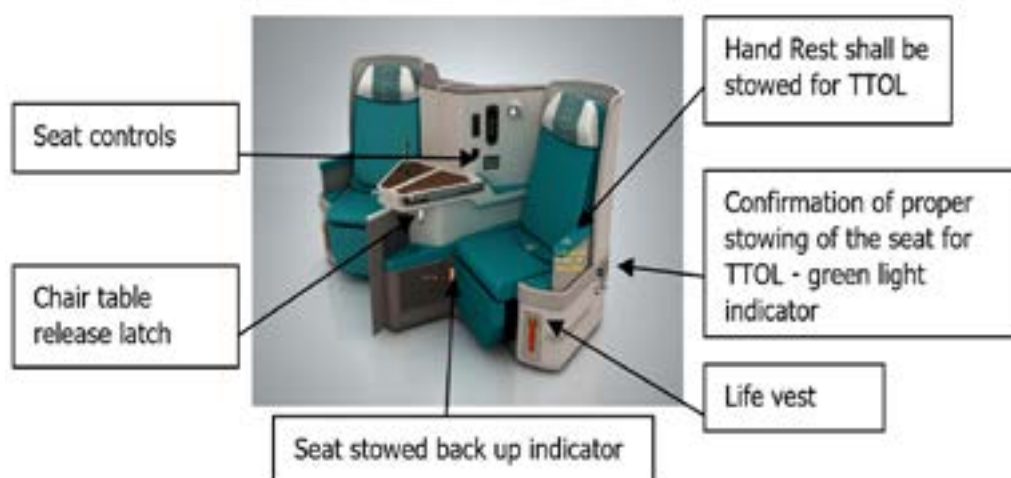

Note: It is mandatory that the Hand Rest shall be stored before every Taxi Take Off and Landing

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 85

5.21.15.1 Manual Operation

1. Remove the seat pan cushion and locate manual control switches
2. Select unlock on the selector (Recline, Leg rest, Tracking) and move the seat manually. Once adjusted select lock.
3. The manual check for the seat stowed position/ is by the orange strip by the side of the leg rest been visible.



Note: Ensure to select lock after the adjustment to restrict the free movement of the seat

5.21.15.2 Business class seat belt with Air Bag System



The Air Bag is stored in the seat belt itself. The airbag would activate on impact provided the cycle is completed by fastening (buckling) seat belt appropriately.

It is so designed, if the seat belt is not fastened appropriately, airbag would not deploy. In the event an extension seat belt is used, the air bag system is deactivated automatically.

The air bag is activated over 16G impact triggered by a sensor.

The metal part of the seat belt has to be engaged correctly in to the buckle to activate the airbag system. Defects to the seat have to be logged in the Cabin Defects log book.

Any changes to the seat shall be carried out only by an approved maintenance team.

Fixing a kangaroo belt on to the BC seat – A standard kangaroo belt could be fixed to the BC seat, the loop on the kangaroo belt should be inserted on the belt that does not contain the air bag.

WARNING: SEAT BELTS ON UNOCCUPIED SEATS SHALL NOT BE FASTENED.

WARNING: CAR SEATS SHALL NOT BE FIXED ON TO A BC SEAT.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 86

5.21.15.3 EY Seats

Bulk head seats

The rows of EY bulk head seats (16 seats) are equipped with special seat belts –“Y” seat belts (with double attachment points to the seat).

Two sets will loaded as spare seat belts for seats identified as L and R seats (1 set for the L and 1 set for the R) identifications shall be by the seat belt part number only and replacements shall be carried out by the Maintenance Staff.

The arm on the bulk head seats needs to be released by pushing down on the release button for the individual screens to be positioned for viewing.



Arm Rest

The arm rest on the aisle seats can be moved upwards by pressing on the release button located under the arm rest (rear section).The arm rest shall be in the stowed position for TTOL. The aisle bulk head seats do not have this facility.

In the event of a defective seat, it shall be entered in the Cabin Defects Log book.

Seats are equipped with foot rests.

Cabin Oxygen Masks

Every set of seats will be equipped with an extra oxygen mask. The centre row of seats E.g. DEFG will contain one PSU with two points for manual release.

Row 20AC and 20HK PSU contains 4 masks each

Row 20DEFG , 50 DEFG seat row has 8 oxygen masks

5.21.16 Forward Attendant Panel

The following functions are available on the Forward Attendant Panel

The system requires a password to access - set at 111

All standard functions remain the same as per the current fleet



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 87

Screening the Safety Video

BC Seats - The individual video screens of the window seats needs to be unlocked (position) prior to screening the safety video.

Additional Attend Panel,

The L4 AAP is equipped with an Evac command and Evac reset button.

5.21.16.1 Cabin Lighting

FAP - Cabin Lighting Controls

1. Entry light controls
2. Cabin lights (BRT, DIM 1, DIM 2, Night)
3. Reading lights master switch – ON or OFF
4. BC & EY - cabin mood lighting
5. Breakfast/Lunch/Dinner/Sleep/Wake up/Relax
6. The Tech Crew rest seat (7K) lighting can be adjusted individually by using the controls on the FAP – Tech Crew Rest
7. Individual reading light switches are located on the PSU for BC/EY
8. BC is also equipped with low level reading lights with an individual switch on the seat trim

Night Sky - Only for the Business Class cabin



5.21.16.2 Cabin Ready Indication

When the Cabin Status push button is pressed the Cabin Ready button will be displayed and would function only after the engine start up for take-off and for landing once the landing gear is extended. The primary mode of Cabin Ready confirmation shall be through the FAP.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 88

5.21.16.3 Doors and Slides Indications

Display - Armed, Disarmed, Opened, Closed.

5.21.16.4 Cabin Temperature

6 - Cabin temperature zones are installed, which can be individually controlled
3 degrees + or – from the flight deck settings.

5.21.16.5 Water and Waste Quantities

Standard Indications

5.21.16.6 Smoke Detectors

Serviceability of lavatory smoke detectors

5.21.16.7 Additional Attendant Panel

AAP at L4 Station is equipped with an EVAC command switch
Entry light controls – door located at /L2/L4

5.21.16.8 Microwave oven

WAVEJET AX - Operation

Open the secondary latch (located on top right corner)

Pull open latch on the front panel

Place the food on the rotating table and close and latch the door firmly

Use the minute selector or Program the heating time on the key pad

(Maximum of 30 minutes can be programmed)

(If selected over 30 mins, the oven would automatically select 30 mins)

Select Power level to HIGH, MEDIUM, and LOW

(If manually not selected HIGH shall be selected automatically)

Press START button

Press the STOP selector before opening the door

(If the door is opened during heating the process would stop immediately)

WARNING: DO NOT USE FOILS IN THE MICROWAVE OVEN

5.21.17 Hot water boilers

Located in the MID/AFT galleys

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 89

5.21.18 Entertainment System

ENTERTAINMENT SYSTEM	THALES AVANT
Type	Fully AVOD (BC & EY Seats)
Audio Channels	Available
Video	Available
Moving Map/Airshow	Available
Connectivity	BC+EY Seats – GSM,WIFI,
In Seat Power for PED's	BC – Each Seat has an outlet
	EY – Each two seats to share one outlet


Connectivity- (Mobile phone / Wifi) – usage of connectivity on board is permitted during cruise from 10,000 feet to top of decent. Indication to crew and passengers shall be the activation of pictogram on the PSU. The crew shall advice passengers regarding the usage of mobile phone on phases of flight. Crew shall advice passengers and monitor for compliance.

Mobile phones/Wifi, shall not be used in the flight deck and lavatories at any given time.



5.21.19 Floor path lighting

Floor mounted photo luminescent type.

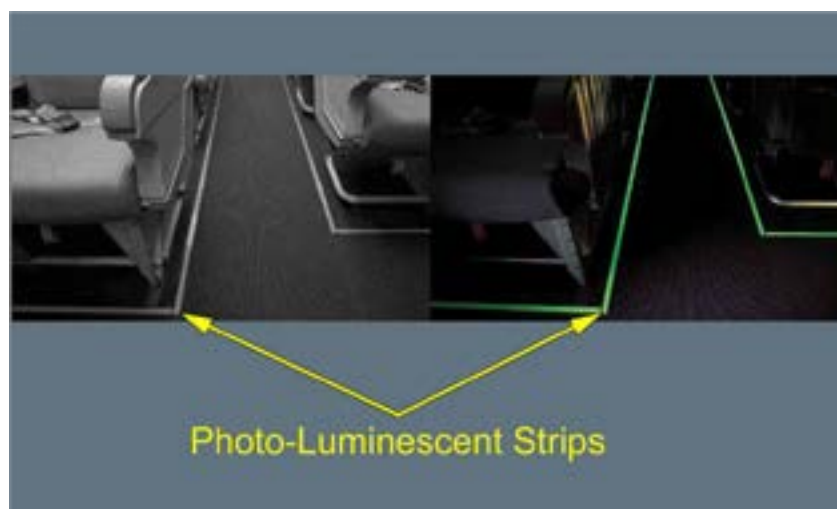

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 90

ALS AIRCRAFT

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 91

5.22 ALS Aircraft Differences

5.22.1 General Discription

Type - Airbus A 330-200
Registration - 4R ALS
Configuration - 18 Business Class, 251 Economy Class

Seating

Row Numbering BC 1-3, FWD EY 20-38, AFT EY 50-63
Cabin Crew Seats 12 (L1, L1A, L1B /R1, L2/R2, L3/R3, L4, R4, L4A, R4A)
Stretcher Positions – Primary – 61,62,63 H/K, Secondary – 61,62,63 A/C

5.22.2 Doors

All doors are type “A” doors. The raft capacities are as per A330-300 aircraft.

5.22.3 Galleys

BC, MID galley, AFT galley
Wet Galleys: BC and AFT water shutoff valves located **above the sink**, MID galley **below the sink**.

5.22.4 Lavatories

07 (L11, L33, R34, L53, R54, L61, R62)

Diaper changing Lavatories: L33, L34, L53, L54

PWD use Lavatories: L33, L34, L53, L54, L61, L62

5.22.5 Additional attendant Panel

L2 and L4 (EVAC CMD available at L4)

5.22.5.1 Drop down oxygen

Centre seats are with single cover oxygen compartments. Additional oxygen mask available at every seat row.

5.22.6 Safety Equipment

5.22.6.1 Life Vest

Passenger and crew as per UL, dual chamber life vest

5.22.6.2 Torch

Is a normal battery-operated device,

Pre-Flight/Serviceable checks – Pull out, switch on and check illumination for brightness (Secure strap is not available

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 92

5.22.6.3 Demo Kits Located at

L1/R1	Overhead compartment 1 each
L2/R2	Overhead compartment 1 each
L3/R3	Overhead compartment 1 each
L4/R4	Overhead compartment 1 each

5.22.6.4 Aisle Chair

R2 – Storage compartment

5.22.7 Cabin Temperature:

6 Cabin temperature zone (1-3,20-25,26-30,31-37,50-59,59-63)

5.22.8 High comfort cabin crew seats

High comfort cabin crew seats are available at R1 and R4

5.22.9 Floor Panel Heating

As per A330-300

5.22.10 FAP

Do not touch the [Water Oper] push button next to the water quantity indicator on the water/waste page as this will stop the water system getting pressurized

5.22.11 High comfort cabin crew seats

High comfort cabin crew seats are available at R1 and R4

5.22.12 BC Seat Manual Override

BC seat comes equipped with four Manual Override levers that allow to deploy and stow the seat manually in the event of electrical malfunction specially from any position to TTOL.

The easy access of to the levers make this a one-person operation.

The Manual Overrides levers are located underneath the Legrest.

Each lever allows to move manually each motor individually:

To use the override control system in order to change the seat position manually:

1. Sit down on the seat
2. Use the translation override lever - To bring the backrest from any position to TTOL position.
3. Use the seat pan override lever - To bring the seat pan from any position to TTOL position.
4. Use the leg rest extension lever - To bring the footrest from any position to TTOL position.
5. Use the leg rest override lever - To bring the leg rest from any position to TTOL position.

Note: The leg rest must be 45 degrees from horizontal in order to manually override the main translation actuator

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 93

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

5.23 Specific details

5.23.1 Seating Configuration

AIRCRAFT TYPE	BC SEATS	EY SEATS	TOTAL
ALH – A 330-200	18	252	270
ALS – A 330-200	18	251	269
ALT - A330-200	18	242	260
A330-300	28	269	297

5.23.2 Doors and Exits

ALH/S aircraft are equipped with 8 main doors, which are “**TYPE A**” doors.

5.23.3 Raft Capacity

AIRCRAFT	REGISTRATION	RAFT CAPACITIES			
		L1/R1	L2/R2	L3/R3	L4/R4
A330-200	ALH,S	65/78	55/68	50/60	65/78
A330-200	ALT	65/78	55/68	-	65/78
A330-300	ALL, M,O,N,P,Q,R	65/78	55/68	50/60	65/78

5.23.4 B/C Manual Seat Adjustments

ALH– Behind the seat and at the floor level on the center console



5.23.5 B/C Life Vest Locations

ALH/S/T – Compartment in between the seats.

5.23.6 BC - Seat Feature Differences

Snake head adjustable reading light

Touch system screens (ALH/ALS/A330-300)

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 95

5.23.7 Lap Top Charging Points

A330-300

1. Business class at each seat (PED switch on the FAP/CMT should be activated)
2. Economy Class at each seat row. One point for two seats.

5.23.8 Water Shut Off/Supply Valves

The water shut off valves cuts off water to the spigots and the coffee makers in the respective galleys.

A330-300/ALH/S Aircraft

Wet galleys above all sink

5.23.9 Lavatory Water shut off valves

A330 Aircraft

It's located under the sink.

5.23.10 Vacuum Release Valve (Float Valve)

A pull valve to assist in releasing any trapped air from the drain pipes is located

1. In the galleys, vicinity of every sink
2. In the lavatories, under the wash basin

5.23.11 Resetting a passenger call

A 330

Press the call button on the relevant PSU/passenger hand set or the reset button on the FAP/AAP panels

5.23.12 Lavatory Vacuum Reset

The lavatory vacuum system may be reset by pressing and holding the blue reset button for 2 minutes located at the AFT CB panel. PIC to be kept informed prior to resetting.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 96

INTENTIONALLY LEFT BLANK


Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

5.23.13 Aircraft Lavatory Locations


5.23.13.1 A330 - ALT Aircraft Lavatories

Total Lavatories -08 - PWD L35, L53, L61, L62 & Diaper Changing Facilities, - L35, L53

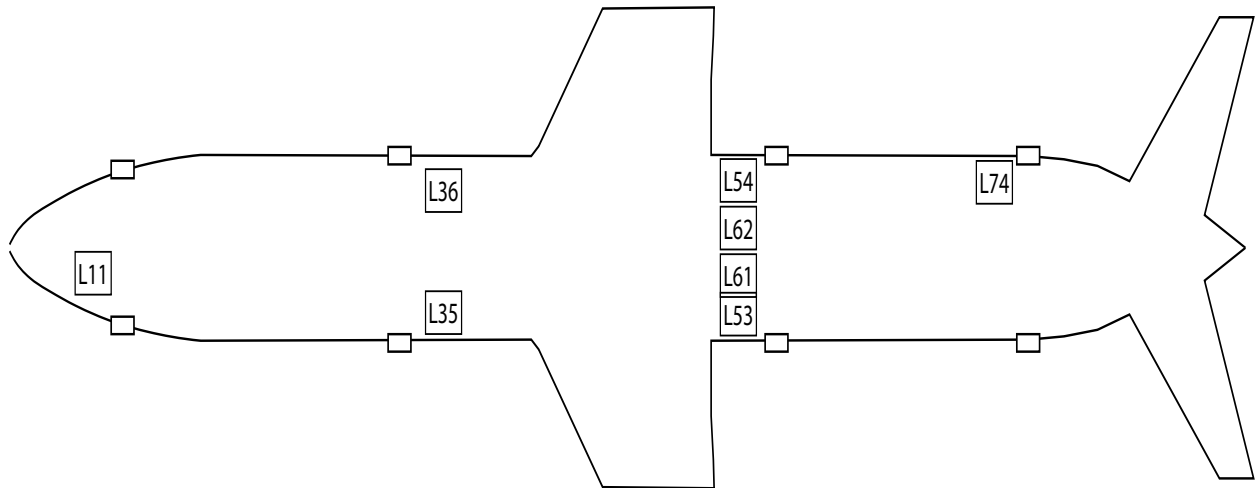

5.23.13.2 A330 - ALH Aircraft Lavatories


Total Lavatories – 07 - PWD Use Lavatory L 81, 82 - Diaper Changing Facilities - L11, L33, L34, L53, L54

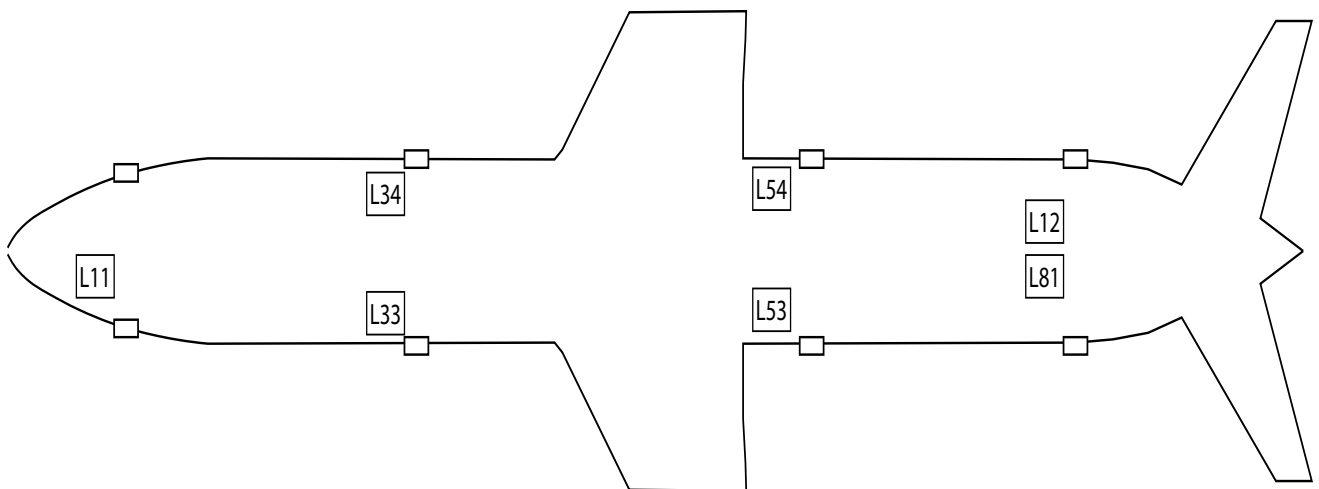

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL


5.23.13.3 A330 - 300 Aircraft Lavatories

Total Lavatories – 08 - PWD Use Lavatory - L 36 Diaper Changing Facilities - L36, L53

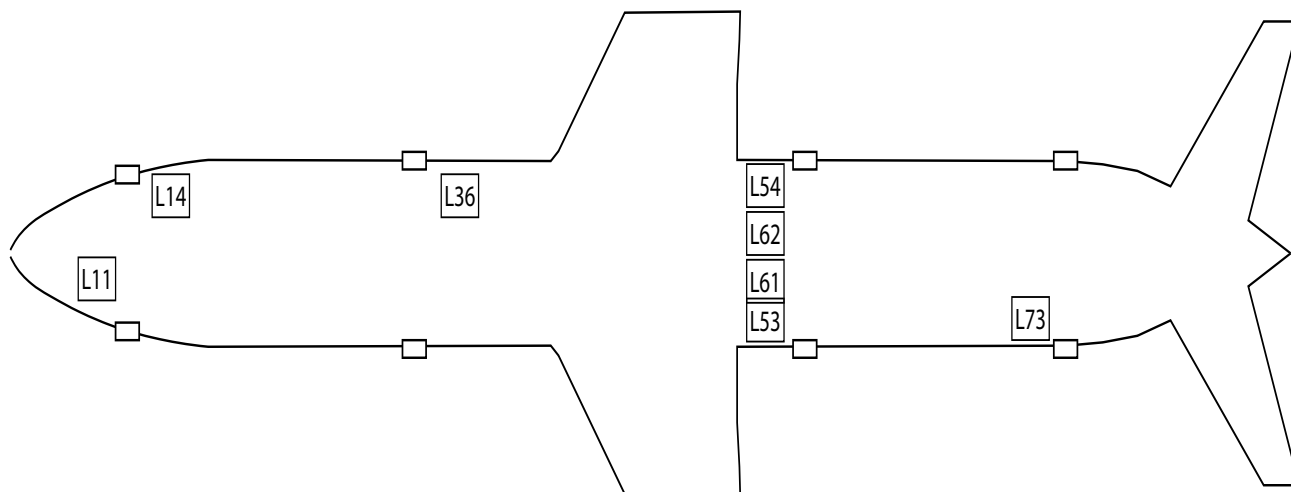

5.23.13.4 A330 - ALS Aircraft Lavatories

Total Lavatories 07 - PWD Use Lavatory- L33, L34, L53, L54, L61, L62 - Diaper Changing L33, L34, L53, L54

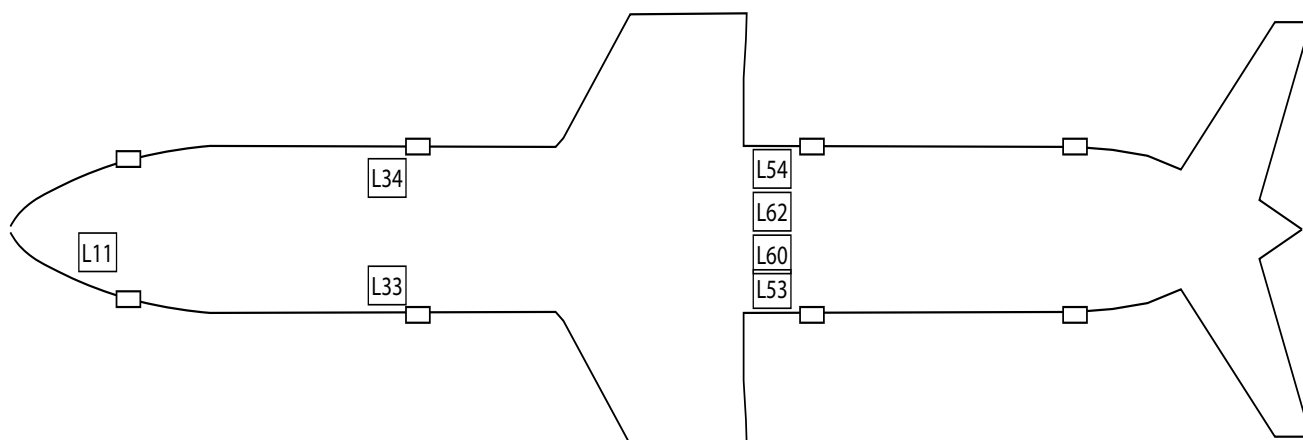

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 99

5.24 Seats blocked for an In-Operative Door

5.24.1 Applicable only on ALT

NUMBERS INSTALLED	NUMBERS REQUIRED	PLACARD
8	7	YES

INOPERATIVE DOOR	SEATS TO BE BLOCKED
L1 or R1	46 seats from Zone C
L2 or R2	103 seats from Zone B including seat row 21
L3 or R3	54 seats from Zone B including row 38 and 24 seats from Zone C including row 39
L4 or R4	87 seats from Zone C including row 51 and row 52 (A,C,D,E,G))

5.24.2 Applicable only on ALH

NUMBERS INSTALLED	NUMBERS REQUIRED	PLACARD
8	7	YES

INOPERATIVE DOOR	SEATS TO BE BLOCKED
L1 or R1	None
L2 or R2	66 seats from Zone B including Seat Row 20 (all)
L3 or R3	66 seats from Zone B including Seat Row 38 (all) and Seat Row 37 (A ,C,H,K) and 22 seats from Zone C including Seat Row 50 (all)
L4 or R4	32 seats from Zone C including Seat Row 63(all) and 62 (D,E,G)

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 100

5.24.3 Applicable only on ALL/ALM/ALN/ALO/ALP/ALQ/ALR

NUMBERS INSTALLED	NUMBERS REQUIRED	PLACARD
8	7	YES

INOPERATIVE DOOR	SEATS TO BE BLOCKED
L1 or R1	None
L2 or R2	58 seats from Zone B including Seat row 20(all)
L3 or R3	58 seats from Zone B including Seat row 37(all) and Seat row 35 (H,K) and 47 seats from Zone C including Seat row 50 (all)
L4 or R4	49 seats from Zone C including seat row 67(All) and 65 (H,K)

5.24.4 Applicable only on ALS

NUMBERS INSTALLED	NUMBERS REQUIRED	PLACARD
8	7	YES

INOPERATIVE DOOR	SEATS TO BE BLOCKED
L1 or R1	None
L2 or R2	66 seats from Zone B including Seat Row 20 (all)
L3 or R3	66 seats from Zone C including Seat Row 38 (all) and Seat Row 37 (A ,C,H,K) and 21 seats from Zone C including Seat Row 50 (all)
L4 or R4	31 seats from Zone C including Seat Row 63(all) and 62 (D,E,G)

Note: For the above table, the zones are defined as follows:

- Zone A : Between Exit L1R1 and L2R2
- Zone B : Between Exit L2R2 and Exit L3R3
- Zone C : Between Exit L3R3 and Exit L4R4

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 101

ALT AIRCRAFT

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 102

5.25 ALT Aircraft Differences

5.25.1 General Description

Type - Airbus A330-200
Registration - 4R-ALT
Configuration - 18 Business Class, 242 Economy Class

Seat Row	BC 1-3	FWD EY 20-23, 25-38	AFT EY 39-52
Cabin Crew Seats (12)	L1, L1A, R1, L2, L2A, R2, R2A, L3, R3, L4, R4, 51H		
Stretcher Positions	Primary 50/51/52 AC		Secondary 49/50/51 HK

5.25.2 Doors

L1,R1,L2,R2,L4,R4 doors are type “A” doors. L3,R3 doors are type “1” doors

5.25.3 Raft Capacity

RAFT CAPACITIES			
L1/R1	L2/R2	L3/R3	L4/R4
65/78	55/68	N/A	65/78

5.25.4 Galley water shut off valves

Wet Galleys - BC, MID and AFT water shut-off valves located adjacent to the sink

5.25.5 Lavatories

08 (L11, L35, R36, L53, R54, L61, R62, R74)

Diaper changing Lavatories - L35, L53

PWD use Lavatories - L35, L53, L61, L62

5.25.6 Drop down oxygen

Centre seats are with single cover oxygen compartments. Additional oxygen mask available at every seat row. (Row 20DEFG has two oxygen compartments)

5.25.7 Forward Attendant Panel (FAP)

Touch screen panel as per the current fleet.

5.25.8 Additional Attendant Panel (AAP)

Located at L2 and L4 as per the current fleet,
“EVAC CMD” (Guarded) available at L4

5.25.9 Aisle Chair

L1 Stowage Compartment (lower)

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

5.25.10 Demo Kits Location

L1	Stowage Compartment
R1	Stowage Compartment
L2	Overhead compartment 21DE
R2	Overhead compartment 21FG
L3	Overhead compartment 39DE
R3	Overhead compartment 39FG
L4	Stowage Compartment
R4	Stowage Compartment

5.25.11 Bassinet Points

Bassinet Points		
BC - 03	MID - 03	AFT - 01
01AC, 01DG, 01HK	20AC, 20DG, 20HK	39DG

5.25.12 BC Seat Manual Override

BC seat comes equipped with three Manual Override levers that allow to deploy and stow the seat manually in the event of electrical malfunction specially from any position to TTOL. The Manual Overrides levers are located underneath seat cushion.



	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 104

5.25.13 Mobile devices charging points

Business class at each seat USB A and USB C

Economy class at each seat USB A

5.25.14 Lavatory Water shut off valves

Below the sink

5.25.15 Medical Outlet

Seat row - 50AC

-

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 105

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CSS/02
		ED 04/Jun 23
	AIRCRAFT SPECIFIC	Chapter 05
		Page 106

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 1

CHAPTER 06

A320 AIRCRAFT

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 2

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 3

Contents

6.0 A320 Aircraft.....	10
6.1 Aircraft Specific.....	10
6.1.1 Description	10
6.2 Doors/Emergency Exits	10
6.3 Landing Gear.....	11
6.4 Cargo Compartments	11
6.5 DOORS/EXITS.....	12
6.5.1 Type '1' Doors	12
6.5.1.1 Viewing Window	13
6.5.1.2 Door Warning System	13
6.5.1.3 White light - Slide Armed Warning Light.....	13
6.5.1.4 Red light Cabin Pressure Warning Light	13
6.5.1.5 Door Restraint Strap.....	13
6.5.1.6 Door Locked / Unlocked Indication System	14
6.5.2 Opening and closing of Type '1' Doors	14
6.5.2.1 External	14
6.5.3 Closing	16
6.5.4 Slide Arming/Disarming Procedure	16
6.5.4.1 When to Arm / Disarm.....	17
6.5.4.2 To Arm the Slide	17
6.5.4.3 To Disarm the Slide	17
6.5.4.4 Cross-Checking.....	17
6.5.4.5 Calling Relevant Stations	17
6.5.5 Emergency Door Opening Procedure	17
6.5.6 Inoperative Door or Slide Raft	18
6.5.7 Type 1 door Escape Slides/Rafts	18
6.6 Type "III" Exits (Hatches).....	18
6.6.1 Opening of Hatches	19
6.6.2 Manual Inflation Handle	19
6.6.3 Deployment of the Over Wing Slide	20
6.6.4 Inflated and deflated Over-Wing Slide.....	20
6.6.5 Ditching Lines (Lifeline).....	21

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 4

6.7 Slide Raft Description.....	22
6.7.1 Raft Capacity.....	23
6.7.2 Lighting Strip.....	23
6.7.3 Canopy	23
6.7.4 Canopy Erection Instructions.....	23
6.8 Flight Deck	24
6.8.1 Viewing Windows	24
6.8.2 Sliding Windows	24
6.8.3 Escape Routes	24
6.8.4 Flight deck oxygen mask.....	25
6.9 Secure Flight Deck Door	25
6.9.1 Controls on the Secure Flight Deck Door.....	26
6.9.2 Normal Operation.....	27
6.9.3 Secondary Operation.....	27
6.9.4 Emergency Operation.....	27
6.10 Avionics Compartment.....	27
6.11 Flight Deck Seats	28
6.11.1 Flight Deck Seats Description	28
6.11.2 First Observer Seat – Foldable Seat	29
6.11.3 Second Observer Seat – Foldable Seat	29
6.11.4 Authorization to occupy a flight Deck Observer Seat	29
6.12 Cabin Crewmember Seats and Stations	29
6.12.1 Forward Attendant Station	30
6.12.2 Aft Attendant Seat	31
6.12.3 Swivel Seat	31
6.12.4 Type A/TYPE B	31
6.13 Special Passenger Seats Allocation	32
6.13.1 Unaccompanied Minors	32
6.13.2 Passenger with Disability.....	32
6.13.3 Emergency Exit Seat Rows.....	32
6.13.4 Stretcher Positions.....	32
6.14 Briefing at the Hatches (Type “III” Exits)	32
6.15 Stowage Areas	32
6.15.1 Over Head stowage Compartment.....	32

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 5

6.15.2 Dog Houses	33
6.16 Galleys	33
6.16.1 Water Shut-Off Valve	33
6.16.2 Waste Water	34
6.17 Lavatories	34
6.17.1 Lavatory Waste Bin Fire Extinguisher	34
6.17.2 Smoke Detector	34
6.17.3 Smoke /Fire Warning Signal.....	35
6.17.4 Lavatory Water Shut off Valves	35
6.18 Communication System.....	35
6.18.1 Communication- Attendant Indicator Panel/Area Call Panel.....	36
6.18.2 Communication System PA/Interphone	36
6.18.3 Crew To Crew Call	36
6.18.4 All Attendant Call	36
6.18.5 Flight Deck to Cabin.....	36
6.18.6 Emergency Calls.....	36
6.18.7 Emergency Calls Flight Deck to Cabin	37
6.18.8 Emergency Calls Cabin to Flight Deck.....	37
6.18.9 Communication - PA /Interphone System	37
6.18.10 PA system.....	37
6.18.11 Passenger call System.....	38
6.19 Emergency Lighting System	38
6.19.1 Ceiling Lights.....	38
6.19.2 Escape Path Lighting System	38
6.20 Control Panels.....	39
6.20.1 Forward Attendant Panel (FAP)	39
6.20.2 Additional Attendant Panel (AAP).....	39
6.20.3 Cabin lighting	39
6.20.4 ABL aircraft the FAP/AAP	40
6.20.5 ABL/MRE Additional Attendant Panel	40
6.21 Entertainment System (e FX System)	40
6.22 Oxygen Systems	41
6.22.1 Fixed Oxygen	41
6.22.2 Portable Oxygen	41
6.22.2.1 Minimum number of Oxygen Bottles required	41

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 6

6.22.3 CCMs Designated Portable Bottles of Oxygen	41
6.23 Demonstration Stations	41
6.24 Cabin and Galley Preparation	42
6.25 Emergency Procedures	42
6.26 Emergency Communication.....	42
6.27 Initiating an Evacuation	42
6.28 Emergency Landing – CCM Responsibilities	43
6.28.1 Door Primary	43
6.28.1.1 Door Assist	44
6.28.2 Prepared Emergency Landing - Flight Crew Check List	44
6.28.3 Unprepared Emergency Landing - Flight Crew Checklist	44
6.28.4 Prepared Emergency Landing CCM Checklist	45
6.28.4.1 Commands	46
6.28.5 Unprepared Emergency landing CCM Checklist	46
6.28.5.1 Inflated and Deflated Slide	46
6.28.5.2 Commands to ABPs	46
6.28.6 Emergency Ditching CCM Responsibilities.....	47
6.28.6.1 Door Primary.....	47
6.28.6.2 Door Assist	47
6.28.7 Prepared Ditching Flight Crew Check List	48
6.28.8 Unprepared Ditching Flight Crew Check List	48
6.28.9 Prepared Ditching CCM Checklist	49
6.29 Blocked Exit	50
6.29.1 Blocked Exit Commands	50
6.29.2 Ditching Commands	51
6.30 Survival Kit.....	51
6.30.1 Unprepared Ditching CCM Checklist.....	52
6.30.2 Equipment to be carried by each CCM	52
6.30.3 Emergency Landing CCM Responsibilities at the Hatches	52
6.30.4 Evacuation Commands at the Hatches (On land)	52
6.30.5 Emergency Ditching CCM Responsibilities at the Hatches	53
6.30.6 Ditching Commands at the Hatches (On water)	53
6.31 Quick Reference	54
6.31.1 12J/138Y Configuration	54

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 7

6.31.2 16J/120EY Configuration	54
6.32 Cabin Safety Minimum Equipment List for A320 fleet.....	55
6.33 ABL Safety Equipment Location Chart	56
6.33.1 ABL Safety Equipment Location Diagram	57
6.34 ABM/N/O Safety Equipment Location Chart	58
6.34.1 ABM/N/O Safety Equipment Location Diagram	59
6.35 Differences.....	59
6.35.1 Facilities Available.....	60
6.35.2 ABM/N/O - Aircraft,.....	60
6.35.3 ABL/ABS/ABT Smoke Reset System in the lavatories	61
6.36 MRE Aircraft.....	61
6.36.1 General Description:	61
6.36.1.1 MRE – Safety Equipment Locations Chart	62
6.36.1.2 MRE – Safety Equipment Locations Diagram	63
6.37 Differences A320 - NEO	65
6.37.1 Aircraft Specific.....	65
6.37.1.1 Cabin Crew Seats and Stations.....	65
6.37.2 Exit & Doors.....	65
6.37.3 PBE (Air Liquid) (06).....	66
6.37.3.1 Portable Oxygen.....	66
6.37.3.2 Business Class Seats	66
6.37.3.3 Swivel seat	66
6.37.4 Emergency Row Seats.....	66
6.37.5 Galley Water shut off valves	67
6.37.6 Lavatories	67
6.37.7 Water Shut Off Valve (Smart Lavatory).....	67
6.37.8 Lavatory locking system.....	67
6.37.8.1 Lavatory Opening for In an emergency	67
6.37.9 Galleys	68
6.37.10 WIFI Connectivity	68
6.37.11 IFE – RAVE system.....	68
6.38 A320Neo ANA/B Safety Equipment Location Chart.....	69
6.38.1 A320Neo ANA/B safety Equipment Location Diagram	70
6.38.2 Prepared Emergency Landing Check List,	71
6.38.3 Prepared Ditching Check List,	71

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 8

6.38.4 designated portable bottles of oxygen,	71
6.38.5 Quick Reference Guide for ANA/B.....	72
6.39 A320 Aircraft -Dispatch of an Aircraft with an In-Operative Door/Hatch	73
6.39.1 Applicable only on ABL	73
6.39.2 Applicable only on ABM/ABN/ABO	73
6.39.3 Applicable only on ANA/B A320 Neo.....	74
6.39.4 Applicable only on MRE.....	74
6.40 ABS/ABT Aircraft	75
6.40.1 Aircraft Specific	75
6.40.2 Aircraft Specifics,	75
6.40.3 Cabin Crew Seats and Stations	75
6.40.4 Safety Equipment,	75
6.40.5 Emergency Torch	76
6.40.6 Doors	76
6.40.7 Galleys	76
6.40.8 Lavatories	76
6.40.9 Coat Closet	76
6.40.10 Designated Portable Bottles Of Oxygen,.....	77
6.40.11 Forward Attendant Panel (FAP)	77
6.40.12 Additional Attendant Panel (AAP)	77
6.40.13 Handset	77
6.40.14 Entertainment	77
6.40.15 Business Class Seats	77
6.40.16 Economy Class Seats.....	77
6.40.17 ABS/ABT Safety Equipment Location Diagram.....	78
6.40.18 ABS/ABT Safety Equipment Location Chart.....	79

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 9

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 10

6.0 A320 Aircraft

6.1 Aircraft Specific

6.1.1 Description

The A-320 is a short to medium range, single aisle subsonic transport aircraft, powered by two turbofan engines. The fuselage has a circular cross section and is entirely pressurized with the exception of the nose and tail cone, the landing gear bays, the air conditioning compartments and the cargo compartments. The flight deck is designed to accommodate two operating crewmembers and two observers. Any combination for Cabin Attendant Seats (CAS) may be provided with a minimum of 4 primary seats.

This Chapter 6 describes the - A 320 and 6A Annex describes the A 321 aircraft

- Doors/Exits
- Landing Gear
- Cargo Compartments
- Flight Deck
- Cabin Crewmember Seats and Stations
- Passenger Seating
- Lavatories
- Communication System
- Control Panels
- Entertainment System
- Water and Waste system
- Oxygen System
- Emergency procedures


6.2 Doors/Emergency Exits

The aircraft is equipped with four Type “I” doors and four Type “III” emergency exits.

The Type “III” Emergency exits are located over the wings and used only during an emergency evacuation.

During a ditching the Type “III” exits are used as a last resort.

All Type “I” doors become emergency exits in case of an emergency evacuation.

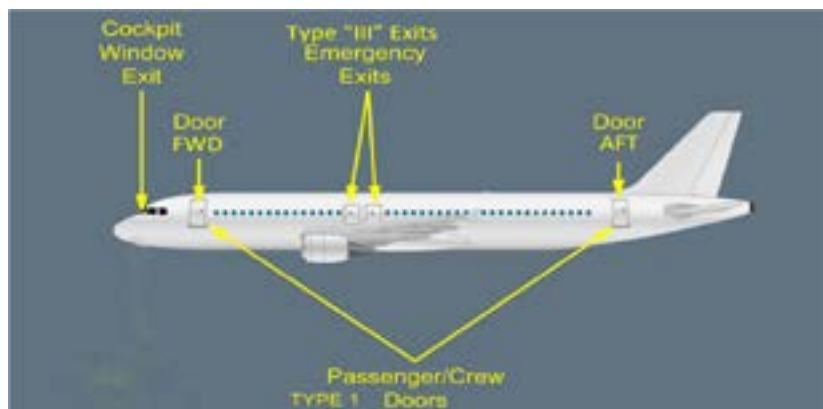

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	A320 AIRCRAFT		Chapter 06
			Page 11


4 doors (2 on each side).

4 emergency exits (2 on each side)

6.3 Landing Gear

Two main Landing Gears

One nose Gear

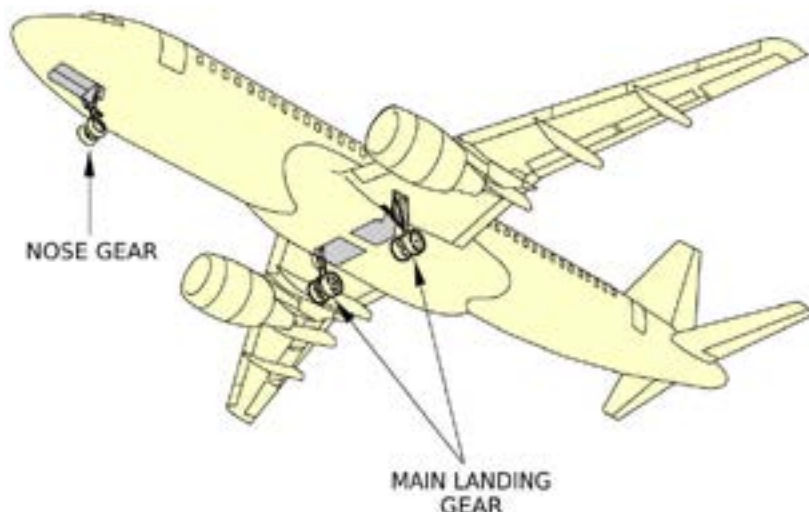

6.4 Cargo Compartments


Three cargo compartments are installed in the A 320 lower deck

The FWD Cargo Compartment

The AFT Cargo Compartment

The Bulk Cargo Compartment

Live Animals cannot be transported in the cargo compartments except for ornamental fish.

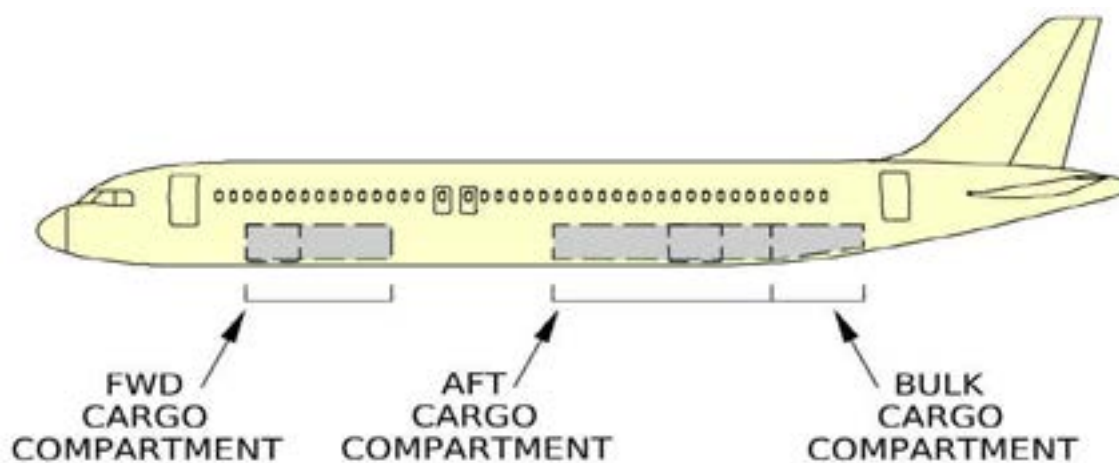

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 12

6.5 DOORS/EXITS

6.5.1 Type '1' Doors



1. Door Control Handle
2. Observation Window with:
 - Cabin Pressure Indicator
 - Slide Armed Indicator
3. Frame Assist Handle
4. Door Assist Handle
5. Door Locking Indication
6. Slide Arming System with:
 - Slide Arming Lever
 - Safety Pin
7. Gust Lock
8. Hinge Arm
9. Escape Slide/Slide raft Container

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 13

6.5.1.1 Viewing Window

Each door has a viewing window equipped with a blind. The opening and closing of the blind must be functioning and shall be kept open during take-off and landing

6.5.1.2 Door Warning System

There are two warning lights adjacent to the viewing window. A white and a red light

6.5.1.3 White light - Slide Armed Warning Light

The white warning light would illuminate when the door control handle is lifted when the slide is armed to warn that the door is being opened in the armed mode.




6.5.1.4 Red light Cabin Pressure Warning Light

The red warning light would flash, to warn that the cabin is still pressurized if door is disarmed when the engines are shut down.

6.5.1.5 Door Restraint Strap

Inside of each cabin door frame there is a bright colored self-reeling Restraint Strap, visible when the door is open. The cabin crew must install the Restraint strap whenever a cabin door is open with no stairs or aerobridge is in position. Before closing the door, ensure that the restraint strap is fully retracted into its recess

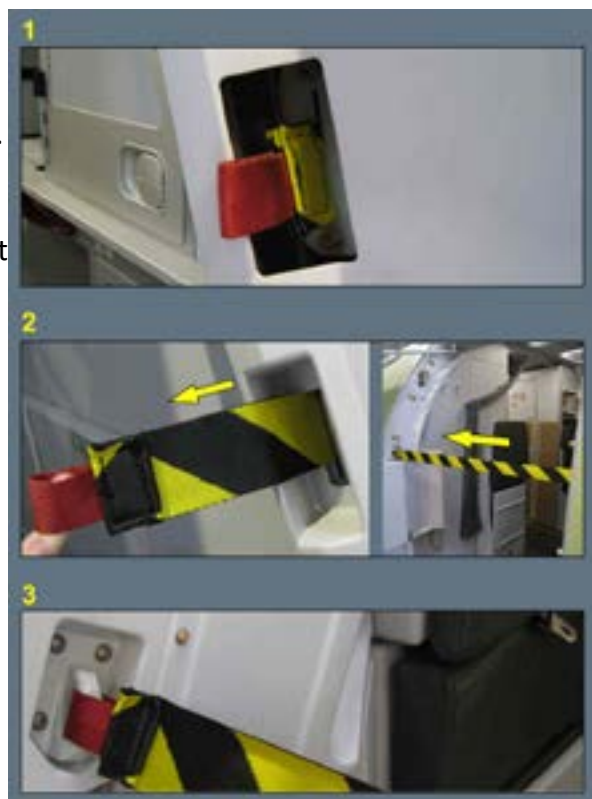

WARNING : DO NOT LEAVE AN OPEN CABIN DOOR UNATTENDED. A SAFETY STRAP WILL NOT PREVENT PASSENGERS OR CREW MEMBERS FROM FALLING DOWN

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	A320 AIRCRAFT		Chapter 06
			Page 14

6.5.1.6 Door Locked / Unlocked Indication System

The door status indicator is located on the upper part of the door. Door locked / unlocked indicator would display the status of the door. Red for Unlocked/Green for Locked

6.5.2 Opening and closing of Type '1' Doors

6.5.2.1 External



Opening

Only authorized and trained ground personal may carry out the following procedure. Shall try to establish contact with the PIC, knock on the viewing window to draw attention of a CCM and failing they shall follow the below procedure,

1. Check for the Cabin Pressure warning light through the viewing window
2. Insert hand up to the palm on the external opening handle
3. Lift the handle up to the horizontal position in line with the green mark
4. The door should be moved outwards and forward till locked in position In the event, the slide arming lever (located inside the aircraft) is in the armed position and the door is opened from outside, the lever will automatically move to the disarmed position.

Closing

1. Ensure the retention strap is removed and stowed
2. Release the door by pressing the gust lock
3. Rotate the door towards the AFT until the door is aligned

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 15

4. Lower the door operating handle down
5. The door is locked when the handle is fully flushed

Internal

Prior to opening a door, CCMs shall receive conformation from the ground staff-Two knocks on the door and thumbs up indication. Exception would be at airports where the door has to be opened to position steps. The Purser shall obtain permission from the PIC prior to opening the door at such stations. When the seat belt sign is switched off, the Purser shall advice CCMs to disarm the slides by initiating the following PA announcement,

‘CREW DISARM SLIDES AND CROSS CHECK’

The doors on the right shall be disarmed first.

Door primaries on the left to cross over to the opposite door. Right side door primary shall then disarm the door observed by the left side door primary. Once the Right side doors are disarmed, door primaries to cross over to the left. The door primary shall disarm the door observed by the Right-side door primary. Only the detailed door primaries are permitted to disarm the designated slides during routine operations.

Opening Doors

Prior to opening the doors, Purser shall confirm with PIC that all slides are disarmed, PIC shall make the following PA announcement,


‘CABIN CREW YOU MAY OPEN DOORS WHEN REQUIRED’

1. Grasp frame assist handle
2. Lift the door control handle fully upwards
3. Push the door outwards and forwards until it locks in its fully opened position
4. Secure the exit using retentions strap

Assist Handle



Control Handle



Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 16

6.5.3 Closing

1. The Purser shall obtain PIC approval
2. Ensure the retention strap is removed and stowed
3. Release the door by pressing the gust lock
4. Grasp the assist handle
5. Using the assist handle, move the door rearwards
6. When the door is placed on the frame, pull inwards and lower the door control handle

Check Door Lock

Ensure the door is locked by checking on the door locking indicators, located on the upper part of the door. Display locked and in green.

CAUTION: PRIOR TO LOWERING THE DOOR CONTROL HANDLE, ENSURE THE RED STREAMER OF THE SAFETY PIN IS DISPLAYED OUTSIDE THE SUPPORT ARM

CAUTION: WHEN THE DOOR IS UNLOCKED THE DOOR LOCKING INDICATORS WOULD DISPLAY UNLOCKED IN RED

6.5.4 Slide Arming/Disarming Procedure



The movement of the lever to the armed position connects the girt bar to the door sill which the escape slide is attached.

When the slide is disarmed the girt bar is released and the escape slide is released from the attachment preventing the slide from deploying.

For normal operation of the door, the slide arming lever shall be in the disarmed position.
For emergency operation of door, the slide arming lever shall be in the armed position

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 17

6.5.4.1 When to Arm / Disarm

A CCM shall arm/disarm a slide only on the Pursers command.

6.5.4.2 To Arm the Slide

Remove safety pin and stow in the slot on the support arm of the door and move the arming/disarming lever down.

6.5.4.3 To Disarm the Slide

Move the arming/disarming lever up to the disarmed position and install the safety pin.

6.5.4.4 Cross-Checking

Prior to disarming the slides on the right, door primaries on the left shall cross over to the right and ensure the following disarming procedure shall be carried out.

(PIN/LEVER/PIN verbally stated by the CCM whilst disarming the slide)

1. Remove safety Pin
2. Move door arming lever to disarm position
3. Insert safety pin

The slides on the left shall be disarmed next,

Once the right side slides are disarmed, both door primaries shall cross over to the left and the left side door primary shall disarm the slide observed by the opposite door primary. The following disarming procedure shall be carried out.

(PIN/LEVER/PIN verbally stated by the CCM whilst disarming the slide)

1. Remove safety Pin
2. Move door arming lever to disarm position
3. Insert safety pin

6.5.4.5 Calling Relevant Stations

On A320/A321 aircraft, the Purser shall contact each station individually to confirm that slides are correctly ARMED/DISARMED and cross-checked, and shall also verify with the door/slide page on the FAP when available.

6.5.5 Emergency Door Opening Procedure

1. Check the outside conditions
2. Check the lever is in the armed position
3. Hold on to the assist handle on the door frame
4. Lift door control handle up and release
5. The door opens automatically and locks in the open position
6. Should the pneumatic assistance of the door fail, push open door manually.
7. If the slide does not inflate pull the manual inflation handle located on the right hand side at floor level



Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	A320 AIRCRAFT		Chapter 06
			Page 18

6.5.6 Inoperative Door or Slide Raft

Number Installed - 04

Number required for dispatch - 03


Ref : 2.32

If the total heads on board (including Flight/Cabin crew) cannot be accommodated in the three life rafts (55 X 3=165), a portable life raft/s shall be carried to accommodate the over flow.

6.5.7 Type 1 door Escape Slides/Rafts


Each type “1” door is equipped with a dual-lane slide. They are stowed in a container hinged on the lower part of the door. When the door is opened in the “ARMED” mode, automatic slide/raft deployment and inflation will occur. The disconnection procedure is clearly marked on the slide.

If the slide is Inflated and Deflates, Instruct four ABPs who have evacuated to hold the no fail handles and direct one passenger at a time to evacuate. Passengers shall be directed to useable exits to expedite the evacuation

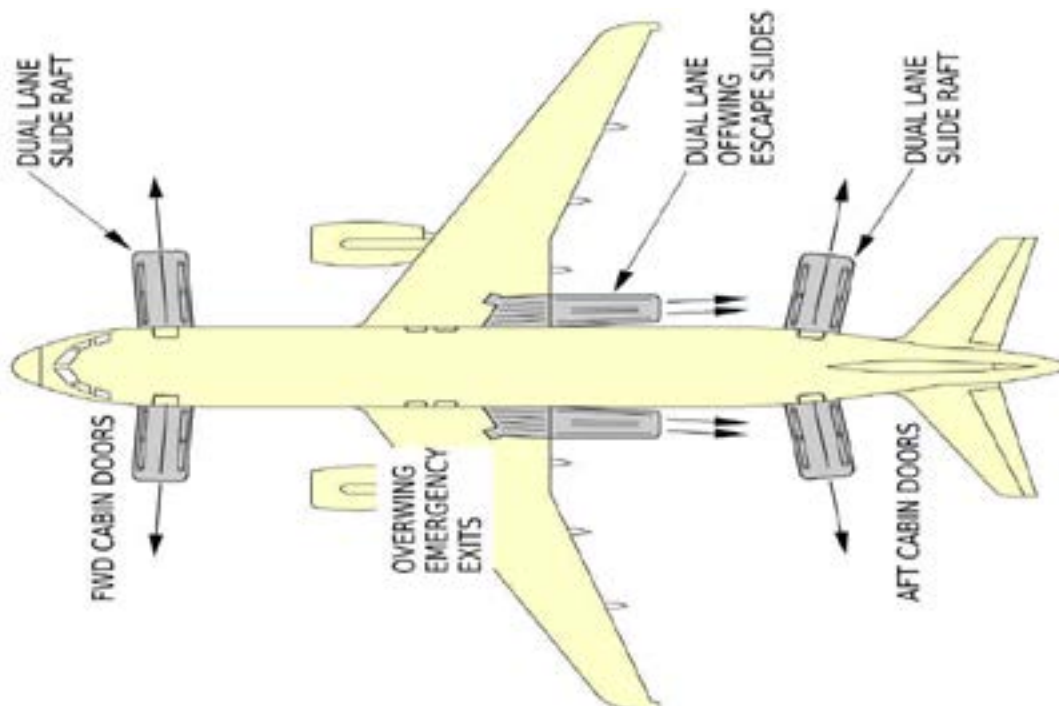

6.6 Type “III” Exits (Hatches)

1. Exit Marker
2. Grip Mould
3. Window
4. Handle Cover
5. Cover Flap
6. Opening Instructions
7. Exit Sign
8. Slide Armed Indicator.
9. Slide Manual Inflation Handle

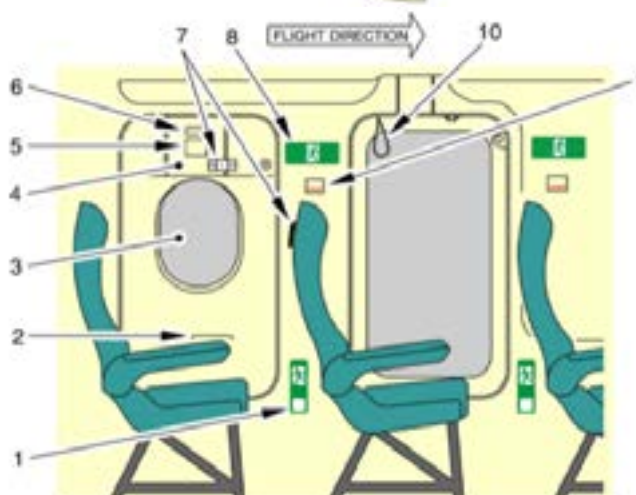

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 19

When the hatch is removed, you can see the SLIDE MANUAL INFLATION HANDLE.

An awareness safety briefing shall be carried out for ABPs seated in the proximity of the hatches. The details of how to open the hatch is depicted on the back of the seat and between the hatches.


The over wing emergency hatches are always in the “ARM MODE” and the slide would automatically inflate when one hatch is opened. Opening one of the hatches on each side will deploy the slide on the relevant side in three seconds. The off wing slides are equipped with a manual inflation system. The red manual inflation handle is located at the upper inner part of the hatch frame and is visible when the hatch is opened.

Hatches are primary exits for a crash landing.

In a ditching it will be opened only as a last resort.


6.6.1 Opening of Hatches

1. Remove the flap cover
2. The slide armed white indicator should illuminate
3. Pull down the control handle, the hatch door should fall inwards
4. Lift the hatch frame by using the grip mould at the bottom of the hatch
5. Throw the hatch out of the leading edge of the wing, to prevent any damage to the slide
6. If it fails to inflate pull the manual inflation handle

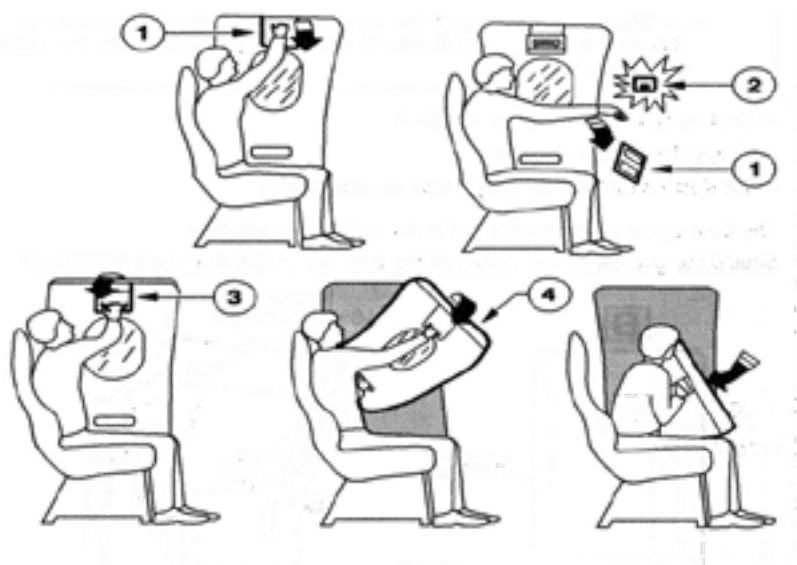

6.6.2 Manual Inflation Handle

The red manual inflation handle located at the upper inner part of the hatch frame

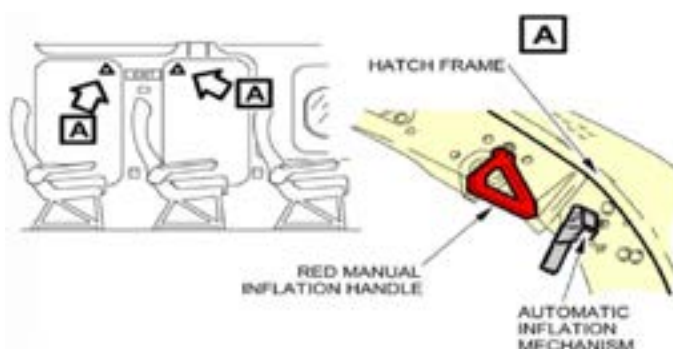


Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	A320 AIRCRAFT		Chapter 06
			Page 20

6.6.3 Deployment of the Over Wing Slide

It is equipped with dual lane slides.

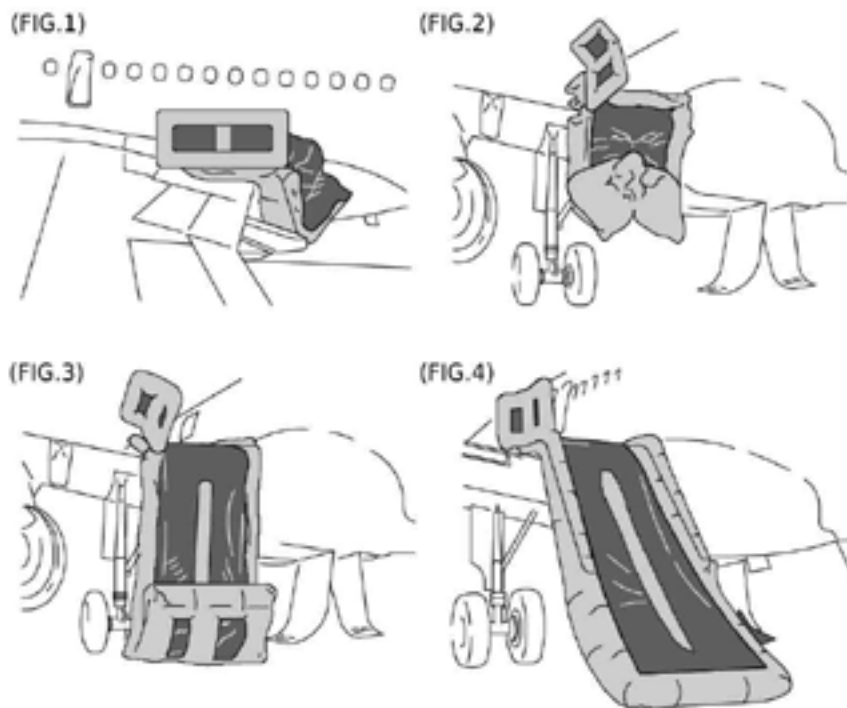

1. Deceleration Strips
2. There are deceleration strips at the far end of the slide. These strips decrease the speed of evacuees, before touching the ground.
3. Sliding Surface
4. Side Rails, The rails prevents the passengers from falling off the slide .
5. Over Wing Ramp Barrier, The barrier provides a visual guide for the evacuees towards to the ramp and to the slide.
6. Ramp, The ramp provides a transition from the wing to the evacuation slide
7. Buoyancy Chambers, The inflated tubes stabilize the slide structure.
8. No fail Handles
9. LED Lights, The LED lights provide lighting to the sliding surface and at the end of the slide.




6.6.4 Inflated and deflated Over-Wing Slide

If the Over-Wing slide is inflated and deflates due to a damage, it can still be used as a hand held escape slide. Locate the snap hook on the slide and attach it to the attachment point on the wing (D ring). Four ABPs shall hold the slide by using the two no fail handles installed on either side of the escape slide.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	A320 AIRCRAFT		Chapter 06
			Page 21

Shall evacuate one passenger at a time, instructing them to sit and slide.

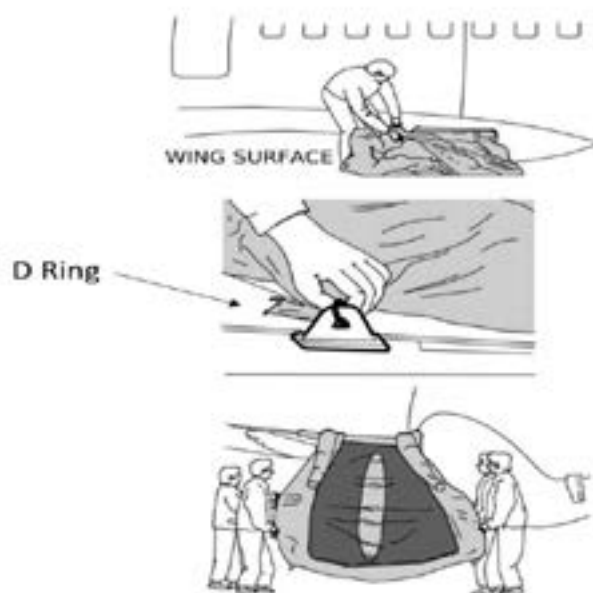



6.6.5 Ditching Lines (Lifeline)

The aircraft is equipped with 4 ditching lines which are used only in a ditching. The ditching lines are used to assist passengers moving on the wing during a ditching. The ditching lines are stowed in a narrow compartment (Overhead bin) above the over wing hatches on either side. It will assist passenger to remain on the wing.

Operation

Instruct ABP to

1. Fix one snap hook of the lifeline to the attachment point located on the upper outer part of the hatch frame
2. Fix the other snap hook to the wing attachment point (B ring) located on the center of the wing surface
3. Once both snap hooks are securely connected, pull the Pull Tab to tighten the lifeline
4. The sliding buckle holds the lifeline tight for the correct length
5. Instruct passengers to evacuate use leg body leg, inflate life vest, hold on to the lifeline and remain on the wing.

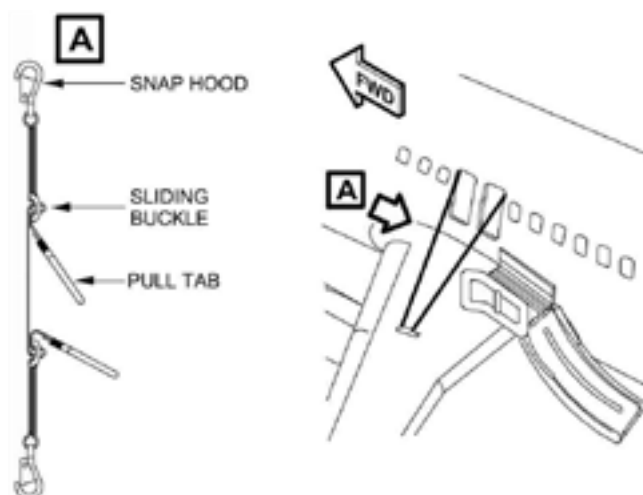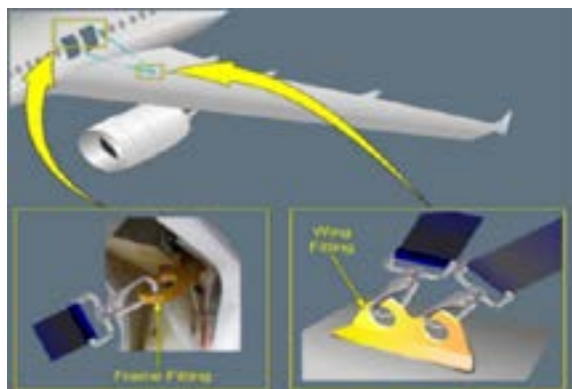


Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL


	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	A320 AIRCRAFT		Chapter 06
			Page 22

6.7 Slide Raft Description

The raft is designed in such a manner that it has two individual buoyancy chambers. Top chamber and a lower chamber. If one chamber is damaged the other chamber will keep the occupants a float. Both chambers are equipped with a facility to top up air and the locations for fixing the hand pump (inflation valves) are clearly marked. A hand pump is located in the survival kit.

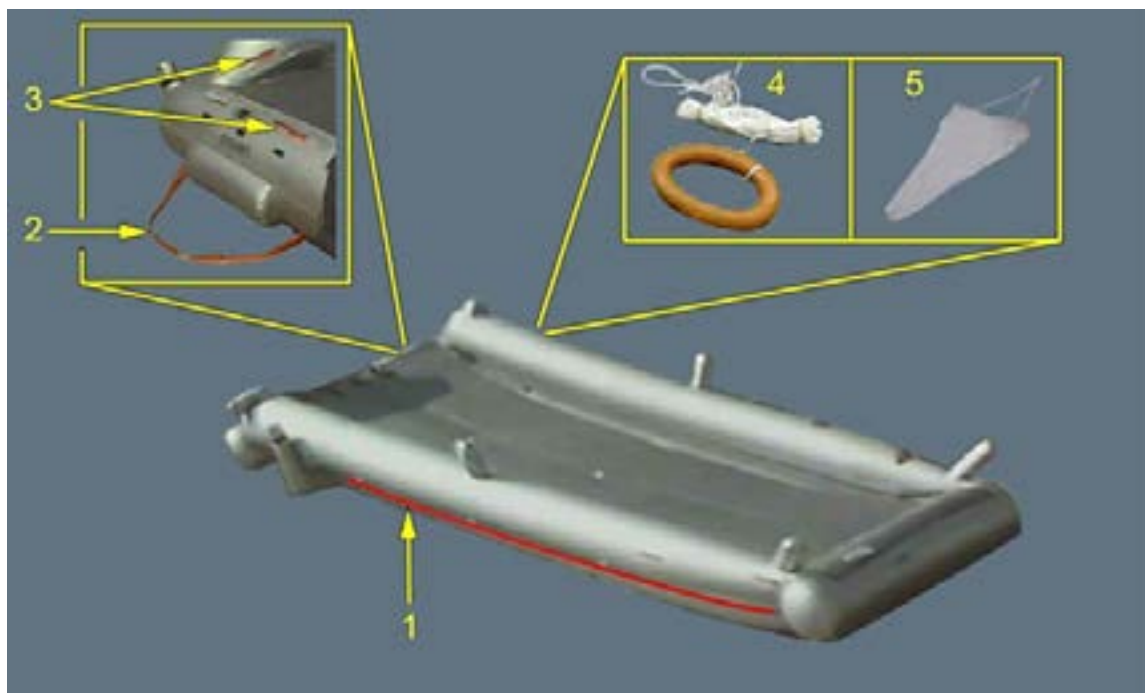

1. Life Line, The life lines are installed along each side of the slideraft to enable passengers to hold onto the slideraft when in water.
2. Boarding Ladder, The boarding ladders are installed for passengers to climb into the slideraft.
3. Boarding Handle, The boarding handle support passengers to climb into the slideraft.
4. Heaving Ring, The heaving ring can be thrown to passengers in the water to pull them towards the slideraft.
5. Sea Anchor, The sea anchor is attached to the raft to stabilize the raft and act as a brake

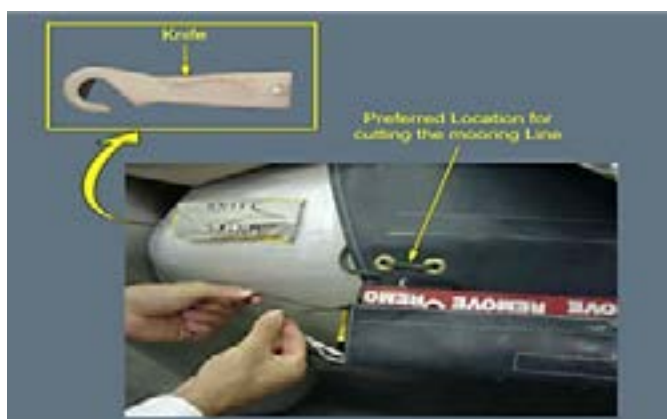

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 23

6.7.1 Raft Capacity

The overload capacity is calculated taking into account one raft is inoperable

DOOR	NORMAL	OVERLOAD
LR1 & LR2	44x4	55x3
Total	176	165


6.7.2 Lighting Strip

The escape slides are equipped with an integral lighting system. The escape slide lights automatically illuminate when the escape slides are deployed. The escape slides are powered by the same power source as the cabin emergency lights and would last until the power supply cable remains connected to the air craft for a maximum period of 12 minutes.

6.7.3 Canopy

The canopy is located in the survival pack. It is water proof, wind resistant and bright orange/red in colour to attract attention. One end of the canopy is marked BOARD END. The outside surface is marked THIS SIDE UP.

6.7.4 Canopy Erection Instructions

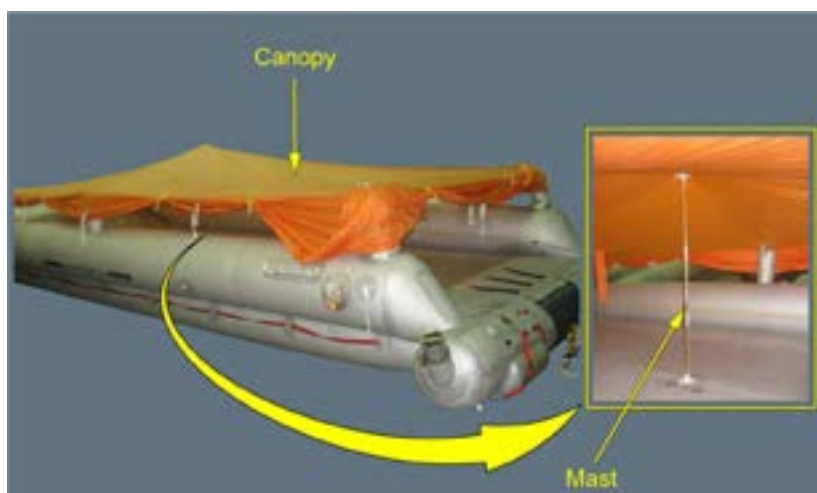

Canopy erection instructions are printed on the pouch in which the canopy is stowed. It is also contained in the slide raft management guide, which is located in the survival kit.


Installing the canopy,

1. Remove canopy from the bag
2. Keep the canopy low to prevent it from being blown out of the raft
3. The markings on the canopy "Board End" should be on the girt bar end
4. The marking this side up should be the outer part of the canopy
5. Numbers are marked as even numbers on the right and odd on the left
6. Numbers on the canopy should correspond with the numbers on the raft support tubes.
7. Fix the rubber mount to the raft center attachment point (Rubber Pads)
8. Extend the center masts to a full length
9. Insert center mast into rubber mount and secure with tie down laces
10. Spread canopy lengthwise on the slide raft
11. Drape the canopy over the support tubes
12. Secure the canopy by tying it on to the attachment points on the main buoyancy tubes.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 24

6.8 Flight Deck

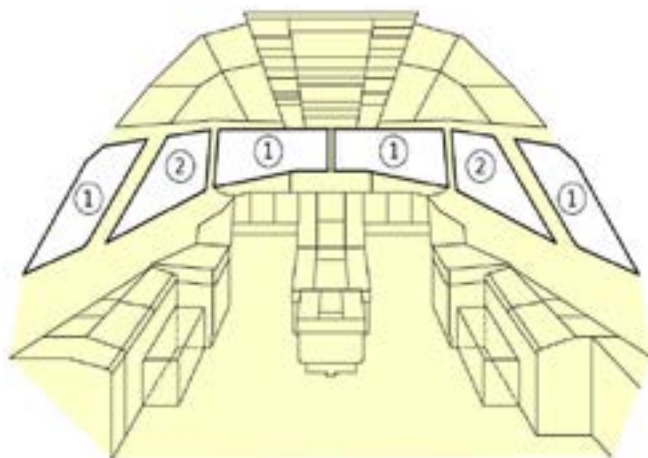


1. Fixed Windows
2. Sliding Windows

6.8.1 Viewing Windows

The windows installed in the flight deck are fixed windows and sliding windows. They are installed in front and each side of the flight deck

6.8.2 Sliding Windows

Two of the flight deck windows can be used as secondary emergency escape routes. They are the second window located on both sides of the Pilots viewing windows. It has a locking and sliding mechanism. The windows can be opened only from inside, once opened it can be closed and locked back into its original position.

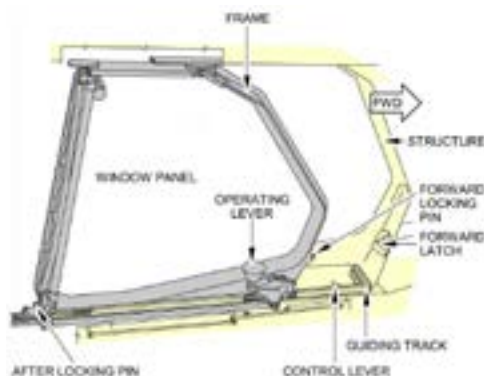

To Operate the Sliding Window

Opening

1. Press down the knob on the operating handle
2. Rotate rearwards until the windows moves inwards and slide window to the AFT until locked.

Closing

1. Move forward the locking lever
2. Move the window with the forward window handle until it reaches the closed position
3. Push the operating handle forward to lock the window.

6.8.3 Escape Routes

Escape routes from the flight deck are sliding windows using the escape rope and through the secure flight deck door.


Descent Ropes

Two knotted descent ropes are installed in a compartment above each sliding window. Each rope shall

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	A320 AIRCRAFT		Chapter 06
			Page 25


withstand a weight up to 180 Kgs. Throw the rope out from the sliding window. Use Leg, Body, Leg technique to evacuate from the sliding window. Face the fuselage and lower body down to prevent injury.

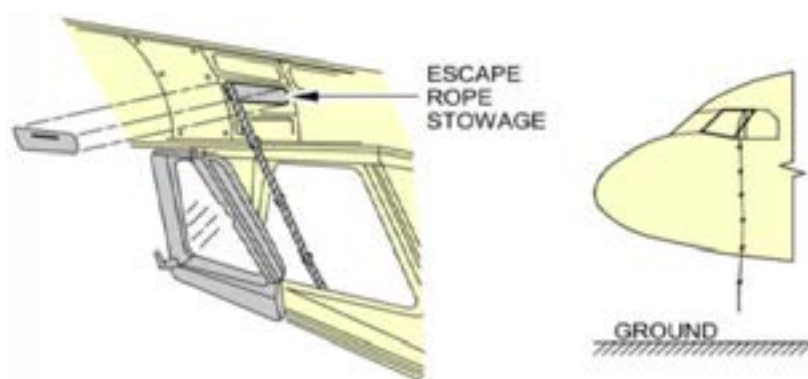


6.8.4 Flight deck oxygen mask

Ref: 4.25

Location of the masks

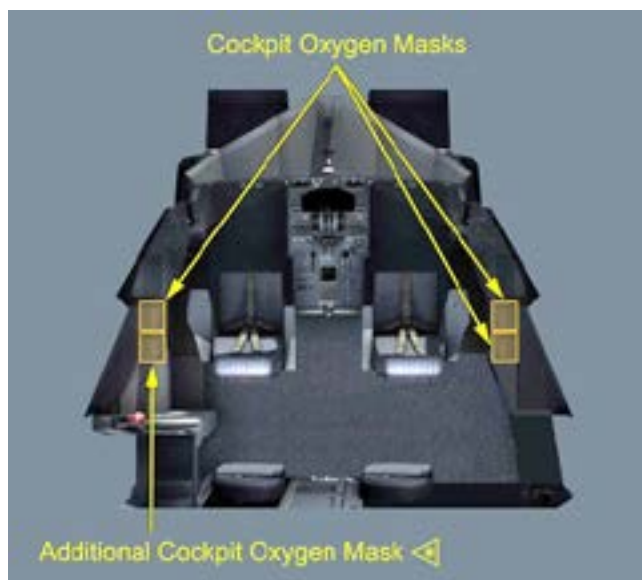

6.9 Secure Flight Deck Door

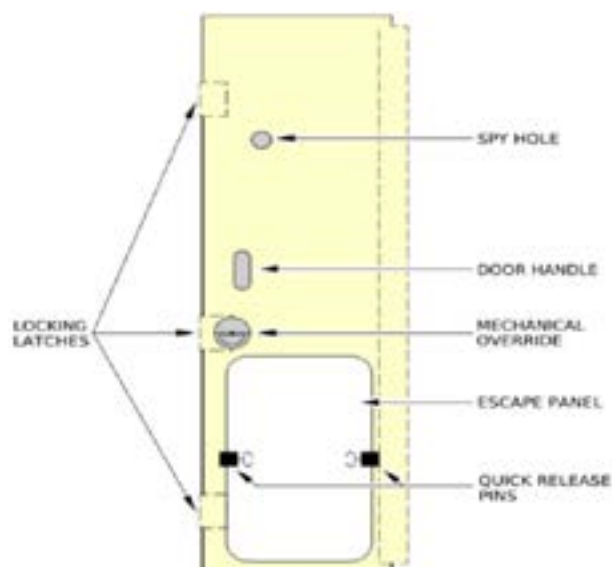

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 26

SriLankan Airlines operated aircraft are equipped with a secure flight deck door, that separates the flight deck from the cabin. It is designed to resist penetration by small arms fire, grenade shrapnel and resist forcible intrusion by unauthorised persons. It is fully compliant with rapid decompression requirements. It has a digital keypad located on the door frame. It has an electrical control system, located in the flight deck.

An emergency exit escape panel is located on the lower part of the door. The door when closed is locked at all times. In the event of a decompression or total electrical power failure, the door unlocks automatically.

As the flight deck door is heavy, care should be taken to close the door gently.


Emergency Exit escape Panel

The emergency exit escape panel could be removed only from the flight deck. The two latches on the side of the panel should be moved to the centre and the panel pushed toward the cabin.

Digital Key Pad

The keypad is located on the side of the forward attendant panel and equipped with two indicator lights (green and red) /numerical display.

The keys are used to, request entry to the flight deck and the numbers are used to unlock the door.

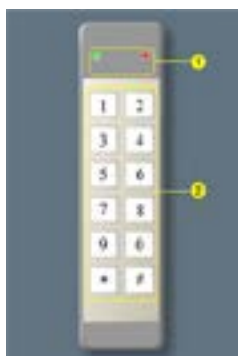

Key Pad Indicators

GREEN light – steady- Indicates the Flight Crew has unlocked the door and it remains unlocked for 5 seconds.

RED light - steady- Indicates the Flight Crew has denied access, the door remains locked and the emergency access keypad is inhibited for a pre-selected time

6.9.1 Controls on the Secure Flight Deck Door

The toggle switch located in the flight deck has three positions 'Unlock/Norm/Lock' and an indicator light comes on when the door is opened.

Opening the Secure Flight Deck Door from the cabin

The door could be opened in,

1. Normal operation
2. Secondary operation

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 27

3. Emergency operation

6.9.2 Normal Operation

Press “CALL CAPT” on the handset

Establish contact with the Flight Crew and request access to the flight deck

If entry is authorized by the Flight Crew:

1. The Flight Crew unlocks the door
2. A green light illuminates steady on the keypad, and kept unlocked for 5 seconds
3. CCM may gain entry by pushing open the door

If entry is not authorized:

1. The door will be locked and red light comes on steady on the keypad
2. The keypad is locked for a pre-selected time

6.9.3 Secondary Operation

3. Press 01 # on the key pad to request entry

If entry is authorized

1. The Flight Crew unlocks the door
2. A green light illuminates steady, and door will be unlocked for 5 seconds
3. CCM may gain entry by pushing open the door

6.9.4 Emergency Operation

PIC shall brief the Purser regarding the 2 to 7 digit secret code at the pre-flight safety briefing to be used in the event of an emergency. The code shall be referred to as **CODE RED**. CCM shall adopt the following emergency procedure in the event of the Flight Crew does not respond to a call from the Cabin.

Press “**EMER CALL**” on the handset to establish contact with the Flight Crew.

If there is no response from the Flight Crew;

1. Enter code red
2. The green light on the key pad would start flashing
3. After a pre-selected time of (15 /120 seconds)
4. The door would unlock for 5 seconds/green light would illuminate steady
5. CCM should gain entry by pushing open the door

Precautions Ref 2.10.8


6.10 Avionics Compartment

Access to the avionics compartment is not possible from the flight deck as an opening is not available.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	A320 AIRCRAFT		Chapter 06
			Page 28

6.11 Flight Deck Seats

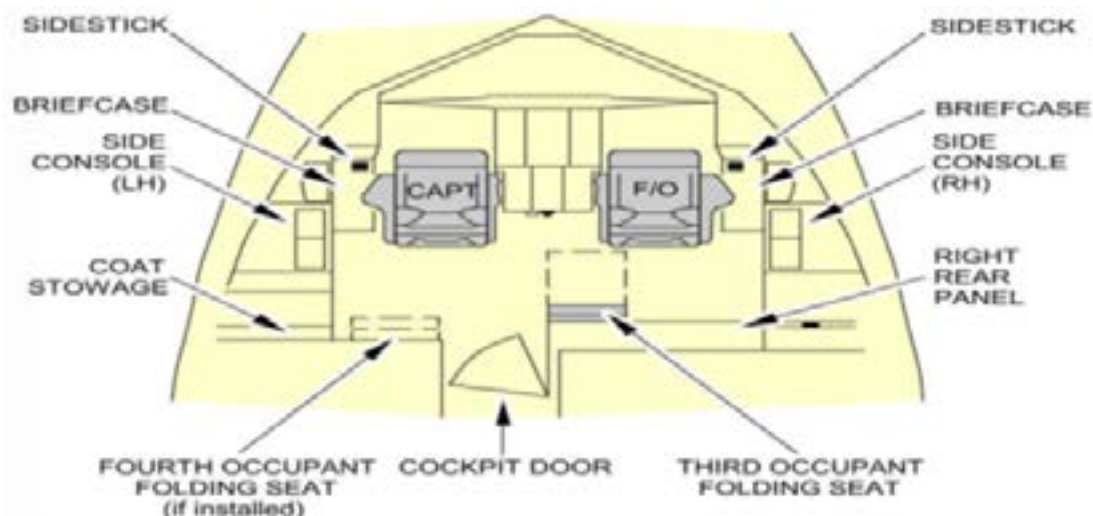

Four seats are available in the flight deck of which two are column mounted and two foldable seats. The PIC's and First Officer's seats are column mounted seats and can be operated electrically and manually.

6.11.1 Flight Deck Seats Description

1. Column mounted seats
2. Electrically operated vertical and horizontal position with a manual back up
3. A manually operated recline lever
4. Equipped with shoulder harness, lap strap, fifth seat belt with a locking lever
5. An adjustable lumbar support
6. A life vest stowed at the back of the seat

The first officer's seat is identical to the PIC's seat except that the controls are located on the left-hand side.



NOTE: THE F/O'S SEAT IS IDENTICAL TO THE CAPTAIN'S SEAT, EXCEPT THAT THE CONTROLS ARE ON THE LEFT-HAND SIDE.


NOTE: THE F/O'S SEAT IS IDENTICAL TO THE CAPTAIN'S SEAT, EXCEPT THAT THE CONTROLS ARE ON THE LEFT-HAND SIDE.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

6.11.2 First Observer Seat – Foldable Seat


7. Located behind the center console

 1. Equipped with a shoulder harness, lap strap and a fifth seat belt
 2. Automatic seat pan folding facility
 3. Releasing the lever located by the side of the seat to move it side ways
 4. A life vest is located under the seat

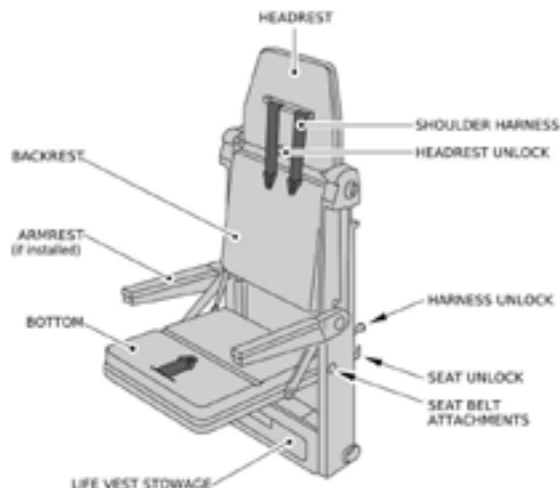

6.11.3 Second Observer Seat – Foldable Seat

1. Located behind the PIC's seat
2. Equipped with a shoulder harness, lap strap and a fifth seat belt
3. Automatic seat pan folding facility
4. Fixed seat

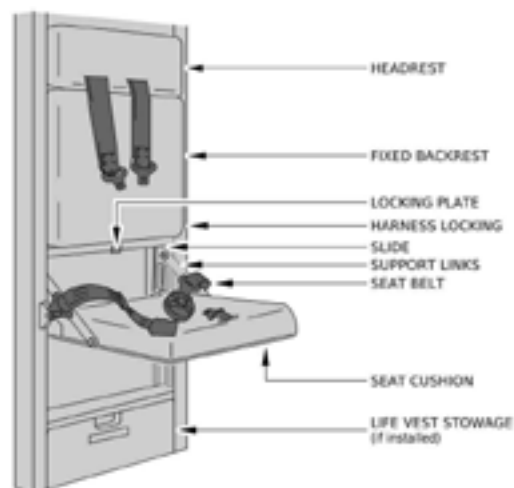

6.11.4 Authorization to occupy a flight Deck Observer Seat

The PIC may authorize a non-revenue passenger to occupy a Flight Deck observer seat with the following conditions: **Ref:2.12.4**

6.12 Cabin Crewmember Seats and Stations

STATION	CCM	STATION	CCM
L1	Purser	Swivel seat	FSS 3
R2	Galley CCM	L2	Cabin Supervisor
L1A	FSS 2	R2A	6th CCM


Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 30

Exits that needs to be manned when minimum crew operation


L1, L1A, L2, Swivel seat

**Note - Minimum Crew operation, CCM occupying the Swivel Seat is R2 Door Primary.
CCM occupying L1A is R1 Door Primary and shall be responsible for the Hatches during an emergency evacuation**

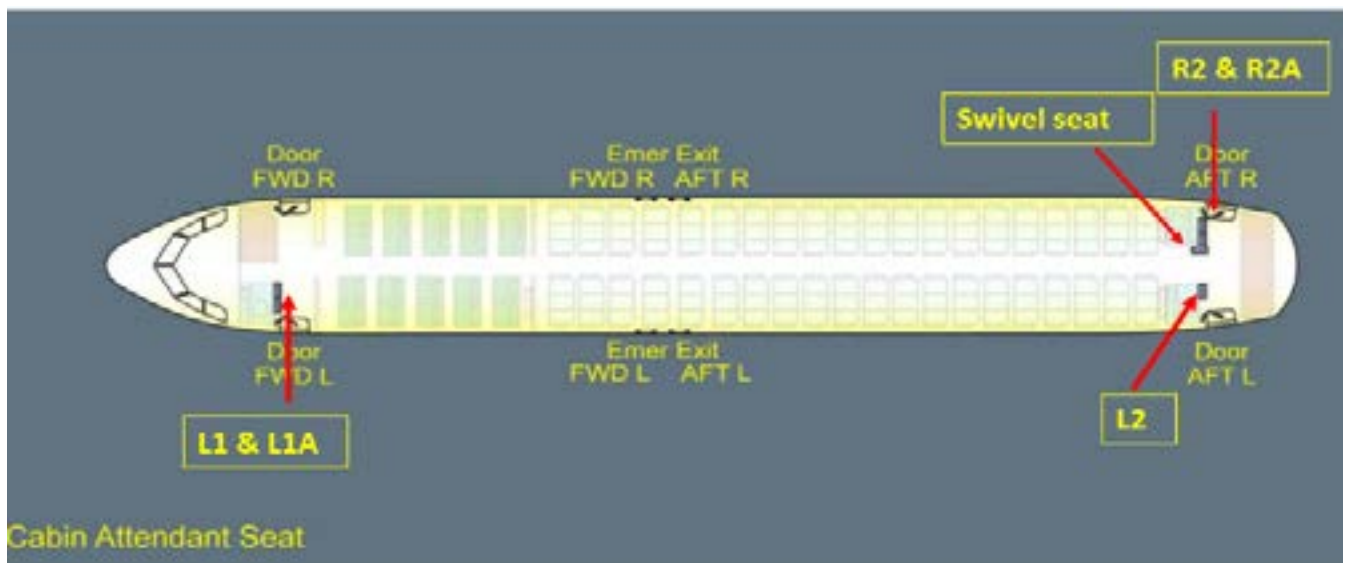

6.12.1 Forward Attendant Station


The forward attendant station accommodates seating for two attendants which are referred to as L1 & L1A

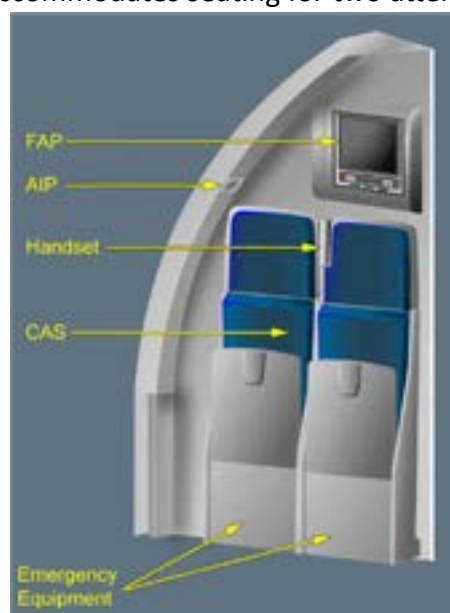

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	A320 AIRCRAFT		Chapter 06
			Page 31

6.12.2 Aft Attendant Seat

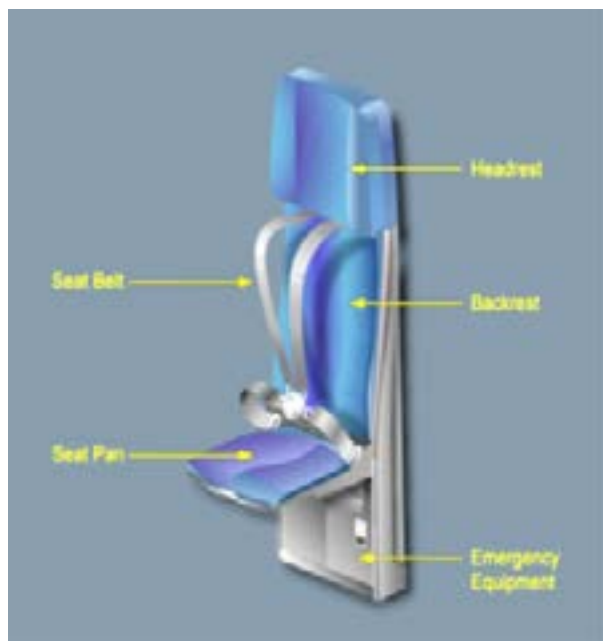


The seat belt must be stow correctly in the stowage cavity located at the rear of the seat pan, in order to avoid obstruction to the exit.

6.12.3 Swivel Seat

The attendant foldable swivel seat is installed in the aisle at the rear of the cabin. To install or to restore the seat, lift the lever to release the locking device (Type “A”) OR release the locking devices behind the seat and under the seat pan (Type “B”). In an emergency the first action of the CCM shall be to ensure the seat is in the stowed position before commencing evacuation commands.

6.12.4 Type A/TYPE B

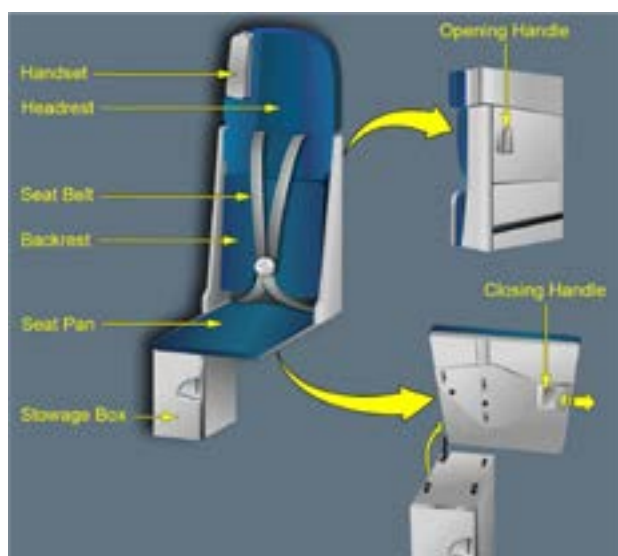

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 32

6.13 Special Passenger Seats Allocation

6.13.1 Unaccompanied Minors

Second and third rows in BC & EY cabins are allocated (Window Seats)

6.13.2 Passenger with Disability

Second and third rows in BC & EY cabins are allocated (Window Seats)

6.13.3 Emergency Exit Seat Rows

Ref 2.25.1

6.13.4 Stretcher Positions

The last three rows (A,B,C / D,E,F) are allocated for stretcher passengers, with D,E,F as the primary location.

6.14 Briefing at the Hatches (Type “III” Exits)

The Passengers occupying seats adjacent to the hatches shall be briefed as stated below.

1. ‘Greet the passenger’
2. ‘My name is’
3. ‘Are you aware that you are seated next to an emergency exit?’ (Point at hatches on both sides/ point at the door)
4. ‘Are you willing to assist in case of emergency?’
5. ‘Thank you very much’
6. The hatch/door must be opened only on command’
7. ‘The steps to open hatch/door are shown on the hatch/door (point to decals) and in the safety card. please take a few minutes to go through it before take-off’
8. ‘Do you have any questions?, thank you once again for your willingness to help us’

The Cabin Supervisor shall be responsible for conducting the briefing.

The CCM conducting the briefing shall ensure the passengers have understood the procedure. If in doubt or if the passenger is not willing to assist, the Purser shall be informed, and passenger/s relocated.


6.15 Stowage Areas

6.15.1 Over Head stowage Compartment

Overhead compartments are located along the cabin sidewalls throughout the cabin. Stowage compartments have a load limit, which is indicated by a placard on the side. The compartment is locked with a slam lock. Once unlocked it will open automatically aided by the vacuum struts which holds the door open. An overhead compartment with a defective slam lock shall not be used for storage and shall be sealed to prevent usage.


Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	A320 AIRCRAFT		Chapter 06
			Page 33

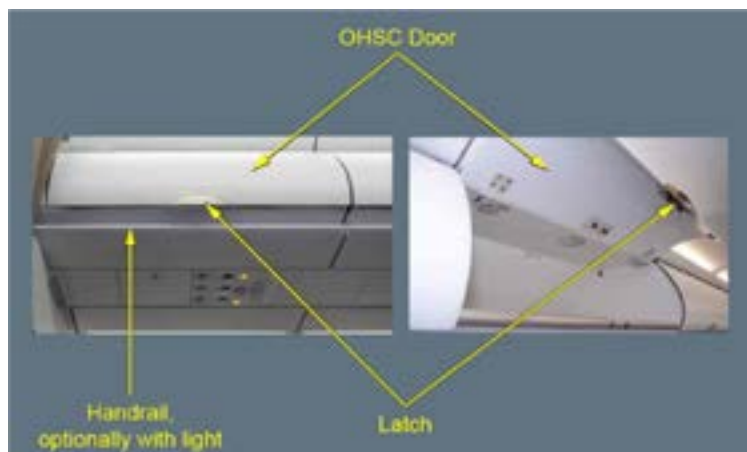


6.15.2 Dog Houses

A doghouse is a stowage compartment with a drawer, fixed on the aircraft floor and are located behind the last row of the BC and EY cabins.

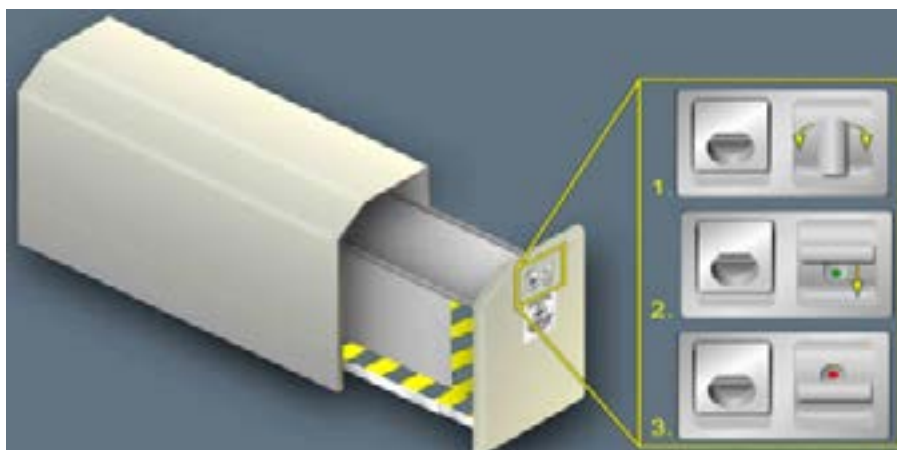

6.16 Galleys

The aircraft is equipped with two galleys. One in the forward identified as - G1 and the other at the rear identified as - G5

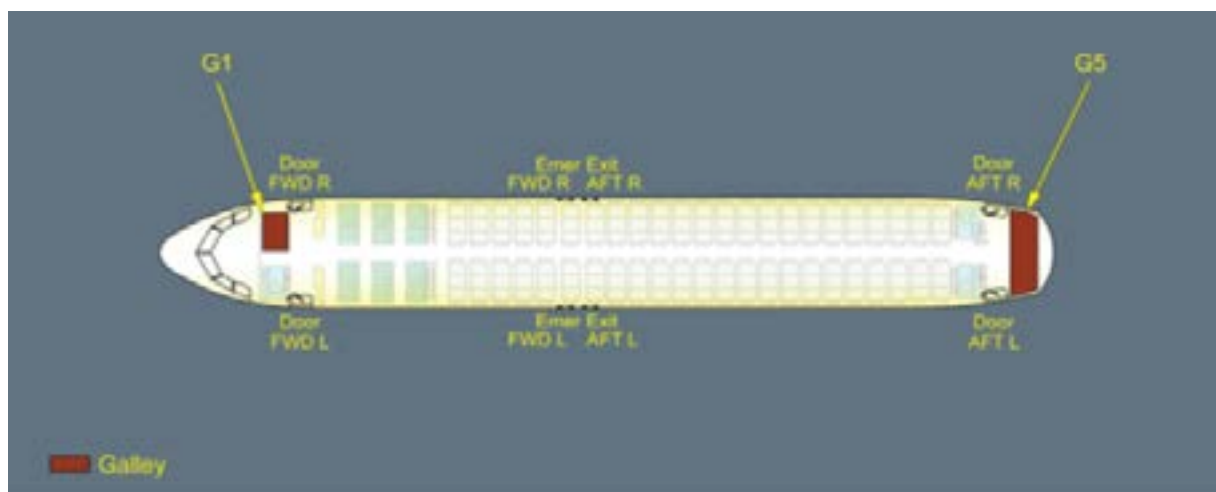

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	A320 AIRCRAFT		Chapter 06
			Page 34

6.16.1 Water Shut-Off Valve

The water shut-off valves for the forward and aft galleys are located adjacent to the sink.

6.16.2 Waste Water

The waste water from the galley sinks are drained out of the aircraft through two heated drain masts in the forward and the aft of the aircraft located on the outer fuselage.

6.17 Lavatories

A 320 aircraft consist of three lavatories, one in the forward and two at the aft. Lavatory "A" in the forward is adjacent to the flight deck door, lavatory "D" and "E" are situated at the aft on either side of the aisle, forward of the aft galley.

All three lavatories are equipped with diaper changing facilities and a handrail for PWD use and are fitted with smoke detectors.

The handicap passenger sign is marked on the lavatory door together with the diaper changing board sign.




6.17.1 Lavatory Waste Bin Fire Extinguisher

Description

The lavatory waste bin fire extinguishers contain Halon and Freon gas. It is installed in the compartment below the sink of each lavatory.

Pre Flight Check

Ensure the needle is in the **green zone**

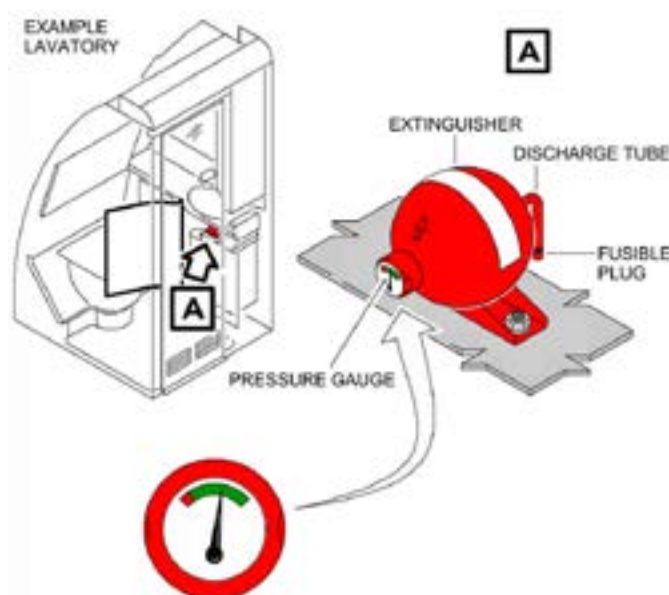

6.17.2 Smoke Detector

One smoke detector each is installed in all the lavatories. When smoke is detected, a warning signal is transmitted throughout the cabin and in the flight deck.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 35

6.17.3 Smoke /Fire Warning Signal

1. A repetitive triple low chime will sound every 30 seconds over the cabin loudspeakers
2. FAP SMOKE PAGE automatically comes on indicating the affected lavatory together with the location on aircrafts with touch screen FAPs
3. Red attention getter on all AIPs flashes, and text displaying the affected lavatory
4. The amber light will flash at the relevant ACPs
5. The amber light mounted on the exterior of the affected lavatory would flash
6. A steady red SMOKE LAV button on the Forward Attendant Panel (FAP) and the Additional Attendant Panels (AAP) will illuminate

Re-setting the Warning System

Once the smoke clears the system will reset automatically. By pressing the LAV SMOKE Indicator on the FAP or AAP's audio and the visual signs on the AIP and ACP will be cancelled, but the following indications will remain until the smoke clears

1. Amber flashing light on LAV exterior wall
2. SMOKE RESET (FAP) and SMOKE LAV (AAP) buttons illuminated red
3. On the touch screen FAP the smoke page indicator

NOTE: On - 4R ABL aircraft the smoke reset switch is located outside each individual lavatory. Press the smoke reset push button outside the affected lavatory to cancel the audio and visual warnings.

6.17.4 Lavatory Water Shut off Valves

A manual water shut off valve is installed in each lavatory to cut off the water supply.

It is located at floor level under the sink.
The waste bin compartment door shall be open to gain access.



CAUTION WHEN THE MANUAL WATER SHUT-OFF VALVE IS CLOSED THE WATER HEATER MUST BE OFF.

Vacuum Release Valve

The vacuum release valve is located under the sink to prevent air loss through the drain mast. If the float valve does not release water from the sink a manual pull ring is located on the float valve



Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 36

6.18 Communication System

6.18.1 Communication- Attendant Indicator Panel/Area Call Panel

AIP

GREEN (steady)	General communication
RED (steady)	General communication
RED (flashing)	Emergency

ACP

AMBER	Steady	Lavatory Call
AMBER	Flashing	Lavatory Smoke
BLUE	Steady	Passenger call
RED	Steady	Crew To Crew Call
RED	Flashing	Flight crew call
RED	Flashing	Emergency crew call

6.18.2 Communication System PA/Interphone

1. The PA system provides adequate sound levels to each row of passenger seats through loud-speakers.
2. In addition, one loudspeaker is installed in each lavatory and each galley.

6.18.3 Crew To Crew Call

1. Remove the handset from the cradle
2. Press interphone
3. Press the desired station
4. A Hi-low chime will be heard at the station called
5. The green attention getter on the AIP will illuminate and the calling station will appear
6. The red segment on the ACP will illuminate at the station called

6.18.4 All Attendant Call

1. Press inter phone
2. Press All
3. A Hi-low chime will transmit throughout the cabin
4. Green attention getter on all AIPs illuminate and the text "ALL ATTND" appear
5. The red light will illuminate on all ACPs

6.18.5 Flight Deck to Cabin

1. Hi/Lo chime
2. Steady Red on relevant ACP
3. Steady green on relevant AIP with text 'CALL CAPT'

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 37

6.18.6 Emergency Calls

1. The serviceability of the PA and the Inter phone system must be checked prior to every departure.
2. Emergency calls can be initiated from F /deck to cabin and cabin to F/deck

6.18.7 Emergency Calls Flight Deck to Cabin

1. Triple Hi/Lo chimes
2. All ACPs - Flashing Red
3. All AIPs – Flashing Red - text “EMER CALL” / Steady red on 4R ABL/MRE aircraft
4. CCMs shall answer and identify the station
5. Responding handsets would go into a conference call mode
6. Reset from each handset after answering

6.18.8 Emergency Calls Cabin to Flight Deck

1. Remove handset from the cradle
2. Select and press ‘EMER CALL’ on Interphone
3. Await response from the Flight Deck

CALL	CHIME	ACP	AIP	OTHER
EMER call from flight deck	3 x Hi low chimes	Flashing red on all ACPs	Steady/Flashing red and EMER CALL on all AIPs	Has to be answered from all handsets to reset
EVAC Command	Pulsating horn	No indication	Flashing red & EVAC ALERT on all	Flashing red on FAP and all AAPs. reset horn area wise
SMOKE LAV	3x Low chimes every 30 seconds	Flashing Amber on relevant ACPs	Flashing red/lavatory number and LAV SMOKE on all AIPs	Flashing amber outside the relevant lavatory and LAV SMOKE on FAP/AAPs

6.18.9 Communication - PA /Interphone System

An interphone handset with integral push button for passenger address and crew calls are provided at all crew seats. The handset is easily accessible to a CCM when strapped into a crew seat.

On 4R-ABM/N/O aircraft a push button must be used to release the hand set from the cradle.

The PA system provides adequate sound levels to each row of passenger seats through loudspeakers.

In addition, one loudspeaker is installed in each lavatory and each galley area. The PA can be operated from any handset and from the flight deck.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 38

6.18.10 PA system

Remove the handset from the cradle.
1. Press PA button.
2. Press the “Push To Talk” (PTT) button and speak
3. When the announcement is finished, replace the handset in its stowage.
Press PTT
1. The announcement can be heard in the flight deck/cabin/ galleys/lavatories.
PA + ALL
1. The announcement can be heard in all cabins/ galleys/ toilets.
PA FWD/PA + 1 and PTT
1. The announcement can be heard in the B/C cabin only.
PA AFT/PA 2 and PTT
1. The announcement can be heard in the E/Y cabin only.


6.18.11 Passenger call System

A passenger call can be activated by pressing the attendant call push button located above each seat row. A HI chime is heard with the seat row indicator flashing on ground and during flight with the seat row indicator lighting up steady. To reset press the originating passenger call push button or by pressing CALL RESET on FAP/AAP on certain aircraft.

6.19 Emergency Lighting System

6.19.1 Ceiling Lights

Emergency ceiling lights are located on the ceiling panels throughout the cabin and are designed to provide downward lighting into the aisles. The cabin crew can turn ON the emergency light regardless of the position of the cockpit control

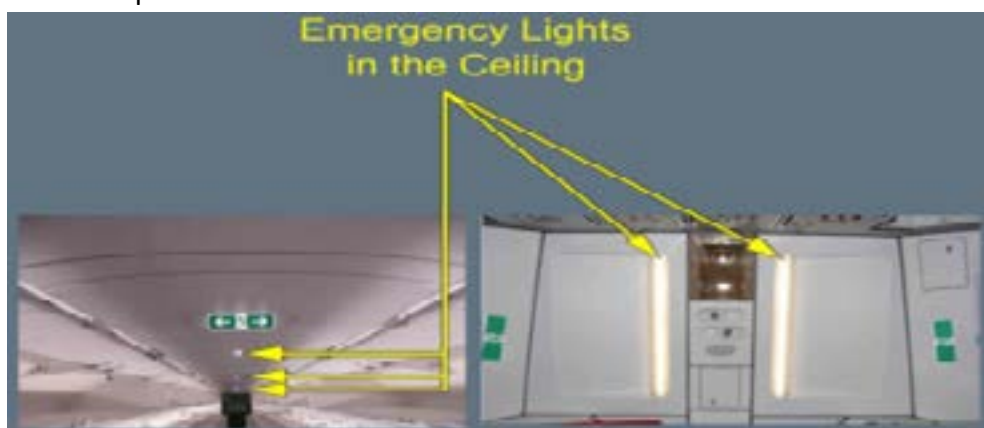


6.19.2 Escape Path Lighting System

Floor Escape Path Lighting System


The floor escape path lighting system is photo luminescent. It requires a minimum of 15 minutes exposure to any light source or ambient daylight to illuminate the system. The Exit lights adjacent to the doors are controlled by the emergency light switches in the flight deck and the FAP.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

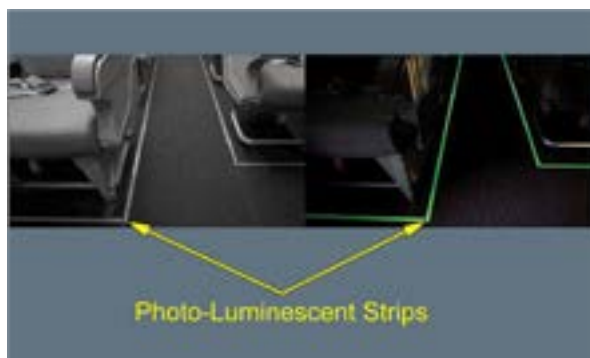

6.20 Control Panels

6.20.1 Forward Attendant Panel (FAP)

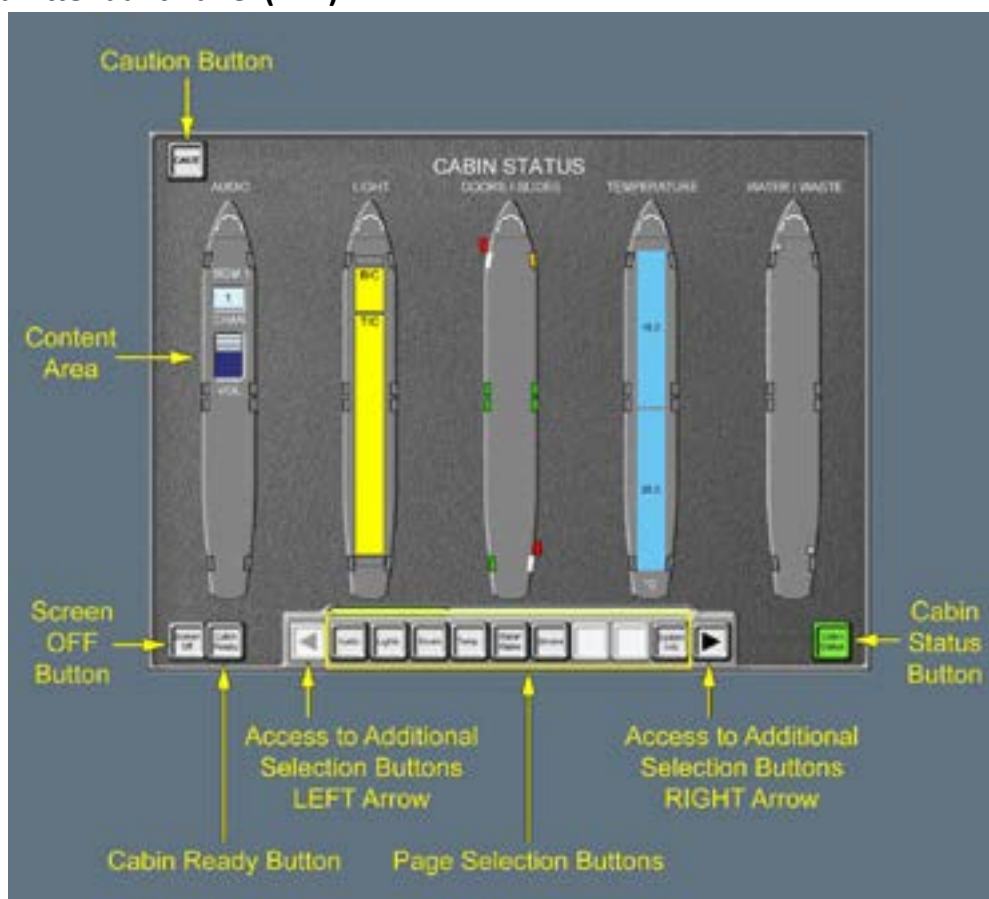

6.20.2 Additional Attendant Panel (AAP)



6.20.3 Cabin lighting

MAIN ON	pressed	Cabin/entrance area lighting come on with 100% intensity
MAIN OFF	pressed	Cabin and entrance area lighting go off.
ENTRY FWD/AFT BRT	Pressed	Corresponding lights switch off
	Pressed again	Corresponding entrance or cabin lighting zone go off.
ENTRY FWD/AFT DIM1	Pressed	Corresponding entrance or cabin lighting zone comes on with 50% intensity.
	Pressed again	Corresponding lights switch off
ENTRY FWD/AFT DIM2	Pressed	Corresponding entrance or cabin lighting zone switches on with 10% intensity. Corresponding DIM2 illumination
	pressed again	Corresponding zone switches off and corresponding DIM2 switches off.
CLG	pressed	The ceiling fluorescent lamps switch on.
	pressed again	The ceiling fluorescent lamps switch off.
WDO	pressed	The window fluorescent lamps switch on.
	Pressed again	The window fluorescent lamps switch off.

Note: The ENTRY BRT, ENTRY DIM1 and ENTRY DIM2 p/bs at the AAP only control the aft entry lighting of the aircraft

6.20.4 ABL aircraft the FAP/AAP

are manual push button type

Cabin temperature indication

Cabin temperature indication

Lighting Control module

Pre-Recorded Announcements and Boarding Music module

Miscellaneous Module



6.20.5 ABL/MRE Additional Attendant Panel



Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 41

6.21 Entertainment System (e FX System)

On selected aircraft the entertainment system has been activated. Once activated the following programs are available,

Audio Channels

Video Channels – As stipulated in the “On Board Entertainment” Guide

Games

The head sets for BC/EY are double pin head sets.

Selection of movies and other programs are by using the touch screen. Audio & Video are on demand (AVOD System).

The USB port is for charging an electronic device such as Mobile phones etc...

Prior to screening of the safety demonstration, the IVS screens in business class ,row 6 and seats located near the hatches needs to be taken out of the stowage on ABM/N/O aircraft.

6.22 Oxygen Systems

6.22.1 Fixed Oxygen

An oxygen generator is located above each row of seats. During a loss of cabin pressure the masks shall deploy automatically. If it fails to open, it can be opened by using the manual release tool. Once deployed one oxygen mask needs to be pulled down to activate the generator. Once activated oxygen will last for 15 minutes.

6.22.2 Portable Oxygen

6.22.2.1 Minimum number of Oxygen Bottles required

Ex-Base for dispatch – **05**

All Portable bottles of oxygen shall read over **1500 PSI**

Ex-En route stations minimum required for safe dispatch

03 bottles at 1000 PSI

01 bottles at 500 PSI

MEDA Bottle of oxygen is located in the **R2** overhead compartment.


Limitations – Bottles above the minimum requirement for dispatch may be used to administer first aid oxygen to a minimum of **250 PSI**

6.22.3 CCMs Designated Portable Bottles of Oxygen

L1 Door Primary	L1 overhead bin
R1 Door Primary	L1 overhead bin
L2 Door Primary	R2 overhead bin
R2 Door Primary	R2 overhead bin
F/SS3	R2 overhead bin
6th Crewmember	Shall act as a passenger

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

6.23 Demonstration Stations

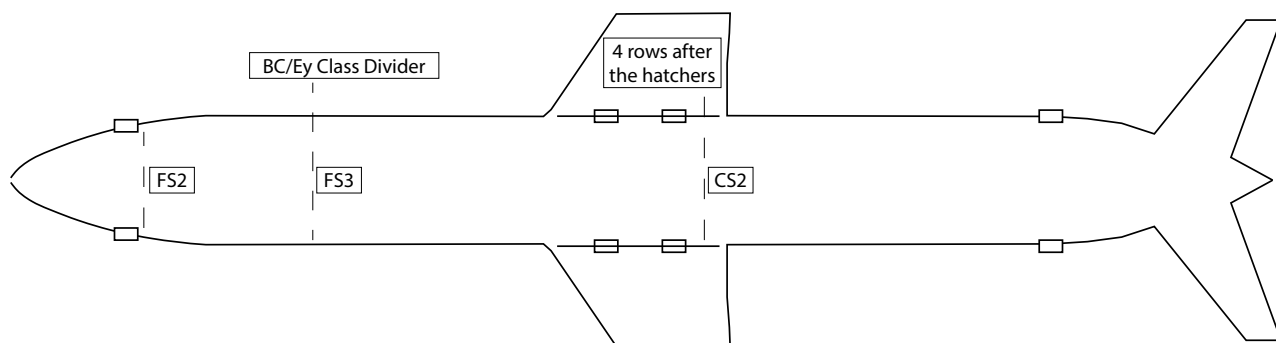


Demonstration

When pointing out the exits the following sequence shall be followed:
Aft doors/hatches/makes a right turn and show the FWD exits.

6.24 Cabin and Galley Preparation

CCM	AREA RESPONSIBLE
Purser	Overall Supervision
S2	Secure BC galley/ Check Cabin/ Flight Deck
S3	Check cabin from Row 5/6 until meeting G1
G1	Secure galley/Lock AFT lavatories/Check cabin until meeting S3
CS	Check lavatories are locked and recheck cabin, confirm with Purser

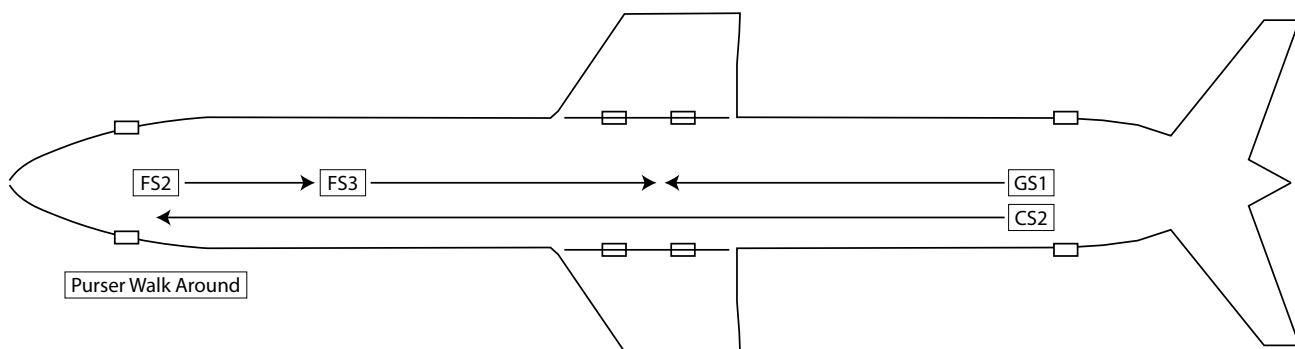

NOTE: Mops and loose equipment shall be stowed/secured for take-off and landing

6.25 Emergency Procedures

Ref Chapter 4 as appropriate

6.26 Emergency Communication

Ref Chapter 4 as appropriate

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 43

6.27 Initiating an Evacuation

FROM THE FLIGHT DECK	
Use PA and Press the EVAC CMND switch	
FROM THE CABIN	
FAP - Use PA and Press the EVAC CMND switch	
FROM THE CABIN	
AAPs – Use the PA and Press the EVAC CMND (If Available)	
CCMs shall try to establish communication with the flight deck, prior to initiating an evacuation.	
INDICATIONS	
Chime	A pulsating horn throughout the cabin
AIP	EVAC ALERT with the flashing red attention getter
ACP	No Indications

From The Flight Deck

Use PA and Press the EVAC CMND switch

From The Cabin

FAP - Use PA and Press the EVAC CMND switch

From The Cabin

AAPs – Use the PA and Press the EVAC CMND (If Available)

CCMs shall try to establish communication with the flight deck, prior to initiating an evacuation.

Indications

Chime - A pulsating horn throughout the cabin

AIP - EVAC ALERT with the flashing red attention getter

ACP - No Indications

6.28 Emergency Landing – CCM Responsibilities

6.28.1 Door Primary

AS DIRECTED BY PIC, COMMENCE EVACUATION COMMANDS
CHECK FOR OUTSIDE CONDITIONS
ENSURE THE LEVER IS IN THE ARMED POSITION
OPEN THE DOOR/CHECK FOR CORRECT SLIDE INFLATION AND ANGLE OF SLIDE
IF SLIDE DOES NOT INFLATE, PULL THE MANUAL INFLATION HANDLE
ENSURE CORRECT SLIDE INFLATION
INSTRUCT ABPs TO EVACUATE AND ASSIST AT THE BOTTOM OF THE SLIDE
ORDER EVACUATION/DIRECT PASSENGERS TO SLIDE
AFTER ALL HAVE EVACUATED CHECK YOUR AREA/ ASSIST IN OTHER AREAS
WHEN ALL ASSISTANCE RENDERED EVACUATE WITH SAFETY EQUIPMENT

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 44

ASSIST ON GROUND
BLOCKED EXIT (DOOR OPENED)
REMAIN AT THE EXIT
ATTACH RESTRAINING STRAP
SECURE SELF (HOLD ON TO AN ASSIST HANDLE)
REDIRECT PASSENGERS TO USEABLE EXITS
BLOCKED EXIT (DOOR CLOSED)
REMAIN IN THE IMMEDIATE VICINITY OF THE EXIT
SECURE SELF
REDIRECT PASSENGERS TO USEABLE EXITS

6.28.1.1 Door Assist

CHECK ON PRIMARY - IF INCAPACITATED TAKE OVER THE PRIMARY DUTIES
AS DIRECTED BY THE PIC, COMMENCE EVACUATION COMMANDS
ASSIST IN EVACUATION
DIRECT PASSENGERS TO SLIDE
ENSURE EVEN FLOW OF PASSENGERS
CHECK YOUR AREA, ASSIST IN OTHER AREAS
WHEN ALL ASSISTANCE RENDERED EVACUATE AND ASSIST ON GROUND

Use eye contact/positive commands/effective body language and if required physical force to ensure passengers safety. ABPs assistance may be used to block an exit.

6.28.2 Prepared Emergency Landing - Flight Crew Check List

	PRE-LANDING	POST-LANDING
PIC	1. EMER call to the Purser 2. Carry out NITS Briefing 3. Announcement to passengers 4. Command crew to be seated 5. Command to brace	1. Order/Activate EVAC command. 2. Assist in evacuation. 3. Evacuate (preferably R2 door)
F/O	1. Follow PIC instructions	1. Take the Emergency Medical Kit (A10)/ Assist in evacuation 2. Evacuate (Preferably L2 door)

PIC and First Officer shall make every effort to evacuate from R2&L2 respectively. If unable they would evacuate from an available exit.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 45

6.28.3 Unprepared Emergency Landing - Flight Crew Checklist

CREW	PRE-LANDING	POST-LANDING
PIC	1. Command to brace	1. Order/Activate EVAC command 2. Assist in evacuation 3. Evacuate (preferably R2 door)
F/O	1. Follow PIC instructions	1. Take the Emergency Medical Kit (A10)/ assist in evacuation 2. Evacuate (preferably L2 Door)

6.28.4 Prepared Emergency Landing CCM Checklist

CREW	PRE-LANDING	POST-LANDING
L1	1. Receive NITS briefing 2. Brief CCMs 3. Carry out preparation phases 4. Supervise preparations 5. Report to PIC 6. Secure self 7. Assume brace Position 8. Repeat brace commands	1. Activate the emergency lights 2. Order/Activate the EVAC Command 3. Silence the EVAC Horn 4. Check outside conditions 5. Open L1 door 6. Expedite evacuation 7. Check your area/assist in other areas 8. Take ELT/megaphone/torch 9. Evacuate
L1A	1. Secure B/C cabin and galley 2. Report to Purser 3. Secure self 4. Assume brace Position 5. Repeat brace command	1. Check outside conditions/open R1 door 2. Expedite evacuation 3. Check your area/assist in other areas 4. Take FA kit & Torch 5. Evacuate
L2	1. Carryout/supervise preparations 2. Report to Purser 3. Secure self 4. Assume brace Position 5. Repeat brace command	1. Silence the EVAC horn 2. Check outside conditions 3. Open L2 door 4. Expedite evacuation 5. Check your area/assist in other areas 6. Take Torch 7. Evacuate
R2	1. Secure galley (aft) 2. Report to CS 3. Secure self 4. Assume brace Position 5. Repeat brace Command	1. Check outside conditions 2. Open R2 door 3. Expedite evacuation 4. Check your area/assist in other areas 5. Take F/A kit/ Torch/ Megaphone/ ELT(if available) 6. Evacuate

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 46

Swivel Seat	1. Carry out preparations 2. Report to CS 3. Secure self 4. Assume brace Position 5. Repeat brace Command	1. Stow seat 2. Check outside conditions 3. Open hatches 4. Expedite evacuation 5. Check your area/assist in other areas 6. Take torch 7. Evacuate
R2A	1. Carry out preparations 2. Report to CS 3. Secure self 4. Assume brace Position 5. Repeat brace Command	1. Order ABP to follow directions 2. Check outside conditions 3. Open hatches on one side 4. Check correct over wing slide inflation 5. Order evacuation 6. Direct passengers to exit 7. Check your area/assist in other areas 8. Take torch 9. Evacuate from suitable exit

6.28.4.1 Commands

PREPARED	UNPREPARED
<i>“OPEN SEAT BELTS/EXITS OVER HERE COME THIS WAY, YOU TWO STAY AT THE BOTTOM AND HELP”</i> (Pre-selected ABPs) <i>“MOVE FASTER JUMP AND SLIDE”</i>	Preparation Commands <i>“REMOVE HIGH HEELED SHOES LEAVE EVERYTHING BEHIND”</i> <i>“OPEN SEAT BELTS/EXITS OVER HERE COME THIS WAY, STAY AT THE BOTTOM AND HELP”</i> (Randomly selected of ABPs) <i>“MOVE FASTER JUMP AND SLIDE”</i>

6.28.5 Unprepared Emergency landing CCM Checklist

Ref:4.10.7.5

6.28.5.1 Inflated and Deflated Slide

Instruct four ABPs who have evacuated to hold the no fail handles and direct one passenger at a time to evacuate. Passengers should be directed to useable exits to expedite the evacuation.

6.28.5.2 Commands to ABPs

<i>“STAY AT THE BOTTOM AND HELP”</i>

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 47

6.28.6 Emergency Ditching CCM Responsibilities

6.28.6.1 Door Primary

COMMENCE DITCHING COMMANDS, DON PERSONAL LIFE VEST
CHECK OUTSIDE CONDITIONS
ENSURE THE LEVER IN ARMED POSITION
OPEN THE DOOR AND CHECK FOR CORRECT RAFT INFLATION
IF RAFT DOES NOT INFLATE PULL THE MANUAL INFLATION HANDLE
ENSURE CORRECT RAFT INFLATION
ATTACH SURVIVAL KIT
INSTRUCT 2 ABPs TO INFLATE BOTH CHAMBERS ,BOARD RAFT FIRST AND ASSIST PASSENGERS. (1 AT THE DOORSILL, 1 AT THE FAR END)
ORDER EVACUATION
COMMAND PASSENGERS TO INFLATE BOTH CHAMBERS AND STEP IN TO THE RAFT
DIRECT PASSENGERS TO RAFT
ONCE ALL HAVE EVACUATED CHECK YOUR AREA AND ASSIST IN OTHER AREAS
AFTER ALL ASSISTANCE RENDERED BOARD RAFT WITH SAFETY EQUIPMENT
DETACH SLIDE RAFT FROM THE DOOR SILL
DISCONNECT SLIDE RAFT FROM THE AIRCRAFT
MOVE AWAY
COMMAND/ASSIST IN THE RAFT
Blocked Exit (Door Opened)
REMAIN AT THE EXIT
ATTACH RESTRAINING STRAP
SECURE SELF (HOLD ON TO AN ASSIST HANDLE)
REDIRECT PASSENGERS TO USEABLE EXITS
Blocked Exit (Door Closed)
REMAIN IN THE IMMEDIATE VICINITY OF THE EXIT
SECURE SELF
REDIRECT PASSENGERS TO USEABLE EXITS

Note: Consider the raft capacities when directing passenger in to rafts.

6.28.6.2 Door Assist

CHECK ON PRIMARY - IF INCAPACITATED TAKE OVER THE PRIMARY DUTIES
IF DOOR PRIMARY IS IN COMMAND, ASSIST TO LAUNCH RAFT
DIRECT PASSENGERS TO THE RAFT
ENSURE PASSENGERS HAVE INFLATED THEIR LIFE VEST BEFORE STEPPING OUT OF THE AIRCRAFT

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 48

CHECK YOUR AREA, ASSIST IN OTHER AREAS

WHEN ALL ASSISTANCE RENDERED INFLATE LIFE VEST BOARD RAFT

Use eye contact/positive commands/effective body language and if required physical force to ensure passengers safety. ABPs assistance may be used to block an exit.

6.28.7 Prepared Ditching Flight Crew Check List

	PRE-DITCHING	POST-DITCHING
PIC	1. EMER call to the Purser 2. Carry out NITS Briefing 3. Don personal life vest 4. Announcement to passengers 5. Command crew to be seated 6. Command to brace	1. Order/Activate EVAC CMD 2. Assist in evacuation 3. Inflate life vest 4. Board available raft
F/O	1. Follow PIC, instructions 2. Don personal life vest	1. Take the Emergency Medical Kit (A10) 2. Assist in evacuation 3. Inflate life vest 4. Board available raft

PIC and First Officer shall make every effort to evacuate from R2/L2 respectively. If unable they would evacuate from wherever possible.

6.28.8 Unprepared Ditching Flight Crew Check List

CREW	PRE-DITCHING	POST-DITCHING
PIC	1. Command to brace	1. Order/Activate EVAC command 2. Don life vest 3. Assist in evacuation 4. Inflate life vest 5. Board available raft
F/O	1. Follows PIC instructions	1. Don life vest 1. Take the Emergency Medical Kit (A10) 2. Assist in evacuation 3. Inflate life vest 4. Board available raft

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 49

6.28.9 Prepared Ditching CCM Checklist

CREW	PRE-LANDING	POST-LANDING
L1	1. Receive NITS Briefing 2. Brief CCMs 3. Initiate emergency announcement 4. Supervise cabin/passenger preparation 5. Don personal life vest 6. Report to PIC - preparation completed 7. Assume brace Position 8. Repeat brace command	1. Activate emergency lights 2. Order/Activate EVAC Command (optional) 3. Silence EVAC horn 4. Check out side conditions 5. Open L1 door and deploy slide/raft 6. Attach survival pack 7. Ensure passengers inflate their life vests prior to leaving the aircraft 8. Expedite evacuation 9. Check your area/assist in other area's 10. Take Megaphone/ELT & Torch 11. Inflate life vest 12. board L1 raft 13. Detach and disconnect slide/raft 14. Command L1 Raft
L1A	1. Secure galley (FWD) 2. Don personal life vest 3. Report to Purser 4. Secure self 5. Assume brace Position 6. Repeat brace command	1. Check out side conditions 2. Open R1 door & deploy slide/raft 3. Attach survival pack 4. Ensure passengers inflate their life vest prior to leaving the aircraft 5. Expedite evacuation 6. Check your area/assist in other area's 7. Take Torch & F/A kit Inflate life vest 8. Board R1 raft 9. Detach and Disconnect slide/raft 10. Command R1 raft
L2	1. Carry out/supervise preparations 2. Don personal life vest 3. Report to Purser 4. Secure self 5. Assume brace Position 6. Repeat brace command	1. Silence the EVAC horn 2. Check out side conditions 3. Open L2 door and Deploy slide/raft 4. Attach survival pack 5. Ensure passengers inflate their life vest prior to leaving the aircraft 6. Expedite evacuation 7. Check your area/assist in other areas 8. Take Torch 9. Inflate life vest Leave 10. board L2 raft 11. Detach and disconnect slide/raft 12. Command L2 raft

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 50

R2	1. Secure galley (AFT) 2. Don personal life vest 3. Report to CS 4. Secure self 5. Assume brace Position 6. Repeat brace command	1. Check out side conditions 2. Open R2 door and Deploy slide/raft 3. Attach survival pack 4. Ensure passengers inflate their life vest prior to leaving the aircraft 5. Expedite evacuation 6. Check your area/assist in other areas 7. Take F/A Kit /Torch, Megaphone/ELT 8. Inflate life vest 9. board R2 Raft 10. Detach and disconnect slide/raft 11. Command R2 raft
Swivel Seat	1. Secure galley (AFT) 2. Don personal life vest 3. Report to CS 4. Secure self 5. Assume brace Position 6. Repeat brace command	1. Stow swivel seat 2. Open the hatches if required 3. Order ABPs to check out side conditions and open the other hatches 4. Delegate ABPs to attach the ditching lines 5. Order evacuation 6. Check your area/assist in other areas 7. Take torch Inflate life vest. 8. Board available raft
R2A	1. Carry out preparations 2. Don personal life vest 3. Report to CS 4. Secure self 5. Assume brace Position 6. Repeat brace command	1. Open the hatches if required 2. Order ABPs to check out side conditions and open the other hatches 3. Delegate ABPs to attach the ditching lines 4. Order evacuation 5. Check your area/assist in other areas 6. Take torch 7. Inflate life vest Board available raft

6.29 Blocked Exit

Remain at the door and redirect passengers to usable exits. Inform in brief the reason the exit is blocked. Assess usability of other exits prior to re-directing passengers.

6.29.1 Blocked Exit Commands

***“EXIT BLOCKED/FIRE OUTSIDE
GO BACK/GO FORWARD/CROSS OVER THE AISLE/CROSS THROUGH THE SEATS ETC”.***

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 51

6.29.2 Ditching Commands

PREPARED	UNPREPARED
<i>“OPEN SEAT BELTS/EXITS OVER HERE COME THIS WAY, INFLATE LIFE VESTS “</i> <i>(At the doorsill)</i> <i>“YOU TWO BOARD RAFT AND ASSIST OTHERS”</i> <i>(Pre-selected ABPs)</i> <i>“MOVE FASTER STEP INTO THE RAFT/CRAWL TO THE FAR END”</i>	Preparation Commands <i>“LIFE VEST UNDER YOUR SEAT TAKE IT OUT, PUT IT ON REMOVE HIGH HEELED SHOES LEAVE EVERYTHING BEHIND”</i>
	<i>“OPEN SEAT BELTS/EXITS OVER HERE COME THIS WAY INFLATE LIFE VESTS”</i> <i>(At the doorsill)</i> <i>“BOARD RAFT AND ASSIST OTHERS”</i> <i>(Randomly selected ABPs)</i> <i>“MOVE FASTER STEP INTO THE RAFT/CRAWL TO THE FAR END”</i>
Raft Commands <i>“REMAIN SEATED IN THE RAFT CRAWL TO THE FAR END”</i>	Raft Commands <i>“REMAIN SEATED IN THE RAFT CRAWL TO THE FAR END”</i>

6.30 Survival Kit

The survival equipment is stowed in a bright colored zipper type canvas container.

It should be attached once the raft is fully inflated. The snap hook on the survival pack should be connected to the attachment point at the door sill end of the raft. Crew shall retrieve the survival pack from the water when the raft is disconnected. The contents of the kit are as follows;

Mirror / Heliograph	Bailing bucket	First aid kit
Whistle	Sponge	Desalting kits
Signals/Mini flares	Hand pump	Food rations
Sea dye markers	Repair plugs	Plastic water bags
Flashlight- water activated	Canopy and struts X 3	Survival Manual

Note : CCMs to check if the snap hook is attached to the survival pack when carryig out pre depature duties

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 52

6.30.1 Unprepared Ditching CCM Checklist

Ref 4.11.7.5

6.30.2 Equipment to be carried by each CCM

NO	EQUIPMENT	
1	Torch	All crew
2	Megaphone	L1 and R2
3	First Aid Kit	R1 and R2
4	Emergency Medical Kit (A10)	F/O
5	ELT	L1 & R2 (When available)
6	Survival Pack	L1, R1, L2 and R2

Unprepared Emergency Landing/Ditching

Responsibilities for equipment remain the same for each CCM station

6.30.3 Emergency Landing CCM Responsibilities at the Hatches

AS DIRECTED BY PIC, COMMENCE EVACUATION COMMANDS
CHECK FOR OUTSIDE CONDITIONS AND OPEN HATCHES
INSTRUCT ABPs TO CHECK OUTSIDE CONDITIONS AND FOLLOW DIRECTIONS TO OPEN THE OTHER HATCHES
ENSURE ALL HATCHES ARE OPENED
ENSURE CORRECT OVER WING SLIDES INFLATION
IF SLIDE DOES NOT INFLATE, PULL MANUAL INFLATION HANDLE
INSTRUCT TWO ABPs TO EVACUATE AND ASSIST PASSENGERS AT THE BOTTOM OF THE SLIDE
ORDER EVACUATION
DIRECT PASSENGERS TO HATCHES
AFTER ALL HAVE EVACUATED CHECK YOUR AREA, ASSIST IN OTHER AREAS
WHEN ALL ASSISTANCE RENDERED EVACUATE
MOVE PASSENGERS AWAY FROM THE AIRCRAFT AND ASSIST ON GROUND

6.30.4 Evacuation Commands at the Hatches (On land)

“OPEN SEAT BELTS COME THIS WAY EXIT OVER HERE LEG BODY LEG WALK, JUMP AND SLIDE MOVE FASTER”

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 53

6.30.5 Emergency Ditching CCM Responsibilities at the Hatches

COMMENCE DITCHING COMMANDS
OBTAIN AND DON LIFE VEST
PREVENT OPENING HATCHES
OPEN THE HATCHES AS A LAST RESORT
INSTRUCT ABPs TO CHECK OUT SIDE CONDITIONS AND FOLLOW DIRECTIONS TO OPEN THE OTHER HATCHES
ENSURE ALL HATCHES ARE OPENED
DELEGATE ABPs TO ATTACH THE DITCHING LINES
ORDER EVACUATION
CHECK YOUR AREA
ASSIST IN OTHER AREAS
INFLATE LIFE VEST
EVACUATE FROM AN APPROPRIATE EXIT

6.30.6 Ditching Commands at the Hatches (On water)

<i>“OPEN SEAT BELT, COME THIS WAY EXIT OVER HERE LEG BODY LEG INFLATE LIFE JACKET HOLD ONTO THE LIFE LINE STEP ONTO THE WING”</i>
--

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 54

6.31 Quick Reference

CALL	CHIME	ACP	AIP
Passenger call	High	Steady BLUE	Steady GREEN
Toilet call	High	Steady AMBER	Steady GREEN
Flight Deck Crew call	High/ Low	Steady/Flashing RED	Steady GREEN
Crew to crew	High / Low	Steady Red	Steady GREEN
EMER CALL from the F/ deck	Three HI-LO	Flashing RED	Flashing/ Steady RED
Lavatory smoke	3 x low chimes Pulsating every 30 sec.	Flashing AMBER	Flashing RED
Evacuation Command	Pulsating horn	No indication	Flashing RED
Emergency lights	12 Minutes		
Fixed Oxygen	15 Minutes		

6.31.1 12J/138Y Configuration

SEATING CATEGORIES	BUSINESS CLASS	ECONOMY CLASS	REMARKS
BASSINET	1AC, 1DF	5ABC,5DEF	
EMERGENCY EXITS	N/A	Row 11 & 12	Limited leg room
MAXIMUM LEG ROOM	1ACDF	Row 5	
STRETCHER POSITIONS	N/A	25/26/27DEF	Ensure a curtain is available
DISABLED PASSENGERS	2AF	6/7AF	
UNACCOMPANIED MINORS	N/A	9A, 10A	
PRISONERS	N/A	REAR END	Window/Centre Seat
DEPORTEE/INAD PAX	N/A	28ABEF	Subject to change if STCR occupies these seats
CABIN CREW REST	N/A	N/A	

6.31.2 16J/120EY Configuration

SEATING CATEGORIES	BUSINESS CLASS	ECONOMY CLASS	REMARKS,
NO SMOKING	ALL	ALL	
SMOKING	N/A	N/A	
BASSINET	1AC,1DF	6 A,B,C 6 D,E,F	

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 55

EMERGENCY EXITS	N/A	Row 8 & 9	Seats Cannot be re-clined
MAXIMUM LEG ROOM	1ACDF	Row 6, Row 8 & 9	
STRETCHER POSITIONS	N/A	26/27/28D,E,F	Ensure curtain is available
DISABLED PASSENGERS	2AF	6/7A,F	
UNACCOMPANIED MINORS	N/A	6/7 A,F	
PRISONERS	N/A	REAR END	Window/Centre Seat
DEPORTEE/INAD PAX	N/A	28ABEF	Subject to change if STCR occupies these seats
CABIN CREW REST	N/A	N/A	

6.32 Cabin Safety Minimum Equipment List for A320 fleet

EQUIPMENT	NUMBER INSTALLED	MINIMUM FOR DISPATCH/ EX OTHER STATIONS
Oxygen	05	04
Extinguishers	05	03
PBE	06	04
ELT	01/02	01
Megaphones	02	02
First Aid Kit	02	02
Emergency Medical Kit (A10)	01	01
Axe	01	01
Protective Gloves	01	01
Infant Life Vest	14	01 for every infant
Kangaroo Belts	20	01 for every infant
Spare Seat Belt	01	01
Survival kits	04	04
Adult/Child L/V	05	05
MRT	06	04
Ditching Line	04	04
Torches	06	04
ERK	01	01

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL


	SAFETY AND EMERGENCY PROCEDURES MANUAL						MN/CST/04
							ED 04/Jun 23
	A320 AIRCRAFT						Chapter 06
							Page 56

6.33 ABL Safety Equipment Location Chart

Protective Breathing Equipment (06)			Ditching Lines (04)			Megaphones (02)		
R1	Narrow Over Head Compartment	02	Narrow Compartment Left Side		02	L1	Over Head Compartment	01
L2	Above the Crew Seat	01	Narrow Compartment Right Side		02	L2	Over Head Compartment	01
L2	Adjacent to the Crew Seat	01						
R2	Above the Crew Seat	02	Emergency Locator Transmitters (01)			Survival Kits (04)		
			L1	Over Head Compartment	01	R1	Over Head Compartment	02
Portable Oxygen (05)						L2	Over Head Compartment	02
L1	Over Head Compartment	02						
R2	Over Head Compartment	03	Infant Life Vests (14)			AMBU Bag (01)		
			L1	Over Head Compartment	07	L2	Over Head Compartment	01
Extinguishers (05)			R2	Over Head Compartment	07	NO EXIT Cards 04		
L1	Compartment Under the Crew Seat	01				L1	Over Head Compartment	04
L1A	Compartment Under the Crew Seat	01	Spare Adult/Child Life Vest (05)			DEMO Kits (03)		
L2	Compartment Under the Crew Seat	01	R2	Over Head Compartment	05	R1	Over Head Compartment	01
R2	Compartment Under the Crew Seat	01				L2	Over Head Compartment	02
R2	Adjacent to the Crew Seat	01	Adult/Child Life Vest (Cabin)			Heat Resistant Gloves (01)		
			BC	Under Each Seat	01	R2	Compartment Under the Crew Seat	01
Emergency Flashlights (06)			EY	Under Each Seat	01	Flight Deck Equipment		
Compartment Under the Crew Seat		01 each				Extinguisher	Behind the F/O's Seat	01
			Kangaroo Belts (20)			PBE	Behind the F/O's Seat	01
Manual Release Tool (06)			L1	Over Head Compartment	10	Axe	Behind the S/O's Seat	01
Compartment Under the Crew Seat		01 each	R2	Over Head Compartment	10	Heat Resistant Gloves	Behind the S/O's Seat	01
						Emergency Medical Kit (A10)	Behind the F/O's Seat	01
Crew Life Vests (06)			Spare Seat Belt			Res: Ties	Coat Closet	03
Compartment Under the Crew Seat		01 each	R2	Over Head Compartment	01	Torch	Next C/Seat	02
First aid Kits (02)						Crew Life Vests	F/D Each seat	04
R1	Over Head Compartment	01	Emergency Response Kit (01)			Escape Rope	Above PIC/FO Seats	02
R2	Over Head Compartment	01	L2	Over Head Compartment	01	Quick Donning Masks	Adjacent to seats	04

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

6.33.1 ABL Safety Equipment Location Diagram

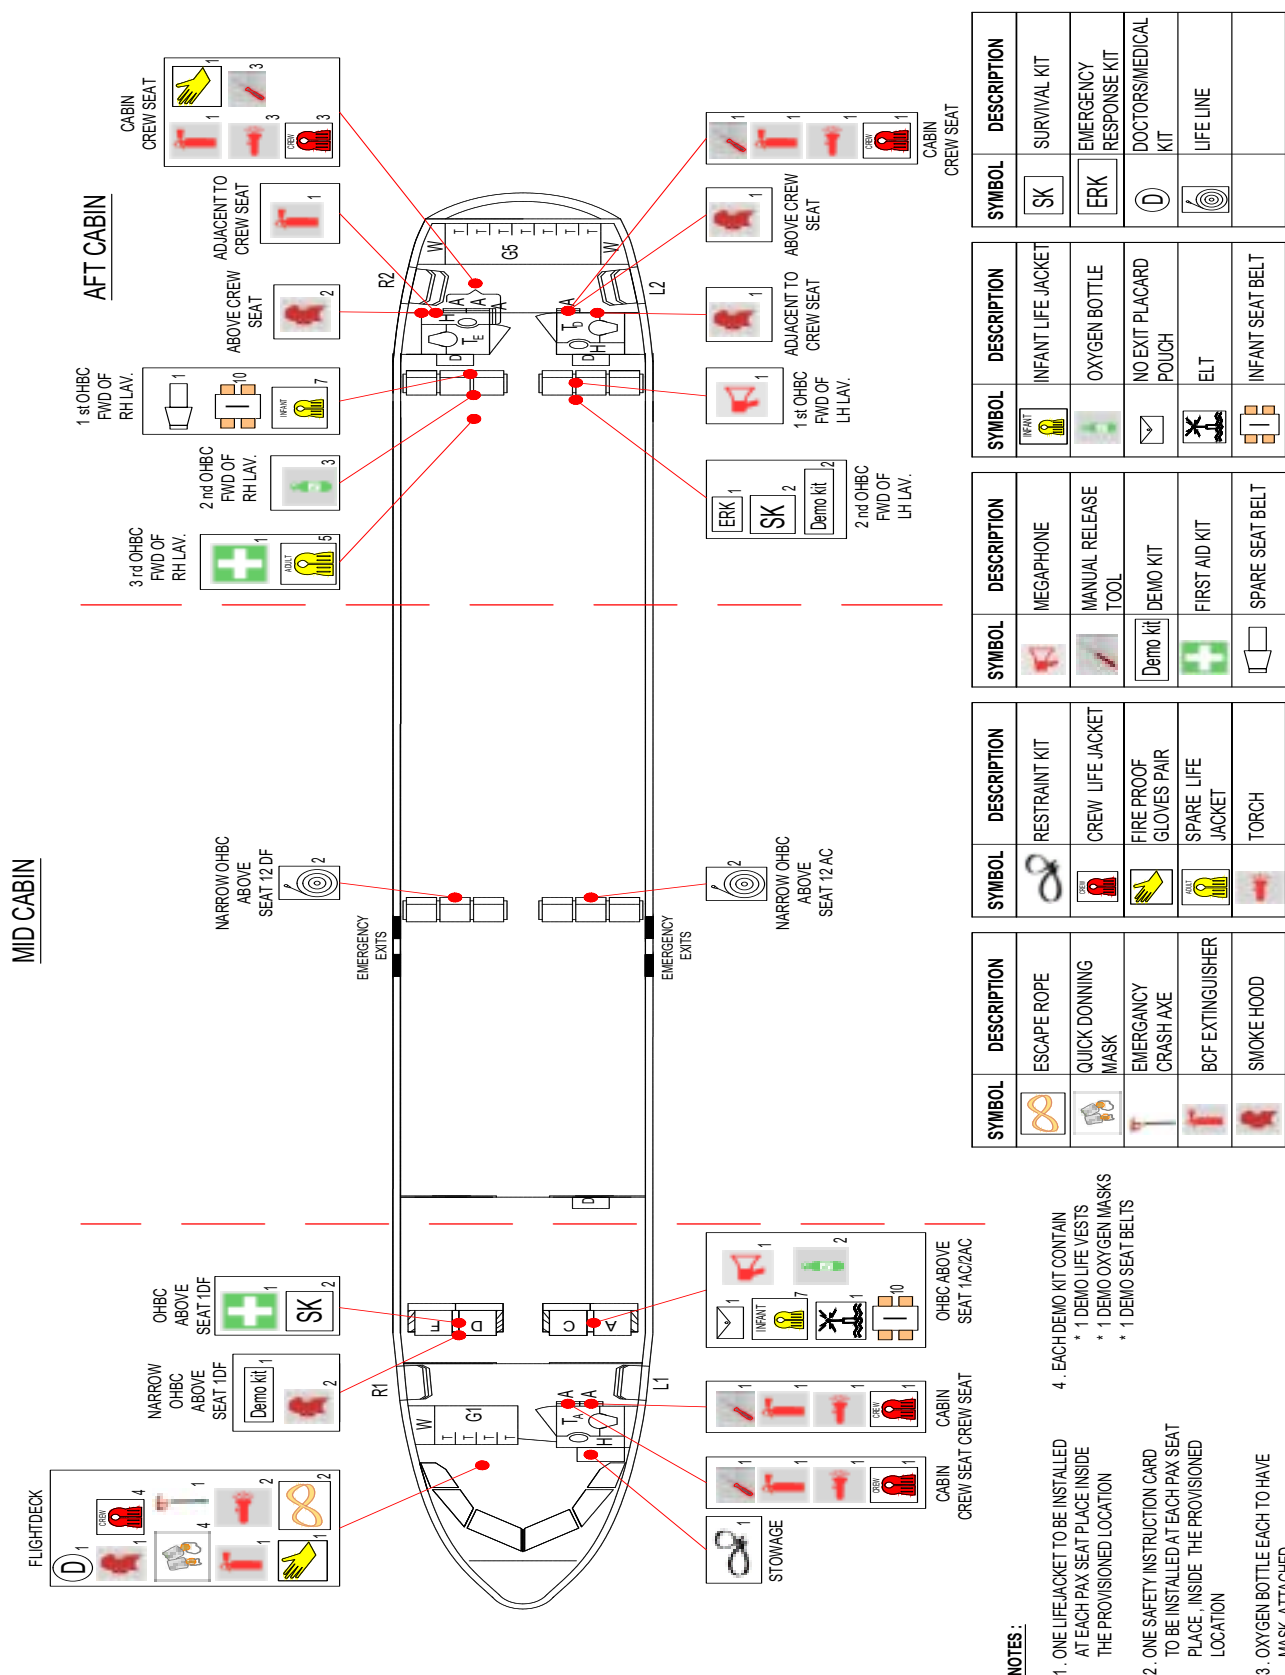

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL


	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	A320 AIRCRAFT		Chapter 06
			Page 58

6.34 ABM/N/O Safety Equipment Location Chart

Protective Breathing Equipment (06)			Ditching Lines (04)			Megaphones (02)		
R1	Narrow Over Head Compartment	02	Narrow Compartment Left Side		02	L1	Over Head Compartment	01
L2	Above the Crew Seat	01	Narrow Compartment Right Side		02	L2	Over Head Compartment	01
L2	Adjacent to the Crew Seat	01						
R2	Above the Crew Seat	02	Emergency Locator Transmitters (02)			Survival Kits (04)		
			L1	Over Head Compartment	01			
Portable Oxygen (05)			L2	Over Head Compartment	01	R1	Over Head Compartment	02
L1	Over Head Compartment (1AC/2AC)	02				L2	Over Head Compartment 02	02
R2	2nd Over Head Compartment	03	Infant Life Vests (14)			AMBU BAG (01)		
			L1	Over Head Compartment	07	L2	Over Head Compartment	01
Extinguishers (05)			R2	Over Head Compartment	07	NO EXIT CARDS 04		
L1	Compartment Under the Crew Seat	02				L1	Over Head Compartment	04
L2	Compartment Under the Crew Seat	01	Spare Adult/Child Life Vest (05)			DEMO Kits (03)		
R2	Compartment Under the Crew Seat	02	R2	Over Head Compartment	05	R1	Over Head Compartment	01
						L2	Over Head Compartment	02
			Adult/Child Life Vest (Cabin)			Heat Resistant Gloves (01)		
			BC	Under Each Seat	01	R2	Compartment Under the Crew Seat	01
Emergency Flashlights (06)			EY	Under Each Seat	01	Flight Deck Equipment		
Compartment Under the Crew Seat		01 each				Extinguisher	Behind the F/O's Seat	01
			Kangaroo Belts (20)			PBE	Behind the F/O's Seat	01
Manual Release Tool (06)			L1	Over Head Compartment	10	Axe	Behind the S/O's Seat	01
Compartment Under the Crew Seat		01 each	R2	Over Head Compartment	10	Heat Res Gloves	Behind the S/O's Seat	01
						Emergency Medical Kit (A10)	Behind the F/O's Seat	01
Crew Life Vests (06)			Spare Seat Belt			Res: Ties	Coat Closet	01
Compartment Under the Crew Seat		01 each	R2	Over Head Compartment	01	Torch	Next C/Seat	02
First aid Kits (02)						Crew Life Vests	Flight Deck	04
R1	Over Head Compartment	01	Emergency Response Kit (01)			Escape Rope	Above PIC/FO Seats	02
R2	3rd Over Head Compartment	01	L2	Over Head Compartment	01	Quick Donning Masks	Adjacent to seats	04

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

6.34.1 ABM/N/O Safety Equipment Location Diagram

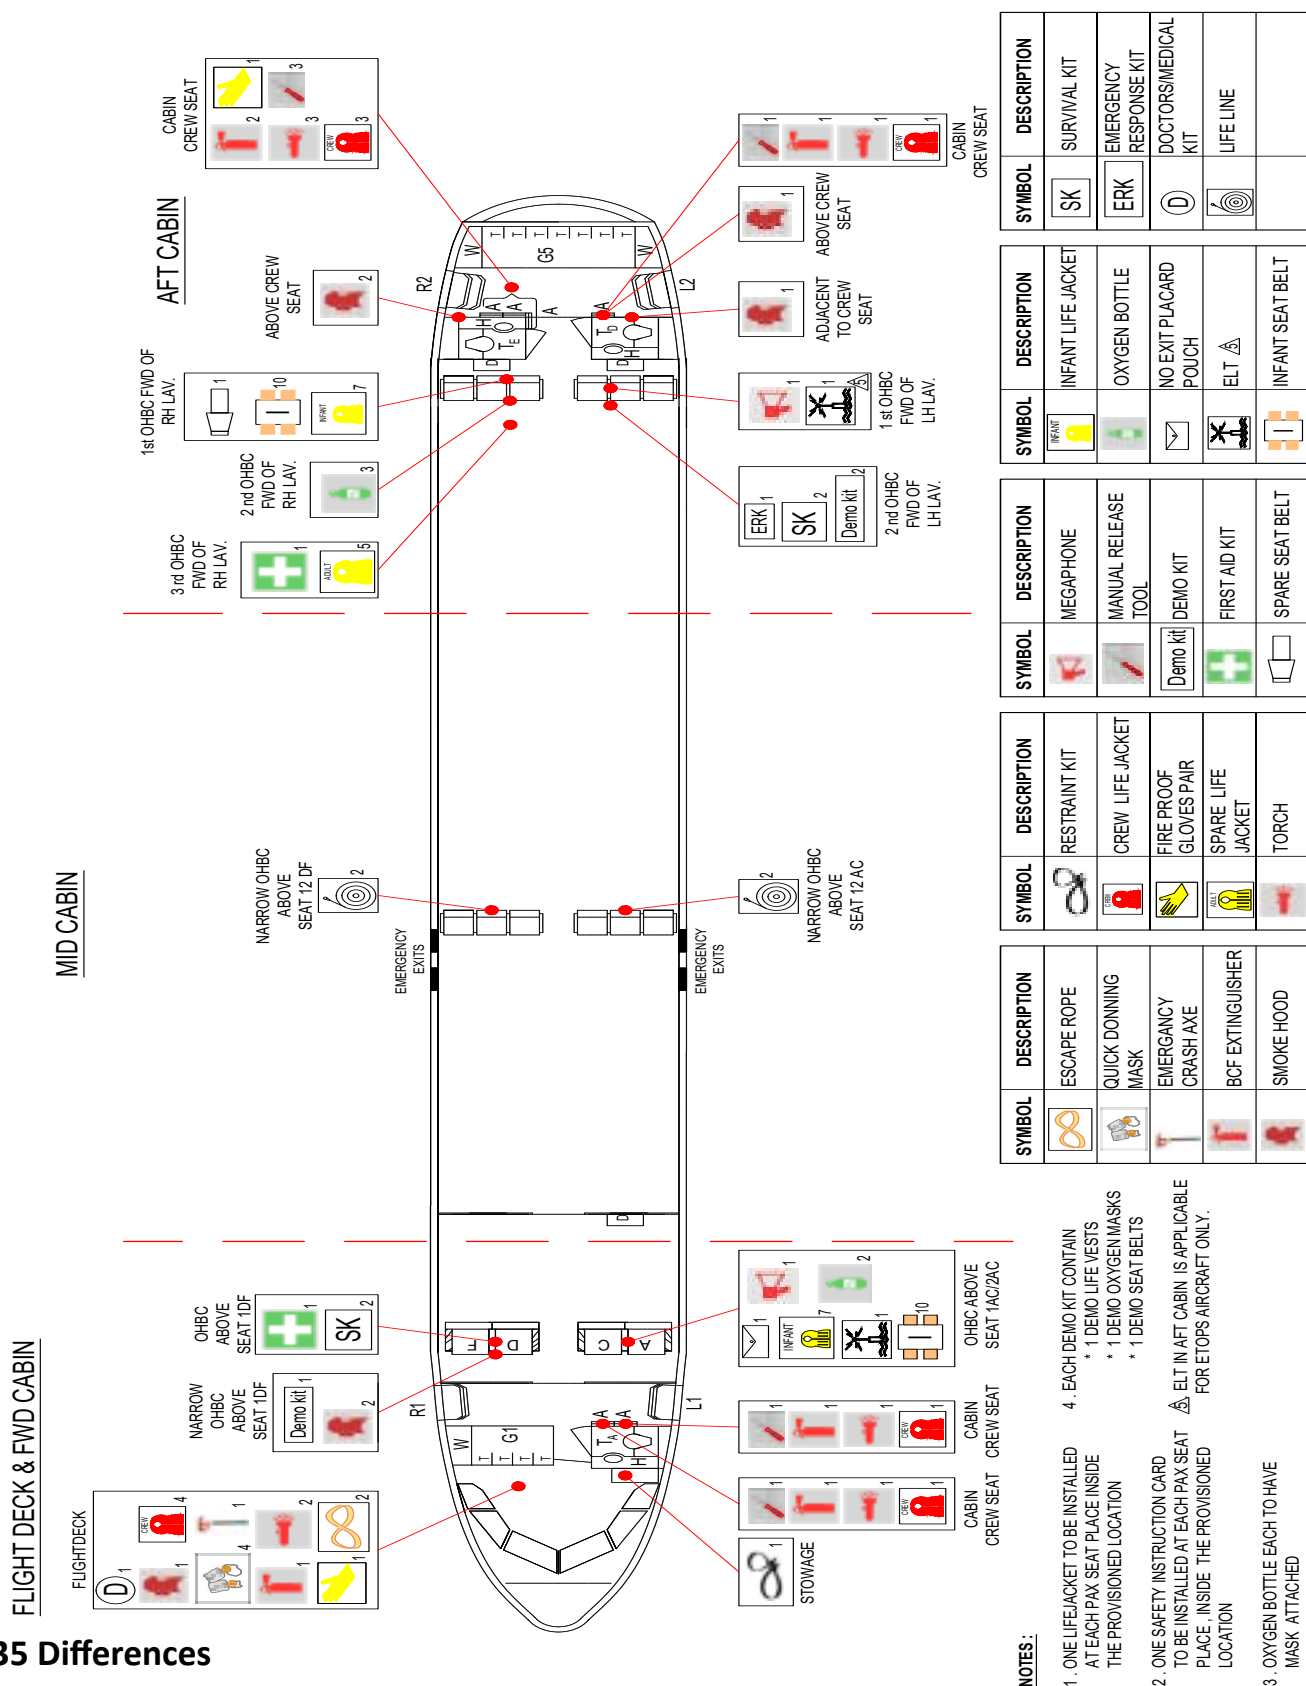

6.35 Differences

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 60

Communication - PA /Interphone System

An interphone handset with integral push button for passenger address and crew calls are provided at all crew seats. The handset is easily accessible to a CCM when strapped into a crew seat.

On 4R-ABM/N/O and 4R- ANA/B aircraft a push button must be used to release the hand set from the cradle.

Passenger Seating and Facilities

ABL /ANA, B -Aircraft,

Configuration – 12 Business Class, 138 Economy Class



6.35.1 Facilities Available

BUSINESS CLASS	ECONOMY CLASS
Individual Reading Light	Individual reading light
Manually adjustable seat back	Manually adjustable seat back
Personal air vent	Personal air vent
Life vest under the seat	Head set socket
Head set socket	Life vest under the seat

6.35.2 ABM/N/O - Aircraft,

Configuration – 16 Business Class, 120 Economy Class

BUSINESS CLASS	ECONOMY CLASS
8" Touch screen individual movie monitor	8" Touch screen individual monitor
Head Set Socket/USB port for charging	Head set Socket/USB port for charging
Personal air vent	Personal air vent
Personal reading light	Personal reading light
Life vest located under the seat	

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 61

6.35.3 ABL/ABS/ABT Smoke Reset System in the lavatories

On ABL/ABS aircraft the smoke reset switch is located outside each individual lavatory. Press the smoke reset push button outside the affected lavatory to cancel the audio and visual warnings.



6.36 MRE Aircraft

6.36.1 General Description:

Type	- Airbus A320
Configuration	- 12 BC / 150 EY
Potable Raft Location	- 31 DEF
Portable Raft Capacity	- 25 with an overload of 38
Cabin Crew Seats	- 6 (L1, L1A, L2, R2, R2A, Swivel Seat)
Minimum Crew	- 4 (L1,L1A,L2,Swivel Seat)
Kangaroo Belts	- 10 (5 Each at L1, L2)

The emergency procedures shall remain the same as the UL-A320 fleet for a ground evacuation. If one slide raft is unserviceable, the portable life raft shall be deployed preferably from L2/R2 or any usable exit. However, prior to launching the portable raft, the existing slide raft shall be detached and disconnected from the aircraft. The portable rafts shall be deployed as per UL procedures.

Protective Breathing Equipment (PBE)

Scott Type - Located in flight deck on selected aircraft.

Description and Usage **Ref: 3.1.7.3**

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL


	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	A320 AIRCRAFT		Chapter 06
			Page 62

6.36.1.1 MRE – Safety Equipment Locations Chart

Protective Breathing Equipment (06)			First Aid kits (02)			Megaphones (02)		
R1	Overhead Compartment	02	R1	Overhead Compartment	01	L1	Overhead Compartment	01
L2	Above the crew seat	01	R2	Overhead Compartment	01	L2	Overhead Compartment	01
L2	Next to the crew seat	01						
R2	Above the crew seat	02	Emergency Locator Transmitter (02)			Survival Kits (04)		
			L1	Overhead Compartment	01	R1	Overhead Compartment	02
Portable oxygen (06)			L2	Overhead Compartment	01	R2	Overhead Compartment	02
R1	Overhead Compartment	02						
L2	Behind row 31 ABC	02	Infant Life Vests (10)			Extension Seat Belts (03)		
R2	Behind row 31 DEF	02	L1	Overhead Compartment	05	L1	Overhead Compartment	03
			R2	Overhead Compartment	05			
Fire Extinguishers (05)						DEMO Kits (04)		
L1	Comp: under the crew seat	01	Spare Adult Life Vests (10)			R1	Overhead Compartment	02
L1A	Comp: under the crew seat	01	L1	Overhead Compartment	05	R2	Overhead Compartment	02
L2	Comp: under the crew seat	01	R2	Overhead Compartment	05	Portable Life Raft (01)		
R2	Comp: under the crew seat	01				R2	Overhead Compartment	01
Swivel Seat	Comp: under the crew seat	01	Kangaroo Belts (10)			AMBU BAG		
			L1	Overhead Compartment	05	L2	Overhead Compartment	01
Emergency Torches (06)			L2	Overhead Compartment	05	Flight Deck Safety Equipment		
Comp: under each crew seat		01				Torch-Next to Seat		
			Emergency Response Kit (01)			Quick Donning Masks- Adjacent to seats		
Manual Release Tools (06)			R2	Overhead Compartment	01	Crash Axe – Behind the F/O seat		
Mounted on the door of each comp: under each crew seat		01	NO EXIT Stickers (04)			Restraining Ties – Coat Closet		
			R1	Overhead Compartment	04	Emergency Medical Kit (A10) – Behind the F/O seat		
Adult Life Vest (Cabin)			Ditching Lines (04)			Extinguisher – Behind the F/O seat		
Comp: under each PAX seat		01		Narrow Compartment Left Side	02	PBE – Behind the F/O seat		
				Narrow Compartment Right Side	02	Heat Res Gloves- Behind the S/O's Seat		

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

6.36.1.2 MRE – Safety Equipment Locations Diagram

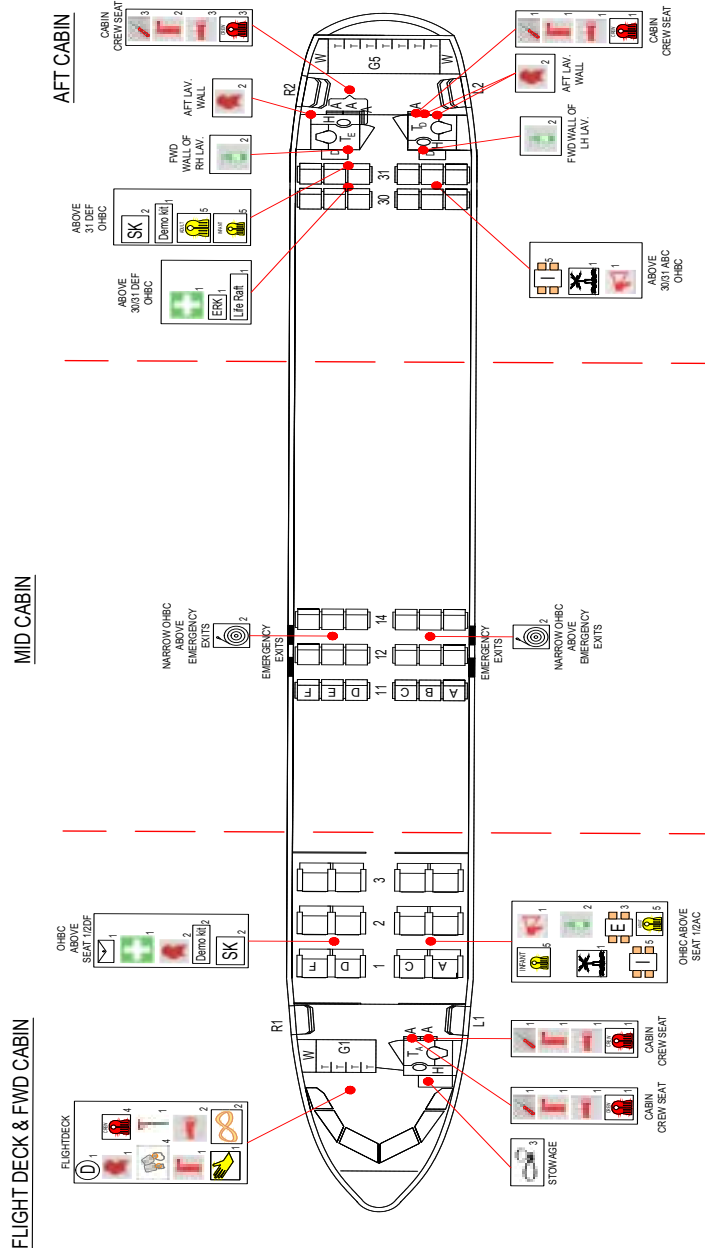

SYMBOL	DESCRIPTION	FLIGHT DECK	FWD CABIN	MID CABIN	AFT CABIN	TOTAL
	NO EXIT FLACARD	1				1
	POUCH		1			1
	ELT			5		5
	INFANT SEAT BELT			2		2
	SURVIVAL KIT				4	4
	EMERGENCY RESPONSE KIT				1	1
	DOCTORS/MEDICAL KIT				1	1
	LIFE LINE			4		4
	LIFE RAFT				1	1

SYMBOL	DESCRIPTION	FLIGHT DECK	FWD CABIN	MID CABIN	AFT CABIN	TOTAL
	TOUICH	2	2		4	8
	MEGAPHONE		1		1	2
	MANUAL RELEASE TOOL		2		4	6
	DEMO KIT		2		1	3
	FIRST AID KIT		1		1	2
	INFANT LIFE JACKET		5		5	10
	OXYGEN BOTTLE		2		4	6
	EXT. SEAT BELT		3			3

SYMBOL	DESCRIPTION	FLIGHT DECK	FWD CABIN	MID CABIN	AFT CABIN	TOTAL
	ESCAPE ROPE	2				2
	QUICK DONNING MASK	4				4
	EMERGENCY CRASH AXE	1				1
	BCF EXTINGUISHER	1	2		3	6
	SMOKE HOOD	1	2		4	7
	RESTRAINT KIT	3				3
	CREW LIFE JACKET	4	2		4	10
	FIRE PROOF GLOVES PAIR	1				1
	SPARE LIFE JACKET		5		5	10

NOTES

- ONE LIFEJACKET TO BE INSTALLED AT EACH PAX SEAT PLACE INSIDE THE PROVISIONED LOCATION
- ONE SAFETY INSTRUCTION CARD TO BE INSTALLED AT EACH PAX SEAT PLACE, INSIDE THE PROVISIONED LOCATION
- OXYGEN BOTTLE EACH TO HAVE MASK ATTACHED
- EACH DEMO KIT CONTAIN
 - * 1 DEMO LIFE VESTS
 - * 1 DEMO OXYGEN MASKS
 - * 1 DEMO SEAT BELTS

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 64

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 65

6.37 Differences A320 - NEO

6.37.1 Aircraft Specific

Description

The A320 NEO is a short to medium range, single aisle subsonic transport aircraft, powered by two turbofan engines. The fuselage has a circular cross section and is entirely pressurized with the exception of the nose and tail cone, the landing gear bays, the air conditioning compartments and the cargo compartments. The flight deck is designed to accommodate a two operating crewmembers and two observers. Any combination for cabin attendant seats may be provided with a minimum of 4 primary seats.



Aircraft Specifics,

Aircraft Registration	- 4R ANA/B
Model	- A 320 - NEO
Operating Range	- 6,850km (3,700nm)
Flight Deck Seats	- 02
Flight Deck Observer Seats	- 02
Cabin Crew Seats	- 06 (L1, L1A, L2, L2A, R2, Swivel Seat)
Minimum Crew	- 4 (L1,L1A,L2,Swivel Seat)
Configuration	- Business Class 12, Economy Class 138

6.37.1.1 Cabin Crew Seats and Stations

STN	CCM	STN	CCM
L1	Purser	L1A	F/SS 2
L2	C/S	L2A	6th CCM
R2	G/S	Swivel Seat	F/SS 3

6.37.2 Exit & Doors

Four type “I” doors at L1, R1, L2, and R2

Four type “III” exits (Hatches)

Protective transparent cover installed on all type “I” doors for protecting the

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 66

arming/disarming lever



6.37.3 PBE (Air Liquid) (06)

Located at each headrest of the CCM seats.

Pre Flight Serviceability Checks

1. Security seal is intact
2. The green disc is visible – Check through the viewing window on the seat head rest

To access the PBE squeeze the clamps together located on the top of the headrest. This will release the headrest cover as shown above.

6.37.3.1 Portable Oxygen

06 – Bottles (02 – L1 Overhead bin, 04 - R2 Overhead bin)

6.37.3.2 Business Class Seats

Power outlet located at each seat

Life vest stowed in a compartment between the seats

6.37.3.3 Swivel seat

Operation as per 4R ABM, N, O, aircraft

6.37.4 Emergency Row Seats

Seats 10A/F, 11A/F cannot be reclined. The other two seats (10/11 B/C,D/E) are with limited recline facility.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 67

6.37.5 Galley Water shut off valves

Located under the waste bin compartment

6.37.6 Lavatories

L1 (A), L2 (D), R2 (E) – The lavatories at L2/R2 are smart compact lavatories, All lavatories are equipped for PWD use and diaper changing facility.

LAV – D/E (EY lavatories) the waste bin for the lavatories are located behind the toilet bowl with the extinguisher. The latch located behind bowl requires to be opened to check on the extinguisher



6.37.7 Water Shut Off Valve (Smart Lavatory)

The lavatory water shutoff valve is located in a compartment next to the lavatory bowl at the floor level



6.37.8 Lavatory locking system

The lavatory door locking system can be unlocked from outside.


6.37.8.1 Lavatory Opening for In an emergency

1. Lift up the spring-loaded LAVATORY cover
2. Slide the knob to the side until the indicator shows VACANT
3. Turn the lock-pin (located next to the door handle) from left to right which would release the

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL


	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	A320 AIRCRAFT		Chapter 06
			Page 68

catch to open the door To reset the locking mechanism, close the door, push the catch back in to position and turn the locking pin to the left

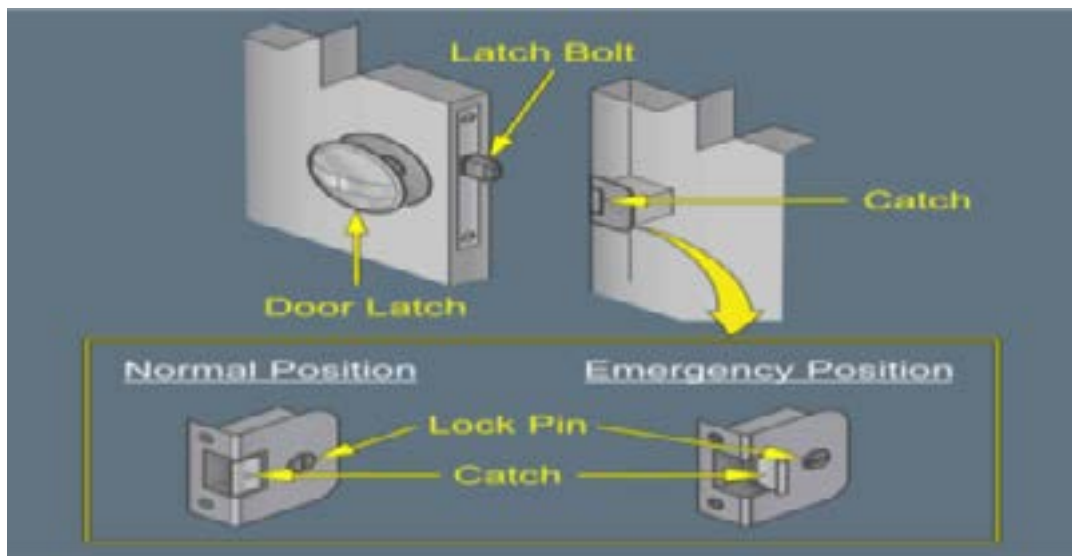

6.37.9 Galleys

Located in the FWD and AFT of the aircraft. The water shut off valve is located at the bottom of the waste bin adjacent to the sink. FWD/AFT galleys are equipped with a master power switch on the circuit breaker panel.

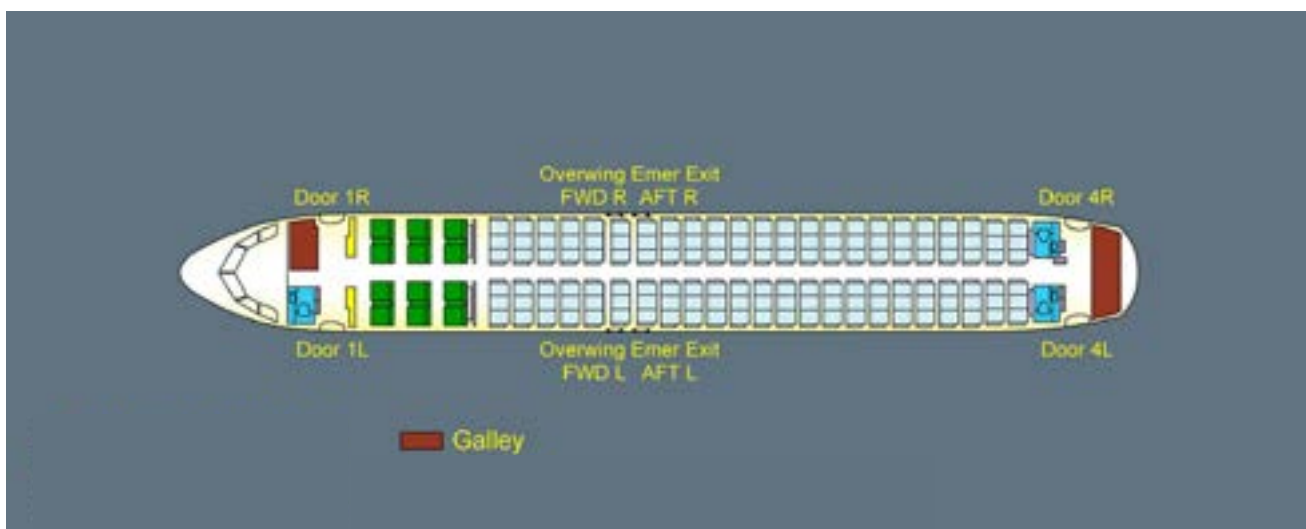

6.37.10 WIFI Connectivity

SITA-ONAIR- Operation same as a 330-300 aircraft. WIFI and Internet facilities are available. Connectivity available after reaching 4000 meters (12,000 feet)

6.37.11 IFE – RAVE system

First row of seats at each cabin the IFE screens are located on the bulk head.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL


	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	A320 AIRCRAFT		Chapter 06
			Page 69

6.38 A320Neo ANA/B Safety Equipment Location Chart

Protective Breathing Equipment (06)			Kangaroo Belts (20)			Megaphone (02)		
L1	Head Rest Compartment	01	L1	Overhead Compartment	10	L1	Overhead Compartment	01
L1A	Head Rest Compartment	01	R2	Overhead Compartment	10	L2	Overhead Compartment	01
L2	Head Rest Compartment	01						
L2A	Head Rest Compartment	01	First Aid Kits (02)			Heat Resistant Gloves (02)		
R2	Head Rest Compartment	01	R1	Overhead Compartment	01	L1A	Comp: under the crew seat	01
Swivel Seat	Head Rest Compartment	01	R2	Overhead Compartment	01	R2	Comp: under the crew seat	01
Emergency response Kit (ERK)								
L2	Overhead Compartment	01						
Portable Oxygen (06)			Emergency Locator Transmitters (02)			DEMO Kits (03)		
L1	Overhead Compartment	02	L1	Overhead Compartment	01	R1	Overhead Compartment	01
R2	Overhead Compartment	04	L2	Overhead Compartment	01	L2	Overhead Compartment	02
Fire Extinguishers (06)			Infant Life Vests (14)			NO EXIT Stickers (04)		
L1	Comp: under the crew seat	01	L1	Overhead Compartment	07	L1	Overhead Compartment	01
L1A	Comp: under the crew seat	01	R2	Overhead Compartment	07			
L2	Comp: under the crew seat	01				Ditching Lines (04)		
L2A	Above the crew seat	01	Crew Life Vests (06)			Narrow Compartment Left Side		
R2	Comp: under the crew seat	01	Comp: under the crew seat			Narrow Compartment Right Side		
R2	By the side of the crew seat	01				Flight Deck Safety Equipment		
			Aisle Chair (01)			Extinguisher – Behind the F/O Seat		
Adult Spare life Vests (05)			Overhead Compartment at 21 DEF			PBE – Behind the F/O Seat		
R2	Overhead Compartment	05				Crash Axe – Behind the F/O seat		
			Survival Kits (04)			Heat Resistant Gloves- Above the axe		
Spare Seat Belts (01)			R1	Overhead Compartment	02	AED – Coat Closet		
R2	Overhead Compartment	01	L2	Overhead Compartment	02	Emergency Medical Kit (A10) – Behind the F/O seat		
			AMBU BAG (01)			Restraining Ties Kit – Coat Closet		
			L2	Overhead Compartment	01	Quick Donning Masks- Adjacent to seats		

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

6.38.1 A320Neo ANA/B safety Equipment Location Diagram

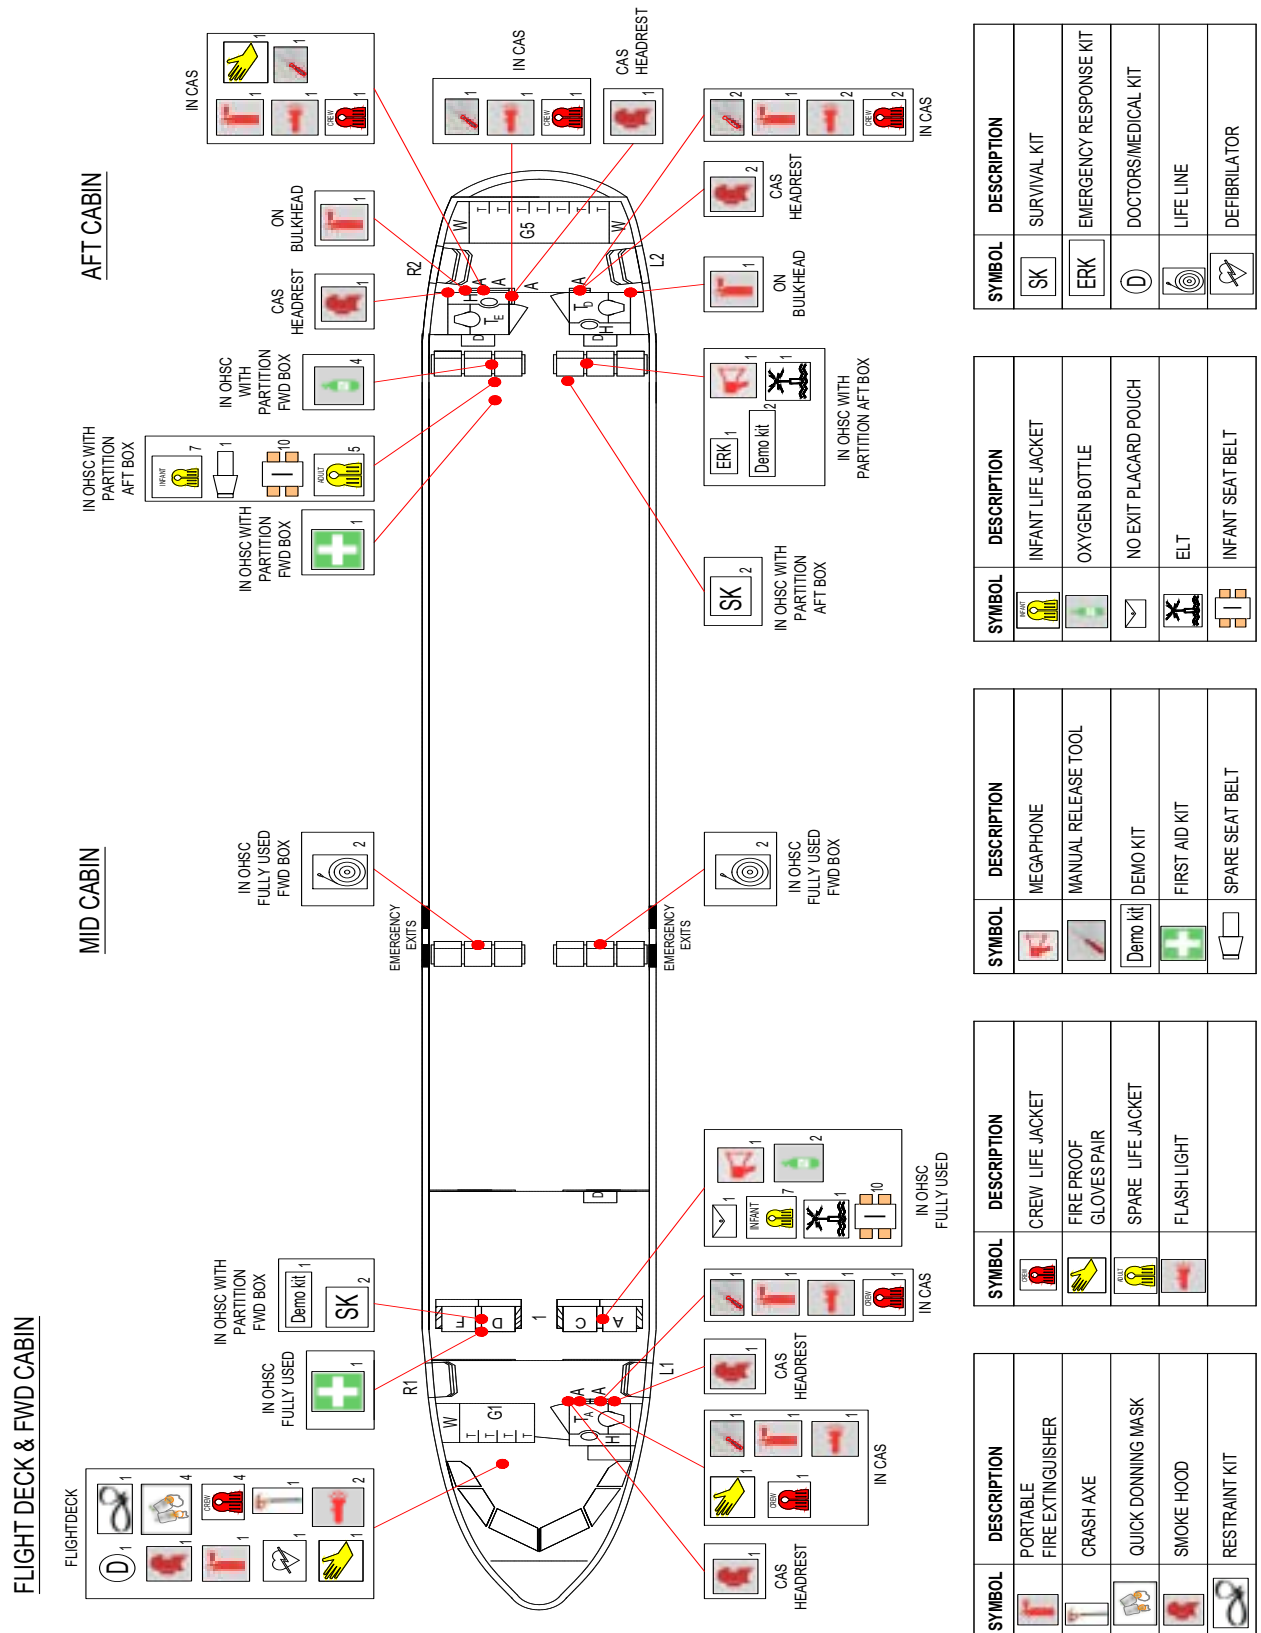

FOR NO: ENG/ITS/GEN/07

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 71

6.38.2 Prepared Emergency Landing Check List,

CREW	Pre-LANDING	POST-LANDING
L2A	1. Carry out preparations 2. Report to CS 3. Secure self 4. Assume brace Position 5. Repeat brace Command	1. Order ABP to follow directions 2. Check outside conditions 3. Open hatches on one side 4. Check correct over wing slide inflation 5. Order evacuation 6. Direct passengers to exit 7. Check your area/assist in other areas 8. Take torch 9. Evacuate from suitable exit

6.38.3 Prepared Ditching Check List,

CREW	PRE-LANDING	POST-LANDING
L2A	1. Carry out preparations 2. Wear life vest 3. Report to CS 4. Secure self 5. Assume brace Position 6. Repeat brace command	1. Block exit and redirect passengers 2. Open the hatches if required 3. Order ABPs to check out side conditions and open the other hatches 4. Open hatches 5. Delegate ABPs to attach the life lines 6. Order evacuation 7. Check your area/assist in other areas 8. Take torch 9. Inflate life vest 10. Board available raft

NOTE: Other duties remain as per the A 320 fleet check list. Ref: 6.25.4/6.25.7

6.38.4 designated portable bottles of oxygen,

CCM	A 320 - NEO
L1	Overhead compartment at L1
L1A	Overhead compartment at L1
L2	Overhead compartment at R2
L2A	Overhead compartment at R2
R2	Over Head Compartment at R2
Swivel Seat	Over Head Compartment at R2

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 72

6.38.5 Quick Reference Guide for ANA/B

SEATING CATEGORIES	BUSINESS CLASS	ECONOMY CLASS	REMARKS
Bassinet	N/A	6AF	
Emergency Exits	N/A	Row 11 & 12	Limited leg room
Maximum Leg Room	1ACDF	Row 6	
Stretcher positions	N/A	27/28/29ABC, 27/28/29DEF	02 Positions
Passengers with Reduced Mobility	2F/3F	6/7/8AF, 14/15/16/17AF, 18A	
Unaccompanied Minors	N/A	6-10AF, 14/15AF, 16A	
Deportee/In-Ad pax	N/A	29ABEF	No Aisle seats.
Over wing	N/A	ROWS 09-17	
Security observer if carried on board		6C, 7D, 11C, 12D	Maintain Priority Order
Passengers needing extra oxygen on board.	2AF	6AF/7AF	
Passenger travelling with a Service Animal	1AF	6AF	BSCT may restrict
PWD with immobilized leg.	2AF	6AF/7AF	
Personal care attendant/ Safety assistant / Reader/ interpreter in case of a vision or hearing impairment.			Adjoining seat to the travelling party to be allocated

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 73

6.39 A320 Aircraft -Dispatch of an Aircraft with an In-Operative Door/Hatch

Doors

Number installed	Number required	Placard
4	3	Yes

Over wing Hatch

Number installed	Number required	Placard
4	3	Yes

6.39.1 Applicable only on ABL

Inoperative Door	Seats to be Blocked
L1 or R1	Seat Rows 1-3 (all), Rows 5-6 (all) and Row 7 (A only)
L2 or R2 (Exit 3)	Seat Rows 25-28 (all) and Row 24 (A,F only)

Inoperative Hatch	Seats to be Blocked
Over wing Exit L2A or R2A	Seat Row 18 (A only) and Row 19 (A, B,D,E,F only)
Over wing Exit L2B or R2B	Seat Row 18 (A only) and Row 19 (A,B,D,E,F only)

6.39.2 Applicable only on ABM/ABN/ABO

Inoperative Door	Seats to be Blocked
L1 or R1	Seat Rows 1-2 (all) and Row 3 (A,D,F only)
L2 or R2 (Exit 3)	Seat Rows 23-26 (all) and Row 22 (A,F only)

Inoperative Hatch	Seats to be Blocked
Over wing Exit L2A or R2A	Seat Row 16 (A only) and Row 17 (A,B,D,E,F only)
Over wing Exit L2B or R2B	Seat Row 16 (A only) and Row 17 (A,B,D,E,F only)

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 74

6.39.3 Applicable only on ANA/B A320 Neo

Inoperative Door	Seats to be Blocked
L1 or R1	S/ Rows 1-3 (all), Rows 6-7 (all) and Row 8 (F only)
L2 or R2	S/ Rows 25-29 (all) and Row 24 (A,F only)
PAX door L1 or R1 (if required to retain BC seats)	S/Row 6-9(all) 10F

Inoperative Hatch	Seats to be Blocked
Over wing Exit L2A or R2A	Seat Row 18 (A only) and Row 19 (A, B,D,E,F only)
Over wing Exit L2B or R2B	Seat Row 18 (A only) and Row 19 (A, B,D,E,F only)
Over wing Exit L2A and R2A	Seat Rows 12-19 (all) and 20 ABCDE
Over wing Exit L2B and R2B	Seat Rows 12-19 (all) and 20 ABCDE

6.39.4 Applicable only on MRE

Inoperative Door	Seats to be Blocked
L1 or R1	S/ Rows 1-3 (all), Rows 6-9 (all) and Row 10 (A only)
L2 or R2	S/ Rows 26-31 (all) and 25A and 25F
PAX door L1 or R1 (if required to retain BC seats)	S/Row 6-12(all) 11A

Inoperative Hatch	Seats to be Blocked
Over wing Exit LHA or RHA	Seat Rows 14-15 (all) and 16ABCDE
Over wing Exit LHB or RHB	Seat Rows 22-24 (all)
Over wing Exit LHA and RHA	Seat Rows 14-22 (all) and 23 ABCEF
Over wing Exit LHB and RHB	Seat Rows 14-22 (all) and 23 ABCEF

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 75

6.40 ABS/ABT Aircraft

6.40.1 Aircraft Specific

Description

The A320 is a short to medium range, single aisle subsonic transport aircraft, powered by two turbofan engines. The fuselage has a circular cross section and is entirely pressurized with the exception of the nose and tail cone, the landing gear bays, the air conditioning compartments and the cargo compartments. The flight deck is designed to accommodate a two operating crewmembers and two observers. Any combination for cabin attendant seats may be provided with a minimum of 4 primary seats. Though the winglets are bent upwards as per the NEOs this aircraft is equipped with current engine option.

6.40.2 Aircraft Specifics,

Model	- A 320 Ceo
Operating Range	- 3,000nm, 5,600 Km
Flight Deck Seats	- 02
Flight Deck Observer Seats	- 02
Cabin Crew Seats	- 06 (L1, L1A, L2, R2, R2A Swivel Seat)
Configuration	- Business Class 12, Economy Class 138
Seat Numbering	- Business Class 6,7,8 AC/HK - Economy Class – 21-45 ABC/HJK

6.40.3 Cabin Crew Seats and Stations

STN	CCM	STN	CCM
L1	Purser	L1A	F/SS 2
L2	C/S	R2A	6th CCM
R2	G/S	Swivel Seat	F/SS 3

6.40.4 Safety Equipment,

- Extinguishers – AIRTOTAL (06)
- PBE's – AIRLIQUIDE (06)
- Emergency Locator Transmitters - KANNAD (02)
- Megaphones – Standard item (02)
- Survival Packs – Standard Item (04)

Revision No	02	Revision Date	15 August 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 76

6.40.5 Emergency Torch

The serviceability of the torch shall be checked by pressing the black button on the bracket until the green LED illuminates.



6.40.6 Doors

- L1,R1,L2,R2 - Standard Type I doors. (Arming lever is protected with a cover)
- Overhead Wing Exits – Type III exits.

6.40.7 Galleys

- Two Galleys in the FWD cabin FWD & AFT of R1 exit.
- One standard galley at the AFT with all requirements such as ovens, boilers, water outlets.
- MASTER POWER shut off is available in each FWD/AFT galley protected with a guard.

6.40.8 Lavatories

- Lavatory “A” FWD of L1 door.
- Lavatory “D” FWD of L2 door.
- Lavatory “E” FWD of R2 door.
- All three lavatories are standard lavatories with facilities for PWD use and diaper changing.

NOTE: During a smoke or fire in the lavatories, the re-set button to silence the audio/visual warnings is located outside each lavatory. Ref 6.35.3

6.40.9 Coat Closet

- 01 on the left side of the Business class cabin.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 77

6.40.10 Designated Portable Bottles Of Oxygen,

CCM	Location
L1	Overhead compartment at R1
L1A	Overhead compartment at R1
L2	Doghouse behind the last row of seat (Left Side)
R2A	Doghouse behind the last row of seat (Right Side)
R2	Doghouse behind the last row of seat (Right Side)
Swivel Seat	Doghouse behind the last row of seat (Left Side)

6.40.11 Forward Attendant Panel (FAP)

Touch screen panel as per the current fleet.

6.40.12 Additional Attendant Panel (AAP)

Located at L2 as per the current fleet, Includes the following,

- Cabin Lighting control. (BRIGHT/OFF)
- Galley lighting control.
- EVAC CMD Switch. (Guarded)
- EVAC Reset.
- SMOKE.



6.40.13 Handset

Standard Handset as per current fleet.

6.40.14 Entertainment

THALES operating system with drop down monitors spread throughout the cabin. By the side of the seat the following functions shall be available,

- Headset socket.
- Selector to choose channels for music.
- Selector to increase/decrease the volume.

6.40.15 Business Class Seats

Reclinable seats operated manually.

Function to recline and adjust the leg rest.


Life vest stored in a compartment between the seats in the middle console.

6.40.16 Economy Class Seats

- Standard seats as per the current fleet.
- Life vest stowed under the seat.
- Two rows of seats at the Type III exit cannot be reclined.

Revision No	02	Revision Date	15 August 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

6.40.17 ABS/ABT Safety Equipment Location Diagram

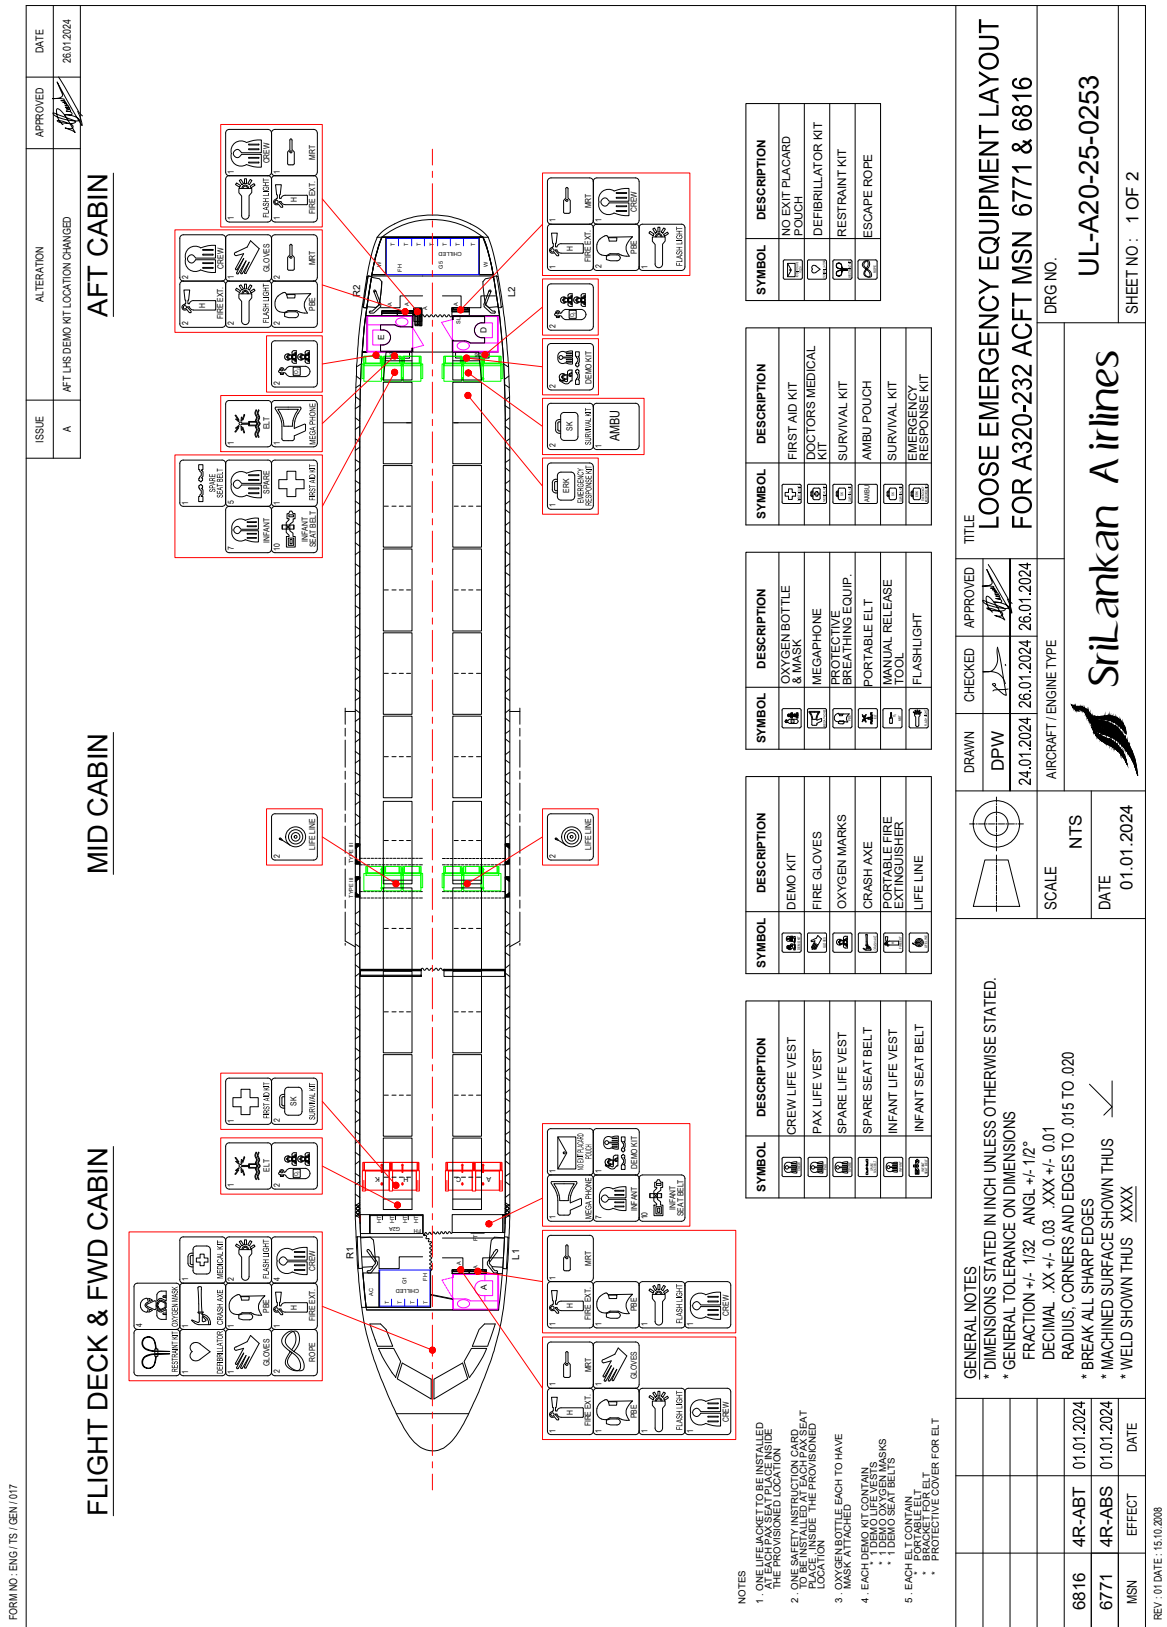

Revision No	02	Revision Date	15 August 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	A320 AIRCRAFT		Chapter 06
			Page 79

6.40.18 ABS/ABT Safety Equipment Location Chart

Protective Breathing Equipment (06)			Kangaroo Belts (20)			Megaphone (02)		
L1	Head Rest Compartment	01	L1	Front of the Crew Seat	10	L1	Overhead Compartment	01
L1A	Head Rest Compartment	01	R2	Overhead Compartment	10	L2	Overhead Compartment	01
L2	Head Rest Compartment	01						
R2	Head Rest Compartment	01	First Aid Kits (02)			Heat Resistant Gloves (02)		
R2A	Head Rest Compartment	01	R1	Overhead Compartment	01	L1A	Comp: under the crew seat	01
Swivel Seat	Compartment Behind L2 Crew Seat	01	R2	Overhead Compartment	01	R2	Comp: under the crew seat	01
Portable Oxygen (06)			Emergency Locator Transmitters (02)			DEMO Kits (03)		
L1/ L1A	R1 Overhead Compartment	02	R1	Overhead Compartment	01	L1	Compartment in Front of Crew Seat	01
L2/ swivel	Doghouse Behind Last Seat Row	02	R2	Overhead Compartment	01	L2	Narrow Overhead Compartment 45C	02
R2/ R2A	Doghouse Behind Last Seat Row	02						
Fire Extinguishers (06)			Infant Life Vests (14)			NO EXIT Stickers (04)/Lav INOP Stickers (04)		
L1	Comp: under the crew seat	01	L1	Front of the Crew Seat	07	L1	Compartment in Front of Crew Seat	04
L1A	Comp: under the crew seat	01	R2	Overhead Compartment	07			
L2	Comp: under the crew seat	01				Ditching Lines (04)		
R2	Comp: under the crew seat	01	Crew Life Vests (06)			Narrow Compartment Left Side		
R2A	Comp: under the crew seat	01	Comp: under the crew seat			Narrow Compartment Right Side		
Swivel Seat	By the side of the crew seat	01				Flight Deck Safety Equipment		
Adult Spare life Vests (05)			ERK (01)			Extinguisher – Behind the F/O Seat		
R2	Overhead Compartment	05	L2 - Overhead Compartment			PBE – Behind the F/O Seat		
Spare Seat Belts (01)						Crash Axe – Behind the F/O seat		
R2	Overhead Compartment	01	Survival Kits (04)			Heat Resistant Gloves- Above the axe		
MRT/Emergency Torch (06)			R1	Overhead Compartment	02	AED – Coat Closet		
	Under the Crew Seat		L2	Overhead Compartment	02	Emergency Medical Kit (A10) – Behind the F/O seat		
			AMBU BAG (01)			Restraining Ties Kit – Coat Closet		
			L2	Overhead Compartment	01	Quick Donning Masks- Adjacent to seats		

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A320 AIRCRAFT	Chapter 06
		Page 80

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 1

ANNEX “A” TO CHAPTER 06

A321 AIRCRAFT

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 2

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 3

Contents

6A.0 A321 AIRCRAFT SPECIFIC	8
6A.1 General Description	8
6A.1.1 Aircraft Specifics,	8
6A.2 Doors/ Emergency Exits/Flight Deck Escape Route	8
6A.3 Landing Gear	9
6A.4 Cargo Compartments.....	9
6A.5 Doors/Exits.....	11
6A.5.1 Secure Flight Deck Door	11
6A.5.2 Flight Deck Oxygen System.....	11
6A.5.3 Type I Doors/Exits.....	11
6A.5.4 Viewing Window	11
6A.5.5 Door Warning System.....	11
6A.5.6 Door Locked / Unlocked Indication System	11
6A.5.7 Opening Doors	11
6A.5.8 Closing Doors	11
6A.5.9 Slide Arming Disarming Procedure	11
6A.5.10 Emergency Door Opening Procedure	11
6A.5.11 Emergency Door Operation with minimum crew	11
6A.6 Type “C” Exits	12
6A.6.1 Serviceability Checks	13
6A.6.2 Opening the door - Internal	13
6A.6.3 Closing the door - Internal.....	13
6A.6.4 Closing of the door – External.....	13
6A.6.5 Emergency Operation	14
6A.6.6 Manual Inflation Handle.....	14
6A.6.7 Operation	14
6A.6.8 Arming the slide on a Type “C” door.....	14
6A.6.9 Disarming the slide on a Type “C” door	14
6A.7 Type “I” door Slide Raft	14
6A.7.1 Canopy Erection	14
6A.8 Type “C” Door Slide	14
6A.9 Portable Raft	15

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 4

6A.9.1 Detail	15
6A.9.2 Deploying the Portable Raft	16
6A.9.3 Erecting the Canopy	16
6A.10 Briefing Passengers seated at the emergency exits	18
6A.11 Reserved	18
6A.11.1 Reserved.....	18
6A.11.2 Crew Seat Features,.....	21
6A.12 Calls and Chimes	21
6A.13 Galleys.....	21
6A.13.1 Galley Equipment	21
6A.13.2 Additional features	22
6A.14 Passenger Cabin/Galley	22
6A.14.1 Business Class Seats	22
6A.14.2 Economy Class.....	22
6A.15 Special Passenger Seats	23
6A.15.1 UM/YP Seating	23
6A.15.2 Passengers with Disability	23
6A.15.3 Stretcher Positions	23
6A.15.4 Emergency Exit Rows	23
6A.15.5 Bassinettes	23
6A.16 Forward Attendant Panel	23
6A.16.1 Emergency	24
6A.17 Additional Attendant Panel.....	24
6A.18 Lavatories	24
6A.18.1 Lavatory Identification.....	24
6A.18.2 Lavatory Facilities	24
6A.19 Manual Release Tool.....	25
6A.20 Demonstration Stations	25
6A.20.1 Emergency Landing –CCM Responsibilities	25
6A.20.2 Prepared Emergency Landing - Flight Crew Check List.....	25
6A.20.2.1 Emergency Landing Check List for CCM's	26
6A.20.3 Unprepared Emergency landing CCM Checklist.....	27
6A.20.4 Emergency Ditching CCM Responsibilities	27
6A.20.5 Prepared Ditching Flight Crew Check List.....	27

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 5

6A.20.6 Unprepared Ditching Flight Crew Check List	27
6A.20.7 Prepared Ditching CCM's Check List	28
6A.20.8 Unprepared Ditching CCM Checklist	30
6A.21 Cabin Safety Minimum Equipment List.....	30
6A.21.1 Reserved.....	31
6A.21.2 Reserved.....	32
6A.22 Reserved	33
6A.23 A321 Minimum number of Oxygen Bottles required	33
6A.24 A321 Neo	35
6A.24.1 Aircraft Specific	35
6A.24.2 Aircraft Specifics	35
6A.24.3 Minimum cabin crew required – 05.	35
6A.25 Doors/ Emergency Exits/Flight Deck Escape Route	35
6A.26 Crew Seats and Stations.....	36
6A.27 Business Class Seats.....	36
6A.28 Economy Class Seats	36
6A.29 Special Passenger Seats	37
6A.29.1 UM/YP Seating	37
6A.29.2 PWD Seating	37
6A.29.3 Stretcher Positions	37
6A.30 Portable Raft	37
6A.30.1 During a land evacuation	37
6A.30.1.1 In the event of a ditching	38
6A.30.2 Deploying the Portable Raft	38
6A.30.3 Erecting the Canopy	38
6A.31 Crew Seat Features	38
6A.32 Emergency Exit Rows	38
6A.33 Bassinet Points	38
6A.34 Forward Attendant Panel	38
6A.35 Emergency Panel (sub panel)	38
6A.36 Additional Attendant Panel.....	38
6A.37 Galleys.....	39
6A.37.1 Master Power Switch	39
6A .38 Lavatories	40

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 6

6A.38.1 Lavatory Identification.....	40
6A.39 Demonstration Stations	40
6A.40 Emergency Landing CCMs Check List	41
6A.41 Ditching CCMs Check List	41
6A.42 Cabin Safety Minimum Equipment List.....	42
6A.43 Door Primary Oxygen.....	43
6A.44 A321 Neo Aircraft Safety Equipment list	44
6A.45 A321 Neo Aircraft Safety Equipment Locations.....	45
6A.46 A321 Neo Dispatch of an Aircraft with an In-Operative Door Doors.....	46
6A.47 Quick Reference Guide for ANC/D/E/F.....	47

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 7

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 8

6A.0 A321 AIRCRAFT SPECIFIC

6A.1 General Description

The Airbus A321 is a short to medium range narrow body aircraft equipped with two turbofan engines. The A321 is a development of the A320, with an increased fuselage length of approximately 7.0 meters (22 feet). The A321 is the longest model of the A320 single aisle family. It's a subsonic transport aircraft. The fuselage has a circular cross section and is entirely pressurized with the exception of the nose and tail cone, the landing gear bays and the air conditioning compartments.

6A.1.1 Aircraft Specifics,

Model	- A321
Operating Range	- 3,000nm, 5,950 Km
Flight Deck Seats	- 02
Flight Deck Observer Seats	- 02

6A.2 Doors/ Emergency Exits/Flight Deck Escape Route


The A 321 is equipped with

- Type "I" Doors (04)
- Type "C" Exits (04)
- Two sliding windows in the flight deck for emergency escape

Type "I" Doors are used for normal and emergency operation

Type "C" Exits are used only during an emergency

The Type "C" emergency exits are located at L2, R2, L3, R3 which are located FWD and AFT of the wings. These exits do not consist of a raft but a single lane slide.

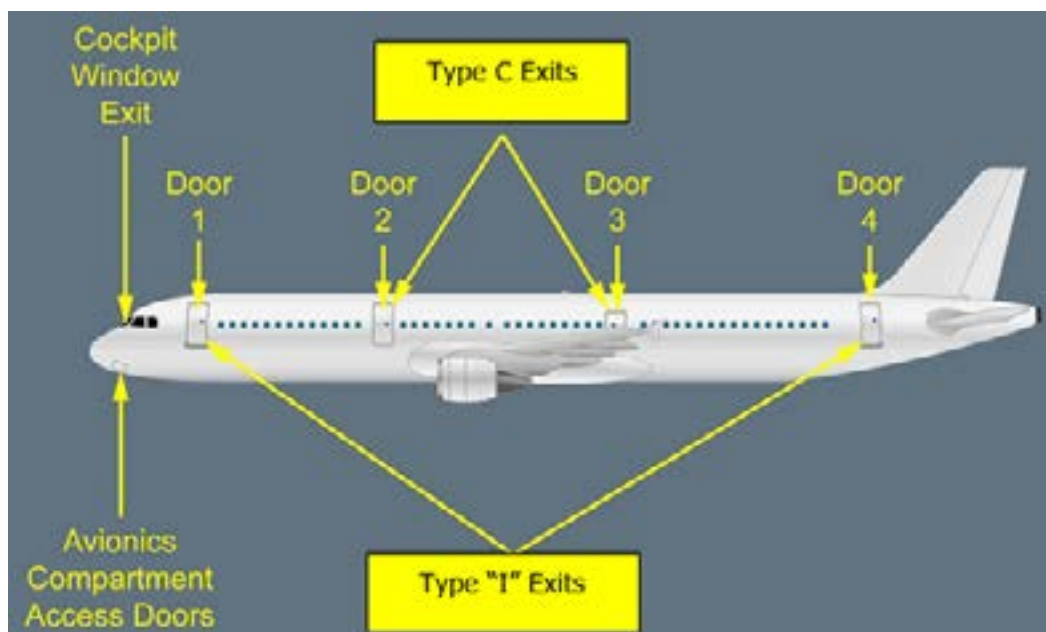


Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	A321 AIRCRAFT		Anx 'A' Ch 06
			Page 9


6A.3 Landing Gear

Two Main Landing Gear
One Nose Gear

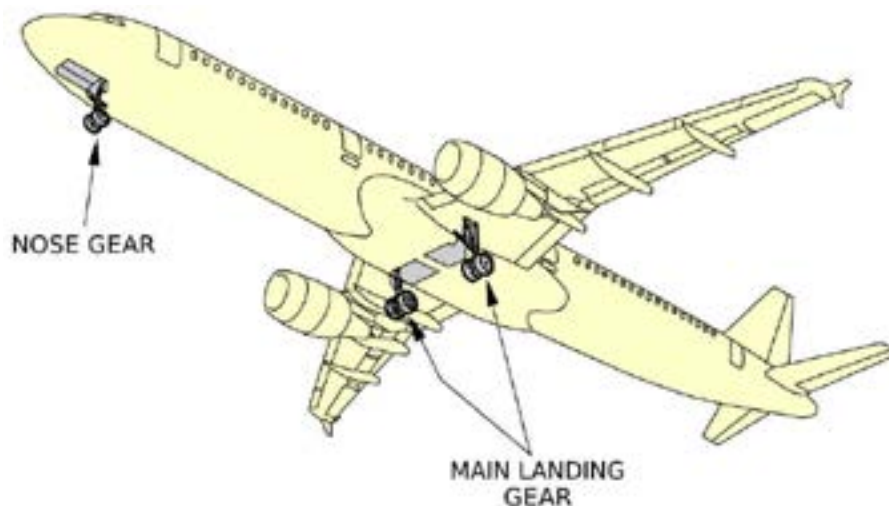

6A.4 Cargo Compartments

Three Cargo Compartments,
FWD cargo compartment
AFT cargo compartment
Bulk cargo compartment

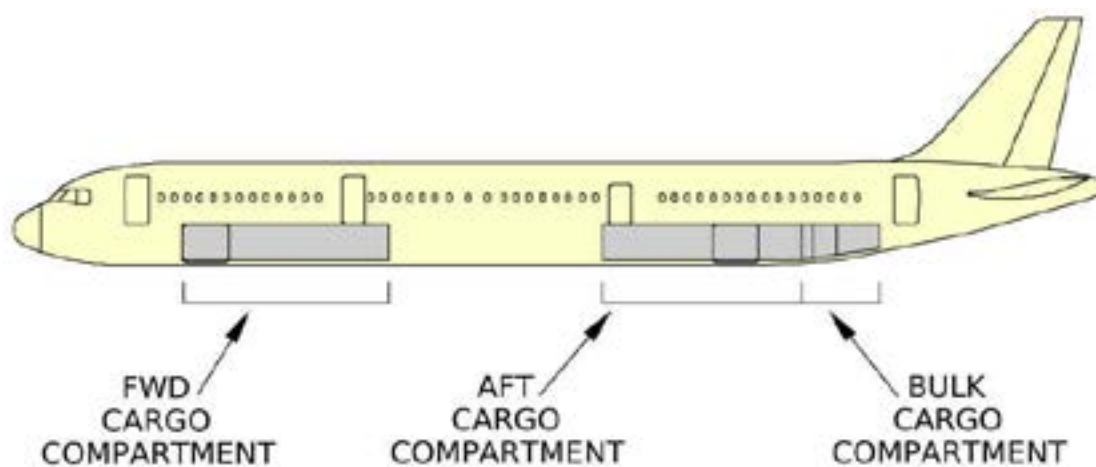

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 10

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 11

6A.5 Doors/Exits

6A.5.1 Secure Flight Deck Door

Ref 5.7.2

6A.5.2 Flight Deck Oxygen System

Ref 4.2.5

6A.5.3 Type I Doors/Exits

Ref 6.5.1

6A.5.4 Viewing Window

Ref 6.5.1.1

6A.5.5 Door Warning System

Ref 6.5.1.2

6A.5.6 Door Locked / Unlocked Indication System

Ref 6.5.1.6

6A.5.7 Opening Doors

External/Internal. Ref 6.5.2.1

6A.5.8 Closing Doors

External/Internal. Ref 6.5.3

6A.5.9 Slide Arming Disarming Procedure

Ref 6.5.4/6.5.4.5

6A.5.10 Emergency Door Opening Procedure

Ref 6.5.5

6A.5.11 Emergency Door Operation with minimum crew

During minimum crew operation, CCM's responsible for two exits (L1, R2, L3) shall open their designated exit and start evacuating passengers. Once this is underway, they shall proceed to the opposite exit, open it and continue evacuating passengers.

Note - Same procedure shall be followed when the opposite door is not manned


The escape slides at L2/R2/L3/R3 exits cannot be detached/disconnected from the aircraft and will be an obstruction in a ditching situation. Therefore, if these exits are required to be opened in a ditching, it shall be disarmed prior to opening.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	A321 AIRCRAFT		Anx 'A' Ch 06
			Page 12

6A.6 Type “C” Exits

Four type “C” exits are located at L2/R2, L3/R3 and shall be used only during an emergency evacuation. These doors which open outwards and forward in a staggered motion until locked and held in place by a “GUST” lock.

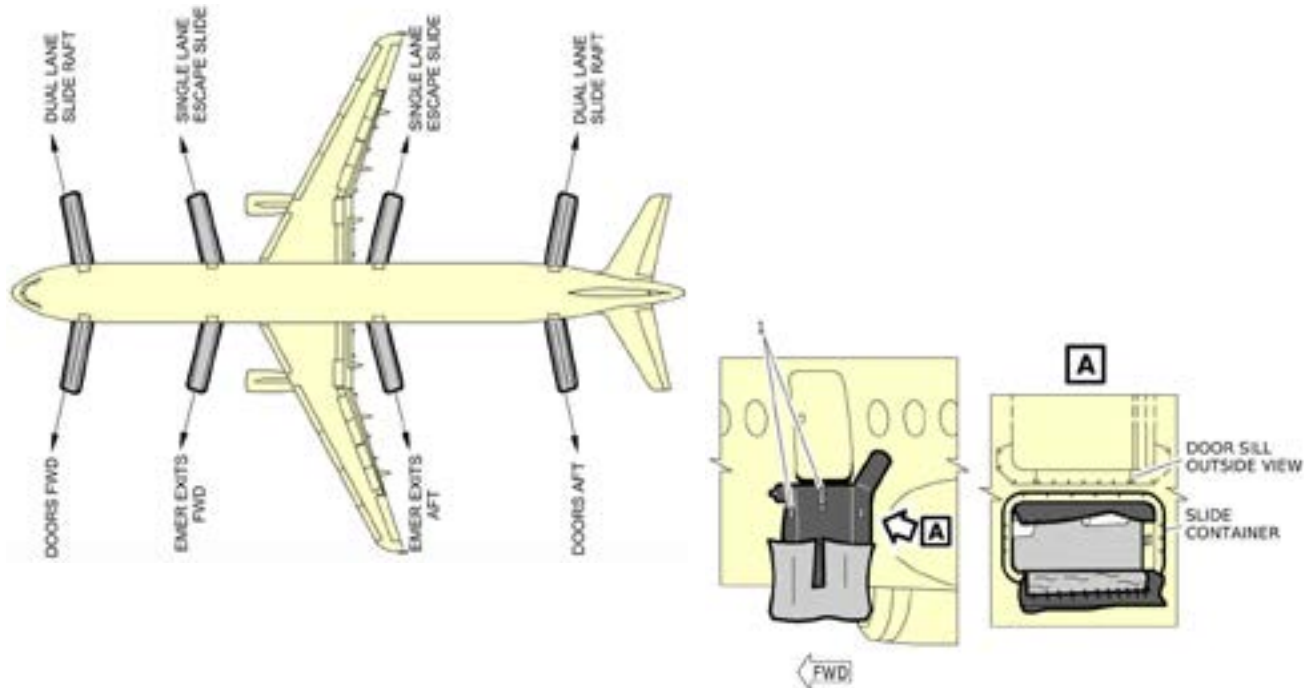

A protective cover is on the door control handle to prevent inadvertent lifting of the handle. A single lane slide is stored in a compartment located underneath the door in the fuselage. The slides are canted slightly in order to deploy at a safe distance from the engines.

1. Door Control Handle Cover
2. Door Control Handle
3. Frame Assist Handle
4. Door Assist Handle
5. Door Locking Indication
6. Observation Window with
 - Cabin Pressure Indicator
 - Slide Armed Indicator
7. Arming Lever
 - Safety Pin
8. Gust Lock
9. Support Arm




Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 13

6A.6.1 Serviceability Checks

The inflation cylinder for each slide is stowed above each emergency exit in the overhead compartment. As a pre-flight check the needle on the gauge shall be in the green zone.

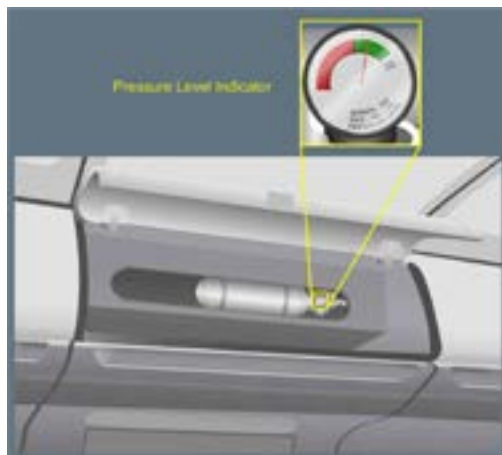

6A.6.2 Opening the door - Internal

1. Check door is disarmed
2. Check attention getters next to the viewing window
3. Check outside conditions
4. Open protective cover of the control handle
5. Hold assist handle and lift the door control handle
6. The door shall open in stages, do not force the opening process

6A.6.3 Closing the door - Internal

1. Grasp the assist handle on the door frame
2. Press the gust lock down firmly to release the door
3. Pull door rearwards in a semicircle until positioned in front of the door frame
4. Pull in and lower the door control handle until locked
5. Check the indicator reads "**LOCKED**" in green
6. Opening the door – External
7. Ensure the RED cabin pressure warning attention getter is not flashing
8. Push the flap in and grasp the control handle
9. Lift up fully until the door is open (Above the green horizontal line)
10. Pull the door outwards and push forward until locked (gust lock)

Note: The slide would disarm automatically when opened from outside

6A.6.4 Closing of the door – External

1. Push the gust lock firmly down to release the door
2. Lift the door control handle above the green horizontal line
3. Move the door rearwards and into the frame
4. Lower the control handle and flush the control handle in to the door

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 14

6A.6.5 Emergency Operation

1. Check out side conditions
2. Ensure lever is in the ARMED mode
3. Hold assist handle firmly
4. Open protective guard covering the door control handle
5. Pull the door control handle fully upwards and release
6. The door shall open and stay still for a few seconds to facilitate the slide deployment and gradually open fully
7. Check correct slide deployment

6A.6.6 Manual Inflation Handle

If the slide does not inflate automatically a RED manual inflation handle is stowed in upper right-hand side of the door frame. It is protected with a transparent cover.



6A.6.7 Operation

Remove the transparent cover and pull the RED manual inflation handle firmly.

6A.6.8 Arming the slide on a Type “C” door

Remove safety pin and stow in the pouch available under the, R2, R3, L3, crew seats. Move the arming/disarming lever down until flushed in. At L2/R2 both safety pins shall be stored in the pouch under R2 crew seat.

6A.6.9 Disarming the slide on a Type “C” door

Move the arming/disarming lever up to the disarmed position and install the safety pin

6A.7 Type “I” door Slide Raft

Ref 6.7

6A.7.1 Canopy Erection


Ref 6.7.4

6A.8 Type “C” Door Slide

Single lane slide.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 15

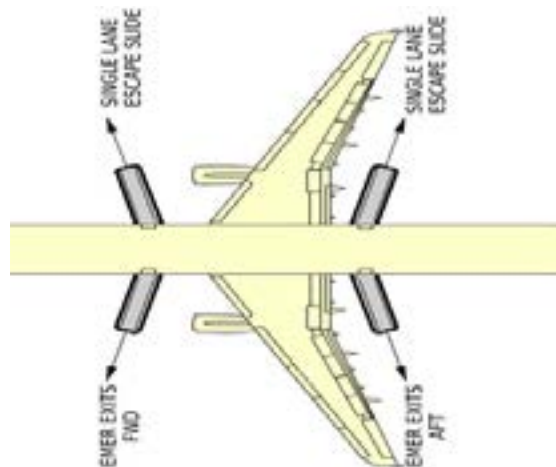


6A.9 Portable Raft

The portable raft (EAM T25) is capable of carrying 25 heads with an over load capacity of 38. It is to accommodate the over flow if one of the rafts are unserviceable. It is stowed in the overhead compartment at row 09 DEF. It shall be deployed from R2 door. CCM shall ensure the slide is disarmed prior to opening the R2 door.

If all rafts are serviceable the portable life raft should not be launched.

6A.9.1 Detail

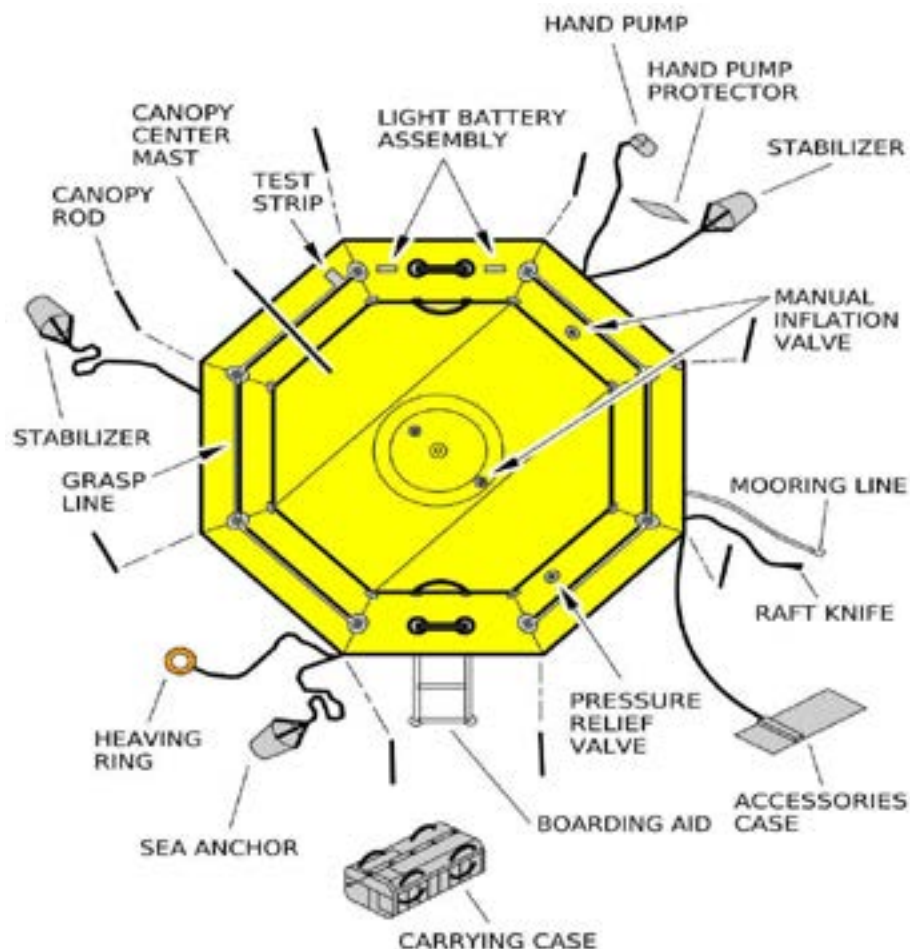

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 16

6A.9.2 Deploying the Portable Raft

Position the raft at R2 exit, Check water level and open the door in disarmed mode

Locate the activation line on the portable raft and secure to an anchor point on the aircraft. E.g. Assist handles, Launch raft and let it drift away, Pull sharply on the activation line to inflate the raft

Pull raft towards the door sill and order passengers to board the raft



In extreme conditions passengers may be advised to inflate life vest and jump into the water to board the raft, Cut the activation line attached to the aircraft using a hook knife available in the raft and move away




6A.9.3 Erecting the Canopy

Open the accessory case and pull out the contents, 08 canopy support rods and the telescopic centre mast. Leave the rest of the accessories in the accessory case. Unfold the canopy (bright coloured) and position the openings above each boarding ramp, Locate 08 support rod webbing at each intersection of the buoyancy tube, Attach the support rods (Eight) by threading each rod through each webbing and attach the lower end to the attachment point located at the bottom of the buoyancy tube. Install canopy, Pull canopy over the struts and secure using the attachment hooks, Attach the centre mast to the attachment point at the centre of the raft and extend the telescopic centre mast until two pins snap into locked position, Pull canopy over the raft buoyancy tube and secure by knotting the line provided at the bottom of the canopy sides. Remove the survivor locator light from the top of the buoyancy tube and position on the canopy to be visible and immerse the water activated battery into the water



Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

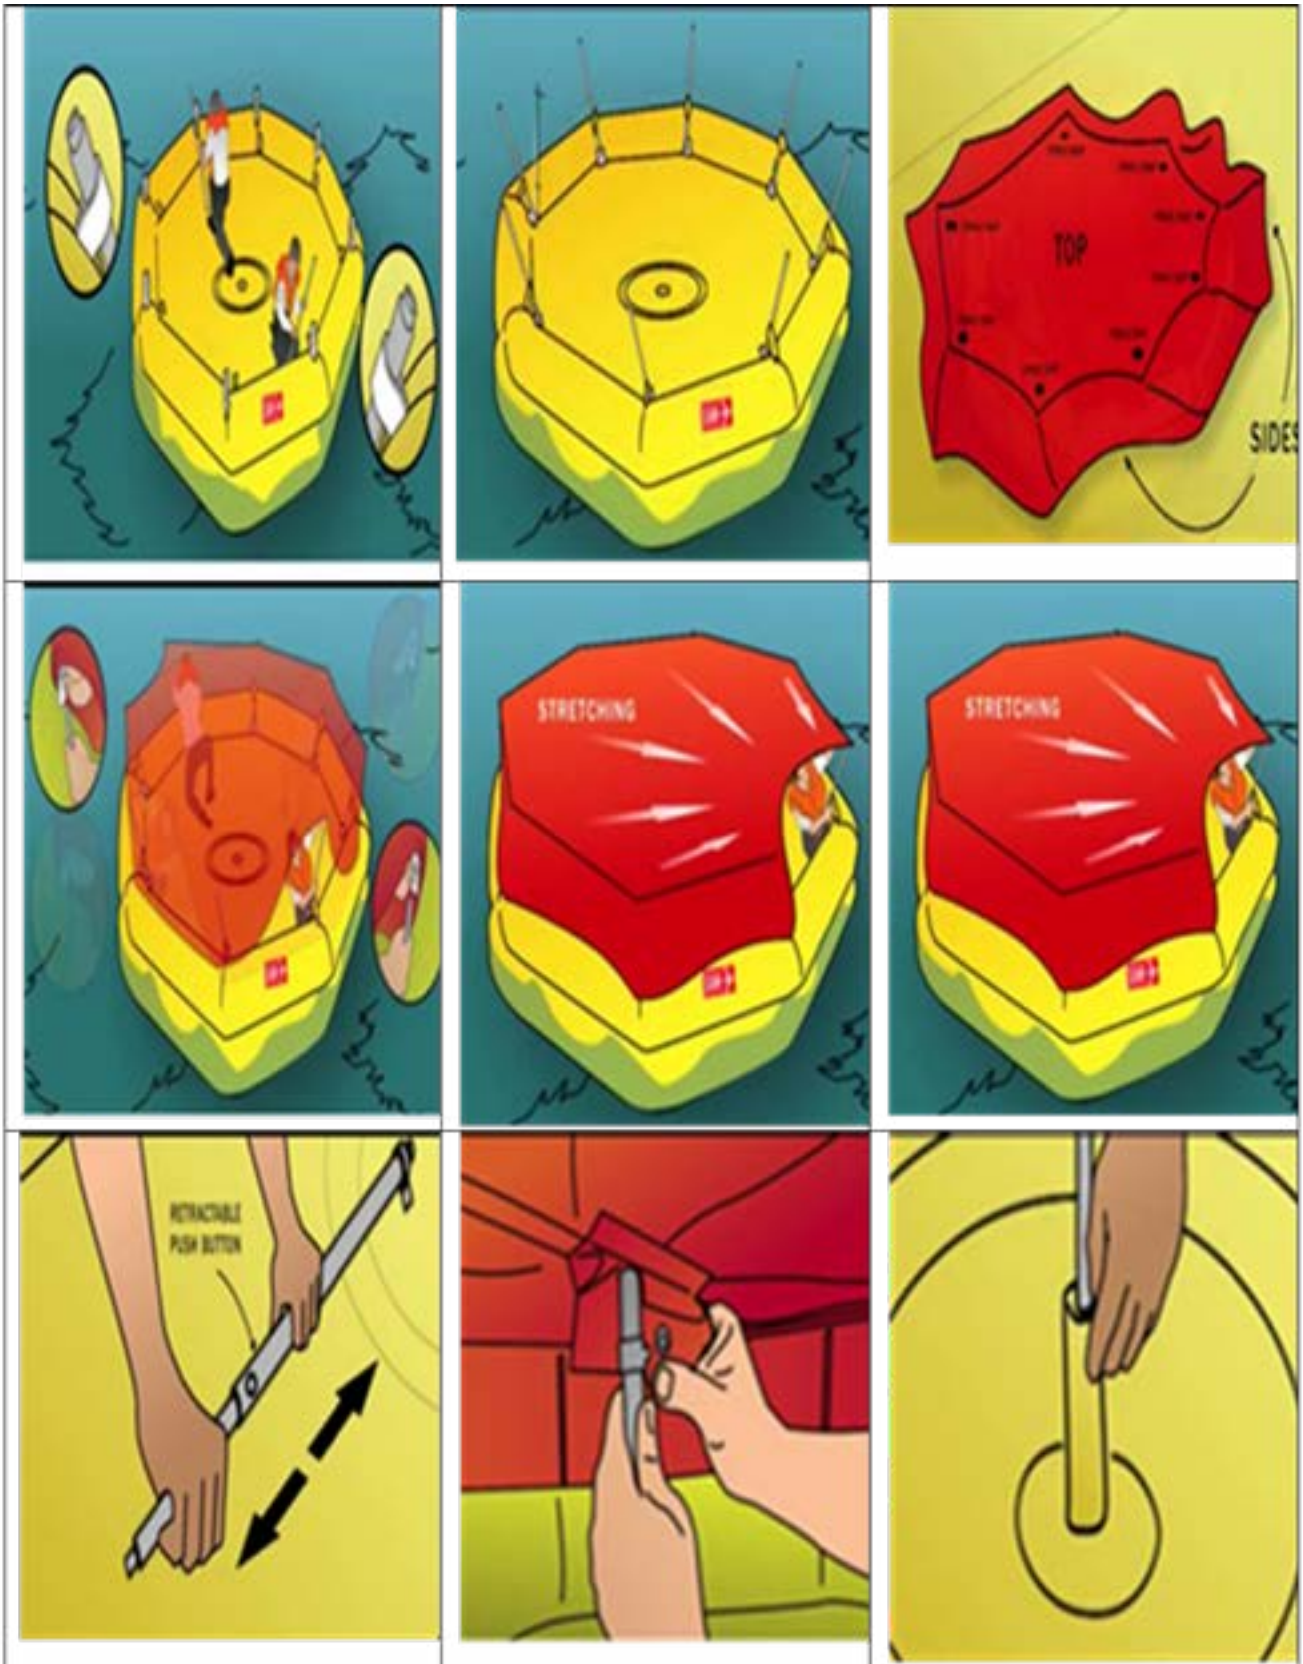

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 18

6A.10 Briefing Passengers seated at the emergency exits

A321 - L2/R2 and L3/R3

1. 'Greet the passenger'
2. 'My name is
3. 'Are you aware that you are seated next to an emergency exit?' (Point at the door)
4. 'Are you willing to assist in case of emergency?'
5. 'Thank you very much'
6. The door must be opened only on command'
7. 'The steps to open door are shown on the door (point to decals) and in the safety card. please take a few minutes to go through it before take-off'
8. 'Do you have any questions?, Thank you once again for your willingness to help us'

Note: Above briefing shall be carried out at all other unmanned exit/s by the appropriate door primary

6A.11 Reserved

6A.11.1 Reserved

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 19

INTERNATIONALLY LEFT BLANK

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 20

INTENTIONAL LEFT BLANK


Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

6A.11.2 Crew Seat Features,

- Service Unit with two oxygen masks each
- Interphone
- Torch
- Life vests
- Reading light
- Attendant Indicator Panel (AIP)
- Seat belt with a single point release device (adjustable pelvic restrain)
- Shoulder harness (on auto locking reel)
- Auto folding seat pan

6A.12 Calls and Chimes

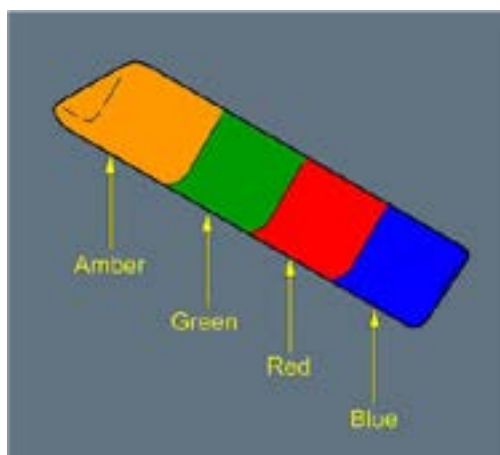

The area call panels are located at L1/R1, R2, L3/R3, L4/R4 and consists of the following indications

BLUE	Passenger call
AMBER	LAV call
GREEN	Station to station call
RED	Flight deck call

6A.13 Galleys

Four Galleys are located,

- | | | |
|-----------------|---|------------------------|
| 02 half galleys | - | FWD and AFT of R1 door |
| 01 Full galley | - | AFT of L4/R4 |
| 01 half galley | - | FWD of R4 door |

The water shut off valves for each galley is located adjacent to each galley unit.

6A.13.1 Galley Equipment

- Ovens
- Coffee Makers
- Fridge (FWD Galley)
- Water spigot

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 22

6A.13.2 Additional features


Locking devices

Half galley forward of R4 door,

A locking device is available which must be released and moved to remove the meal cart stowed close to the fuselage.



6A.14 Passenger Cabin/Galley

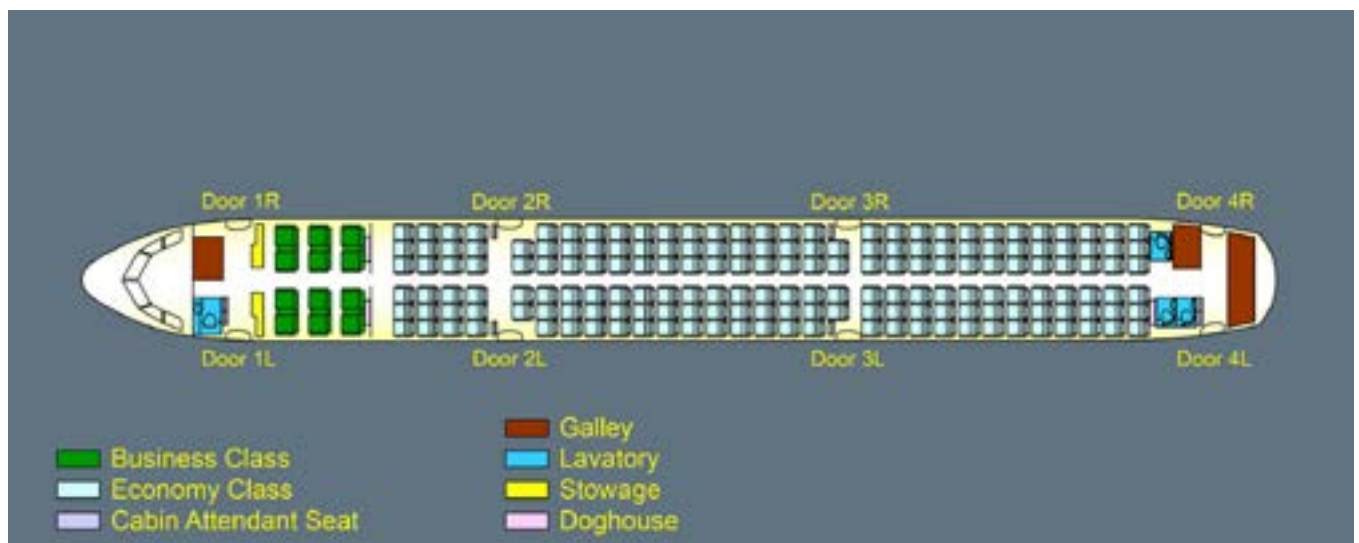

Features

- Seat Width 21" with a 160° recline
- Electrically control recline facilities
- Manual back-up to recline the seat and leg rest is under the hand rest
- Electrical socket with a voltage of 110V
- Personal reading light and air vent
- Two pin socket for head set
- Life vest stowed in-between the seat at the floor level

6A.14.2 Economy Class

Features

- Seat width 18"

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 23

- Manually control recline facility
- Adjustable head rest
- Two pin socket for head set
- Personal reading light and air vent
- Life vest stowed under the seat

6A.15 Special Passenger Seats

6A.15.1 UM/YP Seating

Second and third rows in the aft of BC cabin & Second and third rows in the forward of the EY cabins are allocated (Window Seats)

6A.15.2 Passengers with Disability

Ref - 6A.47

6A.15.3 Stretcher Positions

Ref - 6A.47

6A.15.4 Emergency Exit Rows

Ref 2.25.1

6A.15.5 Bassinets

Bassinets points

Ref - 6A.47

6A.16 Forward Attendant Panel

Located above L1/L1A crew seat

Digital touch system with following features

- Audio Control
- Cabin/Galley Lighting Control (BRT, DIM 1, DIM 2)
- Temperature Control
- Slide and Doors indications
- LAV smoke detectors
- Water and Waste quantities

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 24

6A.16.1 Emergency

Protected with a transparent cover

Emergency light switch

1. EVAC CMD pb
2. EVAC RESET pb
3. LAV SMOKE RESET pb
4. Emergency path lights in the cabin are floor path lights.

6A.17 Additional Attendant Panel


Located FWD of L4 Door

Manual operation with the following,

1. Cabin and Galley lighting control (BRT, DIM 1, DIM 2)
2. EVAC RESET pb
3. LAV SMOKE RESET pb
4. Call reset pb

“EVAC RESET” is available at R2/R3/L4 stations

6A.18 Lavatories

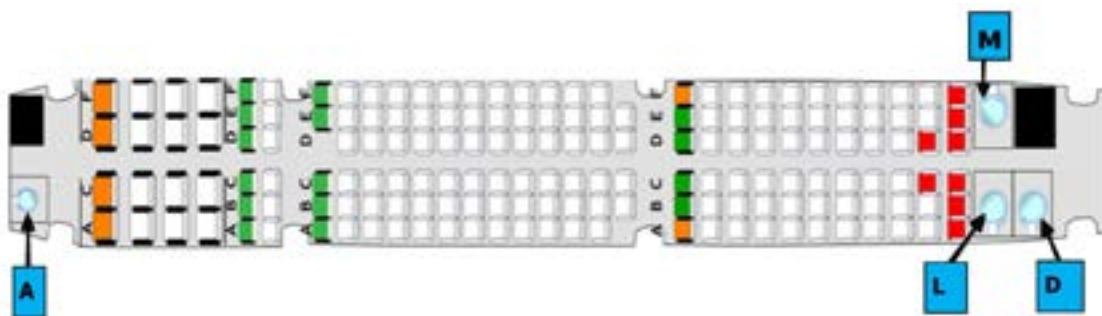

6A.18.1 Lavatory Identification

- Lav “A” – FWD cabin behind the flight deck
- Lav “L” – AFT cabin FWD of L4 Door
- Lav “D” – AFT cabin FWD of L4 Door
- Lav “M” – AFT cabin FWD of half galley at R4

6A.18.2 Lavatory Facilities

- Diaper changing boards and PWD use assist handles
- Single doors out ward opening
- Water shut off valve located under the sink
- Water heater

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

- Smoke detector
- Waste bin extinguisher with a gauge


6A.19 Manual Release Tool

Located under each crew seat. Used to open the oxygen compartment door by inserting in to the slot in oxygen compartment door.



6A.20 Demonstration Stations

The CCMs positioning locations for the manual demonstrations.

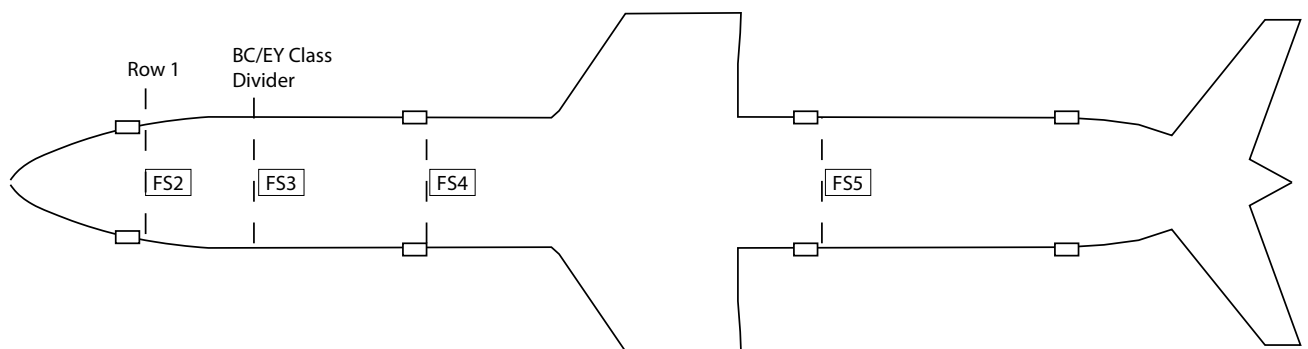

6A.20.1 Emergency Landing –CCM Responsibilities

Ref 6.28

6A.20.2 Prepared Emergency Landing - Flight Crew Check List

	PRE-LANDING	POST-LANDING
PIC	1. EMER call to the Purser 2. Carry out NITS Briefing 3. Announcement to passengers 4. Command crew to be seated 5. Command to brace	1. Order/Activate EVAC command. 2. Assist in evacuation. 3. Evacuate (preferably R4 door)
F/O	1. Follow PIC instructions	1. Take the Emergency Medical Kit (A10) 2. Assist in evacuation 3. Evacuate (Preferably L4 door)

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 26

Unprepared Emergency Landing Flight Crew Checklist
Ref 6.28.3

6A.20.2.1 Emergency Landing Check List for CCM's

CREW	PRE-LANDING	POST-LANDING
L1	1. Receive NITS briefing 2. Brief CCMs 3. Carry out preparation phases 4. Supervise preparations 5. Report to PIC 6. Secure self 7. Assume brace Position 8. Repeat brace commands	1. Activate the emergency lights (optional) 2. Order/Activate the EVAC Command (optional) 3. Silence the EVAC Horn 4. Check outside conditions 5. Open L1 door 6. Expedite evacuation 7. Check your area/assist in other areas 8. Take ELT/megaphone/torch 9. Evacuate
L1A	1. Secure B/C cabin and galley 2. Report to Purser 3. Secure self 4. Assume brace Position 5. Repeat brace command	1. Check outside conditions, open R1 door 2. Expedite evacuation 3. Check your area/assist in other areas 4. Take FA kit & Torch 5. Evacuate
R2	1. Carry out preparations 2. Report to CS 3. Secure self 4. Assume brace Position 5. Repeat brace Command	1. Silence the EVAC horn 2. Check outside conditions 3. Open R2 door, Command ABP to open L2 door if safe 4. Expedite evacuation 5. Check your area/assist in other areas 6. Take Torch 7. Evacuate
L3/R3	1. Carry out preparations 2. Report to CS 3. Secure self 4. Assume brace Position 5. Repeat brace Command	1. Silence the EVAC horn 2. Check outside conditions/open L3/R3 doors 3. Expedite evacuation 4. Check your area/assist in other areas 5. Take Torch 6. Evacuate

Revision No	02	Revision Date	15 August 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 27

L4	1. Carryout/supervise preparations 2. Report to Purser 3. Secure self 4. Assume brace Position 5. Repeat brace command	1. Silence the EVAC horn 2. Check outside conditions 3. Open L4 door 4. Expedite evacuation 5. Check your area/assist in other areas 6. Take Torch 7. Evacuate
L4A	1. Secure galley (aft) 2. Report to CS 3. Secure self 4. Assume brace Position 5. Repeat brace Command	1. Check outside conditions 2. Open R4 door 3. Expedite evacuation 4. Check your area/assist in other areas 5. Take/Torch/ Megaphone /ELT & F/A kit 6. Evacuate

6A.20.3 Unprepared Emergency landing CCM Checklist

Ref 6.28

6A.20.4 Emergency Ditching CCM Responsibilities

Ref 6.28.6

6A.20.5 Prepared Ditching Flight Crew Check List

	PRE-DITCHING	POST-DITCHING
PIC	1. EMER call to the Purser 2. Carry out NITS Briefing 3. Don personal life vest 4. Announcement to passengers 5. Command crew to be seated 6. Command to brace	1. Order/Activate EVAC CMD 2. Activate EMER lights 3. Assist in evacuation 4. Inflate life vest 5. Board available raft
F/O	1. Follow PIC, instructions 2. Don personal life vest	1. Take the Emergency Medical Kit (A10) 2. Assist in evacuation 3. Inflate life vest 4. Board available raft

6A.20.6 Unprepared Ditching Flight Crew Check List

Ref 6.28.8

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 28

6A.20.7 Prepared Ditching CCM's Check List

CREW	PRE-LANDING	POST-LANDING
L1	1. Receive NITS Briefing 2. Brief CCMs 3. Initiate emergency announcement 4. Supervise cabin/passenger preparation 5. Don personal life vest 6. Report to PIC - preparation completed 7. Assume brace Position 8. Repeat brace command	1. Activate emergency lights 2. Order/Activate EVAC Command 3. Silence EVAC horn 4. Check out side conditions 5. Open L1 door and deploy slide/raft 6. Attach survival pack 7. Ensure passengers inflate their life vests prior to leaving the aircraft 8. Expedite evacuation 9. Check your area/assist in other area's 10. Take Megaphone/ELT & Torch 11. Inflate life vest 12. Leave aircraft board L1 raft 13. Detach and disconnect slide/raft 14. Command L1 Raft
L1A	1. Secure galley (FWD) 2. Don personal life vest 3. Report to Purser 4. Secure self 5. Assume brace Position 6. Repeat brace command	1. Check out side conditions 2. Open R1 door & deploy slide/raft 3. Attach survival pack 4. Ensure passengers inflate their life vest prior to leaving the aircraft 5. Expedite evacuation 6. Check your area/assist in other area's 7. Take Torch & F/A kit 8. Inflate life vest 9. Leave aircraft and board R1 raft 10. Detach and Disconnect slide/raft 11. Command R1 raft

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 29

R2	1. Carry out preparations 2. Don personal life vest 3. Report to CS 4. Secure self 5. Assume brace Position 6. Repeat brace command	1. Silence EVAC horn 2. Block L2/R2 exits and redirect passengers 3. If Required, Open R2 in disarm mode, launch the portable raft 4. Secure activation line, throw raft out and pull sharply to inflate 5. Once fully inflated order evacuation 6. Ensure passengers have inflated the life vest 7. Once all passengers boarded check your area and assist in other areas 8. Take Torch 9. Board portable raft cut activation line and move away 10. Attach portable raft to R1 raft 11. Erect Canopy
L3/R3	1. Carry out preparations 2. Don personal life vest 3. Report to CS 4. Secure self 5. Assume brace Position 6. Repeat brace command	1. Silence EVAC horn 2. Block exit and redirect passengers to usable exits 3. Take Torch 4. Board available raft
L4	1. Carry out/supervise preparations 2. Don personal life vest 3. Report to Purser 4. Secure self 5. Assume brace Position 6. Repeat brace command	1. Silence EVAC horn 2. Silence the EVAC horn 3. Check out side conditions 4. Open L4 door and Deploy slide/raft 5. Attach survival pack 6. Ensure passengers inflate their life vest prior to leaving the aircraft 7. Expedite evacuation 8. Check your area/assist in other areas 9. Take Torch 10. Inflate life vest 11. Leave aircraft board L4 raft 12. Detach and disconnect slide/raft 13. Command L4 raft

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

L4A	1. Secure galley (AFT) 2. Don personal life vest 3. Report to CS 4. Secure self 5. Assume brace Position 6. Repeat brace command	1. Lock and stow swivel seat 2. Check out side conditions 3. Open R4 door and Deploy slide/raft 4. Attach survival pack 5. Ensure passengers inflate their life vest prior to leaving the aircraft 6. Expedite evacuation 7. Check your area/assist in other areas 8. Take/Torch/Megaphone/ELT & First Aid Kit 9. Inflate life vest 10. Leave aircraft and board R4 Raft 11. Detach and disconnect slide/raft 12. Command R4 raft
-----	---	--

6A.20.8 Unprepared Ditching CCM Checklist

Ref: 6.30.1 / 4.11.6.5

6A.21 Cabin Safety Minimum Equipment List

EQUIPMENT	NUMBER INSTALLED	MINIMUM FOR DISPATCH/ EX OTHER STATIONS
Oxygen	08	05
Extinguishers	07	04
PBE	07	05
ELT	02	02
Megaphones	02	02
First Aid Kit	02	02
Emergency Medical Kit (A10)	01	01
Axe	01	01
Protective Gloves	01	01
Infant Life Vest	16	01 for every infant
Kangaroo Belts	20	01 for every infant
Spare Seat Belt	01	01
Survival kits	04	04
Adult/Child L/V	05	05
MRT	07	05
Portable life raft	01	01
Torches	07	05
ERK	01	01

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 31

6A.21.1 Reserved

INTENTIONALLY LEFT BLANK

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 32

6A.21.2 Reserved

INTENTIONALLY LEFT BLANK

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 33

6A.22 Reserved

6A.23 A321 Minimum number of Oxygen Bottles required

Ex-Base for dispatch – **08**

All Portable bottles of oxygen shall read over **1500 PSI**

Ex-En route stations minimum required for safe dispatch

- 1. 04 bottles at 1000 PSI**
- 2. 01 bottles at 500 PSI**

MEDA Bottle of oxygen is located in the **L2** overhead compartment.

Limitations – Bottles above the minimum requirement for dispatch may be used to administer first aid oxygen to a minimum of **250 PSI**

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 34

A321 – NEO

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 35

6A.24 A321 Neo

6A.24.1 Aircraft Specific

Description

The A321 NEO is a short to medium range, single aisle subsonic transport aircraft, powered by two turbofan engines. The fuselage has a circular cross section and is entirely pressurized with the exception of the nose and tail cone, the landing gear bays, the air conditioning compartments and the cargo compartments. The flight deck is designed to accommodate two operating crewmembers and two observers. Any combination for cabin attendant seats may be provided with a minimum of 5 primary seats.

6A.24.2 Aircraft Specifics

Model	- A321 - NEO
Operating Range	- 3,700nm, 6850 Km
Flight Deck Seats	- 02
Flight Deck Observer Seats	- 02
Cabin Crew Seats	- 08 (L1, L1A, L2, R2, L3, R3 L4/L4A)
Configuration	- Business Class 12, Economy Class 176

6A.24.3 Minimum cabin crew required – 05.


The exits to be manned are L1,R2,L3,L4,L4A

Note: Door primary at L1 shall operate the R1 Exit and be responsible to take the F/Aid kit at R1 in the event of an emergency.

6A.25 Doors/ Emergency Exits/Flight Deck Escape Route

The A 321 is equipped with

- Type “I” Doors (04)
- Type “C” Exits (04)
- Two sliding windows in the flight deck for emergency escape

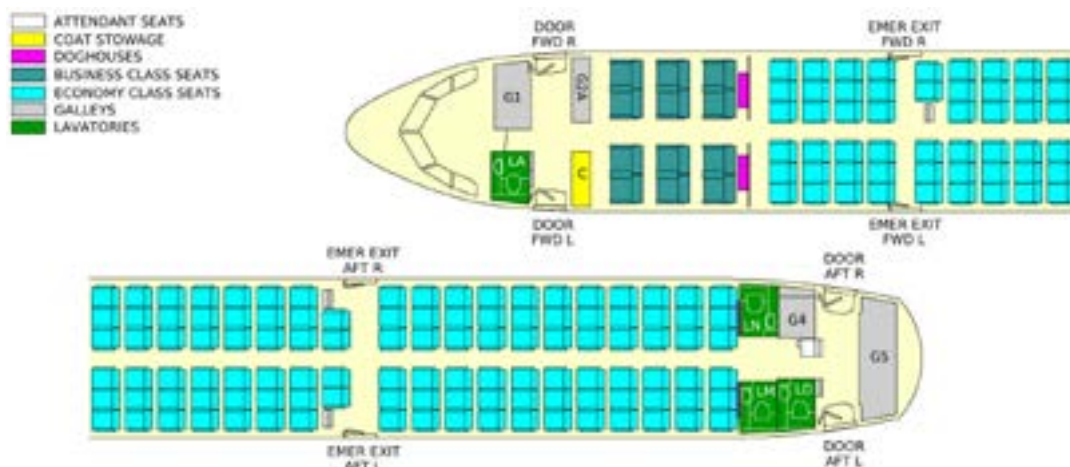


Type “I” Doors are used for normal and emergency operation

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Type "C" Exits are used only during an emergency

The Type "C" emergency exits are located at L2, R2, L3, R3 which are located FWD and AFT of the wings. These exits do not consist of a raft but a single lane slide.

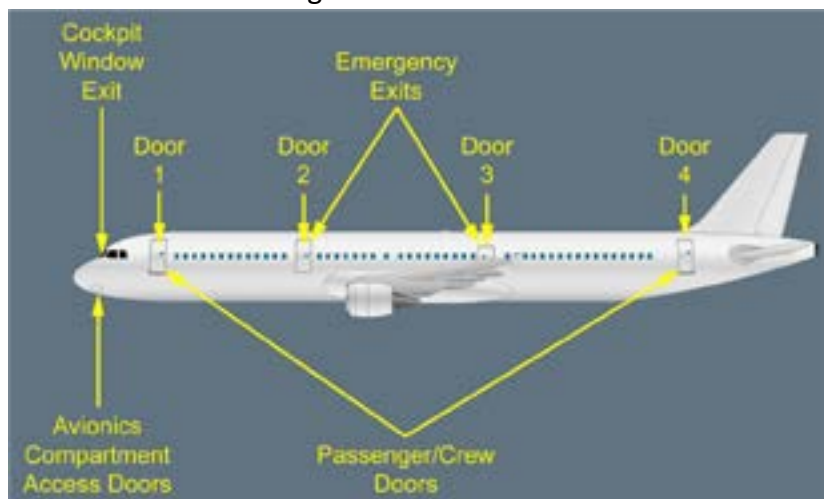

6A.26 Crew Seats and Stations

STN	CCM	STN	CCM
L1	Purser	L1A	F/SS 2
L2	Not Occupied	R2	F/SS 3
L3	F/SS 4	R3	F/SS 5
L4	C/S	L4A	G/S 1

6A.27 Business Class Seats

- Seat Width 21" with a 160° recline
- Manual back-up to recline the seat and leg rest is under the hand rest
- Electrical socket with a voltage of 110V
- Personal reading light and air vent
- Two pin socket for head set
- Coat Closet with a pull out railing for easy storage
- Life vest stowed in-between the seat at the floor level

6A.28 Economy Class Seats

- Seat width 18"
- Manually control recline facility
- Adjustable head rest
- Two pin socket for head set
- Personal reading light and air vent
- Life vest stowed under the seat

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 37



6A.29 Special Passenger Seats

6A.29.1 UM/YP Seating

- B/C - Second and third rows of seats from the forward
- EY - Window Seats

6A.29.2 PWD Seating

- B/C - 2F/3F
- E/Y - 14 to 18 F

6A.29.3 Stretcher Positions

- The primary stretcher position is the last three rows on the right hand side
- 34/35/36 ABC and 34/35/36 DEF (2 positions)

6A.30 Portable Raft

- The portable raft (EAM T25) is capable of carrying 25 heads with an over load capacity of **38**.
- It is to accommodate the over flow if one of the rafts are unserviceable.
- It is stowed in the overhead compartment at row 9 DEF
- It shall be deployed from R2 door. CCM shall ensure the slide is disarmed prior to opening the R2 door
- If all rafts are serviceable the portable life raft should not be launched

Detail/Total Heads

BC	12
EY	176
Total Crew	9
Total Heads	197
3 Serviceable Rafts X 55 = 165 Over-flow of 32 heads to be accommodated in the portable raft	

6A.30.1 During a land evacuation

All doors and exits shall be used as primary exits.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 38

6A.30.1.1 In the event of a ditching

The primary exits are L1,R1,L4,R4

6A.30.2 Deploying the Portable Raft

Ref 6A.9

6A.30.3 Erecting the Canopy

Ref 6A.9

6A.31 Crew Seat Features

Ref 6A.12.1/6.12.2/6.12.3

6A.32 Emergency Exit Rows

Ref 2.25.1

Briefing at Type 'C' exits Ref 6A.10

6A.33 Bassinet Points

Economy Class - 6 A, B, C / 6 D, E, F

6A.34 Forward Attendant Panel

Located above L1/L1A crew seat

Digital touch system with following features

- Audio Control
- Cabin/Galley Lighting Control (BRT, DIM 1, DIM 2)
- Temperature Control
- Slide and Doors indications
- LAV smoke detectors
- Water and Waste quantities

6A.35 Emergency Panel (sub panel)

Protected with a transparent cover

- Emergency light switch
- EVAC CMD pb
- EVAC RESET pb
- LAV SMOKE RESET pb

6A.36 Additional Attendant Panel

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 39

Located FWD of L4 Door

Manual operation with the following,

- Cabin and Galley lighting control (BRT,DIM 1, DIM 2)
- EVAC RESET pb
- LAV SMOKE RESET pb
- Call reset pb

In addition to FAP & AAP the “EVAC RESET” is also available at R2, R3
Emergency floor path lights in the cabin are photo luminescent strips.

6A.37 Galleys

Three Galleys are located,

- 01 half galley - FWD Of R 1 door
- 01 half galley - FWD of R4 door
- 01 Full galley - AFT of L4/R4


The water shut off valves for each galley is located adjacent to each galley unit.

6A.37.1 Master Power Switch

Located on the circuit breaker panel on FWD/AFT galleys.



NOTE: On 4R ANE/F aircraft the AFT galley is equipped with a door next to each waste bin which shall be open after removing the meal carts in case of a fire. If the waste bin requires to be removed as the slide pack cover blocks the removal during flight.

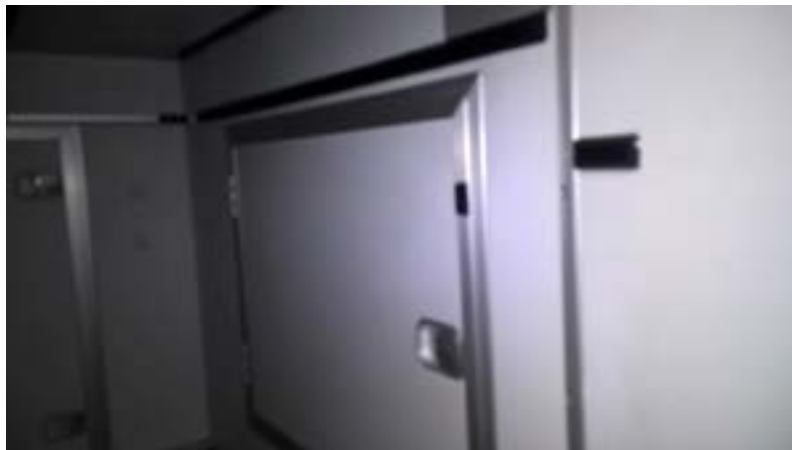

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 40

6A .38 Lavatories



6A.38.1 Lavatory Identification

Lav "A" – FWD cabin behind the flight deck

Lav "L" – AFT cabin FWD of L4 Door (smart Lav)


Lav "D" – AFT cabin FWD of L4 Door (smart Lav)

Lav "M" – AFT cabin FWD of half galley at R4 (smart Lav)

Waste Bin Extinguisher (smart LAV D/L/M) : Refer A320 Neo

Water Shut off valve (smart LAV D/L/M) : Refer A320 Neo

6A.39 Demonstration Stations

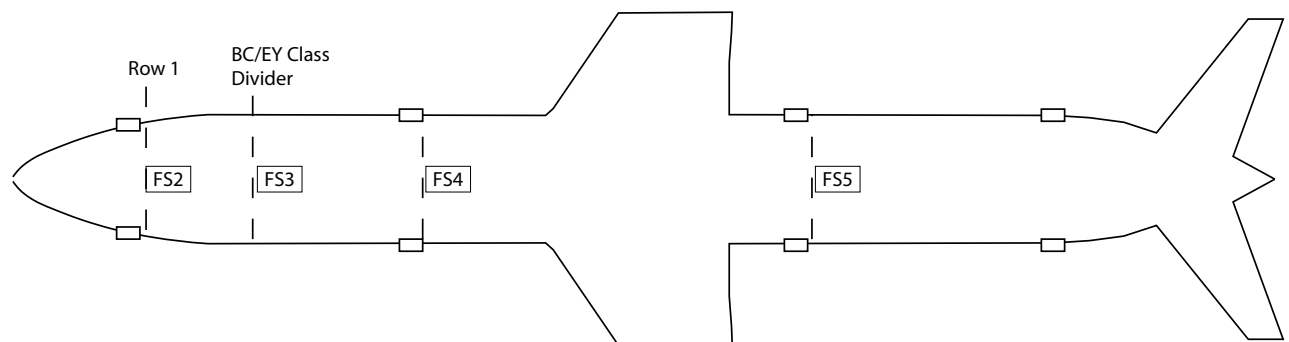

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 41

6A.40 Emergency Landing CCMs Check List

CREW	PRE-LANDING	POST-LANDING
L2	1. Carry out preparations 2. Report to CS 3. Secure self 4. Assume brace Position 5. Repeat brace Command	1. Check outside conditions 2. Open L2 door 3. Expedite evacuation 4. Check your area/assist in other areas 5. Take Torch 6. Evacuate
L4A	1. Carry out preparations 2. Report to CS 3. Secure self 4. Assume brace Position 5. Repeat brace Command	1. Check outside conditions 2. Open R4 door 3. Expedite evacuation 4. Check your area/assist in other areas 5. Take torch, AFT first aid kit, AFT-ELT and Megaphone 6. Evacuate

Other CCM duties remain as per the A 321 fleet check list

6A.41 Ditching CCMs Check List

CREW	PRE-LANDING	POST-LANDING
L2	1. Carry out preparations 2. Don personal life vest 3. Report to CS 4. Secure self 5. Assume brace Position 6. Repeat brace command	1. Block L2 exits and redirect passengers 2. Check your area and assist in other areas 3. Take Torch 4. Board available raft
L4A	1. Carry out preparations 2. Don personal life vest 3. Report to CS 4. Secure self 5. Assume brace Position 6. Repeat brace command	1. Check out side conditions Open R4 door and Deploy slide/raft 2. Attach survival pack 3. Ensure passengers inflate their life vest prior to leaving the aircraft 4. Expedite evacuation 5. Check your area/assist in other areas 6. Take /Torch / AFT - Megaphone / ELT & F/ A Kit 7. Inflate life vest 8. Leave aircraft and board R4 Raft 9. Detach and disconnect slide/raft 10. Command R4 raft

Other duties remain as per the A 321 fleet

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 42

6A.42 Cabin Safety Minimum Equipment List

EQUIPMENT	NUMBER INSTALLED	MIN. FOR DISPATCH
Oxygen	08	05
Extinguishers	08	04
PBE	08	05
ELT	02	02
Megaphones	02	02
First Aid Kit	02	02
Emergency Medical Kit (A10)	01	01
Axe	01	01
Protective Gloves	02	
Infant Life Vest	16	01 for every infant
Kangaroo Belts	20	01 for every infant
Spare Seat Belt	01	01
Survival kits	04	04
Adult/Child L/V	05	05
MRT	08	05
Portable life raft	01	01
Torches	08	05

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 43

6A.43 Door Primary Oxygen

CCM	A 321 Neo
L1	Overhead compartment left hand side
L1A	Overhead compartment left hand side
L2	Overhead compartment at L2
R2	Overhead compartment at R2
L3	Over Head Compartment at L3
R3	Over Head Compartment at R3
L4	Over Head Compartment at L3
L4A	Over Head compartment at R3

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	A321 AIRCRAFT		Anx 'A' Ch 06
			Page 44

6A.44 A321 Neo Aircraft Safety Equipment list

Protective Breathing Equipment (08)			Emergency Locator Transmitters (02)			Survival Kits (04)		
L1/L1A	Crew Seat Head Rest	02	L1	Overhead Compartment	01	R1	Over Head Compartment	02
L2/R2	Over Head Compartment	02	L4	Overhead Compartment	01	L4	Over Head Compartment	02
L3/R3	Over Head Compartment	02	Portable Life Raft (01)					
L4/L4A	Crew Seat Head Rest	02	R2	O/H compartment 9 D/E/F	01	AMBU BAG(01)		
						L4	Over Head Compartment	01
			Infant Life Vests (16)			FIREPROOF GLOVES PAIR (2)		
			Over Head Compartment L1/R1/L2/R2/L3/R3		02 each	L1A	Compartment Under the Crew Seat	01
Portable Oxygen (08)			R4	Over Head Compartment	04	L4A	Compartment under the crew seat	01
L1	Over Head Compartment	02						
L2/R2	Over Head Compartment	02				NO EXIT PLACARDS 04		
L3/R3	Over Head Compartment	04	Spare Adult/Child Life Vest (05)			L1	Over Head Compartment	04
			R4 Over Head Compartment - 05					
Extinguishers (08)						AISLE WHEELCHAIR		
L1/L1A	Compart/Under the Crew Seat	02	Adult/Child Life Vest (Cabin)			Overhead Compartment 20DEF -01		
L2/R2	Compart/Under the Crew Seat	02	BC	In between Passenger Seats	01	DEMO Kits (04)		
L3/R3	Compart/ Under the Crew Seat	02	EY	Under Each Passenger Seat	01	R1	Over Head Compartment	02
L4/L4A	C/Under & Above the Crew Seat	01+01				R4	Over Head Compartment	02
			Kangaroo Belts (20)					
Emergency Flashlights (08)			L1	Over Head Compartment	10	Flight Deck Equipment		
Compartment Under the Crew Seat		01 each	R4	Over Head Compartment	10	Extinguisher – behind F/O’s seat		01
						PBE – Behind F/O’s seat		01
Manual Release Tool (08)			Spare Seat Belt			Axe – Behind F/O’s seat on bulkhead		01
Compartment Under the Crew Seat		01 each	R4	Over Head Compartment	01	Heat Res: Gloves pair – Above the axe		01
						Emergency Medical Kit (A10) – Behind F/O’s seat		01
Crew Life Vests (08)			Emergency Response Kit (01)			Res: Ties kit – Coat Closet		01
Compartment Under the Crew Seat		01 each	R4	Over Head Compartment	01	Torch – Every seat		02
						Crew Life Vests – Every seat		04
First aid Kits (02)			Megaphones (02)			Escape Rope – Above the sliding windows		02
R1	Over Head Compartment	01	L1	Over Head Compartment	01	Quick Donning Masks – Adjacent to seats		04
R4	Over Head Compartment	01	L4	Over Head Compartment	01	AED. – Coat Closet		01


Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

6A.45 A321 Neo Aircraft Safety Equipment Locations

AFT CABIN

MID CABIN

FLIGHT DECK & FWD CABIN

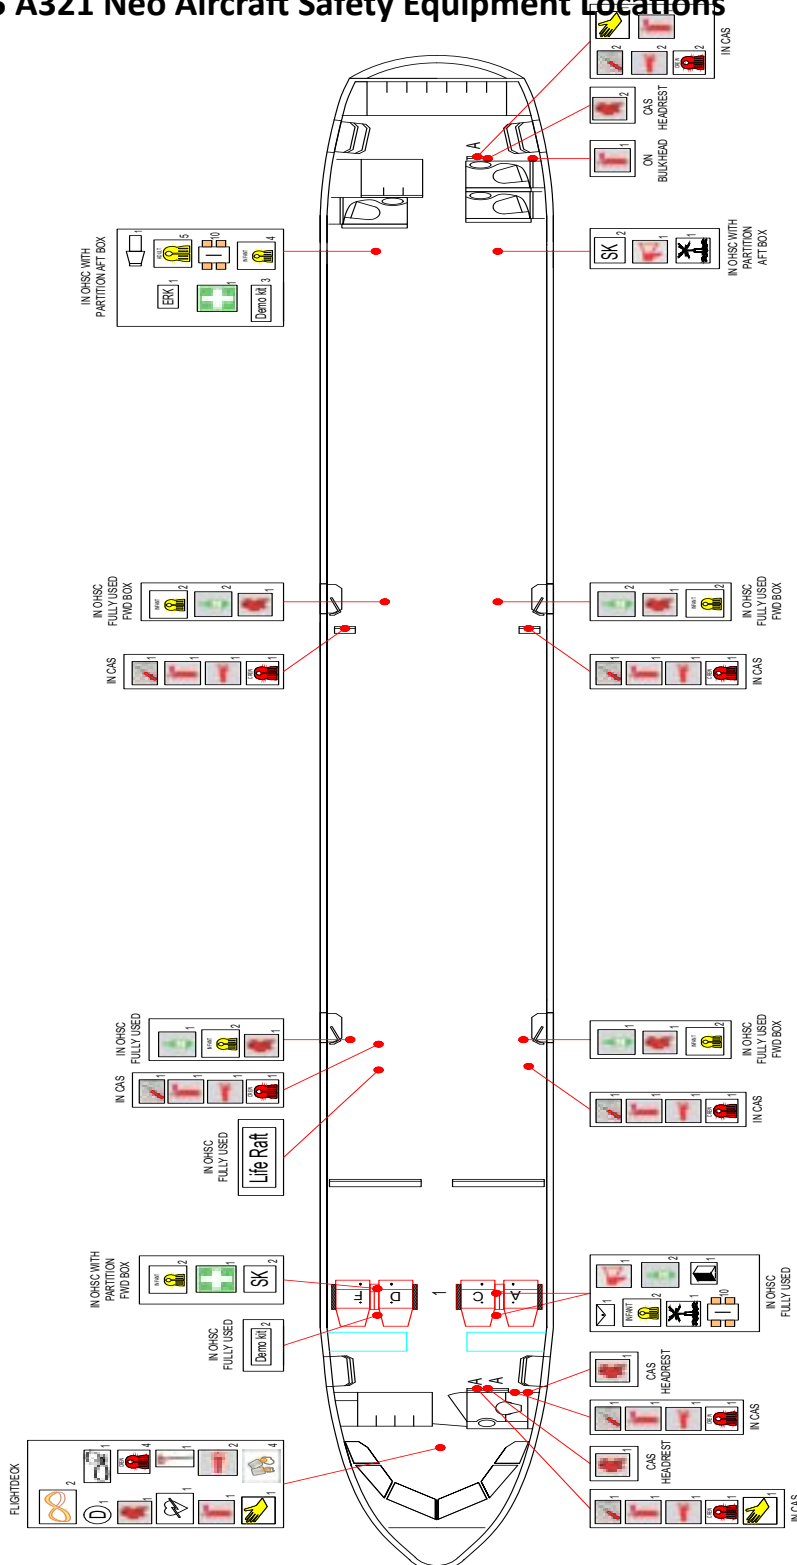

SYMBOL	DESCRIPTION
	SURVIVAL KIT
	EMERGENCY RESPONSE KIT
	DOCTORS/MEDICAL KIT
	SPARE SEAT BELT
	ESCAPE ROPE

SYMBOL	DESCRIPTION
	INFANT LIFE JACKET
	OXYGEN BOTTLE
	NO EXIT PLACARD POUCH
	ELT
	INFANT SEAT BELT

SYMBOL	DESCRIPTION
	MEGAPHONE
	MANUAL RELEASE TOOL
	DEMO KIT
	FIRST AID KIT
	LIFE RAFT

SYMBOL	DESCRIPTION
	RESTRAINT KIT
	CREW LIFE JACKET
	FIRE PROOF GLOVES PAIR
	SPARE LIFE JACKET
	TORCH

SYMBOL	DESCRIPTION
	EMERGENCY CRASH AXE
	PORTABLE FIRE EXTINGUISHER
	SMOKE HOOD
	QUICK DONNING MASK
	DEFIBRILLATOR

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 46

6A.46 A321 Neo Dispatch of an Aircraft with an In-Operative Door Doors

Number installed	Number required	Placard
8	7	YES

Applicable only on ANC/D/E/E/F

Inoperative Door	Seats to be Blocked
L1 or R1	Seat Rows 1-3 (all) Seat Rows 6(all) Row 7(A and F only)
L1 or R1 (If required to Retain BC seats)	Seat Rows 6-8 (all) and Row 9A and 9F
Emer L2 or R2	Seat Rows 10-17 (all) and Row 18A and 18F
Emer L3 or R3	Seat Rows 21-24 (all) Row 20ABF Row 25-26 (all) 27ABDEF
L4 or R4	Seat Rows 30-36 (all)

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 47

6A.47 Quick Reference Guide for ANC/D/E/F

SEATING CATEGORIES	BUSINESS CLASS	ECONOMY CLASS	REMARKS
Bassinet	N/A	6AF	
Emergency Exits	N/A	Row 10 & 25	
Maximum Leg Room	IACDF	Row 6, 10 & 25	Avoid allocating BSCT positions
Stretcher positions	N/A	34/35/36 DEF 34/35/36 ABC	01 st Position 02 nd Position
Passengers with Reduced Mobility	2F/3F	12F, 14 - 18F	
Unaccompanied Minors	N/A	12A, 14-22A & 19-23F	
Prisoners	N/A	Rear End	Window or Centre Seat with an able bodied passenger
Deportee/INAD	N/A	Rear End	No Aisle seats.
Over wing	N/A	ROWS 15-23	
Cabin Crew Seats		8	
Completely immobile passengers	N/A	34/35/36 DEF 34/35/36 ABC	With an escort

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	A321 AIRCRAFT	Anx 'A' Ch 06
		Page 48

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Mar25
	PROVISIONAL ISSUE	Chapter 07
		Page 1

CHAPTER 07

Provisional Issue

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Mar25
	PROVISIONAL ISSUE	Chapter 07
		Page 2

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Mar25
	PROVISIONAL ISSUE	Chapter 07
		Page 3

Safety and Emergency Procedures Manual shall be updated with all provisional issues incorporated into the manual within 90 days

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Mar25
	PROVISIONAL ISSUE	Chapter 07
		Page 4

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 1

CHAPTER 08 **SECURITY PROCEDURES**

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 2

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 3

CONTENTS

8.0 SECURITY PROCEDURES	6
8.1 International Conventions, National Legislations and ICAO Annexes	6
8.1.1 Aircraft and Flight Security	6
8.1.2 Purpose of security measures	7
8.1.2.1 Searches and checks of aircraft	7
8.1.2.2 Standard of searches and checks	7
8.1.3 Control of access to aircraft	7
8.1.4 Co-operation with Airport Authorities	8
8.1.5 Head of Security/Senior Manager Security and Investigations	8
8.1.6 PIC/Purser Responsibilities	8
8.1.7 Identity Cards	8
8.1.7.1 Loss/Theft of ID card	8
8.1.8 Security of Crew, Cabin and Hold Baggage	8
8.1.8.1 Standards of screening and searching	8
8.1.8.2 Baggage Identification	9
8.1.9 Apron Security	9
8.1.10 Unattended Aircraft	9
8.1.11 Unscheduled Night Stops	9
8.1.12 Passenger Baggage Search	9
8.1.13 Transit Point Security Check	10
8.2 Airport Categorisation & Security Measures	10
8.2.1 Airport Categorisation	10
8.2.1.1 Responsibility for classification of bomb warning	17
8.2.1.2 Officials to Notify and Threat Assessment	17
8.2.1.3 Threat Assessment by PIC	17
8.2.1.4 Isolated aircraft parking position	18
8.2.1.5 Search of aircraft - Inflight	18
8.2.1.6 Discovery of suspect or prohibited articles	19
8.3 Bomb On Board	19
8.3.1 Suspect Object	20
8.3.2 Bomb On Board - Cabin Crew Procedure	20
8.3.3 Categorisation of Airport	25
8.3.3.1 Threat Level Categories	25

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 4

8.3.4 Security Measures	26
8.4 Hijack Management	28
8.4.1 Motivation, Objectives and Type of Hijackers	28
8.4.2 Aircraft Hijack	29
8.4.2.1 Stages of a Hijack	29
8.4.3 Hijacker on board – recommended action by cabin/flight crew	30
8.4.3.1 Communication to the crew (Cabin to Flight Deck)	30
8.4.4 Action and Responsibilities of the Flight Deck Crew.....	30
8.4.5 Action and Responsibilities by Cabin Crew	32
8.4.6 Guidelines For Handling A Hijack Situation	34
8.4.7 The Aftermath Of A Hijacking	35
8.5 Firearms/Weapons/Restricted Articles.....	35
8.5.1 Carriage	35
8.5.2 Legal provisions and regulations	35
8.6 Vandalism, Sabotage.....	35
8.7 Chemical Biological Weapons (CBW) Threat Against Aircraft	36
8.7.1 Cabin - Threat without Activation	37
8.7.2 Cabin - Threat with Activation	37
8.8 Responses to Acts of Unlawful Interference	38
8.8.1 Threat Assessment	38
8.8.2 Crew Response according to Threat Level	39
8.9 Policy for unruly passengers.....	41
8.10 Reporting procedures.....	41
8.11 Company Procedure For Carriage Of Arms/ Ammunitions	42

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 5

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 6

8.0 SECURITY PROCEDURES

8.1 International Conventions, National Legislations and ICAO Annexes

International Conventions:

1. Convention on Offences and Certain Other Acts Committed Onboard Aircraft (1963 Tokyo Convention)
2. Convention for the Suppression of Unlawful Seizure of Aircraft (1970 Hague Convention)
3. Convention for the Suppression of Unlawful Acts Against the Safety of Civil Aviation (1971 Montreal Convention)
4. Protocol for the Suppression of Unlawful Violence at Airports Serving International Civil Aviation - Supplementary to the Convention of Suppression of Unlawful Acts Against the Safety of Civil Aviation (1988 Montreal Protocol)
5. Convention on the Marking of Plastic Explosives for the Purpose of Detection, Done at Montréal on 1 March 1991 (Doc 9571, MEX Convention);
6. Protocol-Supplementary to the Convention for the Suppression of Unlawful Seizure of Aircraft (2010 Beijing Protocol)
7. Convention for the Suppression of Unlawful Acts Relating to International Civil Aviation (2010 Beijing Convention)
8. Protocol to amend the Convention on Offences and Certain Other Acts Committed Onboard Aircraft (2014 Montreal Protocol / MP14)

National Law

Following legislations have a bearing to AVSEC within Sri Lanka's territory, and extraterritorial jurisdiction in appropriate cases.

1. Offences Against Aircraft Act, No. 24 of 1982
2. Suppression of Unlawful Acts of Violence at Airports serving international Civil Aviation (Act No. 31 of 1996)
3. Civil Aviation Authority of Sri Lanka Act, No. 34 of 2002
4. Civil Aviation (Interim) Regulations, No. 01 of 2002
5. Civil Aviation Act, No. 14 of 2010 as amended in 2018.

ICAO Annexes

1. ICAO Annex17 (Edition 12)
2. ICAO Annex 6 Chapter 13 (Edition 12)

8.1.1 Aircraft and Flight Security

General

Due to a serious build of aviation security threats the authorities has eagerly promoted awareness and made it mandatory a high level of security is established and maintained in the aviation sector. Taking

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 7

in to account the past incidents experienced SriLankan airlines Security department has formulated a detailed chapter to successfully mitigate the security threats that might prevail. It is compiled in compliance to the CAASL requirements and approved by the DGCA. This section refers in general terms to the precautions and procedures applicable to Cabin Crew, and may be supplemented by information in the Flight Crew Notices or Cabin Crew Notices. Any incident which has a bearing on security is to be reported to the Head of Security / Senior Manager Security & Investigations, Station Manager & Manager In-flight Services, Delivery.

8.1.2 Purpose of security measures

To ensure the security and safety of the aircraft against unlawful interferences

8.1.2.1 Searches and checks of aircraft

8.1.2.2 Standard of searches and checks

3. All service personnel boarding the aircraft with their carry-on items, shall be subjected to appropriate security checks
4. Ensure that disembarking passengers do not leave items onboard the aircraft at transit stops and or turnarounds
5. During transit, stopovers and turnaround cabin crew / SriLankan Security staff / hired Security agents, would conduct appropriate aircraft inspection / search

For obvious reasons, all reports and information on security matters shall be treated as confidential.

8.1.3 Control of access to aircraft

1. Standard of access control
 - Ensure unauthorized persons are being prevented from entering the aircraft, no person other than those listed below, would be permitted to board SriLankan aircraft
 - Director General of the Civil Aviation Authority of Sri Lanka (DGCA) or his representative to perform regulatory functions
 - Representatives of Aviation Authorities of other countries at their relevant stations for the purpose of regulatory functions
 - Customs/Immigration/Law Enforcement Officials according to perform official duties
 - Bona fide passengers issued with boarding cards for the particular flight
 - Authorized SriLankan staff
 - Authorized staff of Handling Agents
2. During transit stopovers and turnaround, cabin crew/SriLankan Security staff/ hired Security agents shall be on duty on board to prevent unauthorized entry into aircraft
3. Any unidentified / suspicious person found within the aircraft, shall be immediately reported to the Local Law Enforcement Authority/or Airport Authority

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 8

8.1.4 Co-operation with Airport Authorities

CCMs shall comply with security procedures required by airport authorities. At en-route stations the station manager or agent would ensure that procedures are compatible with local regulations. In the event of an aircraft diversion to any other airport, the PIC shall liaise with the local authorities to ensure the safety of the passengers and the aircraft.

8.1.5 Head of Security/Senior Manager Security and Investigations

The company has appointed a Head of Security/Senior Manager Security and Investigations who is responsible to liaise with national security authorities to evaluate levels of risk to SriLankan Airline's and its area of Operations.

In addition, he or his delegate (Duty Manager Security-ops) is responsible for informing the PIC/Purser of any security matter related to the current operations and/or duties.

8.1.6 PIC/Purser Responsibilities

The PIC is responsible for ensuring that security procedures at the aircraft that are pertinent to that particular flight have been completed prior to departure and before leaving the aircraft after the flight. Purser must report to the PIC that a Cabin Security checks such as galley compartments/Toilets/Meal Carts/Overhead Bins, have been completed before passengers' board, before departure.

Advice on non standard requirements and procedures at particular stations will be provided by the Senior Manager Security & Investigations.

8.1.7 Identity Cards

CCMs shall wear their ID cards clearly visible on the outside of their clothing when on duty within the restricted zone at an airport (except when traveling on duty as a passenger) and remove/securely stow their cards after boarding the aircraft.

It is the individual's responsibility to ensure that his/her identity card remains valid and that he/she is familiar with its conditions of issue and use.

All reasonable care shall to be taken to prevent loss or theft of ID cards, particularly when off duty, due to the security implications of misuse. It is even more serious if other identifying documents such as passports and licenses are lost or stolen at the same time.

8.1.7.1 Loss/Theft of ID card

Loss/Theft of ID card shall be reported to the Police in the area concerned immediately at the base or en-route station.

Subsequently the loss/theft shall be reported to the Purser/PIC/Station Manager/In-flight Services Department/Security & Investigations Department and the Human Resources Department (As applicable).

8.1.8 Security of Crew, Cabin and Hold Baggage

8.1.8.1 Standards of screening and searching

1. To ensure that crew, cabin and hold baggage intended for carriage onboard an aircraft engaged

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 9

in an International Civil Aviation operation, is x-ray screened in order to prevent security risk articles or prohibited items or any item which can be used in an act of sabotage or other forms of unlawful interference. In the event of failure of x-ray equipment same shall be subjected to manual search

2. At destinations other than Sri Lanka, screening duties will be performed by an agency authorized by the Aviation Authority of that state to screen crew, hold and cabin baggage
3. Flight Deck Crew and Cabin Crewmembers are to safeguard personal baggage against possible interference or substitution, from the time it is packed until handed over for loading. Suitcases shall be locked at all times when unattended
4. If hotel or airport arrangements are such that Airline crew bags are left unattended at any time, a Crewmember shall be delegated to supervise them
5. All crew hold baggage & crew hand baggage must carry a Crew label
6. All items labelled as Crew Baggage are to be checked-in as belonging to a crewmember before being handed over for loading onto the aircraft

8.1.8.2 Baggage Identification

If local procedures require that crew baggage shall be identified prior to boarding, such identification shall be done personally by the CCM concerned.

8.1.9 Apron Security

Only authorized persons are allowed in the vicinity of aircraft or equipment. Staff or appointed agents in ramp areas must be vigilant at all times; any suspicious behaviour is to be questioned, the suspect reported to the airport authorities and where possible, kept under observation until the arrival of security staff. All staff in ramp areas or in the airport restricted zone must wear valid I.D cards.

8.1.10 Unattended Aircraft

No air bridge/powered gangway or any other means of direct access from terminal or pier to aircraft may be in position against an aircraft unless under surveillance by staff or handling agents or appointed security agents. When the aircraft is left unattended on the ramp, it shall be parked with all doors, hatches and windows closed and steps and ground equipment withdrawn, except when parked within the restricted zone and subject to the surveillance mentioned above.

8.1.11 Unscheduled Night Stops

At an unscheduled night stop, where adequate Station staff and good security facilities exist, the PIC's responsibility for the safety of his aircraft is delegated to the Station Manager/Agent after it has been safely positioned for unloading.

8.1.12 Passenger Baggage Search

All passengers, their hand-baggage, and all duty-free items are to be searched except exemptions given by the SriLankan Airlines Security Manual chapter 4.8.12 before boarding the aircraft; the use of electronic metal detectors is approved for this purpose. Local security screening and boarding procedures must not permit passengers to by-pass this personnel search.

Any article considered a "security risk" is to be taken from a passenger and not to be loaded in aircraft cabin.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 10

Any cargo/ baggage or mail loaded in the hold or cabin shall be on completion of an appropriate security check. Checked/screened baggage shall be under the surveillance of the security staff until loaded on to the aircraft.

Particular attention shall be paid to originating passengers possessing tickets purchased on the day of travel and passengers without any records.

8.1.13 Transit Point Security Check

Flight Crew/CCMs and ground staff are to make a careful check, particularly at transit and terminal stations, that passengers who have completed their flight have left no bags or packages on the aircraft.

8.2 Airport Categorisation & Security Measures

8.2.1 Airport Categorisation

All airlines and airports have preventive systems on the ground aimed at preventing criminals and their weapons from getting into an aircraft. Such deterrents have played an important part in making aviation safer but they cannot totally prevent a resolute and ingenious criminal from beating the system. The continuing reports of hijack and sabotage incidents bear witness to this.

This section provides guidance on handling security situations such as hijacks, and security procedures for crew compliance. The guidelines are recommended by the world's aviation security or authorities based on in-depth studies of actual hijack and sabotage incidents. These organizations and Civil Aviation Authorities include ICAO, IATA, FAA, and State Civil Aviation Authorities.

Every security situation has its own unique features, and certain developments not covered within this handbook, may arise. Nothing in this section is intended to override sound reasoning and good judgment to be applied by crew when such situations develop.

1. Classification of a Bomb warning shall generally be based only on the first hand information
2. All bomb warnings may be classified as **SPECIFIC, NON SPECIFIC & HOAX**. The more information given by the caller, the more likely the threat shall be taken seriously. Each threat must be assessed to determine its significant risk it represents, so that appropriate measures may be implemented. SriLankan Airlines employees at home base or overseas shall ensure that contingency plans are provided for

- A controlled response by persons receiving bomb threats
- an assessment of the threat and risk involved by accredited personnel employed in positive target identification (P.T.I)
- detection of persons responsible for bomb threats and
- follow-up action

3. Bomb Threat assessors shall assess the threat by working methodically using the Bomb Threat Report Form, which is designed to lead them to a logical assessment of the threat, as described below.

CATEGORY RED (Level 3 - High) or **AMBER** (Level 2 - Intermediate) warnings against aircraft in-flight shall be notified immediately to the PIC and the destination or the nominated airport of

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

diversion.

4. CATEGORY **RED** warnings against aircraft in-flight shall be notified immediately to the Pilot-in-command of the aircraft and the destination or the nominated airport of diversion. The PIC may decide for an emergency landing and or evacuation of passengers
5. The following section provides criteria for three levels of threat conditions, which correlate to the three sets of suggested counter measures laid out in the risk management matrix
6. Security alert classification Under 3 Levels

- **Level One - Baseline - Green** - there is no verifiable intelligence to indicate that any aircraft operator or airport has been targeted for attack, but there is always the possibility of unlawful interference by person or group of persons for numerous reasons.
- **Level Two - Intermediate - Amber** - verifiable intelligence indicates the probability that civil aviation operations have been targeted for attack.
- **Level Three - High - Red** - verifiable intelligence indicates that civil aviation operations have been specifically targeted for attack.

7. The following security measures shall be used for **baseline, intermediate and high** threat conditions:

No	Focus Area	Level One - Green Baseline	Level Two - Amber Intermediate	Level Three - Red High
1	Passenger screening at departure gate	Screen all departing passengers by hand-search or using body scanners, metal detection equipment (WTMD supported by HHMD) before granting access to SRAs or boarding an aircraft. Irrespective of above, 10% of randomly selected passengers have to be hand- searched Unpredictable Security Measures shall be implemented by the screening entity	Apply baseline measures and increase the number of randomly selected passengers for handsearch, to 15%	Apply intermediate measures and increase the number of randomly selected passengers for hand-search, to 20%
2	Cabin Baggage screening at departure gate	Screen all cabin baggage of departing passengers either by hand-search or by X-ray equipment. 10% of X-rayed Cabin Baggage shall be to hand-searched. Unpredictable Security Measures shall be implemented by the screening entity.	Apply baseline measures and 15% of X-rayed Cabin Baggage shall be hand-searched.	Apply intermediate measures and increase the number of hand-searched Cabin Baggage, to 20%

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	SECURITY PROCEDURES		Chapter 08
			Page 12

3	Separation of screened and unscreened passengers to avoid mixing or contact	If mixing takes place within the Sterile Area, it shall be security cleared. (i). All departing passengers and their Cabin Baggage shall be re-screened; (ii). When the mixing takes place on board an aircraft both aircraft and passengers shall be subjected to re-check / re-screen respectively. Above security measures shall be based on a threat assessment carried out by the national authority. Other routine measures would continue as appropriate.	Apply baseline measures	Apply intermediate measures and increase random profiling of passengers. Enhance behavioural pattern recognition systems
4	Aircraft Security Check and Search	Aircraft Security Check or Search shall be conducted routinely or based on a security risk assessment conducted by the state authority. These operations shall be performed by trained AVSEC personnel or by operating crew. Aircraft in Service shall be subject to Security Check/ Search. Security Checked/ Searched aircraft shall be protected against unauthorized entry, by positioning guards or affixing tamper evident security seals and conducting surveillance as appropriate. AVSEC personnel / crew member to be positioned at door/s which is/are in use to prevent unauthorized entry from the commencement of the Check/ Search Unpredictable security checks shall be conducted.	Apply baseline measures and enhance security surveillance. If the security integrity of the relevant aircraft has been jeopardized, it shall be searched.	Apply intermediate measures and conduct Aircraft Security Search by deploying trained AVSEC teams which includes technical staff. Deployment of Security Flight Observers in selected flights / destinations, based on risk assessments.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	SECURITY PROCEDURES		Chapter 08
			Page 13

5	Access Control to aircraft	Restrict access to aircraft only to passengers with the valid boarding cards, regulatory officials / auditors, law enforcement officers and authorized staff with duties on board. All personnel seek access to the aircraft to be screened together with items carried. AVSEC personnel shall be deployed where necessary on aircraft door positions. Aircraft doors shall be closed steps/air bridges removed when unattended. Aircraft shall be parked on a well illuminated area with security surveillance. Access control to the aircraft shall be conducted by security / flight crews. Unpredictable security checks shall be conducted.	Apply baseline measures, and enhance security surveillance.	Apply intermediate measures Access to aircraft to be strictly controlled with AVSEC personnel at each door in use. Aircraft shall be parked at designated slots. Authorized Airline representative to be available at (respective) aircraft. Deployment of security flight observers on selected flights / destinations.
6	Passenger Risk Assessment	Passenger Name Record (PNR) to be maintained. Passenger movements shall be monitored through the surveillance system established by the airport operator	Apply baseline measures and enhance security surveillance including unpredictable security measures. Risk assessment shall be done through the established mechanism by the airport operator.	All passengers shall be subjected to a system of Passenger Risk Assessment conducted by the national authorities.
7	Reconciliation of Person and Hold Baggage	Conduct Person and Hold Baggage Reconciliation either manually or automated means, prior to loading All expedite baggage to be verified with documentation Hold Baggage Manifest Declaration (HBMD) shall be maintained.	Apply baseline measures and enhance security surveillance	Apply intermediate measures and Automated BRS or physical passenger / baggage identification as required by the Appropriate Authority, and other measures as appropriate, for specific lights

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

8	Hold Baggage Screening	All originating and transfer Hold Baggage shall be screened 10% of originating Hold Baggage shall be screened by physical-search and 10% of Transfer Hold Baggage shall be screened by EDD/ETD equipment. Unpredictable Security Measures shall be implemented by the screening entity	Apply baseline measures and 15% of originating Hold Baggage shall be screened by physicalsearch. Increase the random EDD/ETD screening for Transfer Hold Baggage. Quality Control activities to be enhanced	Apply intermediate measures and 20% of X-rayed Hold Baggage shall be physically screened and random EDD/ETD screening shall be increased Transfer Hold Baggage EDD shall be deployed as secondary screening measure.
9	Expedite /Rush Hold Baggage	Relevant documents shall be checked to verify the ownership. Expedite Baggage shall be screened by ETD/EDD. Each piece shall be affixed with a specific security label after screening. Screened baggage shall be stored in the SRA under surveillance.	Apply baseline measures and enhance security surveillance	Apply intermediate measures No Interline Rush Baggage shall be accepted for transportation. Escort the baggage concerned from Baggage Make-up Area to aircraft.
10	Protection of Hold Baggage	Screened Hold Baggage shall be protected against unauthorized interference until the departure of the aircraft. Containers to be screened before use or entering into BMA. Unpredictable Security Measures shall be applied.	Apply baseline measures and enhance security surveillance.	Apply intermediate measures and surveillance by designated AVSEC personnel. Transport baggage in sealed containers or under security escort.

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	SECURITY PROCEDURES		Chapter 08
			Page 15

11	Screening of Cargo including Unaccompanied Baggage	All consignments shall be screened based on their nature Secondary ETD/EDDs screening shall be conducted on random basis 10% of all electronically screened cargo shall be subjected to physical screening All Unaccompanied Baggage shall be subjected to 100% physical screening prior to X-raying same. Unpredictable Security Measures shall be conducted.	Apply baseline measures, and increase random secondary ETD/EED screening as appropriate 15% of all electronically screened cargo shall be subjected to physical screening Enhance security surveillance	Apply intermediate measures and increase random secondary screening as appropriate 20% of all electronically screened cargo shall be subjected to physical screening Unaccompanied Baggage shall be subject to 100% ETD / EDD screening. Increase Unpredictable Security Measures
12	Protection of screened cargo	Screened cargo shall be stowed in a demarcated area in SRA under security surveillance and protected against unauthorized interference, until the departure of the aircraft. After the screening of special cargo, shall be stowed in pre-designated areas in accordance with the handling standards. Apply Unpredictable Security Measures.	Apply baseline measures and enhance security surveillance.	Apply intermediate measures. Stow cargo under designated security guards. Transport cargo in sealed containers and/or under security escort. Increase Unpredictable Security Measures.
13	Screening of Post Office (PO) Mail	Authorized Postal Agent shall deliver mail in prescribed UPU mail bags, tagged with CN 35 (tag / label) and secured with the prescribed ties, and CN 38 (Delivery Bill) will accompany all PO Mail shipments. All mail bags shall be screened and secondary ETD/EED screening shall be conducted on random basis. Apply Unpredictable Security Measures.	Apply baseline measures, and increase random secondary screening as appropriate	Apply intermediate measures, and increase random secondary screening as appropriate. Increase Unpredictable Security Measures.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	SECURITY PROCEDURES		Chapter 08
			Page 16

14	Protection of screened Post Office (PO) Mail	Screened PO Mail shall be stowed in a demarcated area in SRA under security surveillance and protected against unauthorized interference, until the departure of the aircraft.	Apply baseline measures plus enhance security surveillance. Other measures as appropriate for specific flights	Apply intermediate measures. Stow mail under designated security guards. Transport mail in sealed containers and/or under security escort. Apply unpredictable security measures.
15	Airline Catering Stores and Supplies	Catering Operator Security Programme shall meet UL Security Programme requirements. Catering Stores and Supplies shall be screened and protected until loaded onto the aircraft. Transporting vehicles shall be screened and access controlled. Appropriate operating areas shall be identified as restricted areas Apply Unpredictable Security Measures	Apply baseline measures and enhance security surveillance. Security Seals shall be inspected on a random basis prior to entering the SRA.	Apply intermediate measures Catering Stores and Supplies shall be escorted to the aircraft, or special security seals shall be used for carts and containers Increase Unpredictable Security Measures.
16	Aircraft Cleaning Operations	Approved security programme shall available with the cleaning service provider. Particular areas such as stores and distribution areas shall be demarcated as restricted areas. All cleaning materials and equipment shall be physically screened at the aircraft-entrance, prior to their coming on board. Apply Unpredictable Security Measures.	Apply intermediate measures All cleaning materials and equipment shall be physically screened at the cleaning premises, prior to being taken to the aircraft. Enhance security surveillance.	All cleaning materials and equipment may be to security-escorted to the aircraft. Cleaning operations shall be conducted in the presence of AVSEC personnel. Increase Unpredictable Security Measures.
17	Security Coordinator / DMS (Ops) at base station.	There shall be a dedicated Security Coordinator to ensure all measures are properly implemented liaising with MSO and other relevant agencies.	Maintenance of closer contact with MSO, SMSO, GMGS is required when liaising with other relevant agencies.	Continuous closer contact with MSO, SMSO, GMGS and the regulator is required when liaising with other relevant agencies. Making of appropriate operational decisions, in varying circumstances, may become necessary.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 17

8.2.1.1 Responsibility for classification of bomb warning

1. The Duty Manager Security Operations will inform the FCC immediately and assess the bomb threat along with the following if the incident occurred in Sri Lanka; and shall keep the PIC informed
 - a. Manager Airport or his delegate
 - b. Senior Representative from the Flight Operations Department
 - c. Senior Representative from SriLankan Airlines Airport Services
 - d. Duty Aircraft Engineer or senior representative of Aircraft Engineering Staff
 - e. Above classifying team, at a time, would comprise a minimum of two members including Duty Manager Security Operations

8.2.1.2 Officials to Notify and Threat Assessment

1. The recipient of the Bomb Threat call shall immediately inform DMS-Ops all available information and provide a report of as in Annexure "A" to this chapter and transmit by fax or scan and email to AOCC (Fax no: 0197335315, email: ul_aocc@srilankan.com)
2. Upon receipt of such information, DMS-Ops shall immediately summon the Bomb Threat Assessment Team, who will meet at AOCC or appropriate assembly point.
3. AOCC is located at the 1st floor, Air Cargo Terminal 4, and contact numbers are as below. Details of any place other than the AOCC, will notify by the DMS-Ops:
4. Manager Operations Control (MOC): fixed line & mobile nos. 0197332009 & 0710212009
5. Operations Control Centre Manager (OCCM): fixed line & mobile nos. 0197332324 & 0710212324

8.2.1.3 Threat Assessment by PIC

In dealing with a Bomb Threat directed against an aircraft inflight, some or all the following actions shall be taken:

1. Evaluation of the threat;
2. Response and/or decision, including whether the response would be overt or covert;
3. Conducting of inflight search procedures;
4. Evaluation of the possible effects on pressurization or pressure equalization;
5. Establishment of the order of search, for example, public areas may be searched first;
6. Announcement of the threat by the PIC to the passengers (in such a manner as not to cause passengers to get panicked);
7. Arrangement of possible passenger participation in a search;
8. Establishment of emergency procedures, if a suspect explosive device is located; and
9. Determination of flight routing, and landing and disembarking procedures.

When a warning is classified specific, the PIC will take action having due regard to the nature of the threat, weather conditions, distance from the nearest suitable airport and any other relevant factors.

1. Give priority to land the aircraft and initiate disembarkation of passengers as soon as possible.
2. Advise Cabin Crew to refrain from discussing the deviation while conversing with passengers or reporting via the public address system.
3. If it is decided by the PIC that an in-flight search is to be made, the appropriate technical proce-

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 18

cedure shall be followed.

4. Search of Aircraft - inflight
5. The relevant checklist is attached as Annexure "E" to this Chapter.

8.2.1.4 Isolated aircraft parking position

1. The isolated parking position shall be located at the maximum distance possible, from other aircraft parking positions, buildings or public areas and the airport fence. (minimum - 400m distance) The isolated aircraft parking position may also serve as a "security parking area" where an aircraft threatened with unlawful interference may be parked as long as necessary or positioned for the loading or unloading of passengers. It may also be necessary to remove and examine cargo, mail and stores from an aircraft during bomb threat conditions
2. Aircraft on ground – The Pilot-in-command / representative of the Airline shall coordinate with Air Traffic Control (ATC), Local Law Enforcement, airport authorities and Enforcement of appropriate emergency procedure
3. Aircraft airborne – The Pilot-in-command shall be responsible for all action required preserving the lives and ensuring the safety of passengers and crew whenever the aircraft is under his direct command. The PIC shall assess the threat level and communicate to the relevant departments. The PIC shall communicate to the Purser and his intentions and shall decide to what level of information shall be passed down to the passengers in the event of a search
4. When a warning is classified specific, he will take action having due regard to the nature of the threat, weather conditions, distance from the nearest airport and any other relevant factor
 - a. Give priority to land the aircraft and initiate disembarkation of passengers as soon as possible
 - b. Advise cabin crew to refrain from discussing the deviation while conversing with passengers or reporting to public address announcements
 - c. If it is decided by the Pilot-in-command that an in-flight search is to be made, the appropriate technical procedure shall be followed
 - d. Once aircraft is declared as safe, the re-boarding and re-loading may take place, following total Physical Passenger and Baggage Reconciliation

8.2.1.5 Search of aircraft - Inflight

1. In general a bomb search shall be conducted with extreme caution. Use flashlights and mirrors when searching dark areas
2. Search may not be necessary, if a door compartment or a piece of equipment is properly sealed or secured and there is no evidence of tampering
3. The object of the search is to look for something out of place which does not belong to the aircraft or is not an integral part of the aircraft
4. Those who are involved in the search, shall be assigned specific areas, and be provided with the checklists which is located in the flight deck by the PIC.
5. Passengers shall be requested to keep their cabin baggage on their laps and search their hand luggage and clothing with any cabin crew available
6. Advise passengers of the information that a bomb may be on board and that precautionary measures are necessary although the warning may be a hoax
7. Request them to remain seated with their seat belts fastened
8. On completion of the search inform air traffic control and if a suspicious object is found **do not**

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 19

touch or disturb it but request specialized advise in relocating the object to a **safe area**

9. Passengers and Crew shall be moved as far as possible from the suspected object (at least 5.5 meters away)
10. Cushions, blankets etc. shall be placed in such a manner, as to act as a blast wall, in order that damage could be minimized

8.2.1.6 Discovery of suspect or prohibited articles

If something is found which does not seem right or in any way suspicious

1. do not move it
2. Inform flight deck immediately, giving the exact location and description and size of the device
3. Where possible move passengers away from that area and instruct them to sit with their heads below tops of seat backs
4. Oxygen bottles, duty free liquor, perfumes, flammables or other stowed equipment which could present a projectile hazard shall be removed from the area
5. Fire extinguishers shall be readily available in case of an explosion
6. Once it is decided that the device is in a safe location, cover it with a split plastic bag to prevent liquid from entering the device. Cover with cushions, soft clothing and / or blankets to a depth and area as large as possible and saturate with water to reduce the risk of fire in the event the device is capable of causing fire
7. On completion of the search ATC shall be informed and in the event of finding a suspicious object a request shall be made for specialized assistance to relocate the object in a safe area. (Least Risk Bomb Location – LRBL)
8. In the event the item found is of no threat, it shall be removed from the aircraft and the aircraft searched and certified prior to passenger boarding or signing off for airworthiness

Movement of suspect device to LRBL - (A 330/321 –R4) (A 320 –R2)

8.3 Bomb On Board

A bomb threat can take many forms.

Although not all of them are real, they shall always be considered a threat to flight safety.

There are two main types of bomb threats:

1. **Specific:** Operator, flight number, aircraft type, departure time and destination are positively identified. The location of the bomb on board the aircraft may also be provided
2. **Non-specific:** May identify a flight by destination, origin or departure time. These type of threat usually takes the form of a telephone call.

Bomb threats may also occur on board the aircraft. The following are examples of this:

1. Threats by passengers
2. Anonymous written messages found onboard (e.g.: on the lavatory mirror, on an airsickness bag, etc.).

In the event of a threat during the flight, the cabin crew must notify the flight crew immediately.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 20

8.3.1 Suspect Object

The three following questions may help to determine a suspect object:

1. Is the object usually in this location?
2. Was the object visible/not visible?
3. Does the object look suspicious?

If the cabin crew are not sure about the presence of any object on board, they shall report it.

The crewmember who finds the object shall:

1. Notify the flight crew immediately
2. Provide clear information: exact location, detailed description of the object, any odors
3. Notify all other cabin crew
4. Wait for instructions from the flight crew.

The crewmember that finds the object shall not:

1. Leave the object alone - if needed, they may ask another crewmember to stay and guard the area, to prevent any inadvertent movement
2. Touch or move the object (unless the Captain decides to transfer it to the Least Risk Bomb-Location (LRBL))
3. Cut or disconnect any wires/strings
4. Use electronic devices near the object.

8.3.2 Bomb On Board - Cabin Crew Procedure

When a suspect device is found in the cabin:

WARNING DO NOT CUT OR DISCONNECT ANY WIRES. DO NOT ATTEMPT TO GAIN ENTRY TO INTERNAL COMPONENTS OF A CLOSED OR SEALED SUSPECT DEVICE. ANY ATTEMPT MAY RESULT IN AN EXPLOSION. BOOBY-TRAPPED CLOSED DEVICES HAVE BEEN USED ON AIRCRAFT IN THE PAST

WARNING: ALTERNATIVE LEAST RISK BOMB LOCATIONS (LRBL) MUST NOT BE USED WITHOUT CONSULTING WITH AN AVIATION EXPLOSIVES SECURITY SPECIALIST. NEVER TAKE A SUSPECT DEVICE TO THE COCKPIT.

CAUTION - THE LRBL LOCATION FOR EACH AIRCRAFT IS DOCUMENTED IN THE AIRCRAFT FLIGHT MANUAL.

Purser

EOD Personnel On Board Check - Announcement.

“Is there any EOD personnel on board?”

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 21

By using the initials, only persons familiar with EOD (**EXPLOSIVE ORDNANCE DISPOSAL**) will be made aware of the problem”.

Cabin Crew or EOD

BOMB - DO NOT OPEN, DO NOT CUT WIRES, SECURE AGAINST SLIPPING, AVOID SHOCKS.

Secure in the attitude found and do not lift before having checked for an anti-lift ignition device.

Cabin Crew

PASSENGERS - LEAD AWAY FROM BOMB

Move passengers at least 4 seat rows away the bomb location. On full flights, it may be necessary to double up passengers to achieve standoff from the suspect device. Passengers near the bomb shall protect their heads with pillows, blankets. All passengers must remain seated with seat belts on and, if possible, head below the top of the head rest. Seat backs and tray tables must be in their full upright position.

Service items may need to be collected in order to secure tray tables. Distance from an explosion is one of the best protective measures for passenger safety. Placing seat backs and tray labels in their full, upright positions will provide additional protection.

Cabin Crew

PORTABLE ELECTRONIC DEVICES - SWITCH OFF

The cabin crew must command passengers to switch off all portable electronic devices.

Cabin Crew or EOD

BOMB - CHECK NO ANTI-LIFT DEVICE

To check for an anti-lift switch or lever, slide a string or stiff card (such as the emergency information card) under the bomb, without disturbing the bomb. If the string or card cannot be slipped under the bomb, it may indicate that an anti-lift switch or lever is present and that the bomb cannot be moved. If a card is used and can be slid under the bomb, leave it under the bomb and move together with the bomb.

If it is not possible to move the bomb, then it shall be covered with a single thin sheet of plastic (e.g. trash bag), then with wetted materials, and other blast attenuation materials such as seat cushions and soft baggage. Move personnel as far away from the bomb location as possible.

Cabin Crew

EMERGENCY EQUIPMENT - REMOVE AND STOW

Emergency equipment (Oxygen, PBE, fire extinguisher, etc.) located close to the LRBL must be removed and stowed in alternate location.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 22

Cabin Crew

GALLEY/IFE POWER - OFF

All galley and IFE equipment located close to the LRBL must be switched off. (AFT Galley)

IF THE BOMB CAN BE MOVED

Cabin Crew

RH AFT CABIN DOOR SLIDE - DISARM

LEAST RISK BOMB LOCATION (LRBL) - PREPARE

Build up a platform of baggage out to the aisle, from the floor up to the mid-height of the door at the LRBL. Wetted material for example, blankets or clothes, shall make up the last 10 inches (25 cm) of this platform.

Place a single, thin sheet of plastic for example, a trash bag, on top of the wetted materials.

CAUTION - DO NOT OMIT THE PLASTIC SHEETS, AS THE SUSPECT DEVICE COULD GET WET AND POSSIBLY SHORT CIRCUIT ELECTRONIC COMPONENTS CAUSING INADVERTENT DEVICE ACTIVATION.

Cabin Crew

BOMB INDICATION LINE - POSITION

Position the bomb indication line from the location on the platform where you will place the suspect device, EXTENDING outward into the aisle.

Note: A bomb indicator line is a 6 to 8 foot (1.8 to 2.4 m) line (e.g. neckties, headset cords, or belts tied together) preferably of contrasting color, that helps the responding bomb squad find the precise location of the suspect device within the LRBL stack once constructed.

Cabin Crew or EOD

BOMB - MOVE TO LRBL

Carefully carry in the attitude found and place on top of the wetted materials in the same attitude and as close to the door structure as possible.

CAUTION: ENSURE THAT THE SUSPECT DEVICE, WHEN PLACED ON THE STACK AGAINST THE DOOR, IS ABOVE THE SLIDE PACK BUT NOT AGAINST THE DOOR HANDLE, AND IF POSSIBLE, AVOID PLACEMENT IN THE VIEW PORT.

Cabin Crew or EOD

LEAST RISK BOMB LOCATION (LRBL) - COMPLETE

Place an additional sheet of thin plastic over the bomb.

CAUTION DO NOT OMIT THE PLASTIC SHEETS, AS THE SUSPECT DEVICE COULD GET WET AND POSSIBLY SHORT CIRCUIT ELECTRONIC COMPONENTS CAUSING INADVERTENT DEVICE ACTIVATION.

Build up at 25 cm (10 in) of wetted material around the sides and on top of the bomb. **DO NOT PLACE ANYTHING BETWEEN THE BOMB AND THE DOOR, AND MINIMIZE AIRSPACE AROUND THE**

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 23

BOMB.

The idea is to build up a protective surrounding of the bomb so that the explosive force is directed in the only unprotected area into the door structure.

Fill the area around the bomb with seat cushions and other soft materials such as hand luggage (saturated with water or any other non-flammable liquid) up to the cabin ceiling, compressing as much as possible. Secure the LRBL stack in place using belt, ties or other appropriate materials. The more material stacked around the bomb, the less the damage will be.

USE ONLY SOFT MATERIAL. AVOID USING MATERIALS CONTAINING ANY INFLAMMABLE LIQUID AND ANY METAL OBJECTS WHICH COULD BECOME DANGEROUS PROJECTILES.

Cabin Crew

PASSENGER - MOVE/ADVISE

Move passengers at least 4 seat rows away the bomb location. On full flights, it may be necessary to double up passengers to achieve standoff from the suspect device. Passengers near the bomb shall protect their heads with pillows, blankets. All passengers must remain seated with seat belts on and, if possible, head below the top of the head rest. Seat backs and tray isbte« must be in their full upright position.

Cabin Crew

COCKPIT CREW - NOTIFY

Cabin crew notify the flight crew that the bomb is secured at the LRBL.

Cabin Crew



Cabin Crew standby with a fire extinguishers

Cabin Crew

EVACUATION/DISEMBARKATION - EXECUTE

Evacuate through normal and emergency exits on the opposite side of the “bomb” location. Do not use the door just opposite the “bomb”. Use all available airport facilities to disembark without delay.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

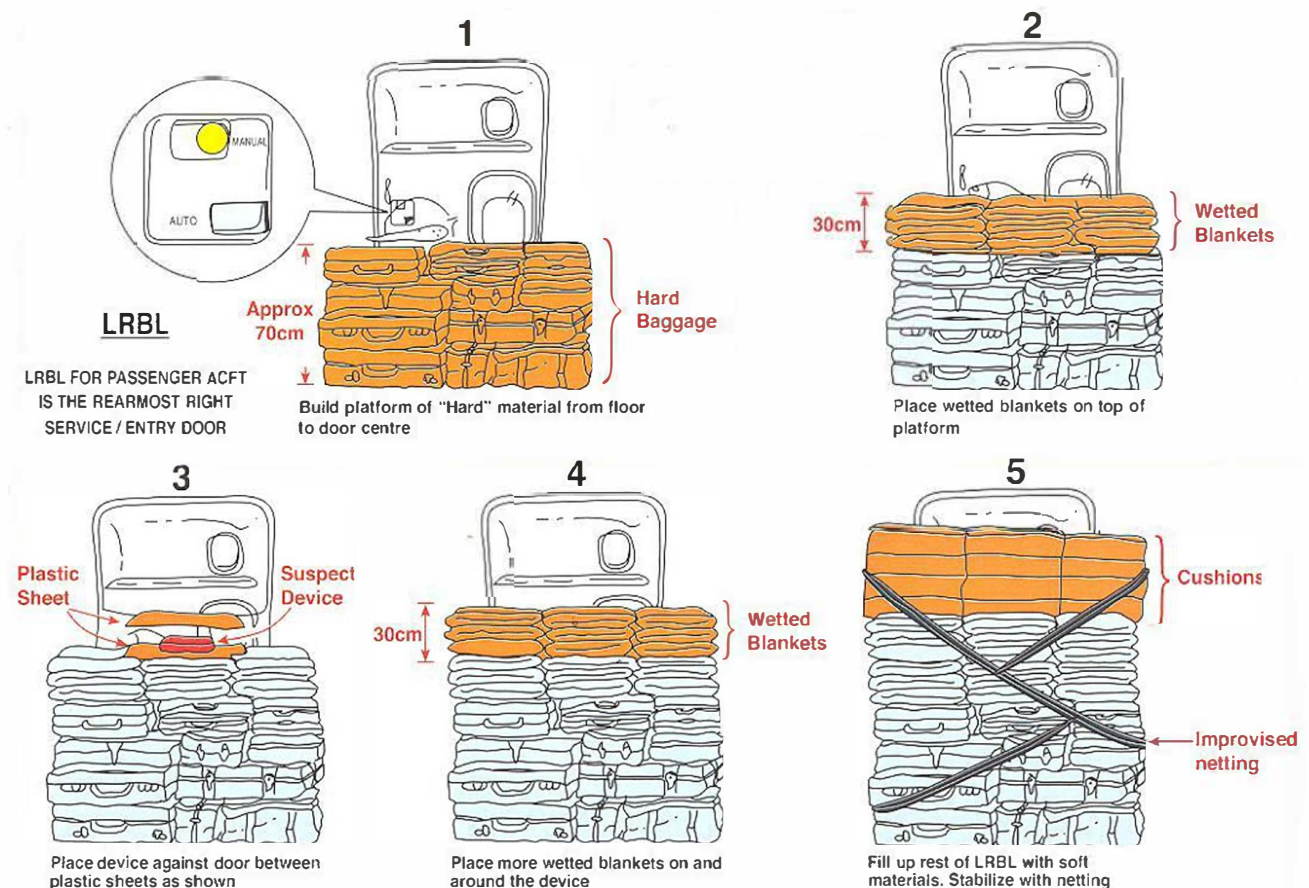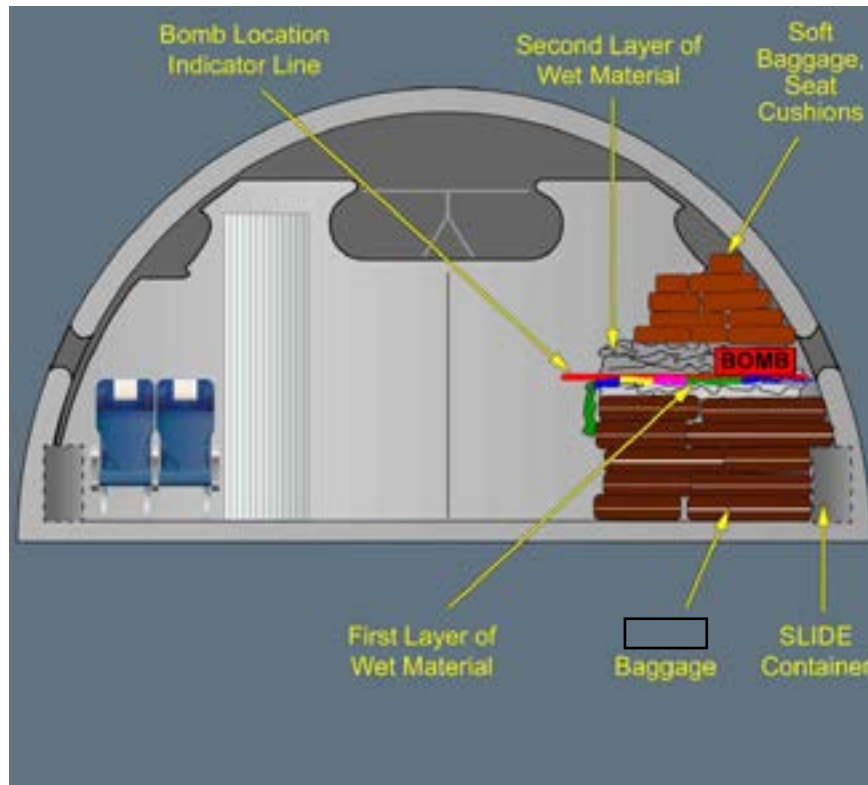

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 25

8.3.3 Categorisation of Airport

Security requirements and protective measures of categorisation of airports according to appropriate authorities,

1. Airports are categorized as:
 - Category - **GREEN**
 - Category - **AMBER**
 - Category - **RED**
2. Prescribed security measures shall apply to:
 - All operations at the station and/or certain flights
3. Airport Categorization is reviewed continuously. If there are changes :
 - A new Airport Category Summary is issued
 - Affected stations are immediately informed
 - Crew will be informed through Control Centres

Station managers will inform Safety & Security of implementation of new measures.

8.3.3.1 Threat Level Categories

1. Category - **GREEN**
 - Normal security measures implemented.
 - Protects an airline when no known threat exists.
2. Category - **AMBER**
 - Action against airlines interest is suspected
 - specific target not ascertained
 - enhanced measures implemented
 - to restrict access to and increase surveillance of potential targets
3. Category - **RED**
 - Action against airlines interest is certain
 - Information is credible to justify full alert measures
 - Measures may be implemented for specific flights

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

8.3.4 Security Measures

The security measures shall be implemented by crew at all stations unless written dispensation is given by General Manager Group Security.

	CATEGORY	GREEN	AMBER	RED
1.	<u>AIRCRAFT</u> During pre-flight/transit, CCMs shall monitor and those authorized to enter the aircraft to ensure that they leave nothing behind that could endanger the aircraft. (Improvised explosive/incendiary devices could be concealed or disguised in cleaning and servicing equipment).	x	x	x
2.	CCMs shall search toilets/galleys/lockers/ storage areas and containers for unidentified or suspect objects explosives/ incendiary devices/ firearms/offensive weapons and stowaways prior to departure.	x	x	x
3.	Flight Crew shall search the flight deck for unidentified objects/explosives/incendiary devices/ firearms/offensive weapons and stowaways before departure.	x	x	x
4.	During transit stops, CCMs shall man the main exit/entry doors to prevent unauthorized entry into the aircraft.	x	x	x
5.	Visits to the flight deck by passengers shall be prohibited.	x	x	x
6.	During layovers, aircraft shall be guarded to prevent unauthorized access. Before flight the aircraft shall be searched and guarded.		x	x

	CATEGORY	GREEN	AMBER	RED
1.	<u>BOARDING</u> Only bona fide passengers shall be permitted to board the flight.	x	x	x
2.	CCMs shall ensure such passengers are in possession of boarding passes.	x	x	x
3.	Discrepancy in passenger count shall be investigated and resolved prior to departure.	x	x	x

4.	Guards shall be available at aircraft steps or aerobridge to ensure that boarding passes are checked.	x	x	x
5.	Authorized staff shall be subjected to search physically or by metal detector prior to being allowed to board the aircraft.	x	x	x
6.	During transit or terminating flights, CCMs shall inspect the cabin to ensure disembarking passengers do not leave behind any article. They shall ensure that only the baggage of the crew remains in the cabin prior to boarding of passengers on an originating flight.	x	x	x

	CATERGORY	GREEN	AMBER	RED
1.	<u>CABIN BAGGAGE</u> Prior to entry to sterile area/holding room/ aircraft/cabin baggage shall be X-rayed/ physically searched. All passengers/ crew/staff shall be body searched either physically or with metal detector.	x	x	x
2.	Require all transit passengers to disembark at each intermediate stop with all of their cabin bags.			x

	CATERGORY	GREEN	AMBER	RED
1.	<u>CATERING</u> CCMs shall check all catering equipment/meal/ dry stores and bonded items uplifted prior acceptance. Any item which cannot be identified as part of the normal cabin or catering complement shall be offloaded and the PIC advised.	x	x	x
2.	All catering equipment/meals/dry stores and bonded items shall be security screened. Security stickers shall be affixed sealing inspected catering containers. Escort shall be provided during transport from the flight kitchen to the aircraft.	x	x	x
	CATERGORY	GREEN	AMBER	RED
1.	<u>CHECK-IN BAGGAGE HANDLING</u> The baggage of any person who is offloaded for any reason or fails to board following check-in or transit shall not be uplifted at airports where local laws require mandatory offloading, unless such baggage is subjected to a security search subsequent to determining that the passenger is not onboard.	x	x	x

2.	stations where it is not mandatory to offload baggage of failed to board passengers, the commander may exercise his discretion to proceed with such baggage under the following circumstances:- *In the event of the passenger's death. *Passenger denied transportation by the airline due to space or weight restrictions. *If the passenger elects to offload himself at an alternate airport as a result of diversion. *If the airline re-routes the bag of the passenger(s).	x		x
3.	Each passenger shall be asked questions confirming the integrity of personal baggage.	x	x	x
4.	All check-in and interline baggage must be subjected to security screening namely X-ray, sniffing with approved explosive detector or physical search.	x	x	x
5.	After screening, security at screening/check-in areas shall ensure that passengers do not place unscreened articles into bags that have been screened.	x	x	x

8.4 Hijack Management

General

Any person, while on board any aircraft, unlawfully by force, or by threat of force, or by any form of intimidation, seizes, or exercises control of that aircraft, or attempts to do so, commits hijack of that aircraft.

The Commander must be advised of any threat made to interfere with the normal operations of the flight irrespective of the actions to fulfill the threat.

In the event of a hijacking, the primary consideration is the safety of passengers and crew.

8.4.1 Motivation, Objectives and Type of Hijackers

Fall into 5 basic categories

1. Criminals
2. Refugees
3. Mentally Disturbed persons
4. Terrorists
5. Others

Understanding the motivation and objectives of hijackers is important because it indicates how they may behave.

1. Criminals - hijack for personal gain. Professional and normally well armed.
2. Refugees - Objective is Political asylum. Amateurs; unlikely to be violent but may be des-

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 29

perate and frightened

3. Mentally
4. Disturbed - motivation varies with form of mental derangement alternatively calm/excitable/sometimes suicidal/susceptible to reasoning
5. Terrorists - motivation is always Political. Highly professional; fanatical; prepared to kill and die for their cause
6. Others - motivation varied e.g. Protest purpose; publicity for cause or release of jailed terrorists, etc

8.4.2 Aircraft Hijack

SriLankan Airlines contingency plans for dealing with an aircraft hijack considers the following factors:-

1. The safest place for an aircraft under an act of unlawful interference is on the ground
2. The paramount objective is the safe release of passengers and crew, which overrides all other important considerations such as capture and punishment of the perpetrators and the protection of property
3. There is a need to ensure that the perpetrators of acts of unlawful interference will be confronted with a well-organized and effective response, so that damage or injury may be prevented or minimized
4. Negotiations shall always prevail before the use of force until it becomes evident to decision makers that all other possibilities have been exhausted and the consultative process has reached a deadlock
5. Negotiation with the offenders shall be conducted by persons trained and skilled in such matters, since this is far more likely to result in the successful termination of the occurrence with the least loss of life, injury to persons and damage or loss of property
6. The key weapon for a hijack cannot be determined but the level of disaster may vary depending on the components used but the human factor and demands shall remain as required as an E.G.; it could be a weapon/invention/an aerosol/biological, chemical threat

8.4.2.1 Stages of a Hijack

There are three distinctive stages.

Intimidation Stage

1. The intimidation stage signals the beginning of a hijack. This stage may be violent and abusive language is used, and the hijackers are emotional, vindictive and could also be nervous if the hijack has not been thoroughly planned. They would try to establish the control as fast as possible by instilling fear and preventing countermeasures from crew and/or passengers. The hijackers may commit random acts of violence, blind-fold or bind certain passengers, abuse certain crew members in full view
2. The hijackers would also limit the comfort of the cabin population by asking for lights to be dimmed and shutters closed, reserving toilets only for their use, moving all passengers to main economy class making sure males are sitting near the windows. They also may try to create confusion by moving passengers around periodically, separating children from parents, and switching clothes with the crew.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 30

Custodial Stage

The custodial stage is the period when passengers and crew are held captive. A prolonged custodial phase can be very hard on crew and passenger moral. Boredom and despair usually set-in. Hijackers would try to turn their hostages to a symbol of their cause and dehumanize them in order to validate their killing, if it comes to that. It is also a period during which the hijackers would be communicating with crew and authorities. Crew members need to take advantage of this moment to make sure the hijackers continue to pursue them and passengers as individuals.

The Resolution Stage

A hijacking can be resolved either by negotiation or armed intervention. Resolving a hijack by negotiation is often a long and arduous process where there can be a few instances of false hope, followed by what seems to be steps that move the situation backward rather than forward. It is important that crew members do not lose hope or begin to distrust the authorities, if there are few setbacks in the negotiation process. Crew members need to understand that the hostage negotiators always have the hostage-welfare in mind and that a slow negotiation process is often safer than a quick armed intervention.

8.4.3 Hijacker on board – recommended action by cabin/flight crew

Details are outlined in SriLankan Airlines recommended procedures for air crew, for handling a hijack situation.

Comply with the initial demand of the hijacker to avoid conflict in the aircraft provided, safety of crew and passengers is not jeopardized.

8.4.3.1 Communication to the crew (Cabin to Flight Deck)

1. Alarm buttons may be installed in the passenger-cabin, to alert the Flight Crew discreetly, of potential threats.
2. Passengers shall not be allowed to visit the flight crew compartment. Only the Cabin Manager/ Purser or a nominated Cabin Crew Member shall use the handset to speak to the Pilot-in-Command (PIC).
3. At the Preflight Briefing, a Secret-Code shall be agreed upon between the Cabin Manager (Purs-er) / Nominated Cabin Crew Member and the Flight Crew, for the purpose of alerting the latter, if open communication is not possible, due to a threat-situation that has arisen in the cabin.
4. If and when the above Secret-Code is heard in the air, if the circumstances permit to do so, the PIC shall take steps to check the authenticity of the communique.
5. If the PIC is satisfied that the communique is authentic, he shall take action forthwith for an emergency landing.

8.4.4 Action and Responsibilities of the Flight Deck Crew

1. Upon confirmation that the aircraft is being subjected to a hijack, the Flight Deck crew shall adhere to the following course of actions:-
2. Ensure the FD door is closed and remains locked.
3. Shall activate transponder 7500 or include "Seven Five Zero Zero" in radio telecommunication transmission to notify ATC if message is passed in plain language. If situation appears desperate, transponder code 7500 shall be followed by 7700;
4. PIC, having selected code 7500 and subsequently requested to confirm this code by ATC, according to circumstances, either confirm this or not reply at all.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 31

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 32

5. The absence of a reply from the PIC will be taken by ATC as an indication that the use of code 7500 is not due to an unintentional, negligent false code selection.
6. Advise ATC for ground arrangements to counter the situation;
7. Plan to land as soon as possible, at a suitable airport of choice;
8. Unless considerations aboard the aircraft dictate otherwise, the PIC shall attempt to continue flying on the assigned track and at the assigned cruising level at least until able to notify an ATS unit or within radar coverage.
9. If PIC is compelled to depart from its assigned track or its assigned cruising level without being able to make radiotelephony contact with ATS, the PIC shall, whenever possible, adhere to laid down ATS procedures.
10. Place the PIC's speaker "off". Minimise volume of First Officer's speaker - wear headsets.
11. The hijacker/s may try to prohibit the use of radio communication. Crew shall insist that the ATC must know the aircraft position so as to avoid the possibility of a mid-air collision.
12. If the hijacker/s demand/s a change of radio call sign, crew shall alert ATC.
13. Hide the crash axe and any other item that a hijacker may use as a weapon.
14. When the aircraft is on ground persuade the hijacker/s to release the passengers on board in the following order of priority:
 - a. Sick and injured;
 - b. Women and children;
 - c. Old and feeble;
 - d. Other passengers and the crew.
5. Convince the hijacker/s that the control of passengers would be easier with a lesser number and the aircraft will need extra fuel.
6. The flight crew shall not leave the passengers and cabin crew behind in order to immobilize the aircraft. However there may be situations where the PIC decides that the escape of the flight crew will improve the resolution of conflict and save lives.
7. Information about the situation shall not be revealed to the media or any other unauthorized persons.
8. Submit a report to GMGS & HCS.

8.4.5 Action and Responsibilities by Cabin Crew

Hijack situation in flight or on ground

1. Gain confidence of the hijacker. Appear to be sympathetic and friendly;
2. Inform the Flight Deck crew promptly.
3. Exercise due care, to ensure that the passengers do not become panic and/or exited. Switch "Seat belt" sign on to restrain passengers from getting involved.
4. Information obtained on the hijacker/s from time to time shall be promptly conveyed to the PIC each time it is obtained and his instructions shall be carried out. Information obtained on the status of the hijacker/s which shall include;
 - Number of hijackers and their gender;
 - Description of weapons / explosive devices etc.;
 - Organization
 - Language spoken;
 - Demands;

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 33

- Number of hostages - how they are held;
 - Number of injured crew and / or passengers;
 - Any damage to the structure of the aircraft which may affect operation.
5. If there are any authorized armed personnel on-board as passengers such as Company security, military or bodyguards of VIPs etc, ensure they are restrained from using weapons or force on the hijacker unless such action is authorized by the PIC. Warn them of the possibility of accomplices of hijackers who may be disguised as passengers.
 6. A personal approach is important especially in the case of a single hijacker. If possible, an experienced flight attendant (opposite gender) shall deal with the hijacker/s, with the view to establish appropriate rapport with the hijacker/s.
 7. Hijack situations are prone to prolonged delays. Ration the food and water to cope-up with worst situations.
 8. The hijacker/s demands can be operationally impossible or too dangerous to comply with. In such situations crew will have to talk to the hijacker/s out of their intention, explain the flight safety hazards. In general, persons authorized to make decisions on the demands made by the hijackers, shall not enter into direct negotiations with them, and shall preferably not be immediately available at the Emergency Operation Centre (EOC) or other command post
 9. Under any circumstances, the demands of the hijacker/s to gain access to the FD shall not be acceded to. If the hijacker/s so demand, they may be permitted to talk to the FD crew by using the intercom. Always remember that there may be others in the hijack team who do not disclose themselves initially and may remain seated amongst the passengers.
 10. Communication at every level is vital and cabin crew shall establish a line of communication with the hijacker as soon as possible. Cabin crew need to communicate with the passengers as well, to build their confidence.
 11. Gain time to form a plan of action in mind; do not antagonize or argue with the hijacker/s. Do not “talk down” to them or appear to be superior. Never make any move unless the hijacker/s understand/s the reasons. Do not make them feel cornered and only one crew member shall approach them at a time.
 12. Any relationship built-up between the crew and the hijacker/s may be vital in resolving the situation and in bringing the incident to a successful termination. Shall not be mentally aligned with the hijacker/s or be over friendly.
 13. Cabin crew shall tactically prevent the possibilities of hijacker/s are getting direct contact / deal with the flight crew.
 14. Crew shall not suggest any cause of action to the hijacker/s. If they do and things go wrong they will almost certainly be held to blame.
 15. Terminate the serving of alcoholic beverages to passengers. Try to prevent passengers from consuming their own liquor; unless it is specifically demanded, alcohol shall not be offered to the hijacker/s.
 16. Serve the hijacker/s with plenty of non-alcoholic fluids in order to make him/them use the toilets. Use this time to pass important messages to the FD.
 17. Explain any sudden noises or changes in crew operating procedures. Most hijackers are “trigger happy” and when excited they may resort to violence.
 18. When apparent signs of unrest are noticed in the state of mind of a hijacker, the crew member shall deal with him with self-confidence, and make every effort to persuade him to abandon his attempt, without hurting his self-respect.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 34

19. The advice to the crew is to respond with passive resistant and delay tactics in complying with the demands of hijacker/s.
20. Keep the service interphone in an audible condition, if possible.
21. If necessary, negotiate with the hijacker/s to obtain agreement for the passengers to move to and from the toilets special attention has to be given to the elderly, sick and passengers with small children.
22. Crew shall identify if possible, any medically qualified persons / physicians are among passengers on board, in order to assist in case of a need.
23. Crew shall keep aircraft cabin clean, neat and maintain hygienic conditions, since incident may be prolonged.
24. Passengers shall be advised not to take any individual initiative/s.
25. Avoid unnecessary conversation or action which may irritate the hijacker or induce panic.
26. Do not attempt heroic actions by underestimating strength of the hijacker, by his appearance or looks that could be deceptive.
27. If the hijacker/s are threatening to harm a passenger or a crew member in order to demand access to the FD, the cabin crew may seek the assistance of passengers to overpower the hijacker/s. In order to subdue hijacker/s, sufficient force and restrains and other on-board resources may be used.

8.4.6 Guidelines For Handling A Hijack Situation

Following are the guidelines for dealing with a hijack. However the situation in hand may require adjustment and adaptation:-

1. Comply with demands/provided that it does not jeopardize safety of passengers/ crew
2. Establish a satisfactory working rapport based on mutual trust. Personal contact with the hijackers is essential to gain the trust and co- operation especially in the case of a lone hijacker
3. Efforts shall be made to keep the hijacker/s off the flight deck where possible.
4. Establish a rapport by showing an interest in the hijacker's problems. However, do not become mentally aligned or sympathize with the hijackers or their ideas. (Stockholm syndrome)
5. Do not antagonize or argue especially on political matters
6. Do not "talk down" to the hijacker
7. At any stage do not make him angry
8. As a general rule do not try to overcome the hijackers
9. Do not make them feel threatened. Ensure that only one crewmember approaches the hijacker at any one time
10. If the hijackers are mentally disturbed, do not make reference to insanity or mental disorders
11. Do not make any sudden physical movements eg; reaching for a switch, unless the hijackers understand the reason
12. Do not make decisions, offer solutions or give opinions to the hijackers. Let them do the thinking
13. Do not serve liquor unless demanded, as alcohol can only complicate the tense situation
14. If possible, the crew shall attempt to obtain release of as many passengers and crew, giving priority to the sick, old and infants
15. If possible, set aside and save eating and drinking utensils used by the Hijackers.
16. Once on the ground crew shall endeavour to detach themselves from the main negotiating process and leave the hijackers in direct contact with the official negotiating team. If forced to act

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 35

as a communication link, avoid answering questions on behalf of the hijackers and avoid giving opinions

17. Be prepared for the incident to be protracted
18. London syndrome refers to hostages' argumentative and/or disobedient behaviour, which typically leads to their own demise. It is named after an incident in London in 1981 where the Iranian Embassy was seized by armed intruders; one of the hostages, Abbas Lavasani, was quite uncooperative and constantly argued with the gunmen. Lavasani's aggressive behaviour made the other captives more fearful as it increased the tension in the room. After six days of negotiation, the perpetrators became frustrated and they seemed to have taken it out on Lavasani. They killed him and threw his body out of the embassy.
19. John Wayne Syndrome -The feeling of helplessness often felt by predominantly male hostages in a crisis situation when they wish they could be the hero but are actually impotent to respond and depression results." For crew members, either male or female, they are likely to feel as if they have failed in some way shall a hijack occur: Many will have had dreams of how they would save the day, yet when faced with the reality of a hijacking, they feel worthless.

8.4.7 The Aftermath Of A Hijacking

After the termination of a hijacking incident, Crew must expect to have to face official inquiries and press conferences; guidance shall always be sought from Management prior to speaking to the media. The general guideline is to allow the Public Relations Department to handle the media.

8.5 Firearms/Weapons/Restricted Articles

8.5.1 Carriage

The relevant procedure approved by the DGCA of Sri Lanka for Carriage of Arms / Ammunitions by passengers as stipulated in SriLankan Airlines Security Manual Chapter 5 Annexure A.

8.5.2 Legal provisions and regulations

The carriage of fire arms/weapons and ammunition on board an aircraft shall be accepted with the prior approval of DGCA/CAASL and storage will be made on following locations,

1. As hold baggage
2. As cargo

Fire arms, weapons shall not be accepted for carriage in cabin of SriLankan airlines aircraft as of the airlines security policy.

On special circumstances with the concurrence of DGCA/CAASL/ appropriate authority of the host state SriLankan airlines shall accept carriage within the cabin and in pre identified locations.

The PIC shall be provided with the names and passport numbers of persons authorized to carry arms and their seating positions.

The Purser shall ensure that all authorised individuals aboard the aircraft are known to each other.

8.6 Vandalism, Sabotage

Vandalism - is wilful or malicious destruction or damage to property. This is a safety related area.

Sabotage - In Aviation Security, Sabotage has been defined as an act of omission, intended to cause

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 36

malicious or wanton destruction of property, endangering or resulting in unlawful interference with International Civil Aviation and its facilities.

Security Standards, Security Measures

To achieve the Company's Security Standards certain security measures must be adopted and practiced by all crew. These security measures in certain countries are law, and if not carried out properly, SriLankan Airlines will be liable to prosecution.

Access To Aircraft - Cabin Crew

Cabin crewmembers shall,

1. Control and observe anybody boarding the aircraft at all stations
2. Question anybody who is unfamiliar to the crew or not involved in the aircraft operation
3. Question anybody who is not wearing a photographic I.D. card
4. In all cases of difficulty, the PIC must be informed and reference made to local/UL ground staff

Pre-Departure Security Check

Search everywhere that does not need a key or tool to open i.e. cupboards, overhead lockers, places to which passengers have access such as toilets. Pay particular attention to seat pockets and spaces between the fuselage linings and outboard seats. Assistance of an engineer may be required.

8.7 Chemical Biological Weapons (CBW) Threat Against Aircraft

1. Recent terrorist activities have demonstrated their capability, willingness and intent to use CBW. it is therefore necessary to be equipped with knowledge and information on such weaponry and that of the threat posed by its presence on-board an aircraft and some means for responding to this in-flight threat.
2. A primary method of introducing Chemical or Biological Agents (CBAs) inside an aircraft, is aerosol dispersion. The action of leaking, exploding or manually pouring the substance into the cabin interior will move the agent through simple airborne transmission onto the skin or into the eyes, lungs and nasal passages.
3. CBWs because of their nature, must be dealt with in a separate unique manner that is different from handling explosives. Depend on the location of the suspected device, identifying it and choosing an appropriate action to the threat, require calm thinking, clear communication and a considered timely response.
4. It is important to define responsibilities between the Flight Crew and Cabin Crew to deal with a CBW on board an aircraft.
 - a. The Flight Crew must focus on flying the aircraft managing the cabin temperature, pressurization and other systems while coordinating with appropriate agencies.
 - b. Cabin Crew shall prepare to deal with any suspected CBW located within the cabin while executing appropriate emergency pre-landing activities.
 - c. With an understanding of the CBW's likely dispersal characteristics, it will be the goal of the Cabin Crew to contain the weapons, aerosol potential, before it spreads through the cabin or if this is not possible, to minimise its effects on passengers and crew.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 37

8.7.1 Cabin - Threat without Activation

If a CBW is reported to be on an aircraft without activation due to the lack of physical symptoms of exposure, it shall be noted that exposure to CBA will not likely result in an immediate presence of symptoms nor will the dispersal of a CBA necessarily be immediately detectable.

1. Flight Crew must take immediate steps to deal with the situation and attempt to minimize aerosol dispersion.
2. They shall put on masks, goggles, select 100% oxygen and maximise skin coverage. Some CBAs are odourless and will not be sensed until affected.
3. An immediate change in cabin pressure shall not be initiated until the inactivated device is secured to the maximum extent possible.
4. Immediately reducing cabin temperature to the lowest practical settings and turning off recirculation fans will decrease most aerosol dispersal characteristics.
5. Once the suspected chemical biological container is covered and sealed from the cabin atmosphere a gradual descend of the aircraft can be initiated using a descent that minimizes the rate of cabin pressure. Slower the descent and increase in the cabin pressure, lower the risk of agent dispersal during the final phase of the flight.

Upon landing and taxing to the airport's minimum risk location, the aircraft shall be parked diagonal to the surface winds and passengers and crew shall deplane through upwind aircraft exits to minimise the risk of contamination. Even if there appears to be no manifestation of possible chemical/ biological contamination, passengers and crew shall remain together and be quarantined / checked by trained personnel

8.7.2 Cabin - Threat with Activation

1. With the exception of slow acting CBAs, airborne exposure to toxic agents may rapidly generate sudden passenger sickness in an epidemic outbreak.
2. If time permits, consultation with knowledgeable specialists on the difference between biological agents and chemical agents with regard to dispersion and the speed with which they would generate symptoms, shall be accomplished. Generally, many biological agents will generate symptoms less rapidly than with chemical agents, many of which cause immediate symptoms. Depending on the agent, passengers and Cabin Crew may exhibit choking, discoloration and fainting, blistering or convulsions that are beyond the means of crew members to effectively deal with while airborne. It is important to remember that symptoms may manifest quickly or slowly, and the chemical weapons itself may be deceptively odourless or of a mild scent.
3. If this situation is reported to the Flight Crew, immediate actions must be taken. They must put on masks and goggles, secure the cabin door and deny any entry from the cabin. Next, they must decrease cabin pressures (by raising the cabin altitude) as quickly as possible - and as much possible - to evacuate and dilute the aerosol chemical agent. Additionally, recirculation fans shall be turned off and the coldest possible temperature selected to aid in minimizing agent aerosol dispersion. Passengers and Cabin Crew shall go on oxygen. Doing so will protect them from the effects of increasing the cabin altitude to over 10,000 feet and will help prevent them from ingesting the toxic agent into lungs and/or nasal passages.
4. Rapid descent and diversion to a suitable airport is of critical importance. An immediate landing is paramount to ensure Flight Crew are physically able to land the aircraft and receive time-crit-

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 38

ical medical treatment for exposed individuals. If chemical agents are suspected, contamination of large populated areas shall not be a concern whilst landing at a major airport, since these agents are short-lived and dissipate rapidly.

8.8 Responses to Acts of Unlawful Interference

Unruly/Disruptive Passengers

1. In most cases, crewmembers will only experience disruptive passengers very sporadically. In fact the more extreme the incident, the less likely in-flight crew will have to face them. However, sound preparedness for an extreme event is very important and will permit staff to intervene properly when effective action and sound judgment will be most crucial
2. Also, all procedures in this section are to be applied only when the aircraft is in flight. In cases where an act of unlawful interference occurs while the aircraft is on the ground, the aircraft shall remain on the ground and, to the greatest extent possible, be brought to an isolated area of the airport and control of the intervention process given to the appropriate authorities

8.8.1 Threat Assessment

1. Threat assessment is based on a general analysis of the likelihood and consequences of dangerous events occurring within air carriers' operations. While threat cannot be reduced, appropriate measures can reduce the risk. Factors such as political climate, historical occurrences, potential or real threat all influence the threat level of a particular flight. The determination of threat level is done the national intelligence agencies with collection of risk assessment on a regular basis and disseminate information about the threat to civil aviation which affects Sri Lanka.
2. All relevant threat information shall be communicated to the DGCA and who will evaluate the information and advice airport operators, aircraft operators and other entities involved in civil aviation on additional security measures required to counter the perceived threat as and when necessary.
3. Srilankan security management shall conduct risk assessment ongoing basis relate to Srilankan airlines operations in Sri Lanka and overseas destinations.
4. An important part of preventing acts of unlawful interference is for the Security Department to make sure crewmembers are aware of the threat level. Crews have to be able to trust the intelligence provided by the Security Department. A strong relationship based on trust and credibility must be achieved. By being aware that the flight they are working on is operating under a higher than normal threat level, crewmembers can make the necessary adjustment to make sure that the increased threat does not result in an increased risk for the flight.
5. Obviously, threat assessment can only inform the crew of pre-flight threat assessment. Once airborne, if an incident occurs, the crew needs to be able to assess what kind of threat it represents. This is necessary to intervene accordingly and to be able to communicate the appropriate information to flight deck and subsequently to the ground in order to provide the necessary support.
6. A four-tiered scheme of threat levels has been devised. This classification scheme shall be promoted throughout the air carrier in order to facilitate the communication shall an unruly passenger incident situation arise on board an aircraft. The levels are as follows:

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 39

- Level 1 — Disruptive behaviour – suspicious or threatening;**
Level 2 — Physically abusive behaviour;
Level 3 — Life-threatening behaviour;
Level 4 — Attempted breach or actual breach of the cockpit;

7. If a disruptive passenger begins acting up while the aircraft is still on the ground, unless the situation can quickly be resolved, he/she shall be removed along with his/her baggage. Again, it shall be stressed that pre-flight observation of the cabin is very important to identify suspect behaviour. Cabin crew need to learn to trust their judgment and understand that every situation is unique and there is no constant recipe to deal with a passenger disturbance. They shall note passengers who are extremely nervous or distant and numb, i.e. suspicious. The first step shall be for cabin crew to attempt to find out why the passenger seems nervous. It could simply be that he/she is sick or afraid to fly
8. Whatever the approach, suspicious behaviour shall not go unnoticed; it is both a sound security practice and a good customer service approach to show that you care about the comfort of each passenger. Conversely, cabin crews shall also identify those that might be Able Bodied Personnel (ABPs), such as off duty crewmembers and military personnel
9. Communication is key. Clear and simple communication between cabin crew is very important to co-ordinate teamwork. The flight crew needs to be updated regularly on the progress of the situation by cabin crew. The flight crew shall relay this information to the ground immediately. Lines of command shall be kept very simple when there is a disruptive situation. All staff members, including sky marshals, shall answer to the Captain whenever possible if there is a disruptive situation
10. The general idea is to presume the worst outcome of a situation yet act according to the current disruption. Crewmembers need to attempt to diffuse the situation up to the very last moment when it is clear that there is no way to resolve the situation verbally. It is usually instructed that the moment you touch the passenger, you have lost. Therefore, physically confronting a passenger or applying restraints shall only be used when all diplomatic approaches have been exhausted. Once restraints have been used, they shall remain on the passenger for the duration of the flight even if he/she promises good behaviour
11. Crew need to be aware that a situation can escalate at any moment, sometimes without warning. Cabin crew and flight crew need to quickly assess if the cabin crew can control the disturbance. If the answer is negative, the flight crew needs to relay this information on the ground and land as quickly as possible. Any verbal or written threat of a weapon means the situation has escalated to threat level 3 and appropriate measures shall be taken

8.8.2 Crew Response according to Threat Level

The crew response shall be appropriate to the threat level. However, if there is an escalation in threat level, crew need to escalate their response accordingly. Here is a list of integrated crew response measures according to the threat level:

• **Level 1 Threat— Disruptive behaviour (Suspicious or verbally threatening)**

1. Communicate with flight crew and other cabin crew
2. Be attentive to other activity within the cabin, sometimes a Level 1 disruption can be a diversion

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 40

to cover a hijacking

3. Lock down the cockpit
4. Suspend passenger traffic in the “clear zone”, the galley area immediately behind the cockpit door
5. Alert able-bodied passengers
6. Attempt to diffuse the situation verbally. If one cabin crewmember fails, consider sending another one who might have more success
7. Notify passenger of their unacceptable behaviour (Final Warning Document).
8. Flight crew shall be aware that an interception by military aircraft is possible;
9. Document all the events and report them to the air carrier and as necessary the authorities

• **Level 2 Threat— Physically abusive behaviour**

1. Use separation techniques
2. Communicate with flight crew and other cabin crew
3. Lock down the cockpit
4. Be attentive to other activity within the cabin; sometimes a Level 2 disruption can be a diversion to cover a hijacking
5. Suspend service of alcoholic beverages
6. Suspend passenger traffic in the “clear zone”, the galley area immediately behind the cockpit door
7. Captain shall advise air traffic control and air carrier and request that the appropriate law enforcement agency meet the aircraft
8. Captain shall consider diversion and landing plan
9. Solicit help from cabin crew and passengers. If passengers get involved, it is important to instruct them on what kind of action is warranted. Since the 11 September attacks, there have been instances where passengers have used excessive, and sometime abusive, force to neutralize disruptive passengers
10. Flight crew shall be aware that an interception by military aircraft is possible

• **Level 3 Threat— Life threatening behaviour**

1. Communicate with flight crew and other cabin crew
2. Suspend passenger traffic in the “clear zone”, the galley area immediately behind the cockpit door, and block with ABPs and service carts
3. Suspend service of alcoholic beverages
4. Solicit all help from cabin crew and passengers. If passengers get involved, it is important to instruct them on what kind of action is warranted. Since the 11 September attacks, there have been instances where passengers have used excessive, and sometimes abusive, force to neutralize disruptive passengers
5. Cabin crew to provide information regarding perpetrators to pilot-in-command
6. Use force to subdue assailants
7. Use restraints and other on board resources
8. If necessary, implement Least-Risk Bomb Location (LRBL) or Chemical/Biological Weapons (CBW) procedures

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 41

9. Captain will declare an emergency and activate landing plan
10. Squawk Transponder code 7500
11. Prepare for rapid descent
12. Monitor Radio on 121.5MHz and prepare for interception by military aircraft
13. After landing, if possible, pull fire switches and disconnect generators
14. If appropriate, escape from the aircraft (mostly relevant to flight crew)

• **Level 4 Threat— Attempted or actual breach of the Flight deck**

1. Maintain aircraft command and control at all cost
2. Communicate with flight crew and other cabin crew
3. Solicit all help from cabin crew and passengers via the public address system
4. Defend cockpit using whatever force is necessary to eliminate the threat
5. Use commands and all available resources and necessary forces to subdue the assailant and eliminate the threat
6. Use restraints and other on board resources
7. Cockpit will declare an emergency and activate landing plan for nearest suitable airport
8. Squawk Transponder code 7500
9. Monitor Radio on 121.5MHz and prepare for interception by military aircraft
10. As soon as operationally feasible, initiate possible rapid descent
11. After landing, if possible, pull fire switches and disconnect generators
12. If appropriate, escape from the aircraft (mostly relevant to flight crew)

8.9 Policy for unruly passengers

1. Passengers who behave in an unruly and disruptive manner in-flight, is an ongoing concern to the airline industry. Disruption of the good order of a flight, will have an impact on other passengers, interferes with crew performance and can threaten the safety of a flight
2. The classification of 'Unruly / Disruptive behaviour' in-flight covers a range of conduct and includes
 - Acts amounts to violation of the criminal laws of a State
 - Acts, not amounting to violations of the criminal law, but leads to jeopardize the safety and security of an aircraft, crew, passengers or property therein
 - Acts which jeopardize good order and discipline on board
3. These acts shall be viewed under the same light, as if they have occurred in the public street and public places of cities of the world. Behaviour of this type in those public places would either result in a severe caution from a Law Enforcement Officer or the arrest of the offender

8.10 Reporting procedures

All staff of SriLankan Airlines must ensure, that incidents are reported and documented in an effective manner, not only to gain an understanding of the incidents themselves but also to ensure that, sufficient and appropriate information is available for legal and judicial purposes in case prosecution of the case is required. Whenever possible, civil and / or penal prosecutions must be pursued along with adequate media coverage of the convictions.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 42

Cabin Crewmembers must inform every incident to Pilot in Command through the Purser in Charge.

If the passenger continues with unruly or disruptive behaviour, Pilot-in command of the flight, may order use of in-flight restraining equipment. The Pilot-in-command may hand over such passengers to the appropriate authority of a contracting state on arrival at destinations.

8.11 Company Procedure For Carriage Of Arms/ Ammunitions

	(A) Applicable rule	(B) Ticketing / Reservations
1. SPORTING WEAPONS AND AMMUNITIONS CARRIED BY PASSENGERS	- IATA DGR 2.3 A Note (1) - Other rules and regulations governed by Origin/Transit / over flaying & destination.	- Passengers shall inform UL Ticketing and Reservation Office at the time of Booking. - Res/Ticket Office to liaise with Dangerous Goods Policies Manager and flight operations to get over flying clearance. - Res/Ticket Office to check with UL Office at destination for any additional requirements necessary and advice passenger & arrange them accordingly.
2. WEAPONS AND AMMUNITION CARRIED BY BODY GUARDS OF VIP/VVIP'S	- According to the approval received from CAA , Sri Lanka this shall be copied to GMGS. - Same as per 1A/2 - Maximum weight of ammunition shall be 5kg	Copy all messages to CMBGZ/CMB-DG/CMBGGUL Comply with 1B/1-1B/3 as stated above
3. WEAPONS AND AMMUNITION CARRIED BY GENERAL PASSENGERS	- Same as per 1A/1 and 1A/2 - Same as per 2A/1 and 2A/3	Comply with 1B/1-1B/3 as stated above
	(C) Approval Necessary	
1. SPORTING WEAPONS AND AMMUNITION'S CARRIED BY PASSENGERS	- Passenger shall obtain CAA / Sri Lanka approval. CAA approval to be copied to GMGS and DGPM. - Res/Ticket office to advice CMBGZ/CMBDG/CMBGGUL when there is a request for carriage of these items and obtain approval. <u>Overseas Stations</u> To advice DGPM following details to apply for DGCA approval from Colombo. - Letter of request from the passenger. - FLT No./Date, Route, Details of the weapons and ammunition's including UN numbers. - Passenger shall obtain all approval applicable to government rules at origin/transit /destination	

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 43

2. WEAPONS AND AMMUNITION CARRIED BY BODY GUARDS OF VIP/VVIP'S	1C/1 and 1C/4 – Applicable 1C/2 and 1C/3 – Not Applicable
3. WEAPONS AND AMMUNITION CARRIED BY GENERAL PASSENGERS	1C/1 and 1C/4 – Applicable No exceptions

	(D) Confirmation to the Passengers
1. SPORTING WEAPONS AND AMMUNITION'S CARRIED BY PASSENGERS	1. Confirmation to the passenger to be given by Res/Ticket Office staff only after getting all approvals stated in 1C 2. Needs Minimum of 07 working days to arrange Civil Aviation and Over flying approvals. 3. Res/Ticket office to advice CMBKDUL copy CMBGZ/CMBDGUL after giving confirmation to the passenger. Pax Name Items to be carried FLT/Date Comment on the PNR is also necessary
2. WEAPONS AND AMMUNITION CARRIED BY BODY GUARDS OF VIP/VVIP'S	1D/1 to 1D/3 - Applicable
3. WEAPONS AND AMMUNITION CARRIED BY GENERAL PASSENGERS	1D/1 to 1D/3 - Applicable

	(E) Acceptance	(F) Handling
--	----------------	--------------

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 44

1. SPORTING WEAPONS AND AMMUNITIONS CARRIED BY PASSENGERS	1. As per passenger service manual 2. Airport service staff to introduce the passenger to UL security staff. 3. Maximum limit of ammunition is 5kgs DIV 1.4S only	1. Passenger shall produce all documents and approvals to UL security on request. 2. Empty weapons and ammunitions separately packed in a solid lockable unit and hand over to UL security for examination. No explosive labels on the package. 3. Passengers shall keep the keys of the package after security examinations. 4. All other according to GOM Part 3 Chapter 2. 5. Weapons and Ammunitions shall be inaccessible in flight and shall not be retain on the person or in cabin baggage. (Read Note Below)
2. WEAPONS AND AMMUNITION CARRIED BY BODY GUARDS OF VIP/VVIP'S	1E/1 to 1E/3 - Applicable	1. 1F/1 – 1F/3 AND 1F/5 applicable 2. Also according to GOM Part 3 Chapter 2 (Read Note Below)
3. WEAPONS AND AMMUNITION CARRIED BY GENERAL PASSENGERS	1E/1 to 1E/3 - Applicable	As per 1F/1 to 1F/5 (Read Note Below)

Note : Weapons and ammunitions must be handed over to UL security at the time of check-in, who will accompany the items to the aircraft. These must be collected by the UL security at the destination and handed over to the passenger only once in the terminal building . This is the responsibility of the Station Manager/Officer and the UL appointed Security Staff at Overseas Stations.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 45

	(G) Loading	(H) NOTOC O/B Message
1. SPORTING WEAPONS AND AMMUNITIONS CARRIED BY PASSENGERS	1. <u>A330</u> Must be loaded in the Dip Locker 2. <u>A320/21</u> Shall be packed in a metal box (to be provided by the passenger solid/ lockable) loading at No. 1 door position.	<u>NOTOC</u> Must be prepared by Load Control <u>O/B Message</u> To dest/ transit/must be sent by Load Control copy to CMB-GZ/CMBDG/CMBGGUL__
2. WEAPONS AND AMMUNITION CARRIED BY BODY GUARDS OF VIP/VVIP'S	Same as 1G/1 to 1G/2	Same as stated 1 H
3. WEAPONS AND AMMUNITION CARRIED BY GENERAL PASSENGERS	Same as 1G/1 to 1G/2	Same as stated 1 H

Note : Company approval must be given to carry weapons and ammunition o/b an aircraft according to IATA DGR.

Sporting weapons - These are weapons designed for sporting purposes, such as target pistols or rifles, Air guns, Safari rifles, Hunting guns etc.,

Contacts for Approvals and Other Information

Security –

Duty Manager Security (Operations) – SITA – CMBGGUL

Mobile – 00 94 710212867

Office – 00 94 19733 2636/2825/2844/2879

Dangerous Goods Unit

Email – cargodg@srilankan.com or

SITA – CMBDGUL

TEL – 00 94 19733 2422/2455

Dangerous Good Policies Manager

TEL - 0094 19733 1553

INCIDENT REPORTING –

Any incident pertaining to above carriage shall be informed immediately to General manager Group security and Dangerous Goods Policies Manager DGPM to submit the reports to Director General of Civil Aviation, Sri Lanka

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	SECURITY PROCEDURES	Chapter 08
		Page 46

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 1

CHAPTER 09

FIRST AID

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 2

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 3

Contents

9.0 FIRST AID	9
9.1 The Role of Cabin Crew as a First Aider	9
9.1.1 Notifying the PIC	9
9.1.1.1 Vital information to the PIC	10
9.1.2 Medical Assistance	10
9.1.3 Emergency Medical Care	10
9.1.3.1 Signs and symptoms	10
9.1.4 Care/Management In-Flight	11
9.1.5 Limitations	11
9.1.6 Precautions	12
9.1.7 Legal Requirement	12
9.2 Cardio Pulmonary Resuscitation - CPR	12
9.2.1 Resuscitation Procedures	12
9.2.2 Pulse Rate/Breathing Rate	12
9.2.3 Assessment of a Collapsed Passenger (Adults)	13
9.2.4 Assessment of a collapsed passenger chart	14
9.2.5 Adult – CPR	15
9.2.5.1 Administering Rescue Breaths to an Adults	15
9.2.6 Administer CPR to Children below 7 yrs/Infants	16
9.2.6.1 Administer CPR to Children/Infants	16
9.2.6.2 Infant (0-1 years) – CPR.....	17
9.2.7 Adult, Child and infant CPR.....	18
9.2.8 Measuring the Pulse	19
9.2.9 Tracheotomy (Neck Breather)	19
9.2.9.1 Administering Oxygen through A Tracheotomy	19
9.2.10 CPR without Medical Help	20
9.3 Administering Oxygen	20
9.3.1 Administering Oxygen to an Adult	20
9.3.2 Administering Oxygen to an Infant/Child	21
9.3.3 MEDA Oxygen	21
9.4 Resuscitator Vent Aid Kit (RVAK)	22
9.5 AMBU Resuscitator	24

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 4

9.6 Contagious Diseases	25
9.7 In-Flight First Aid Handling	25
9.7.1 Cold	25
9.7.2 Headache	25
9.7.3 Air Sickness	25
9.7.4 Toothache	26
9.7.5 Hiccups	26
9.7.6 Diarrhoea	26
9.7.7 Alcoholic Intoxication	26
9.7.8 Using the Digital Thermometer	26
9.7.9 Using the Infra Red Thermometer.....	27
9.7.10 Eye Treatment	27
9.7.10.1 Injury -Non-Embedded - for foreign body in the eye	27
9.7.10.2 Eye Injury -Embedded	27
9.7.11 Eye Infection	27
9.7.12 Eye Irritation	27
9.7.13 Ear Distress	28
9.7.14 Food Poisoning	28
9.7.15 Hysterical Attacks	28
9.7.16 Indigestion	28
9.7.17 Drug Overdose	28
9.7.18 Abdominal Pain	29
9.7.19 Asthma	29
9.7.20 Diabetes	30
9.7.20.1 Hypoglycaemia	30
9.7.20.2 Hyperglycaemia.....	30
9.7.21 Heat Exhaustion	31
9.7.22 Heat Stroke	31
9.7.23 Epilepsy	31
9.7.24 Fainting	32
9.7.25 Hyperventilation	32
9.7.26 Shock	33
9.7.27 Heart Disorders (Angina)	33
9.7.28 Heart Attack	34
9.7.29 Cardiac Arrest	34

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 5

9.7.30 Stroke	35
9.7.31 Allergies	35
9.7.32 Choking	36
9.7.33 Head Injury/Conscious/Unconscious	37
9.7.34 Bleeding/Controlling blood loss	40
9.7.35 Bleeding	40
9.7.35.1 External Bleeding	40
9.7.35.2 Internal Bleeding	41
9.7.36 Nose Bleeding	41
9.7.37 Burns	41
9.7.37.1 First degree Superficial - Skin red	41
9.7.37.2 Second Degree Intermediate - Skin red/blistered	41
9.7.37.3 Third degree Deep – Skin charred	42
9.7.38 Back and Neck Injuries	42
9.7.39 Sprains (On the spine)	42
9.7.40 Strains	42
9.7.41 Dislocation	43
9.7.42 Fractures	43
9.7.42.1 Closed Fractures	44
9.7.42.2 Open Fractures/Compound fracture	44
9.8 Bandages	44
9.8.1 Roller bandages	44
9.8.2 Gauze Bandages	45
9.8.3 Elastic Bandages	45
9.8.4 Triangular Bandages:	45
9.8.5 General rules for bandages	45
9.9 Carriage of Stretcher Cases	46
9.10 Childbirth	46
9.10.1 First Stage	46
9.10.2 Second Stage	47
9.10.3 Third stage	48
9.11 Apparent Death	49
9.12 Automated External Defibrillator (AED)	50
9.13 Suspected communicable disease on-board	53
9.13.1 Guidelines for CCMs	53

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 6

9.13.2 Identification:	53
9.13.3 Procedure to be adopted by CCM	53
9.13.4 If the Passenger is suspected to be suffering from Communicable Disease,	54
9.13.5 Public health Passenger Locator Form	55
9.13.6 Universal Precaution Kit	55
9.13.7 Universal Precaution Kit Usage.....	55
9.14 First Aid Kit	56
9.15 Emergency Medical Kit (A10)	59
9.16 Public Health Passenger Locator Form	61

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 7

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 8

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 9

9.0 FIRST AID

First aid is the provision of initial care for an illness or injury. It is usually performed by a non-expert but by trained personnel until definitive medical treatment can be accessed. All Inflight medical situations shall be reported to the CMO through the VR/Incident, accident form and Illness form or MOR.

9.1 The Role of Cabin Crew as a First Aider

The principle of First Aid is to preserve life/prevent the condition from worsening and promote recovery.

Passengers look to CCMs for help and assistance and CCMs should make every effort to provide lifesaving assistance at all times and are trained to administer First Aid and handle/respond to any situation in a calm/professional manner to the best of their ability when performing duties on board. CCM also shall:

1. Assess the situation without endangering one's own life
2. Be able to identify a medical need and provide immediate/appropriate treatment
3. Arrange for the casualty to get medical help without delay
4. Maintain extreme hygienic conditions before and after administering First Aid by the usage of latex gloves/ face masks
5. Improvise and be innovative, depending on the situation and condition
6. Never panic when dealing with a situation
7. Be aware (through reference) the contents in the Emergency Medical Kit (A10)
8. Be aware of all the contents and its use in the First Aid Kit
9. Do not administer drugs or use any item from the Emergency Medical Kit (A10)
10. Be cautious when assisting in handling syringes and needles
11. Stow used needles and syringes safely in the sharps bin located in the Emergency Medical Kit (A10) and hand over to ground staff
12. CCM shall follow procedure as per **Ref. 9.14** for usage of First Aid Kits
13. Prohibited from injecting a passenger for any reason (even when requested by a passenger)
14. Keep the PIC briefed of any medical emergency
15. Remain with the patient until handed over to medical personnel
16. Be seated during critical phases of flight even if a medical emergency is in progress
17. Be cautious (to avoid injury) when the seat belt sign is switched on during cruise, when administering First Aid
18. Complete all relevant documentation

9.1.1 Notifying the PIC

The PIC shall be notified immediately in case of any type of life threatening Medical Emergency to passengers or Crew during flight, but not limited to,

1. Injuries or Serious illness
2. Administering Oxygen
3. Administering CPR/Use of the AED
4. Requirement to use the Emergency Medical Kit (A10)
5. Childbirth
6. Unconsciousness
7. Apparent death

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 10

8. Carriage of medical alert passengers
9. Public health emergency of international concerns e.g. Covid, SARS

9.1.1.1 Vital information to the PIC

The information communicated to the PIC shall be but not limited to;

Type of Emergency

Condition of the patient

Medical Assistance provided

Medication provided

9.1.2 Medical Assistance

If required, CCMs should page for medical assistance using the PA.

***“LADIES AND GENTLEMEN,
MAY WE HAVE YOUR ATTENTION PLEASE, IF THERE IS A MEDICAL PRACTITIONER, A QUALIFIED NURSE
OR PARAMEDIC ON BOARD, PLEASE IDENTIFY YOURSELF TO A MEMBER OF THE CABIN CREW.
THANK YOU”.***

Purser shall ensure the credentials of the medical practitioner are verified.

In the event medical assistance is requested on landing for a critically ill (life threatening) passenger.

The Purser shall carry out an announcement requesting all passengers to remain seated until the medical assistance reaches the patient.

***“LADIES AND GENTLEMEN,
MAY WE HAVE YOUR ATTENTION PLEASE, WE REQUEST ALL PASSENGERS TO REMAIN SEATED UNTIL
THE MEDICAL TEAM REACHES A CRITICALLY ILL PASSENGER ON BOARD
THANK YOU FOR YOUR PATIENCE AND UNDERSTANDING”.***

9.1.3 Emergency Medical Care

9.1.3.1 Signs and symptoms

CCMs should determine the nature of the illness/injury by paying special attention to:

1. Dangers/Hazards
2. Level of Response
3. Airway
4. Breathing
5. Circulation
6. Bleeding
7. Fractures
8. Levels of consciousness (please refer levels of consciousness table on page 36)

If the passenger is unconscious, look for **Medic-Alert** Emblem or any other identification in the form of necklace or bracelet and check the back of the emblem to identify his/her condition (E.g. – epileptic/diabetic/allergies).

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 11

In All Cases

1. Reassure the passenger
2. Inform the PIC/Purser
3. Allow the passenger to assume the most comfortable posture

If required

1. Loosen tight clothing
2. Open air vents in the area
3. Cover the passenger with a blanket
4. Administer Oxygen
5. Obtain medical history from passenger
6. Request presence of medical aid on arrival at destination

Documentation

In the event of an in-flight medical emergency the following documents should be completed as required:

Refer 2.36

9.1.4 Care/Management In-Flight

Falling ill during flight can often be a very frightening experience. When offering care, trust and building confidence is vital. Although the CCM's responsibilities as First-Aiders are clearly outlined, the caring manner shown during assessing the casualty is important. The following principles shall be applied to all situations:

1. Talk to the person/ask relevant questions that produces a yes or no answer
2. Act calmly and reassure the person constantly, even after treatment
3. Give a clear explanation of what you intend to do. E.g. inform the reason you are loosening his clothing/what to expect when receiving oxygen
4. Do not leave the passenger until he has fully recovered, even if a medical professional has offered to assist. The responsibility of a medical professional is only to offer help with areas that CCMs have not been trained on E.g. injecting.
5. Never leave a passenger who is unconscious or in a life threatening situation. Hold the passenger's hand, physical touch can be very reassuring
6. Use reassuring words like "don't worry", "you will be fine", "everything is going to be fine" etc.
7. Avoid words that could cause emotional distress, E.g. 'Don't worry; you are not going to die'
8. If the victim is accompanied, allow them to stay with him unless it interferes with the treatment

Be cautious of a semi-conscious person hearing you. Avoid discussing the victim's condition in his presence or in the vicinity of other passengers.

9.1.5 Limitations

CCMs are trained in first aid but they are not considered as medically qualified/nurses or paramedics and are not expected to have detailed knowledge or experience of all medical procedures. CCMs are not expected to:

1. Give complicated medical assistance/Inject any person
2. Undertake any procedures they have not received official training in, or any procedures outside the training manual

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 12

9.1.6 Precautions

CCMs should take extreme care when administering First Aid or assisting a medical practitioner. Any equipment suspected of contamination should not be touched with bare hands. A marked air sickness bags should be used for proper disposal.

9.1.7 Legal Requirement

CCMs are considered competent First Aiders only. A CCM shall act in accordance with what he has been trained to do and will not be found fault with for trying to help a person in need of assistance. A trained First Aider shall not stand back and not use his skills and training to save a life.

9.2 Cardio Pulmonary Resuscitation - CPR

9.2.1 Resuscitation Procedures

Oxygen is essential to life. The brain, which controls all bodily functions, must have a supply of oxygen. If the brain is deprived of oxygen for more than three minutes it will suffer brain damage. It is therefore vital to establish that the airway is clear; breathing is present and circulation is functioning in an unconscious patient.

Check the patient's eyes, dilated pupils could be an indication of lack of oxygen and the blood supply to the brain.

9.2.2 Pulse Rate/Breathing Rate

Normal Pulse Rate (Per minute)	Normal Breathing Rate (Per minute)
Adults - 60 - 80 beats	10 breaths
Child - 80 -100 beats	15 breaths
Infant - 100 -120 beats	20 breaths

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 13

9.2.3 Assessment of a Collapsed Passenger (Adults)

If a passenger has collapsed, immediately check on (**DRSABC**)


D	Danger or Hazards	For you or the patient, look up/down and around the area
R	Response	Check response by giving verbal commands or if unresponsive check the pain response. If the patient is responsive, keep him in recovery position and ask 1. S - signs and symptoms 2. A - Allergies 3. M - Medication taking 4. P - Past medical history 5. L - Last meals taken/ 6. E - Extra anything
S	Shout for help	Shout for help, to get help from others
A	Airway	Check/clear the airway for foreign objects. Open the airway using either, head tilt/chin lift or jaw thrust method to keep airway open
B	Breathing	Look/listen for signs of breathing for 10 seconds
C	Circulation	Check the carotid pulse (in the neck) for 10 seconds

Note: If foreign object present use PPE and remove obstruction using finger if possible, remove dentures if applicable.

1. If breathing and pulse is present, place in recovery position and treat as an unconscious person
2. If there is no breathing start CPR immediately check vital signs every 5 minutes.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

9.2.4 Assessment of a collapsed passenger chart

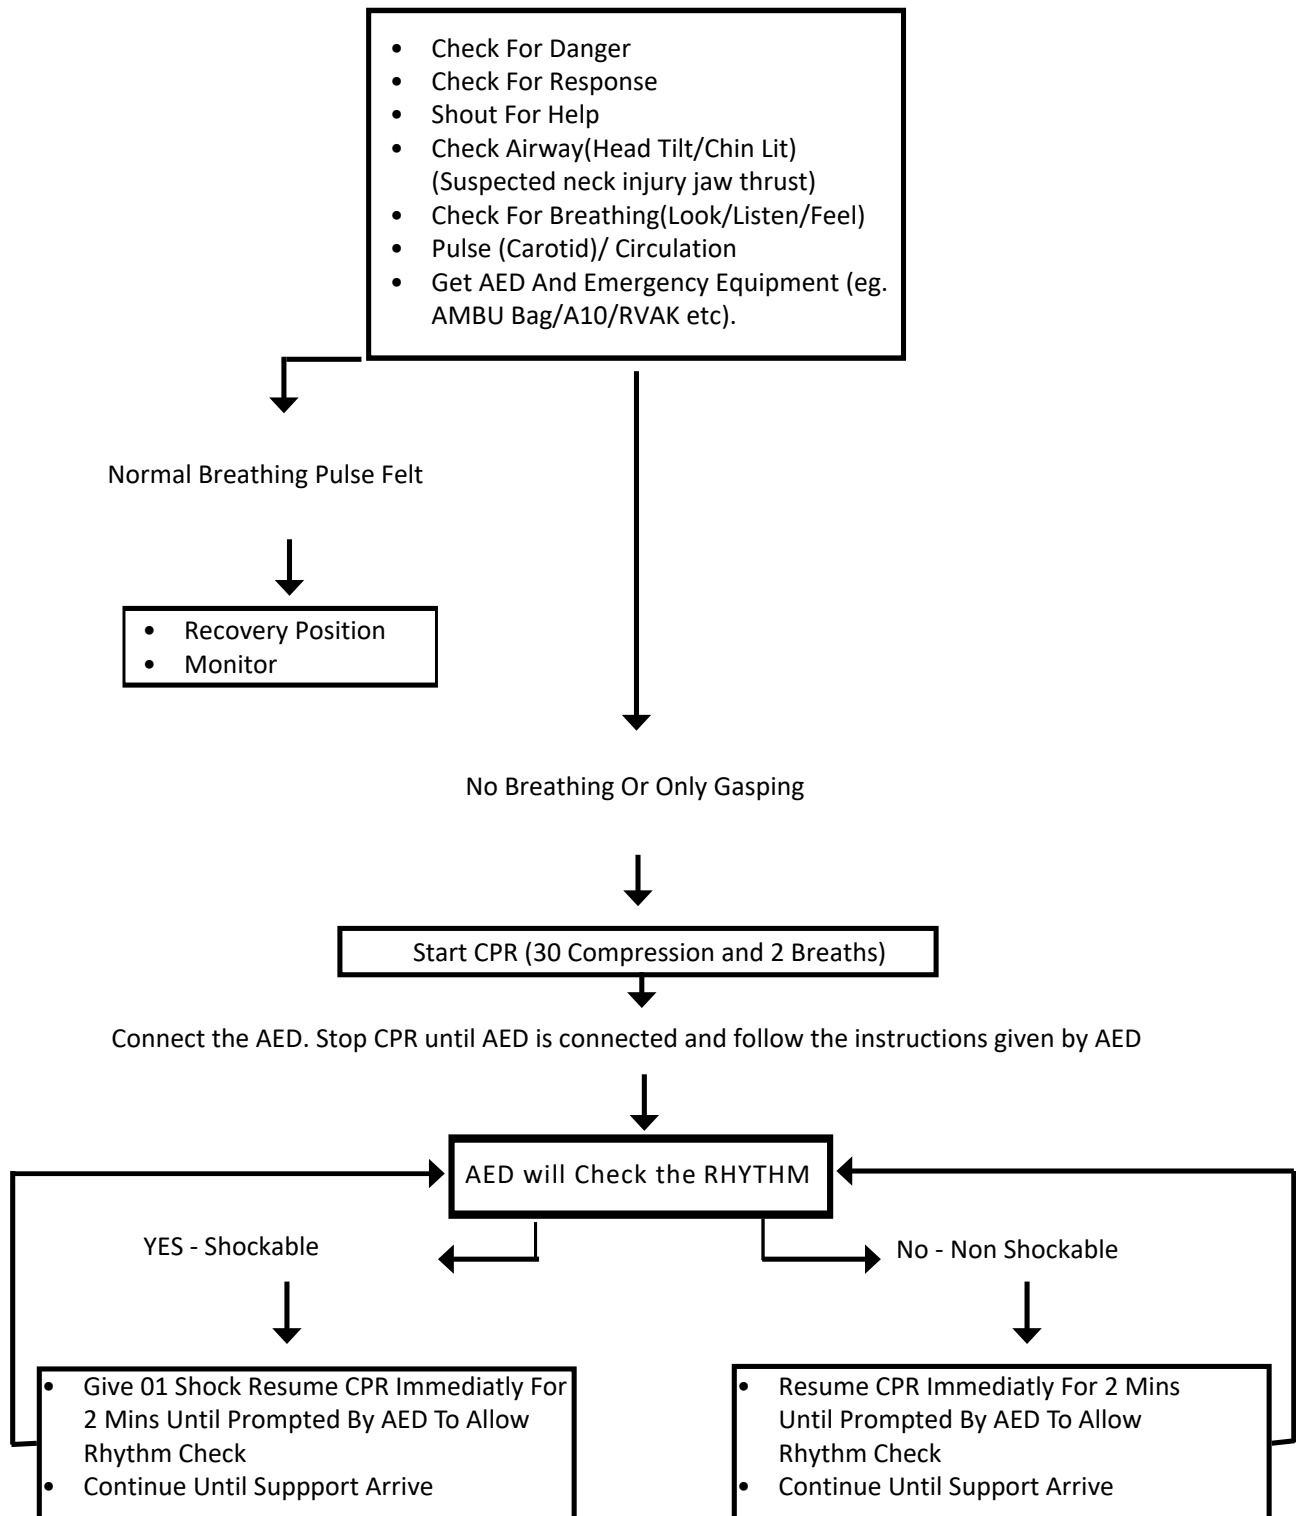


Note: If there is catastrophic bleeding priority shall be to take necessary first aid precautions to arrest the bleeding. Ref 9.7.35.1

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 15

9.2.5 Adult – CPR

Chest Compressions

Lay passenger on hard/flat surface/kneel beside the passenger.
Locate mid of the breastbone or on the breast bone in between nipple line
Place the heel of your other hand beside (lower) the fingers/place other hand on top, interlock hands.
Keeping shoulders directly over hands /depress chest downward approx. 1½ - 2 Inches (Keep elbows locked and straight down)
Release the pressure on the chest – do not remove hands off the chest.
Continue to give compressions at the rate of 100 compressions per minute

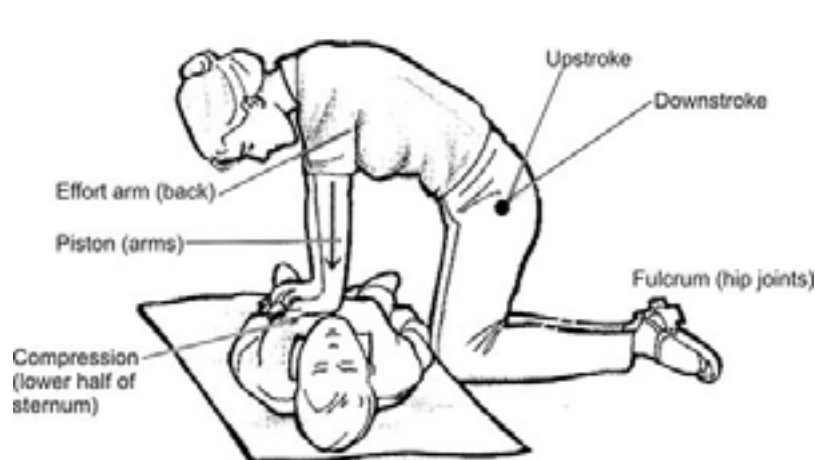

9.2.5.1 Administering Rescue Breaths to an Adults

If no breathing start CPR immediately. The steps as per the below table

Lay the passenger on a hard flat surface.
Use chin lift/head tilt method to open the airway.
Use AMBU Bag or RVAK
Observe for any rise of the chest.
Remove AMBU Bag/RVAK and allow the chest to fall.
Deliver another breath using the same method (Ambu bag/RVAK)
Continue ventilation at the rate of 10 to 12 breaths per minute. Check for pulse every 10 seconds up to a minute.
If a neck/spinal injury is suspected, use 'Jaw thrust' method to open airway (pull the lower jaw forward without moving the head/neck)
Continue 30 compressions alternating with 2 breaths of CPR until help arrives.
It is not necessary to stop and check the pulse, this shall only be done if the person takes a sudden gasp, a cough or moves suddenly.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 16



9.2.6 Administer CPR to Children below 7 yrs/Infants

Administer CPR to Children below 7 yrs. (depending on body structure)/Infants.

Failure to breathe is the main cause of cardiac arrest in children and infants. If breathing can be re-established the heart will start spontaneously. CPR & chest compressions can be performed on older children (8 yrs. And above) as same for an adult. For Children below 7 yrs and infants the technique varies.

1. Immediately check on DRSABC
2. If breathing is not present, give 2 rescue breaths up-to 5 until 2 good chest expansion are seen and check circulation
3. Check carotid pulse if child is above 1 year
4. Check brachial pulse (in the arm) if child is below 1 year

9.2.6.1 Administer CPR to Children/Infants

Failure to breathe is the main cause of cardiac arrest in children and infants. If breathing can be re-established the heart will start spontaneously. CPR & chest compressions can be performed on older children (8 yrs. and above) as same for an adult. For Children below 7 yrs and infants the technique varies.

Immediately check on DRSABC

1. If breathing is not present, give 5 rescue breaths until chest expansion are seen and check circulation
2. Check carotid pulse if child is above 1 year
3. Check brachial pulse (in the arm) if child is below 1 year

Chest Compressions

Chest Compressions for a child is performed with two or one hand depending on the built of the child

Depress $\frac{1}{3}$ to $\frac{1}{2}$ the depth of the chest

Continue to give chest compressions at a speed of 100 compressions per minute.

Continue 30 compressions alternating with 2 breath of CPR until help arrives.

It is not necessary to stop and check the pulse; this shall only be done if there is a sudden movement, cough, or gasp.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL



9.2.6.2 Infant (0-1 years) – CPR

Chest Compressions

01 Rescuer - Locate and place two fingers just below the nipple line.

02 Rescuer - 2 Thumbs - Encircling Hand Technique

Depress $\frac{1}{3}$ to $\frac{1}{2}$ the depth of the chest

Continue to give chest compressions at a speed of 100 compressions per minute.

Continue 30 compressions alternating with 2 breath of CPR until help arrives.

It is not necessary to stop and check the pulse, it should only be done if the infant takes a sudden gasp/coughs or moves suddenly.





No breathing start CPR

Below 1 year

Administer mouth-to-mouth using RVAK or nose resuscitation at 12-20 breaths per minute.

Above 1 year

Administer mouth-to-mouth using RVAK resuscitation at 12-20 breaths per minute.

Check pulse every minute and if pulse is absent start chest compressions combined with resuscitation.

Use Jaw thrust to open the airway in suspected neck injuries.

9.2.7 Adult, Child and infant CPR

	Adult	Child (1 Year to Puberty)	Infant
1-Rescuer Compression: Ventilation Ratio	30:2	30:2	30:2
2-Rescuer Compression: Ventilation Ratio	30:2	5 rescue breaths followed by 30:2	30:2
Compression Rate	100	100	100
Compression Depth	1 ½ - 2 Inches	1/3 to ½ the depth of the chest	1/3 to ½ the depth of the chest
Hand Placement	Two Hands mid of the breastbone or on the breast bone in between nipple line	Two or One Hand mid of the breastbone or on the breast bone in between nipple line	1-Rescuer 2 Finger Technique 1-Rescuer 2 Thumbs-Encircling Hands Technique Just below the nipple line
Pulse Check	Carotid	Carotid	Brachial

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	FIRST AID		Chapter 09
			Page 19

9.2.8 Measuring the Pulse

1. Carotid
2. Radial
3. Brachial



9.2.9 Tracheotomy (Neck Breather)

Is an airway from the throat directly into the windpipe through a hole in the neck (stoma) that could create a total or partial neck breather.

Total Neck Breather

Breathe only through a neck opening. Seal your mouth around the tube of the Tracheotomy and blow slowly.

Partial Neck Breather

They breath through an opening in the neck, nose and mouth. Seal the victim's nose and mouth/ place your mouth around the tube in the Tracheotomy and blow slowly.



Artificial Ventilation through a Tracheotomy

If the patient stops breathing through the neck breather, artificial ventilation should be given through the Tracheotomy.

9.2.9.1 Administering Oxygen through A Tracheotomy

Place the mask over the Tracheotomy and monitor the pressure gauge regularly.

Procedure on administering Oxygen (**Ref 9.3**)



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 20

9.2.10 CPR without Medical Help

If medical help is not available, the PIC may decide to divert the aircraft, hence it is vital the PIC is informed of any medical emergency.

CPR should be carried out until the patient revives. In the event the patient fails to revive CPR may be discontinued after discussion with the PIC and accompanying passengers (if any). If the PIC decide to divert the Aircraft, CPR shall be continued regardless of the time factor and until medical assistance is available.

Pronouncing death could be difficult (CCMs are prohibited from pronouncing death). However the following signs may be apparent:

1. Check neck/arms/wrists and groins for absence of pulse
2. Look, Listen and feel over the chest for absence of heartbeat and breath
3. Feel chest for respiration or absence of breathing. If there is no movement of chest, place your ear close to the mouth and listen and feel for breath. If in doubt, use a shiny metal surface and place it close to the lips (any breath moisture will condense on the surface of the piece of metal)
4. Body colour remains pale and gradually becomes more blue and mottled
5. Pupils remain dilated and fixed with no change and the eyes lose its shine becoming dull and glazed
6. If movement or response is completely absent, place a plastic sheet under the person to contain any leakage of bodily fluids. Accompanying passengers (if any) may be allowed to be in the vicinity unless it compromises any safety regulation. Only a medical practitioner could certify death

If death is certified by a medical practitioner, CCMs shall not move the body (for autopsy reasons) and it should remain on board until all other passengers have de-planed and formalities (pertaining to that country) are completed.

9.3 Administering Oxygen

9.3.1 Administering Oxygen to an Adult

When MEDA bottles of oxygen are requested, the CMO shall inform the Engineering department to stow it on the aircraft.

Procedure and Precautions

1. Page for medical practitioner/qualified nurse or a paramedic.
2. Inform the PIC.
3. Ensure no smoking regulation is adhered to
4. Ensure bottle and mask is free of grease and oil
5. Secure the bottle, with the gauge visible
6. Have an extra bottle of oxygen as stand by
7. Two CCMs shall be involved in fixing the oxygen mask to the passenger

Operation

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 21

1. Remove the face mask from plastic bag
2. Ensure the tubing is fixed to the high outlet
3. Wipe/ clean the face of the recipient with a wet towel
4. Open valve by turning ON/OFF knob anti- clockwise
5. Check for the flow of oxygen by pinching mask end of the re-breather bag
6. Place mask over the nose and mouth, adjust elastic band to hold mask in place
7. Place bottle with the gauge visible
8. Purser shall nominate a CCM to monitor the passenger and the flow of oxygen/elapsed time
9. Monitor the bag inflating and deflating as the person breaths
10. Position another bottle of oxygen to be used when required
11. When the gauge reaches 500/250 PSI remove mask. (Continue administering oxygen from another bottle if required)

After Use

1. Remove the face mask from the passenger
2. Close the valve by turning ON/OFF knob clockwise
3. Disconnect the tube from the bottle
4. Restore bottle of oxygen
5. Inform Purser of the location and the final reading
6. Enter in cabin defects log book

9.3.2 Administering Oxygen to an Infant/Child

1. The child face mask should be placed and held gently to the face of the infant/child or kept in place by using the elastic band
2. It is safe to administer oxygen at 4 LPM to an infant under 2 years of age and for children over 2 years

9.3.3 MEDA Oxygen

When a MEDA passenger is airlifted the following regulations shall be adhered to,

1. Ex base - MEDA oxygen could be used to a minimum of 250 PSI
2. Ex Base - If the requirement for Oxygen exceeds the MEDA bottles, additional bottles shall be supplied by the Engineering Department for ex-base and en-route dispatch.
3. Ex En-Route - If an aircraft is dispatched with the minimum requirement of bottles, they could be used to 500 PSI
4. Administering oxygen over the above regulation is at the discretion of the PIC
5. During post decompression, Oxygen from all bottles may be used until the gauge reads zero
6. The Purser shall nominate a CCM to regularly monitor the MEDA passenger throughout the flight. The nominated CCMs shall position an additional bottle of oxygen and change the bottles prior to the elapse time.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

Additional bottles of Oxygen shall be secured in the following locations

A320 – over head stowage compartment above row 27 D/E/F
A321 – over head stowage compartment above row 32 DEF
A330-200 - over head stowage compartment above row 31 D/E/F/G
A330-300 - over head stowage compartment above row 37 D/E/F/G


Announcement Prior To Administering Oxygen

“LADIES AND GENTLEMAN, MAY WE HAVE YOUR ATTENTION PLEASE, IF THERE IS A MEDICAL PRACTITIONER, QUALIFIED NURSE OR PARAMEDIC ON BOARD; PLEASE IDENTIFY YOUR SELF TO A MEMBER OF THE CABIN CREW. THANK YOU”


9.4 Resuscitator Vent Aid Kit (RVAK)



Setup



Check that the Filter is snapped firmly into place, and push out dome.



Attach One-way Valve to mask port.

Placement of Mask on Adult and Child



Use of Mask on Adult and Child



Seal as illustrated. Blow slowly until chest rises.



Allow patient to exhale.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 23

Placement of Mask on Infant



Position the end marked "nose" under the infant patient's chin.

Use of Mask on Infant



Seal as illustrated. Blow slowly until chest rises.



Allow patient to exhale.

Precaution

1. Page for a medical practitioner prior to use to initiating CPR using RVAK
2. Don protective gloves
3. Blow through valve to verify operation
4. If the patient vomits, remove mask and clear airway. Clear the mask by sweeping out foreign material
5. Re-apply mask to the patient and continue ventilation

Operation

Adults/Children

1. Push out dome and attach one-way valve to the mask
2. Direct exhalation port from the nose end of the mask
3. Apply the rim of the mask between the patient's lower lip and chin keeping the mouth open under the mask
4. Use the thumb to seal and hold the mask in place
5. Open airway and blow gently until the chest rises
6. Remove your mouth and allow the patient to exhale
7. An oxygen tube can be connected to the inlet of the mask
8. If patient vomits remove the mask and clear the airway

Infants

Follow same procedure as above except,

1. Reverse the mask to ensure the nose part is towards the chin
2. An oxygen tube can be connected to the inlet of the mask

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 24

9.5 AMBU Resuscitator

Air-Shields Manual Breathing Unit/Resuscitator (Ambu Bag)



Precaution (Prior to initiating CPR using AMBU bag)

1. Page for a medical practitioner prior to use
2. Don protective gloves
3. Ensure the face mask is connected to the bag and the bag is connected to the oxygen tube
4. If patient vomits, remove mask and clear patient's airway. Clear the mask by sweeping out any foreign material
5. Re-apply mask to the patient and continue ventilation

Assembling AMBU bag and usage

Operation

Adults/Children

1. Be guided by Resuscitation Procedures **Ref 9.2**
2. Connect the tube from the AMBU bag to the high outlet of the oxygen Cylinder
3. Place the mask over the nose and mouth of the patient **Ref 9.2.5.1**
4. Squeeze the bag to ensuring it produces an elevation in the patient's chest as it would when breathing normally
5. Squeeze the AMBU bag once, **Ref 9.2.3**
 - Every 2-3 seconds if the patient is a child
 - Every 5-6 seconds if patient is an adult

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 25

- Continue squeezing the bag until patient starts to breathe normally, or until the medical practitioner arrives

Infants

For Infants follow same procedure as above except,
Reverse the mask to ensure the nose part is towards the chin.

9.6 Contagious Diseases

During boarding, if you see an indication that a passenger may have a contagious disease, (e.g. measles, chicken pox, etc.) tactfully discuss the observation with the passenger and inform the Purser/PIC who will communicate with the ground/ airport officers prior to taking action.

The PIC shall be kept informed and the decision to carry such passengers is at his discretion.

9.7 In-Flight First Aid Handling

General

CCMs are required to inform the Purser who shall inform the PIC. Purser shall be responsible for handling any of the following but not limited to situations/illnesses on board the aircraft.

9.7.1 Cold

Symptoms

- Runny nose
- Chills
- Headache/fever

Treatment

- Keep passenger warm
- Offer 2 Panadol tablets to adults/Calpol syrup to children (Check for allergy)
- Offer plenty of fluids to drink
- Use nasal spray

9.7.2 Headache

Treatment

- Offer 2 Paracetamol tablets (Check for allergy), Offer children Paracetamol Syrup according to body weight (check for allergy prior to administering).
- Encourage intake of fluids

9.7.3 Air Sickness

Symptoms

- Sickness caused by motion
- Dizziness
- Discomfort

Treatment

- Recline seat

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 26

2. Loosen clothing at the neck and waist
3. Open air vent for fresh air
4. Advise passenger to breathe deeply and slowly and to look at a fixed object Position an airsickness bag
5. Administer Promethazine Theoclate 25mg (Avomine)) if the history is compatible with motion sickness and CCM to inform passenger that it takes approximately 01 hour to get the effect after administration.

9.7.4 Toothache

Treatment

- Offer 2 Paracetamol tablets (check for allergy)

9.7.5 Hiccups

Treatment

- Ask passenger to hold breath and drink a glass of water slowly

9.7.6 Diarrhoea

Symptoms

1. Abdominal pain
2. Runny bowels

Treatment

1. Offer constipating food e.g. rice/toast bread/black coffee
2. Offer fluids (oral re-hydration solution)

9.7.7 Alcoholic Intoxication

Symptoms

1. Odour of alcohol/face flushed
2. Breathing slow and deep
3. Possible vomiting
4. Slurred speech
5. Bloodshot eyes
6. Partial or complete unconsciousness

Treatment

Deny any more alcoholic beverages.

1. Offer non-alcoholic drinks i.e. water, soft drinks etc.
2. If the passenger becomes unconscious, maintain an open airway and place the patient in the recovery position – check Airway/Breathing/Circulation (ABC)

9.7.8 Using the Digital Thermometer

1. Wipe the thermometer probe using alcohol or disinfectant swab before using.
2. Press the on/off button next to LCD display.
3. A tone will sound with the screen showing 1888 followed by the last recorded temperature/Lo/Hi.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 27

4. Position thermometer as desired (Mouth or armpit)
 - Mouth -Place the thermometer under the tongue close the mouth.
 - Armpit - Wipe armpit dry. Place the probe in armpit and keep arm pressed firmly at side.
5. The degree sign flashes throughout the testing process.
6. When flashing stops an alarm will beep for approximately 10seconds. The measured reading will appear on the LCD screen.
 - Turn off the unit after obtaining the reading.
 - Wipe the probe with alcohol or disinfectant swab and close the probe with the cover.

9.7.9 Using the Infra Red Thermometer

1. Switch on the thermometer
2. Adjust temperature setting between Celsius and Fahrenheit
3. Direct the device of the wrist or forehead
4. Press trigger and measure
5. Make sure that the device does not touch the skin

9.7.10 Eye Treatment

9.7.10.1 Injury -Non-Embedded - for foreign body in the eye

Treatment

1. Do not rub the eye
2. Do not attempt to remove with a sharp instrument
3. If it is a simple chemical in the eye, wash with water
4. If foreign body is visible, attempt to wash with water
5. If unsuccessful, cover eye with a sterile eye pad

9.7.10.2 Eye Injury -Embedded

CCMs shall refrain from removing an embedded sharp foreign body which has pierced the eye. Cover both eyes with sterile eye pads. Use ring bandages if object is protruding.

9.7.11 Eye Infection

Symptoms

1. Pain in the eye.
2. Foreign body sensation (irritation) and tearing.
3. Discharge from the eye.
4. Redness of the eye or eyelids.

Treatment

Use the available eye drops and cover with an eye pad.

9.7.12 Eye Irritation

Treatment

Use eye-drops for simple irritants e.g. cigarette smoke, moist cotton balls may be used to wipe.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 28

9.7.13 Ear Distress

An unequal pressure between outer and middle ear causes severe pain, particularly on descent than ascent. This occurs due to a blockage in the Eustachian tubes, Eustachian tube gets block from cold, allergies or infection. Pain might be more severe during descent than ascent.

Treatment

1. Advice to yawn
2. Advice to swallow
3. "Popping"- hold nose, closes lips and force air gently out only during decent.
4. Move the jaw out and from side to side
5. Feeding will help to relieve ear distress of an infant

9.7.14 Food Poisoning

Symptoms

1. Nausea
2. Vomiting
3. Diarrhoea
4. Abdominal pain

Treatment

Offer plenty of fluids and position extra airsickness bags with the passenger

9.7.15 Hysterical Attacks

Seldom occurs unless in the company of others.

Symptoms

Laughing/crying/eye lids tremor.

Treatment

Monitor situation, do not give attention more than necessary.

9.7.16 Indigestion

Symptoms

1. Pain in the abdomen
2. Discomfort in the stomach and the chest

Treatment

1. Offer anti acid tablets and monitor

9.7.17 Drug Overdose

Symptoms

1. May vary depending on the type or nature of the drugs taken
2. Agitation/depression and in extreme cases coma
3. Any person unconscious from poisoning by drugs is seriously ill

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 29

Treatment

1. If agitated, reassure and apply gentle restraint/keep under close observation
2. If in a coma, treat as an unconscious passenger (**Ref 9.7.33**)

9.7.18 Abdominal Pain

Abdominal pain due to infection

Symptoms

1. loose motion
2. Vomiting
3. Nausea
4. High temperature

Treatment

1. Hydrate with ORS
2. Anti ematics (domperidone)
3. Sugar free fruit juice

Abdominal pain due to other pathological conditions (e.g. Acute appendicitis, bowel obstruction, renal stone etc...

Symptoms

1. Blood in Urine
2. Rapid pulse
3. Restless and agitated
4. Stiff abdomen

Treatment

1. Warm compress to act as a comfort to passenger
2. Consider pain relief (Diclafenac Suppository)
3. Do not offer anything to eat or drink
4. Let passengers assume most comfortable position
5. Colicky abdominal pain

9.7.19 Asthma

Muscles of small air passages go into spasm.

Symptoms

1. Tight wheezy chest
2. Very anxious
3. Difficulty in speaking/breathing (especially breathing out)
4. Blueness of the lips and nose

Treatment

1. Advise passenger to take his own prescribed medication
2. Offer the inhaler if own medication is not available
3. Reassure and calm passenger
4. Advise passenger to lean forward/sit upright to assist breathing
5. Open-air vent
6. Give oxygen if required. **Ref 9.3**



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 30

9.7.20 Diabetes

Diabetes is a cause when the body does not produce enough or responds normally to insulin, causing blood sugar levels to be abnormally high,

9.7.20.1 Hypoglycaemia

Low blood sugar - Is sudden onset and may be due to over medication or in adequate food.

Symptoms

1. Weak/faint/dizzy/ light headed/Pale/sweaty skin
2. Possible rapid pulse
3. Intense hunger
4. Confused/disoriented and appears to be drunk/may be aggressive
5. Limbs may tremble
6. Possible unconsciousness

If any of the above symptoms are visible check blood sugar level using the glucometer in the Emergency Medical Kit (A10) with the permission of PIC.

Treatment

1. Offer sweet drinks/sugar/honey
2. Offer substantial food i.e. cake etc
3. If unconscious, treat for unconsciousness
4. Raise the blood sugar level as quickly as possible

9.7.20.2 Hyperglycaemia

High Blood Sugar - Develops gradually over a period of days or weeks and could be due to inadequate drugs and over eating

Symptoms

1. Excessive thirst
2. High urine output
3. Dry/warm skin
4. Acetone breathe (nail varnish smell)
5. Loss of appetite
6. Possible abdominal pain
7. Possible unconsciousness

If any of the above symptoms are visible check blood sugar level using the glucometer in the Emergency Medical Kit (A10) with the permission of PIC.

Treatment

1. Encourage passenger to take his own Insulin or medication
2. If unconscious, treat for unconsciousness

Ref 9.7.33

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 31

9.7.21 Heat Exhaustion

This condition occurs due to loss of fluid and salt from excessive sweating, caused by exposure to excessive heat and humidity and is gradual in onset.

Symptoms

1. Looks exhausted/pale/cold/clammy skin
2. Rapid breathing and pulse
3. May complain of cramps due to salt deficiency
4. Person may suddenly faint

Treatment

1. Lay person flat in a cool place/ elevate the legs and replace lost fluids
2. If the casualty is conscious, offer small sips of fluids to re-hydrate
3. If unconscious treat for unconsciousness

Ref 9.7.33

9.7.22 Heat Stroke

Symptoms

1. May complain of headache/weakness/dizziness/nausea
2. Hot flushed dry skin
3. High body temperature – over 41° C
4. Rapid pulse and breathing rate

Treatment

1. Victim requires immediate rapid cooling, use cool compresses i.e. wet towels
2. Keep head cool and offer cold liquid
3. Open air vent/remove excess clothing
4. If the casualty is conscious, place in a half sitting position with head and shoulders supported
5. If unconscious, treat for unconsciousness (**Ref 9.7.33**)
6. Administer oxygen if required (**Ref 9.3**)

9.7.23 Epilepsy

Symptoms

A fit may last a few minutes. Passenger may be very tired and may need to sleep.

AURA – A sign which is known to be the onset of a fit. (E.g. blurred vision/a smell/a taste)

TONIC – May give out a loud, sharp cry, become stiff and rigid. May stop breathing for 30 to 60 seconds; face flushed or pale and staring eyes.

CLONIC – Displays jerky/twitching movements. Throwing of arms and legs. Clenched jaw with the risk of biting tongue. Possible foaming around the mouth may lose control of the bladder/bowel functions.

May injure himself if the area is not cleared.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 32

COMA – Once the fit is over he may be unconscious for a few minutes. When conscious, may appear to be confused/dazed or sleepy.

Treatment

1. Protect passenger from injuring himself or other passengers
2. Remove sharp objects and pad area with pillows and blankets
3. If passenger is seated, fasten seat belt
4. Do not insert anything into passenger's mouth including Airways as this could cause injury
5. Do not restrain passenger
6. When the fit is over, immediately check ABC and allow passenger to awaken naturally
7. If unconscious, treat for unconscious. (Ref 9.7.33)
8. Be cautious as fits/seizures may be repeated

9.7.24 Fainting

Caused by heat/excessive hunger/pain etc., resulting in a brief state of unconsciousness due to temporary lack of blood supply to the brain.

Symptoms

1. Dizziness/weakness
2. Pale face
3. Sweating
4. Possible nausea
5. Passenger may collapse

Treatment

1. Increase blood supply to the brain
2. Lay/sit passenger with head between legs
3. Lay elevate the legs
4. Loosen tight clothing
5. Open air vent
6. If unconscious, treat as an unconscious passenger. (Ref 9.7.33)

9.7.25 Hyperventilation

Over breathing due to uncontrolled fear and anxiety. causes low level of carbon dioxide in the blood

Symptoms

1. Visible over breathing (deep and heavy)
2. Dizziness and blurred vision
3. Muscle stiffness/tingling/especially in hands and feet
4. Loss of balance and fainting
5. May complain of feeling pins/needles in the hands and feet

Treatment

1. Request passenger to breathe slowly in and out to control breathing rate
2. Reassure since the passenger may be very anxious
3. Cover nose and mouth with an air sickness bag, temporarily and request the passenger to breathe in to it



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 33

9.7.26 Shock

Reduction in the volume of circulating blood causes a sudden fall in blood pressure/loss of blood and bodily fluids. When the blood supply is reduced, especially to the brain, the person can become unconscious. As there is a reduced amount of circulating blood, the body's own defence mechanism takes adequate action to maintain blood flow to the vital organs.

Symptoms

1. Weakness/dizziness
2. Skin very pale/blue/cold clammy
3. Nausea/vomiting/restless/agitated
4. Fast/shallow breathing
5. Fast/weak pulse
6. Severe chill/body shakes
7. Slow/verbal response
8. May complain of thirst
9. Possible unconsciousness

Treatment Conscious

1. Do not give anything to eat or drink
2. Aim - to improve blood supply to the brain,
3. Lie down - elevate legs
4. Keep warm
5. Administer oxygen if required. (Ref 9.3)

- Place the victim in shock position
- Keep the person warm and comfortable
- Turn the victim's head to one side if neck injury is not suspected



Unconscious

Treat as a unconscious passenger. (Ref 9.7.33)

9.7.27 Heart Disorders (Angina)

It is narrowing of coronary arteries due to exertion/stress/flying in a pressurized cabin etc.

Symptoms

1. Severe crushing, central chest pain which can radiate down one or both arms
2. Shortness of breath
3. Skin pale or blue/weak pulse
4. Sweaty and anxious
5. Possible shock
6. Possible unconsciousness

Treatment

1. Encourage passenger to take own medication
2. If relieved of pain (by medication) after 10 minutes, treat as a heart attack
3. Reassure
4. Administer oxygen (Ref 9.3)
5. Monitor closely
6. Keep passenger at rest with minimal exertion

Most angina sufferers respond to their medication and remain well for the rest of the flight

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 34

9.7.28 Heart Attack

Obstruction of the coronary arteries

Symptoms

1. Severe, central chest pain may radiate down one or both arms
2. Very short of breath
3. Pale skin/blue/sweaty and clammy
4. Pulse weak and rapid
5. Nausea/vomiting
6. Severe shock
7. Possible unconsciousness

Treatment

1. Continuously monitor ABC
2. Administer oxygen (**Ref 9.3**)
3. Spray GTN under the tongue.
4. Reassure
5. No exertion
6. Treat for shock if required

Unconscious

Treat as an unconscious passenger (**Ref 9.7.33**)

9.7.29 Cardiac Arrest

Sudden stoppage of the heart beat

Symptoms

1. Unconsciousness
2. Not responding
3. No breathing/ pulse
4. Dilated pupils

Treatment

1. Start CPR
2. Continuously Monitor ABC
3. Administer oxygen (Ref 9.3)
4. Reassure
5. No exertion
6. Treat for shock if required

Unconscious

Treat as an unconscious passenger (**Ref 9.7.33**)

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL


	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 35

9.7.30 Stroke

Bleeding artery or a blood clot in the brain generally affecting the middle-aged and the elderly.

Symptoms

1. Headache/flushed face/strong pulse
2. Weakness/paralysis down one side of the body
3. Disorientated /weak /slurred/absence of speech
4. Possible loss of bowel/bladder control
5. Possible unconsciousness (with noisy breathing)

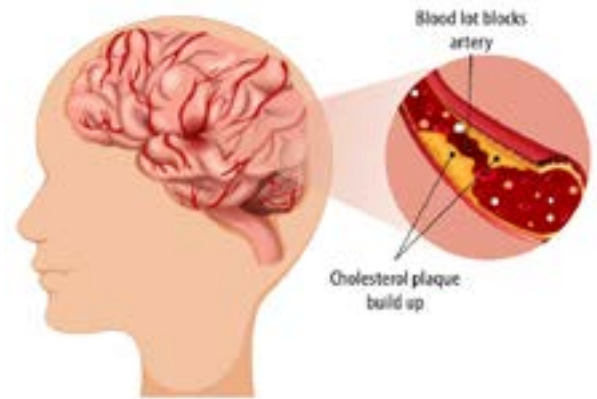

Treatment

1. Reassure
2. Do not give anything through the mouth
3. Raise head slightly if possible
4. Administer oxygen if required **(Ref 9.3)**
5. Monitor closely

Unconscious

Treat as an unconscious passenger **(Ref 9.7.33)**

9.7.31 Allergies

Allergy may be defined as the overreaction of the protective mechanism of the human body against allergenic substances. Common allergens include certain foods (Nuts, shellfish red meat, pineapple), drug allergies, Pollen, dust, Insect allergies.

Symptoms

1. Redness on the skin
2. Urticarial Skin rash
3. Itching
4. Eye irritation
5. Nasal congestion
6. Shortness of breath

Treatment

1. Advise Passenger to take his prescribed medication In line with the symptoms,
2. Offer Antihistamine 01 tablet for adult, half tablet for child above two years and for children below two years seek medical advice,
3. Keep airway open

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 36

9.7.32 Choking

Symptoms

TOTAL OBSTRUCTION	PARTIAL OBSTRUCTION
Unable to cough	Coughing
Unable to speak	Panic and distress
May grasp throat	Difficulty in talking
Blueness of lips	Difficulty in breathing
May stop breathing	
May become unconscious	

Treatment

Total/Partial blockage of airway caused by a foreign object

1. Encourage the passenger to cough up the obstruction
2. Stand behind the casualty place both hands around and pull his abdomen sharply inwards and upwards (abdominal thrust)
3. Give 5 back slaps between the shoulder blades

If conscious and breathing, despite evidence of obstruction

1. Encourage him to continue coughing, but do nothing else.

Total obstruction Shows exhaustion/becomes blue

1. Give back slaps
2. Reassure passenger
3. Bend casualty over so that the mouth lies at a lower level than the chest
4. Slap sharply with the heel of your hand between shoulder blades 5 times
5. If this does not relieve the obstruction, give abdominal thrusts



Abdominal thrust adult/Child (Conscious)

1. Stand behind the passenger
2. Put your arms around the passenger's abdomen
3. Interlock hands and place between the navel and the bottom of the breastbone
4. Pull both hands towards you with a quick inward and upward thrust
5. Repeat 5 times if necessary.
6. If the passenger becomes unconscious follow the next steps
7. Repeat cycle of backslaps followed by Abdominal Thrusts until foreign object is removed

Choking-Collapsed Child (1-7 Years-Conscious)

1. Lean child forward or place over your knee for smaller children with head down
2. Give 5 back-slaps between the shoulder blades. Use less force than for an adult
3. Check mouth and remove any obvious obstruction
4. If back-slaps are unsuccessful, give 5 chest thrusts

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 37

- Stand or kneel behind the child
- Place fist against the breast bone and grasp fist with the other hand
- Pull sharply inward 5 times at a rate of one thrust every 3 seconds
- If unsuccessful, give 5 more back-slaps (as described above)
- If unsuccessful, give 5 abdominal thrusts
- Abdominal thrusts for children are done in the same way as the adult technique using two hands. Modify your force in order to prevent injury
- Continue the sequence of back-slaps and chest thrusts, back-slaps and abdominal thrusts until the object is cleared or help arrives

Choking - Collapsed Babies (0 – 1 Year Conscious)

- Lay the baby along your forearm
- Give 5 back-slaps between the shoulder blades using less force than for a child
- If unsuccessful, give 5 chest thrusts
- Place two fingers between nipples and push inwards for thrusts
- Do not use abdominal thrust on babies
- If the child/baby falls unconscious, check ABC begin CPR




Choking-Collapsed Pregnant Ladies/Obese Persons

- Give 05 back slaps
- Replace abdominal thrusts with 5 chest thrusts

9.7.33 Head Injury/Conscious/Unconscious

Symptoms

- Bump or cut on head
- Nausea or vomiting
- Dizziness
- Confusion/loss of memory
- Possible head wound with bleeding
- Passenger may become unconscious

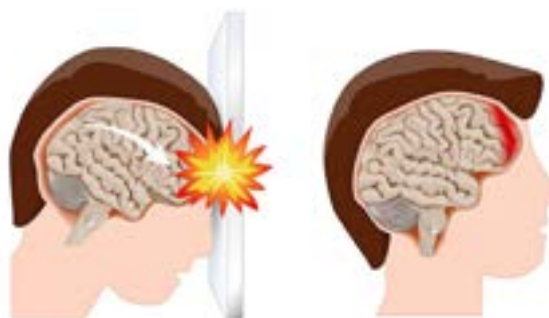

Concussion

The brain is free to move a little within the skull and therefore can be shaken by a violent blow or injury. This may cause concussion, a condition of widespread, but temporary disturbance of the brain. There will be a period of unconsciousness, but it is always brief and is followed by complete recovery. If the casualty is unconscious after 3 minutes, suspect a more serious injury. Page for a doctor and place in the recovery position and monitor if there is clear fluid or blood draining considerably from the ear/nose. If it is a more serious injury, do not plug or try to stop the flow. Loosely cover with a sterile dry dressing to prevent infection. Monitor closely.

Symptoms

- Headache
- Vomiting/nausea
- Drowsiness
- Visual disturbances

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 38

Unconscious Passenger

Unconsciousness is a prolonged state of unawareness due to heart attack/stroke/diabetes/coma/head injury etc.

LEVELS OF CONSCIOUSNESS	APPEARANCE
Conscious	Awake/orientated alert
Semi-conscious	Drowsy/ confused/ responds to speech/non-painful Stimulation
Unconsciousness	Deep sleep/responds to painful stimulation/ Only breathing & Pulse present

Treatment

1. Check **DRSABC** (Ref 9.2.4)
2. Keep in recovery position
3. Administer oxygen if required (**Ref 9.3**)

The Recovery Position



An unconscious person should be placed in the recovery position. This position prevents the tongue from blocking the airway. It allows fluid to drain from the mouth, reducing the risk of the passenger inhaling stomach contents. The head/neck and back are kept in a straight line, while the bent limbs keep the body propped in a secure and comfortable position. Prior to turning a casualty, remove his or her eyeglasses if worn, and any bulky objects from pockets.

Method

1. Kneeling beside the casualty, open the airway by tilting the head and lifting the chin
2. Straighten the legs. Place the arm nearest to you at right-angles to the body, elbow bent, with both palms placed under cheek
3. Bring the arm furthest from you across the chest, and hold the hand, palm outwards, against the casualty's nearest cheek


Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 39

4. With your other hand, grasp the leg furthest from you and pull the knee up, so that the foot is flat on the floor
5. Keeping the hand pressed against the cheek, pull at the knee to roll the casualty towards you and on to the side
6. Tilt the head back to make sure the airway remains open. Adjust the hand under the cheek, if necessary, so that the head stays in a tilted position
7. Adjust the upper leg, if necessary, so that both the hip and the knee are bent at right angles
8. Page for medical assistance
9. Monitor **ABC** continuously
10. Administer oxygen if necessary
11. Keep warm and cover with a blanket
12. Do not offer food or drinks by mouth

Recovery position for passenger suffering from Heart Attack 	Recovery position for passenger suffering from Shock 
---	---

Recovery position for passenger suffering from Head Injury

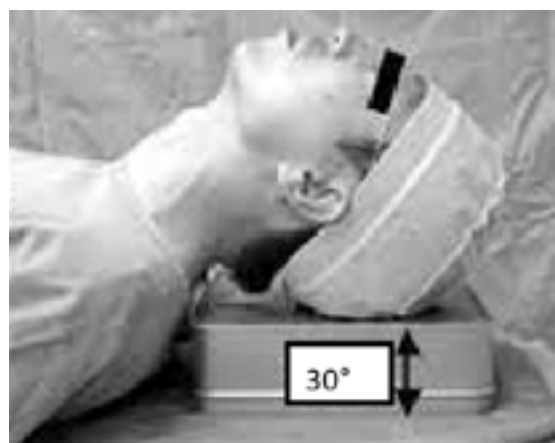

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 40

9.7.34 Bleeding/Controlling blood loss

Types of wounds

1. **Incised wound**- Caused by a clean cut from a sharp edged object and the blood vessels are cut straight across
2. **Laceration** – Crushing or ripping forces result in tears or lacerations and the wound may bleed less profusely than incised wounds but it is likely to have more tissue damage
3. **Abrasion (Graze)** – This is superficial wound in which the top most layer of skin is scraped off, leaving a raw tender area. This is caused by a sliding fall or a friction burn
4. **Contused wound** – Caused by a blunt blow or punch can rupture capillaries beneath the skin, causing blood to leak into the tissues
5. **Punctured wound** – An injury such as standing on a nail or being pricked by a needle will result in a punctured wound and it is a small entry but a deep track of internal damage
6. **Stab wound** - Caused by a long bladed instrument usually a knife penetrating the body. Seriously endangers/injury to vital organs
7. **Gunshot wound** - Caused by a bullet or other missile. May drive into or through the body causing serious internal injury, sucking in clothing and contaminants from the air. The entry wound is small and neat any exit may be large and ragged

9.7.35 Bleeding

9.7.35.1 External Bleeding

Apply Direct Pressure

Apply direct pressure using sterile gauze pads. Maintain pressure on wound for about 10 minutes. This will allow the blood to clot. Do not remove original dressing if they become saturated with blood apply further dressings over original dressing. Elevate limbs using triangular bandage. Monitor closely. If the passenger develops signs/symptoms of shock, treat for shock.

Apply Tourniquet

1. Used only by CCMs as a last resort
2. Apply 2 -3 inches above the wound using bandage from the First Aid Kit and it has to be between the source of bleeding and the heart
3. Record time of applying tourniquet
4. Release for 15 seconds every 15 minutes
5. Never cover a tourniquet
6. Place "T" mark on passengers forehead
7. Never leave passenger unattended
8. Reassure the passenger continuously



Apply direct pressure on external wounds with sterile cloth or your hand, maintaining pressure until bleeding stops



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 41

9.7.35.2 Internal Bleeding

Causes

Stomach ulcers, miscarriage, fractures, etc.

Symptoms

For signs and symptoms, refer to Shock.

Treatment

1. Assess the situation and make a note of history
2. Observe for any bruising
3. Make passenger comfortable and cover with a blanket
4. If he becomes unconscious, then handle as an unconscious passenger
5. Administer oxygen if necessary
6. Do not give anything to eat or drink
7. Treat for shock

9.7.36 Nose Bleeding

1. Seat passenger upright and tilt head slightly forward to prevent swallowing of blood
2. Request passenger to pinch nostrils firmly until bleeding stops (approximately 15 minutes) can place an ice pack on bridge of the nose
3. After the bleeding has stopped, instruct the passenger to breathe through mouth, and not to blow his nose or spit out any blood
4. If severe nose bleed persists, page for a doctor/medical practitioner

9.7.37 Burns

9.7.37.1 First degree Superficial - Skin red

Treatment

1. Pour water (room temp) over affected area for approximately 20 minutes
2. Remove jewellery or constricting clothing from injured area before swelling occurs
3. Apply a burns dressing/cream. Cover with loose dressing. Do not apply pressure to the affected area
4. Consider pain relief (2 Paracetamol tablets after obtaining the allergy history)

9.7.37.2 Second Degree Intermediate - Skin red/blistered

Treatment

1. Pour water (room temperature) over affected area for approximately 20 minutes
2. Do not touch or break blisters
3. Remove any watches, rings, belts or constricting clothing from injured area before it starts to swell
4. Apply a burns dressing/cream. Cover with loose dressing. Do not apply pressure to the affected area
5. Consider pain relief

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	FIRST AID		Chapter 09
			Page 42

9.7.37.3 Third degree Deep – Skin charred

Treatment

1. Do not remove anything that is sticking to the burn or interfering with the injured area
2. Apply silver sulphadiazine and Vaseline gauze (antibiotic tulle) to prevent contamination and infection
3. Treat for shock
4. Consider pain relief

Do Not Use

1. Adhesive dressings or bandages
2. Break blisters
3. Apply lotions, ointments, creams or fats to the affected area
4. Apply any dressing on chemical burns

9.7.38 Back and Neck Injuries

If suspected back or neck fractures – do not move passenger

Symptoms

1. Pain on neck or on the back
2. Paralysis, total or partial, on one or both sides
3. Neck fracture may affect all parts of your body
4. Possible loss of bladder or bowel control

Treatment

1. Do not move passenger or lift his head in case of neck injury
2. Reassure passenger and keep him/her warm
3. Immobilize neck with Sam Splint as a neck collar



9.7.39 Sprains (On the spine)

Symptoms

Injury caused by over-stretching a ligament at a joint.

1. Pain
2. Swelling
3. Bruising
4. Loss of movement

9.7.40 Strains

Injury caused by over-stretching/tearing of a muscle or tendon.



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 43

Symptoms

1. Pain
2. Stiffness and cramp

Treatment

Use the RICE Procedure

- R** - Rest affected area
- I** - Ice, to reduce swelling
- C** - Compression (Elastic Bandage)
- E** - Elevation

Offer two paracetamols for pain relief.

Note : If in doubt – always treat injured part as a fracture

9.7.41 Dislocation

Symptoms

1. Severe pain
2. Deformity of joint
3. Loss of movement of affected limb
4. Swelling and possible bruising
5. Possible shock


Treatment

1. Immobilize and support using Sam Splint, Padding, Sling and Bandages
2. Apply a cold pack if swelling appears
3. Offer mild painkiller – e.g. Panadol



9.7.42 Fractures

Type of Fractures

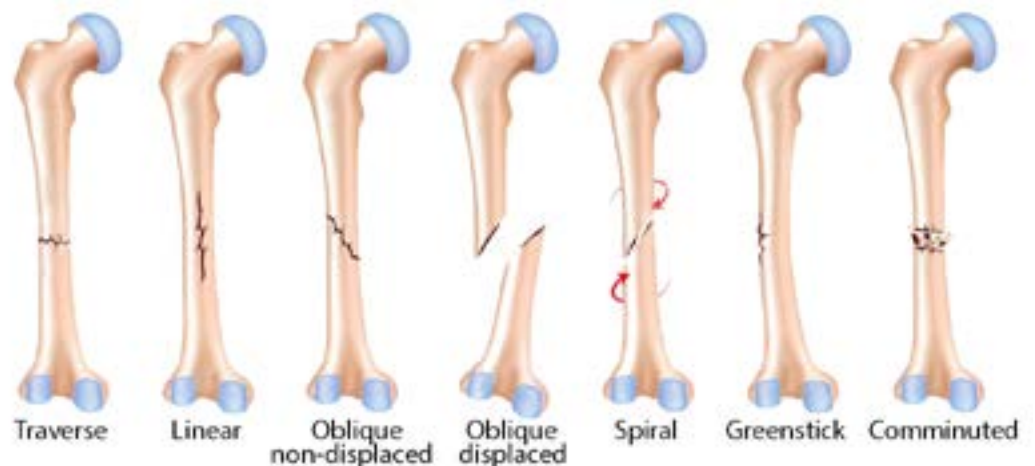

Kind of Fractures (Closed/Open)



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 44

9.7.42.1 Closed Fractures

(The bone is broken, but the surrounding skin is intact)

Symptoms

1. Passenger will feel or hear bone break
2. Pain, tenderness, deformity
3. Partial or complete loss of movement
4. Swelling and bruising
5. Possible shock

Treatment

1. Keep steady and support affected part
2. Immobilize e.g. Sam Splint or other padding
3. If possible, elevate affected part using sling
4. Treat for shock
5. Mild pain killer like Panadol / Disprin

9.7.42.2 Open Fractures/Compound fracture

The bone is broken and protrudes through the skin

Symptoms

1. Wound
2. Protruding bone
3. Moderate-severe bleeding
4. Shock

Treatment

1. Keep steady and support affected part
2. Do not attempt to straighten fractured limbs
3. Control bleeding
4. Dress wound/protect protruding bone using ring bandage
5. Immobilize
6. Treat for shock



9.8 Bandages

They can be used to secure dressings over wounds, to control bleeding, to support and immobilize injuries such as fractures and to reduce swelling.

9.8.1 Roller bandages



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	FIRST AID		Chapter 09
			Page 45

9.8.2 Gauze Bandages

WOW (wide open weave) bandages secure dressing in place and can be used with dressings like jelonet, water jel, and melolin to treat burns, control bleeding and cover wounds.

9.8.3 Elastic Bandages

Elastic Bandages can also be described as tension or crepe bandages, and are used to offer support and reduce swelling to muscle and soft tissue injuries i.e. sprains and strains.



Elastic Roller Bandage

9.8.4 Triangular Bandages:

A Triangular shaped material used to make slings, to offer support and immobilize fractures and dislocations.



9.8.5 General rules for bandages

1. Explain to the casualty what you are going to do and reassure him
2. Make sure the casualty is as comfortable as possible either in a sitting or horizontal position
3. Keep the injured part supported
4. Work directly in front of the casualty and on the injured side
5. Apply the bandage firmly enough to control bleeding (if any) and to hold the dressing in place, but not too tight as it could reduce circulation
6. Leave fingers and toes exposed
7. Ensure that knots do not cause discomfort to the casualty
8. Check circulation to the area every 10 minutes

Checking Circulation

The circulation to any injured part should always be checked to ensure that a dressing or bandage has not been applied too tightly. Swelling can also affect the tightness of the bandage, therefore, checks must be carried out at regular intervals. Observations should include any abnormal colour, movement, sensation and temperature. Press the finger or toe on the affected part firmly, it will become pale. Upon releasing the pressure normal colour (pink) should return promptly. If colour does not return or returns slowly, the bandage may be too tight.

Movement

The passenger must be able to wriggle the toes or fingers of the affected limb (arm or foot). If movement is restricted, loosen the bandage. Be mindful of any numbness, tingling (pins and needles) or any unusual sensation which may indicate that the bandage is too tight.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 46

Temperature

Fingers and toes should be warm to the touch, coldness could suggest that circulation has been affected. If any of the above factors are present the bandage should be removed and the dressing reapplied. Dressings are used to cover wounds, burns and can help to control bleeding. They are used to prevent infection and contamination to the injured site.

9.9 Carriage of Stretcher Cases

Duties in looking after a stretcher passenger requires beyond those performed for an ordinary passengers. Handling of any medical equipment and sanitary support shall be carried out by the accompanying medical personal accompanying the stretcher passenger. CCMs shall ensure that the passenger and the stretcher are secured at all times.

9.10 Childbirth

Passengers pregnant for 29th week, requires a doctor's certificate to fly. From the end of the 35th week of pregnancy to the end of the 36th week, passengers will only be accepted for flights of 4 hours or less. Passengers who suffer from pregnancy related complications are not accepted after the 34th week of pregnancy. Passengers are not accepted for air travel after the end of the 36 Week of pregnancy.

9.10.1 First Stage

The first stage is when the cervix fully dilates. Approximately 4 – 10 hours.

Symptoms

1. Low backache
2. Regular contractions (moderate/severe cramp like pains)
3. Blood-stained mucus (cervical plug)
4. Rupture of membrane surrounding the baby will give way to flow of blood-stained fluid

Management

1. Page for medical assistance – Midwife or Doctor of medicine
2. Take the lady to the lavatory to evacuate bowels and bladder and ask her to wash thoroughly between the legs
3. Select a place of maximum space and privacy. Preferably the AFT galley
4. Place blankets and plastic bags under mother
5. Position; Bottle of oxygen / medical kit and sterile scissors
6. Two bowls or any available containers of boiled water
7. One swab to clean the mother and the other to clean the baby's eyes
8. Plastic bags/air sickness bags for soiled dressings and placenta
9. Wash hands and apply sterile gloves and mask, prepare mother with knees parted and drawn back.
10. The person delivering the baby should not have a cold/sore throat/infection.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL


	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	FIRST AID		Chapter 09
			Page 47

9.10.2 Second Stage

Approximately 10 minutes to 1 hour for delivery of the baby

Symptoms


1. Stronger, frequent contractions (every 2-3 minutes)
2. Skin between rectum and vagina will bulge (birth imminent)
3. Mother will feel the urge to push
4. Cervix fully dilated

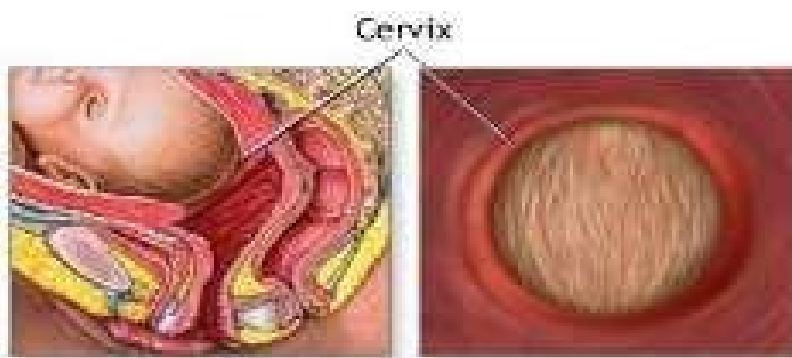

When the cervix has dilated to 10 cm, the mother has an uncontrollable urge to push

Management

1. Protect rectum with sterile pads
2. To prevent rapid delivery apply gentle pressure with palm of hand over baby's head
3. As head appears ask mother to pant
4. Always support baby's head to prevent it "shooting" out
5. Once head is delivered check for cord around the neck

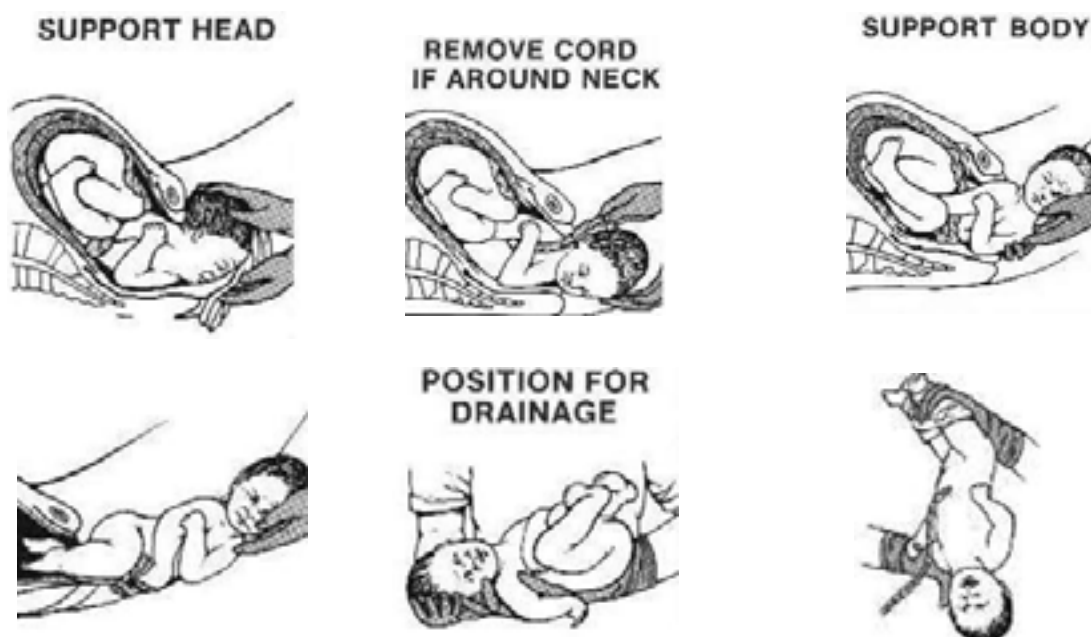

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 48

If cord is around baby's neck, attempt to remove cord by gently lifting it over the baby's head. If not possible, place cord clamps 3 inches apart and cut cord in between clamps using sterile scissors.

Management continued,

1. The baby will now turn and the front shoulder is born with the next contraction
2. Rest of the baby will slip out
3. Lift baby onto mother's abdomen by holding under the armpits
4. Clear mucus from the baby's mouth and nose using a mucus extractor
5. The baby now starts to breathe and may cry
6. Take note of time of delivery

Dealing with the Cord

1. Do not stretch the cord
2. As soon as pulsation has ceased, apply one cord clamp firmly on the umbilical cord 6 inches from the baby's abdomen, and the 2nd cord clamp 9 inches away from the baby's abdomen
3. Cut the cord, using sterile scissors, between clamps
4. Then it becomes white between the two clamps
5. Cover end of baby's cord with sterile gauze pad. Check regularly for signs of bleeding.
6. Do not remove cord clamps at any time

Care of baby

1. Dry baby with a towel
2. Clean eyes with cooled boiled water
3. Wrap baby in a blanket and give to mother

9.10.3 Third stage

Delivery of the placenta will be approximately 15-30 minutes after birth.

Management

1. Mother may experience further contractions
2. Encourage her to push
3. Do not pull the cord
4. Keep placenta for Doctor's inspection by placing in plastic bag
5. If baby fails to breathe adequately after delivery;
6. Clear mouth and nose with mucus extractor and perform gentle mouth to nose and mouth re-suscitation. Re-assess every 15 seconds

Care of mother

1. Clean mother
2. Apply sanitary pad
3. Make her comfortable and offer a warm drink
4. Record and monitor pulse regularly
5. Observe for bleeding advice mother to cross legs at the ankle
6. Encourage mother to breast-feed the baby

Always arrange for a Doctor and Ambulance to meet the flight upon arrival.

MOR shall be completed by the PIC and the Purser shall complete an Incident/Accident report before mother and baby leaves the aircraft. The exact time of birth shall be stated on the documentation.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 49

9.11 Apparent Death

Flight Crew is not competent or legally authorized to pronounce an individual dead.

Therefore, if a passenger appears to be dead, treat him as an unconscious person until a Doctor is present. Use your own judgment to determine if any First Aid steps will be of help. If not, proceed as follows;

Ensure the seat belt is fastened and the seat is reclined to prevent him from falling. The unconscious patient should be covered with a blanket up to the neck and surrounded with pillows. If the eyes remain opened, they may be closed.

Before landing, request a passenger to assist by holding the unconscious person.

Primary CCMs shall return to their assigned seats for landing. The Purser may detail an Assist Crew member to sit on the adjacent seat.

Important; in the absence of a Doctor on flight and a person appears to have succumbed, the PIC shall notify the nearest scheduled landing point to have a Doctor and an ambulance to meet the flight. CCM should remain available for questioning by the Coroner and provide names and addresses.

The name and addresses of persons sitting or working in close proximity to the deceased are to be obtained and submitted with the required reports. Any sort of evidence shall be left undisturbed. CCMs should note down observations as well as the physical sequence of events until the arrival of the Doctor. If death is not pronounced it would be the responsibility of the Station Staff to coordinate and remove the passenger to hospital.

In the event a Doctor is on the flight, and he has certified the person has succumbed, the PIC should notify the landing point, and request that the Coroner and/or police be called to meet the flight on arrival.

Name, address and contact point of the Doctor attending shall be recorded. Whenever possible, arrangements to be made for the Doctor to await the arrival of the Coroner. The Aircraft shall be fumigated as per the requirements and laid down procedures prior to the next operation of a flight.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	FIRST AID		Chapter 09
			Page 50

9.12 Automated External Defibrillator (AED)



Attachments

1. AED battery / 01
2. AED memory card / 01
3. Heart pad adult/Child / 01
4. ECG leads (03 cables) / 01 set
5. ECG electrodes / 03 / 01 set
6. Red box with / no 01-10



Usage

If the patient has been unconscious for more than 5 minutes start CPR immediately. A victim who does not respond may have an abnormal heart rhythm that stops the heart from pumping blood.

Use an AED on a victim of 1 year of age and older only when the victim does not respond and is not breathing.

For victims of 8 years or older, start CPR and use an AED as soon as possible

For victims 1 to 8 years of age, perform about 2 minutes of CPR before using the AED.


Steps

1. Turn the AED on **Push** the button
2. Follow the visual and audible prompts
3. Attach pads



Open the AED pad package and peel away the plastic backing. Attach the sticky side of the pads directly to the victim's bare chest. The picture on the pad will show you where to place the pads.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

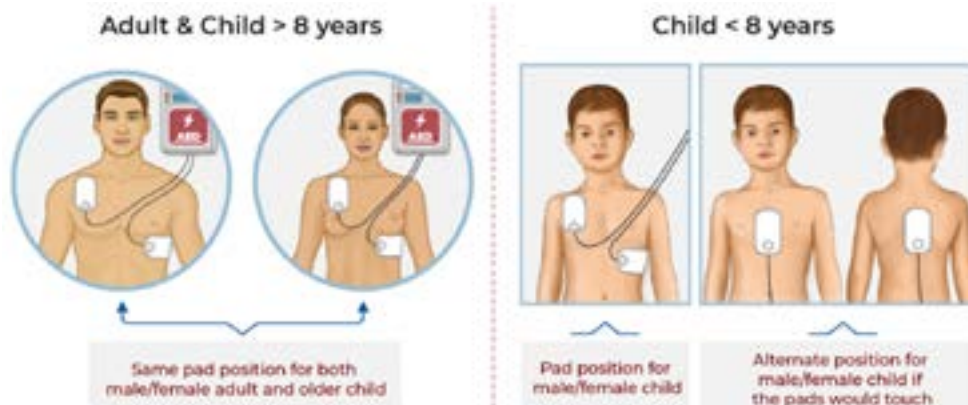

1. Allow the AED to check the heart rhythm
2. Clearing the Victim

CCM shall stay away from the victim (remove oxygen if administering) prior to delivering the shock, Ensure no one touches the victim when the AED prompts to clear.

1. Push the SHOCK button when the AED commands
2. Start the steps of CPR right after shock delivery
3. Use the AED quickly. For adult victims the time from arrival of the AED to first shock should be less than 90 seconds
4. If the AED does not command to give a shock, follow the AED visual and audible prompts.
5. Be ready to resume CPR if needed

Special Situations

Special situations will change the way you use an AED

Water

Do not deliver a shock when a victim is:

1. Lying in water



Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 52

2. Covered with water

(E.g. the victim is covered with sweat or has just been pulled from a swimming pool)

1. Move the victim away from standing water
2. Wipe the victim's chest before you attach the pads

Note: Water may cause the shock to flow over the skin from one pad to the other and the energy won't be transmitted to the heart. If a shock is given in water, the AED also might shock the rescuer.

Small Amounts of Water

If the victim is lying in a small puddle of water or snow but the chest is not wet or covered with water, you may give shocks.

Medicine Patch

You should not put an AED pad over ointment or any medicinal patch. so that some of the energy does not reach the heart. Also giving a shock over the patch may burn the victim.

If a child or adult has a medicine patch in the same place where you would attach the AED pad, take the medicine patch off while wearing gloves.

Quickly wipe the chest where the patch was before you put on the pad.

Implanted Pacemaker or Defibrillator

Some children or adults may have an implanted pacemaker or defibrillator. These devices make a hard lump under the skin of the chest or in the abdomen. The lump is smaller than a deck of cards. You should not place an AED pad over this lump because the implanted device may block the delivery of the shock to the heart.

Look for a lump under the skin of the chest place the pads at least 1 inch away

Hairy Chest

If a victim has a hairy chest, the AED pads may stick to the hair instead of the skin on the chest. If this happens, the AED will not be able to check the victim's heart rhythm or deliver a shock. The AED will prompt you to check the pads. Shave body hair if applicable.

If the pads stick to the hair instead of the skin, press down firmly on each pad. If the AED still commands you to check the pads, pull off the pads off shave the area place a new set of pads. Follow the AED visual and audible prompts.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 53

9.13 Suspected communicable disease on-board

9.13.1 Guidelines for CCMs

As per SLCAIS 045, the following are general guidelines for CCMs when facing a suspected case of communicable disease on-board. During an outbreak of a specific communicable disease, the World Health Organization (WHO) or Civil Aviation Authority of Sri Lanka may modify or add further procedures to these general guidelines. However these general guidelines provide a basic framework of response to reassure the CCMs and help them manage such an event effectively, in a timely manner.

9.13.2 Identification:

A communicable disease is suspected when a passenger or Crewmember has fever (temperature 38°C/100°F or greater) associated with one or more of the following signs or symptoms:

1. Appearing obviously unwell
2. Persistent coughing
3. Difficulty in breathing
4. Persistent diarrhoea
5. Persistent vomiting
6. Skin rash
7. Bruising or bleeding without previous injury
8. Decreased consciousness or confusion of recent onset
9. Headache with stiff neck or
10. Has a fever that has persisted for more than 48 hours or
11. Has symptoms or other indications of communicable disease, as the CAASL may announce through posting of a notice.

9.13.3 Procedure to be adopted by CCM

(a) Don a mask

The passenger suspected, shall be given a mask to wear covering the nose and mouth secured firmly. If the mask becomes damp /humid, it should be replaced by a new one. When the mask is disposed ensure hands are protected by wearing surgical gloves in a secure/ sealed plastic bag. Wash hands thoroughly for 20 Seconds with soap/water. Use alcohol based hand rub (contains at least 60% alcohol) if soap and water is not available.

If the suspected passenger cannot tolerate a face mask, the designated Cabin Crewmember/s or passengers seated around two (2) rows in-front, back and either sides of seats shall don masks. CCM/s shall not place themselves at risk by close contact with the passenger. (E.g. by more frequent hand and face contact by mask adjustments).

(b) Direct Contact with Body Fluids

If there is a risk of direct contact with body fluids, the designated CCM/s shall wear disposable gloves. The gloves are not intended to replace hand hygiene. These gloves shall be removed and disposed in a Bio-hazard bag (or a plastic bag, sealed and labelled as "Bio-Hazard", if a Bio-hazard bag is not available). Wash hands thoroughly and use an alcohol based hand rub.

(c) Inform Pilot in Command

The PIC shall be informed to report the case/s to the ATC of the Departure and Arrival destinations. PIC shall also inform the next station of the requirement for cleaning and disinfection of the aircraft. Public Health Emergencies Involving Operation Aircraft

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 54

(d) Guidelines for CCMs

Disposing of contaminated items – All items which comes in contact with the suspected person shall be disposed into the Bio-hazard bag (or a thick plastic bag and sealed. This bag shall be labelled as “BIO-HAZARD” with a permanent marker).

1. Check with accompanying passengers if they too have similar symptoms.
2. Ensure hand carried cabin luggage of the suspected passenger is/are off loaded along with the passenger and comply with Public Health Authorities request at the destination.
3. Unless stated otherwise by Ground Medical Support or Public Health Officials, request the other passengers who have been occupying seat rows adjacent to the suspected passenger (2 rows in-front, back and either sides) to complete the passenger locator card available in the Emergency Medical Kit (A10) and R1 First Aid Kit.
4. A general way of hand cleansing, performed by means of applying an antiseptic hand rub is to wash one's hands with soap and flowing water for at least 20 Seconds. Touching the face with hands should be avoided. Hands should be washed frequently on board.

(e) A questionnaire for Cabin Crewmembers in such a situation;

1. Are the symptoms consistent with Communicable Disease?
2. (Symptoms may include: fever, weakness, muscle pain, headache, sore throat, vomiting, and diarrhea, rash or bleeding)
3. Is the environment of the plane contaminated? (By vomitus, spilled blood, other body fluid)
4. How many passengers and staff were exposed?
5. Is there a doctor or any other medical person on board?
6. Does the operator have access to ground – based medical support?
7. Has the passenger received medical assistance during the flight?
8. Does the passenger require medical assistance during the flight? (Clinical signs and symptoms among passengers and severity)
9. Are any enhanced precautions for the disembarkation of other passengers needed?
10. Whether the Public Health Passenger Locator Forms were distributed to passengers two (2) rows in-front, back and either sides?

9.13.4 If the Passenger is suspected to be suffering from Communicable Disease,

The CCMs shall;

1. If possible, separate sick passenger from others by 6 feet (or 3 rows) or move adjacent passengers without compromising flight safety or exposing additional passengers, by placing the sick passenger preferably near a toilet for his/her use;
2. This has to be done after a proper evaluation of the situation as relocating the sick passenger may enhance the risk of spread of disease to the other passengers. It is advisable to allow the sick passenger to remain in the same location if he/she does not have vomiting or diarrhoea which need frequent visit to the toilet.
3. Cover the nose and mouth of the patient with a medical face mask (if tolerated), if there are respiratory symptoms (e.g. coughing or sneezing.) if the mask cannot be tolerated, the sick passenger should be provided with tissues and asked to cover the mouth and nose when coughing

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 55

- or sneezing and to perform hand hygiene thereafter;
4. Provide the sick passenger with a plastic bag for disposing, used tissues and an air sickness bag, if experiencing nausea or vomiting;
 5. Store soiled items (used tissues, face masks, linen, pillows, blankets, seat pocket items etc.) in a biohazard bag if available or in a plastic bag and labelling it "Bio Hazard";
 6. Keep interaction with sick passenger as brief as possible. Designate one (or two if a sick passenger requires more assistance) CCM to interact with the sick passenger, preferably only the CCM who has already had contact with the passenger. The CCM or anyone in direct contact with the sick passenger shall be using the Universal Precautionary Kit. The CCM/S should always wear gloves and perform hand hygiene after removing them.
 7. Keep PIC informed of the necessity to immediate isolation of the passenger upon arrival;
 8. Inform/ contact the Medical Officer of Health (MOH) immediately if CCM/s develop symptoms after the flight or
 9. If a CCM/s suspect that there is a risk of getting a Communicable Disease following the interaction between the sick passenger & the CCM/s. (Risk of infection depending on type of disease, flight duration, level of exposure and level of immunity).
 10. If CCM(s) develop symptoms of infection during flight, they should discontinue on board duties as soon as it is safe to do so and follow the procedure
 11. Do not prepare or serve food or beverages if you have symptoms of illness that could be contagious.

9.13.5 Public health Passenger Locator Form

The Purser shall fill up the public health passenger locator form located in the Emergency Medical Kit (A10)/BC First Aid Kit.

9.13.6 Universal Precaution Kit

The content of an aircraft universal precaution kit would typically include:

1. Dry powder that can convert small liquid spill into a granulated gel.
2. Germinal disinfectant for surface cleaning.
3. Disinfectant wipes & Dry wipes
4. Face/eye mask (separate or combined), Gloves (disposable)
5. Polythene Apron and Oversleeves.
6. Polypropylene scoop with scrape.
7. Biohazard bag.
8. Instructions.

9.13.7 Universal Precaution Kit Usage

1. Put on protective clothing provided (Gloves, face/eye mask, Apron & Oversleeves)
2. Sprinkle powder liberally over the spill area (The liquid & powder will become a gel)
3. Remove gel using scoop & scrape, dispose of gel scoop & scrap into biohazard bag
4. Spray area with disinfectant, clean with dry wipe
5. Remove protective clothing & place in biohazard bag
6. Wipe hands using disinfectant wipes

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 56

9.14 First Aid Kit

Procedure on Usage of First Aid Kits

1. CCMs shall not break the seals during pre-departure safety/security check

- CCMs shall check and tally the seal numbers against the numbers indicated on the sticker pasted on the First Aid Kit along with the expiry date. The sticker shall have the medical centre stamp of approval and signature. In the event seal numbers do not tally, contact support services staff for First Aid Kit replacement prior to departing CMB.

2. Cabin crew shall open the First Aid Kits when required only with the consent of the Purser and the PIC has to be kept informed.

- Cabin Crew to page for a medical practitioner prior to administering medication from the First Aid Kits.
- In the absence of a medical practitioner, inform Purser indicating the symptoms and medication requested by the passenger. The Medication Consent Form (MCF) needs to be completed and signed by the passenger before medication is administered. The form needs to be submitted along with the VR.
- At all times it is recommended to use the EY First Aid Kit/s**, first and the BC First Aid Kit to be used as a last resort if the required medication/item is not available in the EY first aid kits.
- The following Medication Consent Forms (MCF) shall be available in all First Aid kits,
- Adult Medication consent form** – For administering medicine to an adult.
- Infant/Children Medication consent form** - Shall be signed by both parents/Guardian if travelling before administering medication.
- Please indicate the flight number and date on the top-right corner of each consent form.
- An Illness report shall be completed only if a medical practitioner is available to attend to the casualty, if not only the consent form to be submitted.

3. Once any First Aid Kit is opened, if a Flight Crew change takes place at a transit station the joining PIC shall be informed regarding same and at a layover station the disembarking Purser shall enter the new seal numbers on the transfer of instructions. The taking over crew shall inform the operating PIC regarding the First Aid Kit that has been opened and shall check, the new seal numbers against the transfer of instructions. In the event the seal numbers do not tally, crew to open the First Aid Kit and carry-out a security check and re seal the kit. Purser to indicate details on the VR.

4. On arrival in CMB, CCMs shall enter comment as “First Aid Kit opened” in the Cabin Defects Log-book, The seal numbers of the used First Aid kit shall be entered on the Voyage Report and Seal Form

5. The unopened First aid kits would remain on-board to be used for the next flight.

Pre-flight Check – Correct Number, Correct Location, Correctly Secured, Clear of Obstructions, Seal intact.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 57

CONTENT	QUANTITY	AILMENT/PRESCRIPTION
Chlorpheniramine maleate (4Mg) (Allermine/piriton)	10 Tablets	Cold, Allergic/rash/swelling/sneezing/ throat irritation Adult - 01 tablet Child - ½ tablet
Antacids - gelusil	10 Tablets	Burning sensation in chest & abdo- men. 2 tablets to be chewed
Promethazine Theoclate (avomine/Motili- um/Donperidone) 25Mg	10 Tablets	Travel Sickness, vomiting and nausea Adult - 01 tablet Child - ½ or ¼ tablet
ORS-jeevaniee (200ML)	4	For diarrhoea , Vomiting and unfitness Follow the instructions given in the pkt
Hyoscine butylbromide (10 Mg) (Boscopan)	10 Tablets	Lower Abdominal Pain
Paracetamal 500 Mg (Panadol)	20	For head ache tooth ache, Fever, Body Pain Adults - 02 tablets
Terbutaline sulphate 2.5Mg (Turbate)	10	For Asthmatic attack, Wheezing Adult - 02 tablets
Declofenac gel	01	For Sprains
Silver sulphadiazine	01	For Burns
Siddhalepa	01	For Headaches
Universal Precaution Kit	01	

Revision No	01	Revision Date	15 April 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 58

Gentamycin Eye/ear	01 Bot	Ear Infection
Chloramphenicol Eye drops	01 Bot	Eye Infection
Nasivion nasal drops	01 Bot	Clear congested nostrils
Polymyxine cream	01 Tube	To apply on wounds
Cotton bandages – 3’	01	Dressing wounds
Traingular bandage	01	Slings
Dettol plaster	20	Dress/Cover small wounds
Adhesives tape	01	Dress Wounds
Eye pad	02	Cover an injured eye
Splint	01	
Cotton swabs	10	
Sterile gauze pack	01	
Non sterile gloves	10	
Masks	05	For protection from infection

ADDITIONAL ITEMS IN R1 FIRST AID KIT		
Paracetamol syrup Available in r1 first aid kit	01	For abdominal pain, Especially for infants. Read Instruction
Non allergy plaster	01	
Ear plugs	06	
DIGITAL THERMOMETER	01	

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 59

9.15 Emergency Medical Kit (A10)

Description -

Carried on the aircraft for Major Medical Emergencies and is under the purview of the PIC. It can be used only by a qualified, Medical Practitioner/Paramedic or a Nurse. The PIC has the authority to grant permission to open the Emergency Medical Kit (A10) and use only the First Aid items (if they are not available in the First Aid kits).

The Medical Centre shall check the Emergency Medical Kit (A10) and all First Aid Kits to ensure all medications including ENT drops are not expired. Furthermore, SLA shall have a serviceable conformity sticker with the "last check date" and "Date of next check," secured with a wire locked blue seal. Medical Centre shall check to ensure serviceability of all equipment in the Emergency Medical Kit (A10).

Additional battery is made available for the glucometer.

Emergency Medical Kit (A10) sealing procedure.

It is the responsibility of the Operating PIC to ensure the following-

- (a) Ex Colombo – The Emergency Medical Kit (A10) is stored in its designated position and is wire locked with a blue seal.
- (b) Ex Line Staton - The Emergency Medical Kit (A10) is stored in its designated position and is wire locked with a seal.

Purser shall complete all documentation, indicate details on the VR, enter in the cabin defects logbook and seal the Emergency Medical Kit (A10). The new seal number of the used Emergency Medical Kit (A10) shall be entered in the Voyage Report & seal form.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

A 10 MEDICAL BOX CONTAIN DRUGS.

A - SECTION		B - SECTION		C - SECTION			
STATIONARY		INJECTIONS	AMTA	MNMR	IV INFUTIONS/ SETS	AMTA	MNMR
CHECK FORM	1	MORPHINE SULPHATE 15 Mg (MORPHINE)	2	2	5% DEXTROSE 500 ml	1	1
TREATMENT FORM	2	HYOSCINE BUTYLBROMIDE 20 Mg (BUSCOPAN)	2	2	NORMAL SALINE 500ml	1	1
DRUGS USAGE FORM	2	ATROPINE 0.5 Mg	2	2	25% DEXTROSE	4	4
DIAGNOSIS FORM	2	ADRENALINE 1:1000	2	2	IV SET	2	2
LOCATOR FORM	2	CHLOPHENIRAMINE MALEATE 4 Mg (PIRITON)	2	2			
EXPIRY LIST	1	HYDROCORTIZONE 100 Mg	5	5	SIRINGE/NEEDLE		
		PROMETHIZINE 25 Mg (PHENAGAN)	2	2	3ml	2	2
SURGICAL PACK		FUROSEMIDE 20 Mg (LASIX)	2	2	5ml	2	2
CLOTH TOWEL	1			2	10ml	2	2
BP HANDLE	1	PROCHLOPERAZINE 12.5 Mg (STEMATIL)	2	2	20ml	1	1
ARTERY FORCEP	1	2% LIGNOCAINE	1	1	23G NEEDLE	5	5
MOSQUITO ARTERY	1	MIDAZOLAM 5 Mg (DOMICUM)	2	2			
CATCH FORCEP	1	HALOPERIDOL	2	2	CANNULA		
NEEDLE HOLDER	1	STERILE WATER	4	4	18G	2	2
PAIR OF SCISSOR	1				20G	2	2
		TABLETS			22G	2	2
EQUIPMENTS		DIAZEPAM 10 Mg	10	10	24G	2	2
SPHGNOMANOMETER	1	DOMPERIDONE 10 Mg (MOTILIUM)	10	10			
STETHOSCOPE	1	NIFEDEPINE EXTENDED RELEASE 20 Mg (NICARDIA RETARD 20)	10	10	OTHERS		
TONGUE DEPRESSOR	1	PROCHLOPERAZINE 5 Mg (STEMATIL)	10	10	PROXY STRIP SKIN CLOSURE	1	1
FLASH LIGHT	1	DICLOFENAC SODIUM 75 Mg (DICLORAN)	10	10	SPIRIT SWABS	5	5
TOURNIQUET	1	CLOPIDOGREL 75 Mg (PLAVIX)	10	10	CORD CLAMP	2	2
AIRWAYS S/M/L	3	CARDIPRIN 100 Mg	10	10	BUTTERFLY CANNULA	2	2
AIDS PROTECTION MASK	1	ATORVASTATIN 20 Mg (ATOCOR 20)	10	10	SURGICAL BLADE	2	2
SURGICAL GLOVES	2	PANTOPRAZOLE 40 Mg (PANUM)	10	10	NONE ALLERGIC PLASTER	1	1
GLUCOMETER	1	DOMPERIDONE SUPP 60 Mg (VOMIN 60)	2	2			
TERMOMETER	1	DICLOFENAC SODIUM SUPP 50 Mg (VOLTAREN PR)	2	2			
		METHYLPREDNISOLONE 16 Mg (HEXILON)	10	10			
OTHERS		CIPROFLOXACIN 500 mg (CIPROLET)	10	10	STERILE DRESSING		
GAUZE PACK	1	THEOPHYLLINE & ETOFYLLINE 300 mg (DERIPHYLLIN RETARD 300)	10	10	ANTIBIOTIC TULE	1	1
		LOPERAMIDE HYDROCHLORRIDE 2 mg (IMODIUM)	10	10	SUTURE METIRIAL	2	2
COTTON PACK	1	SALBUTAMOL PRESSURIED INHALER	1	1			
		GLYCERYL TRINITRATE SUBLINGUAL SPRAY	1	1			
		CREPE BANDAGE	1	1			
		SHARP BIN	1	1			

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

9.16 Public Health Passenger Locator Form

Public Health Passenger Locator Form: To protect your health, public health officers need you to complete this form whenever they suspect a communicable disease onboard a flight. Your information will help public health officers to contact you if you were exposed to a communicable disease. It is important to fill out this form completely and accurately. Your information is intended to be held in accordance with applicable laws and used only for public health purposes. ~Thank you for helping us to protect your health.

One form should be completed by an adult member of each family. Print in capital (UPPERCASE) letters. Leave blank boxes for spaces.

FLIGHT INFORMATION:			
1. Airline name	2. Flight number	3. Seat number	4. Date of arrival (yyyy/mm/dd)
			2 0
PERSONAL INFORMATION:			
5. Last (Family) Name	6. First (Given) Name	7. Middle Initial	8. Your sex
			Male ☐ Female ☐
PHONE NUMBER(S) where you can be reached if needed. Include country code and city code.			
9. Mobile	10. Business		
11. Home	12. Other		
13. Email address			
PERMANENT ADDRESS:			
14. Number and street (Separate number and street with blank box)			15. Apartment number
16. City			17. State/Province
18. Country			19. ZIP/Postal code
TEMPORARY ADDRESS: If you are a visitor, write only the first place where you will be staying.			
20. Hotel name (if any)	21. Number and street (Separate number and street with blank box)	22. Apartment number	
23. City	24. State/Province		
25. Country	26. ZIP/Postal code		
EMERGENCY CONTACT INFORMATION of someone who can reach you during the next 30 days			
27. Last (Family) Name	28. First (Given) Name	29. City	
30. Country	31. Email		
32. Mobile phone	33. Other phone		
34. TRAVEL COMPANIONS – FAMILY: Only include age if younger than 18 years			
Last (Family) Name	First (Given) Name	Seat number	Age <18
(1)			
(2)			
(3)			
(4)			
35. TRAVEL COMPANIONS – NON-FAMILY: Also include name of group (if any)			
Last (Family) Name	First (Given) Name	Group (tour, team, business, other)	
(1)			
(2)			

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	FIRST AID	Chapter 09
		Page 62

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS	Chapter 10
		Page 1

CHAPTER 10 **DANGEROUS GOODS REGULATIONS**

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 2

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS	Chapter 10
		Page 3

Contents

10.0 DANGEROUS GOODS.....	7
10.1 Basis of these regulations.....	7
10.1.1 United Nations Subcommittee of experts	7
10.1.2 Relationship to ICAO.....	7
10.1.3 IATA/DGR	7
10.2 Dangerous Goods Incident	7
10.3 Dangerous Goods Accident	7
10.4 General Philosophy	8
10.4.1 Classification	8
10.4.2 Prohibition	8
10.4.3 Packing.....	8
10.4.4 Marking and Labelling	8
10.4.5 Documentation	8
10.4.6 Notification to Pilot in Command	8
10.4.7 Avoiding Hidden Hazards.....	8
10.4.8 Accident/Incident Reporting	8
10.4.9 Training	8
10.5 State Variations	9
10.5.1 Sri Lanka (VCG)	9
10.6 Operator variations.....	10
10.6.1 Srilankan Airlines (UL).....	10
10.7 Dangerous Goods Strictly Forbidden for Air Transport	12
10.8 Types of Dangerous Goods.....	12
10.8.1 Totally Prohibited dangerous goods	12
10.8.2 Prohibited unless exempted	12
10.8.3 Transported as Air cargo	12
10.8.4 Excepted Quantities	12
10.8.5 Limited quantities.....	12
10.8.6 Treated as Non-Dangerous Goods	12
10.9 Dangerous Goods In Operators Property	13
10.10 Units of Measure	13
10.11 Classes of Dangerous Goods.....	13

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS	Chapter 10
		Page 4

10.11.1 Class 1 – Explosives (6 Divisions/13 Compatibility groups)	14
10.11.2 Class 2 – Gases.....	14
10.11.3 Class 3 - Flammable Liquids.....	15
10.11.4 Class 4 – Flammable Solids	15
10.11.5 Class 5 – Oxidizing Substances and Organic Peroxides	16
10.11.6 Class 6 – Toxic and Infectious Substances	16
10.11.7 Class 7 – Radio Active Substances	17
10.11.8 Class 8 – Corrosives Substances	17
10.11.9 Class 9 – Miscellaneous Dangerous Substances and Articles Including Environmentally Hazardous Substances.....	17
10.12 Subsidiary Risks	18
10.13 Marking and Labeling.....	18
10.13.1 Marking	18
10.13.2 Labeling	18
10.14 Hazard labels	18
10.15 Handling Labels	19
10.15.1 Handling label chart	19
10.15.2 Marking And Label On Packaging	21
10.15.3 Over Pack.....	22
10.16 Provisions for Passengers and Crew Information	22
10.16.1 Passenger/Crew Information	23
10.16.2 DG items Carried by Passengers /Crew (Table 2.3A)	24
10.17 Chemical Substance	26
10.18 Dangerous Goods Emergency Procedure	26
10.18.1 Dangerous Goods in The Cargo Compartments	26
10.18.2 Flight Crew Procedure	26
10.18.3 Cabin Crew Procedure	26
10.18.4 Emergency Response Kit (ERK)	27
10.18.4.1 Location.....	27
10.18.4.2 Improvise Galley Equipment	27
10.18.4.3 Protection	27
10.18.4.4 Reaction	27
10.19 A Spillage or Suspected Dangerous Goods in Powder Form.	27
10.19.1 Disembark Passengers/Crew	28
10.20 Undeclared/Mis-declared DG Items Check List	28

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS	Chapter 10
		Page 5

10.21 Dangerous Goods Incident/Accident Procedure.....	28
10.21.1 In Case of Spillage or Leakage.....	29
10.22 PED Fires - Cabin Crew Checklist.....	31
10.23 Hidden Dangerous Goods.....	34
10.24 Documentation	36
10.24.1 Shippers Declaration for dangerous goods	36
10.24.2 Airway Bill	37
10.24.3 Notification To Captain (NOTOC)	38
10.24.4 Dangerous Goods Emergency Response Guidance	39
10.24.5 Power banks carried by passengers and crew for Personal Use.....	40
10.24.5.1 Portable electronic devices/Power Banks/Spare batteries carried by the Flight Crew/Cabin Crew in the performance of their operational duties.....	40
10.25 Quick Reference – Check list.....	41
10.25.1 Suspected dangerous goods in powder form	41
10.25.2 Dangerous Goods Incidents/Accident Procedure	41
10.25.3 PED Fires	41
10.25.4 Lithium battery fire in the flight Deck.....	42
10.25.5 PED inadvertently crushed or damaged in electrically/Mechanically adjustable seat	42
10.26 Dangerous Goods Unit Coordinator.....	42

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS	Chapter 10
		Page 6

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 7

10.0 DANGEROUS GOODS

Dangerous goods are defined as articles and substances, which pose a significant hazard to health, safety, property or environment, when transported by air (They include common items such as battery electrolyte, butane gas, fire-works, ammunition, weed-killer, paint, mercury) and which are shown in the list of dangerous goods in these Regulations or which are classified according to these Regulations.

10.1 Basis of these regulations

10.1.1 United Nations Subcommittee of experts

Develops recommended procedures for the transport of all types of dangerous goods except radioactive materials. These procedures, applicable to all modes of transport are published in the *Recommendations on the Transport of Dangerous Goods – Model Regulations*.

International Atomic Energy Authority (IAEA) develops recommended procedures for safe transport of radioactive material

10.1.2 Relationship to ICAO

ICAO uses these recommendations as the basis for developing regulations for the safe transport of dangerous goods by air by any aircraft. ICAO regulations are codified in Annex 18 and its technical instructions for safe transport of dangerous goods by air (DOC 9284-AN/905) published once every two years. These regulations are for the transport of dangerous goods by air from to or through the member states of ICAO.

The ICAO Technical instructions for safe transport of dangerous goods by air, provides the basis under which dangerous goods can be transported safely by air at a level of safety necessary to ensure that the aircraft or its occupants are not at risk.

10.1.3 IATA/DGR

The IATA Dangerous Regulations contains all the requirements of the technical Instructions. IATA has included additional requirements, which are more restrictive than the Technical Instructions and Reflects industry standard practices or operational considerations.

10.2 Dangerous Goods Incident

An occurrence other than a dangerous goods accident associated with and related to the transport of dangerous goods by air, not necessarily occurring on board an aircraft, which results in injury to a person, property damage, fire, breakage, spillage, leakage of fluid or radiation or other evidence that the integrity of the packaging has not been maintained

Any occurrence relating to the transport of dangerous goods which seriously jeopardizes an aircraft, or its occupants is also deemed to be a dangerous goods incident

10.3 Dangerous Goods Accident

An occurrence associated with and related to the transport of dangerous goods by air which results in fatal or serious injury to a person or major property damage

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 8

10.4 General Philosophy

Dangerous goods can be transported safely by air provided certain principles are strictly followed. These principles and procedures include,

10.4.1 Classification

Dangerous Goods are classified according to criteria determined by the United Nations Sub Committee of Experts on the Transporting Dangerous Goods.

10.4.2 Prohibition

Some dangerous goods have been identified as being too dangerous to be carried on any aircraft under any circumstances.

10.4.3 Packing

Packaging is the essential component in the safe transport of dangerous goods by air. The IATA Dangerous Goods Regulations provide packing instruction for all dangerous goods acceptable for air transport with a wide range of option for inner, outer and single packaging. Packings are subject to performance tests and are tested by institutes authorized by authorities.

10.4.4 Marking and Labelling

The package is marked with required markings and bear the required labels to ensure that the hazards can be recognized without relying on accompanying documentation in an emergency.

10.4.5 Documentation

This ensured that they are correctly accepted, handled and loaded and if an incident or accident occurs, either in-flight or on ground, what the correct response should be. Shipper shall fill up the Dangerous goods declaration form with all details

10.4.6 Notification to Pilot in Command

The Pilot in Command must know what any emergency that may occur is on board the aircraft in order to properly assess and action. The pilot in command must also convey this information if possible, to air traffic services to aid in the response to any aircraft incident or accident.

10.4.7 Avoiding Hidden Hazards

Information regarding “Hidden Dangerous Goods” must also be conveyed to passengers, crew and ship-pers to assist them in the recognizing dangerous goods.

10.4.8 Accident/Incident Reporting

Dangerous goods accidents or incidents must be reported.

10.4.9 Training

Dangerous Goods training is a mandatory (legal) requirement for all individuals involved in the prepa-

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 9

ration or transport of dangerous goods by air to ensure that they can carry out their responsibilities. Cabin crew shall be trained in IAAT DGR category 11

10.5 State Variations

State may impose additional restrictions to the ICAO regulations known as state variance

10.5.1 Sri Lanka (VCG)

VCG 01-No aircraft operator shall transport dangerous goods by air to, from or over Sri Lanka without explicit approval in writing from the Director General of Civil aviation, Sri Lanka

VCG 02 -Permission is usually granted for a specified period of time, subject to strict compliance with ICAO technical Instructions and any other conditions which the Director general of Civil Aviation deems necessary

VCG 03-Application for permission shall be made to:

Director General of Civil Aviation,
Civil Aviation Authority of Sri Lanka,
No: 152/1, Minuwangoda road,
P.O.Box 056,
Katunayake, Sri Lanka

VCG 04 - Infectious substances, including diagnostic specimens and biological products, are not permitted in international mail either to or from Sri Lanka

VCG 05 - No transport by air of any weapons, explosives or other dangerous devices, articles or substances which may be used to commit an act of unlawful interference, may take place from to or in transit through Sri Lanka

VCG 06 -English language shall be used for marking packages and over packs.

VCG 07 - Radioactive shipments need prior approval from the Sri Lanka Atomic Energy Regulatory Council when transported by air.

VCG 8: On shipment to, from or transiting through Sri Lanka, a 24hr emergency response telephone number of a person who has all the information on the contents (Including access, country, and city codes) must be provided on the shipper's declaration form

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS	Chapter 10
		Page 10

10.6 Operator variations

Operators may impose additional restrictions to the ICAO and IATA regulations known as operator variance

10.6.1 Srilankan Airlines (UL)

UL-01 The shipper must provide a 24-hour emergency telephone number of a person/agency who is knowledgeable of the hazards, characteristics and actions to be taken in the case of an accident or incident concerning each of the dangerous goods being transported.

This telephone number, including the country and area code, preceded by the words, e.g. “Emergency Contact” or “24-hour number”, must be inserted on the DGD, preferably in the “Handling Information” box (see 8.1.6.11 and 10.8.3.11).

This will be applied on shipments to, from or transiting through Sri Lanka. The 24-hour emergency telephone number is not required for shipments that do not require a Shipper’s Declaration for dangerous goods.

Additional information or operator approval can be obtained from:

Dangerous Goods Policies Manager

Srilankan Airlines

Cargo Centre

Bandaranike International Airport

Katunayake

SRI LANKA

Tel: Fax: +94 1 9733 2455

Tel: Fax: +94 7 4444 2455–Dangerous goods office

Tel: Fax: +94 1 9733 1553

Tel: Fax: +94 7 4444 1553–Dangerous Goods Policies Manager

Tel: Fax: +94 1 9733 5288

Tel: Fax: SITA: CMBDGUL

email: cargodg@srilankan.com

UL-02 Not used.

UL-03 Prior approval from the carrier is needed for shipments of explosives and weapons.

UL-04 Dangerous goods in airmail originating from Srilanka will not be accepted for carriage. (see 2.4 and 10.2.2)

UL-05 Not used.

UL-06 Prior approval is required for shipments containing radioactive material. Information can be obtained from:

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 11

Director General/Director Authorization
Sri Lanka Atomic Energy Regulatory Council,
No. 977/18, Kandy Road, Bulugaha Junction, Kelaniya, SRI LANKA

Tel: Fax: +94 11 2984096 (Direct), Tel: Fax: +94 766685656 (Mobile), Tel: Fax: +94 11 2984099
email: kapiladesilva@aerc.gov.lk

or

Director (Inspection & Enforcement)
Sri Lanka Atomic Energy Regulatory Council
No 977/18, Kandy Road, Bulugaha Junction, Kelaniya, SRI LANKA

Tel: Fax: +94 11 2984098 (Direct), Tel: Fax: +94 71 8330846 (Mobile), Tel: Fax: +94 11 2984099
email: prageeth@aerc.gov.lk

UL-07 Gaseous oxygen or air cylinders required for medical use will not be accepted for carriage. Should a passenger require supplementary oxygen, a prior request must be made to Srilankan Airlines (see 2.3.4.1). Supplementary oxygen kits shall be provided by Srilankan Airlines.

UL-08 Small lithium battery powered vehicles (UN 3171) are not allowed as carry-on or checked in baggage. Some examples of these small lithium battery-powered vehicles are air wheels, solo wheels, balance wheels and hover boards, mini-segways, and bikes. These devices are not “mobility aids” and are to be treated as “portable electronic devices” (PED).

Passengers with reduced mobility traveling with these devices on Sri Lankan Airlines are requested to contact the reservation before the start of their journey.

UL-09 Single packagings containing liquid dangerous goods packed in steel, aluminium or plastic drums or jerricans will be accepted for transport only when overpacked (see 5.0.1.5).

UL-10 Fissile radioactive material will not be accepted for carriage on passenger aircraft (See 10.5.13).

UL-11 Wheelchairs/mobility aids with spillable batteries are forbidden for carriage by passenger.

UL-12 The carriage of Carbon dioxide, solid (Dry ice) UN 1845 is limited by aircraft type and the net weight of the Dry ice must be provided during the booking process to determine whether aircraft limits may be exceeded.

UL-13 Infected animals, dead or alive, will not be accepted for carriage.

UL-14 The shipper must attach a Certificate duly signed and issued by a medical, scientific or other similar professional which confirms the classification of these specimens in the following case:

- shipment of Biological Substance, Category B;
- shipment of any Patient Specimens prepared according 3.6.2.2.3.6.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 12

10.7 Dangerous Goods Strictly Forbidden for Air Transport

Substances and objects that may combust, react dangerously, inflame, produce a dangerous evolution of heat, release toxic vapor, corrosives or inflammable gas or smoke under transportation conditions are strictly forbidden on aircraft. Certain dangerous goods forbidden for transportation without an exception are considered to be highly dangerous for air transportation. It may however be possible for these goods to be carried on board in exceptional conditions and with approval of the relevant country. Carriage of dangerous goods is at the discretion of the carrier.

10.8 Types of Dangerous Goods

10.8.1 Totally Prohibited dangerous goods

Cannot be transported by air under any circumstances.

10.8.2 Prohibited unless exempted

Under special exception from the authorities of the state, air transport is permitted.

10.8.3 Transported as Air cargo

Items permitted on a passenger aircraft shall be permitted on a cargo aircraft. Items permitted on a cargo only aircraft shall not be permitted on a passenger aircraft.

10.8.4 Excepted Quantities

Special provisions for transport of very small quantities of dangerous goods as cargo, which exempts them from the usual provisions for Dangerous goods including documentation, hazard labels and segregation. Dangerous goods in excepted quantities are not required to be indicated on the NOTOC. Excepted quantities packages are not permitted on carry on or checked luggage and are marked with a special EXCEPTED QUANTITIES label.

10.8.5 Limited quantities

Items where the risk in carriage can be reduced to an acceptable level by limiting the quantity per package, and by packing in accordance with the regulations. Maximum gross weight is 30 kgs. Limited quantities packages are not permitted on carry on or checked luggage, are marked with a "Y" label and a UN specified packing is not required.

10.8.6 Treated as Non-Dangerous Goods

Articles and substances which do not fall within the definitions of dangerous goods as shown in these Regulations and which in the event of leakage may cause a serious clean-up problem or corrosion to aluminium on a long-term basis must be checked by the shipper to at least ensure that the packaging is adequate to prevent leakage during transportation. These may include brine, powdered or liquid dyes, pickled foodstuffs, etc.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS	Chapter 10
		Page 13

10.9 Dangerous Goods In Operators Property

DG regulations does not apply for the operator's property carried for operational reasons/air worthiness and state requirements under specification such as,

1. Air worthiness	Oxygen cylinders, Fire extinguishers
2. Consumer goods	Aerosols alcohol, Perfume, Dry ice
3. Specifications	Properly packed, stowed and monitored.

The provisions have been expanded to allow operators to carry and use on board during flight electronic equipment such as personal entertainment devices and credit card readers containing lithium batteries and spare batteries for these devices. Replacement devices containing batteries and replacement batteries must be shipped in accordance with the regulations. (Properly packed to ensure the batteries will not short circuit)

Ordered by procurement section as replacement or for Operator use must be shipped as Dangerous Goods.

10.10 Units of Measure

The units of measurement to be used in the transport of dangerous goods by air are those specified by the International System (SI) as modified for international civil Aviation by Annex 5 to the Chicago Convention on International Civil Aviation.

SOLIDS	Kilo grams
LIQUIDS	Litres
PRESSURE	Pasqual's
RADIO ACTIVITY	Becquerel's. (Bq)
RADIATION	Sieverts (Sv)
LENGTH	Meters

10.11 Classes of Dangerous Goods

The regulations divide dangerous goods into 9 classes reflecting the type of risk involved, Some hazard classes are further subdivided into hazard divisions due to the wide scope of the class. The nine hazard classes and their divisions are listed below.

The order in which they are numbered is for convenience and does not imply a relative degree of danger, This means that class 1 is not necessarily more dangerous than class 3 or 4 etc

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

10.11.1 Class 1 – Explosives (6 Divisions/13 Compatibility groups)

Name of Class Or Division				Description	Label	Examples
Class 1	1.1	Explosives	Compatibility group	Article or substances which present no significant hazard. Effect from accidental functioning is confined within the package		- Cartridges for sporting use - Distress Flares - Fire works - Avalanche rescue backpack
	1.2					
	1.3					
	1.4					
	1.5					
	1.6		1.4S			

10.11.2 Class 2 – Gases

Name of Class Or Division			Description	Label	Examples
Class 2	2.1	Flammable Gas	Any gas which, when mixed with air in certain proportions, forms a inflammable mixture		- Liquid Petroleum gas - Propane/Butane - Perfume aerosol sprays
	2.2	Non Flammable Non Toxic Gas	Any non-flammable nontoxic gas or low temperature liquefied gas		- Carbon Dioxide - Neon - Liquid Nitrogen - Aerosol for sporting use - Shock absorbers struts/airbags
	2.3	Toxic Gasses	Gasses known to be toxic or corrosive to human and known to pose a health risk Note: Toxic has the same meaning as 'Poisonous'		- Carbon Monoxide - Tear Gas - Baygon / Mortein - Pepper spray

Revision No	01	Revision Date	01 April 2024
Prepared By	Cabin Safety Training	Approved By	CAASL

10.11.3 Class 3 - Flammable Liquids

Name of Class Or Division			Description	Label	Examples
Class 3		Flammable Liquids	Any liquid having a closed cup test flash point of 60°C or below or open-cup flash point of 65.6°C or below Flash point: Lowest temperature at which enough flammable vapour is given off a liquid to be ignited in air when exposed to a source of ignition.		- Petrol - Varnish - Paint - Animal specimens with 30 ml alcohol - Medicines containing alcohol

10.11.4 Class 4 – Flammable Solids

Name of Class Or Division			Description	Label	Examples
Class 4	4.1	Flammable Solids	Any solid material Which is readily combustible or may cause or contribute to cause a fire through friction		- Camphor - Magnesium - Safety Matches
	4.2	Spontaneously Combustible	Such substance are liable to spontaneous heating or to heating up when exposed to air and then liable to catch fire		- Activated Carbon - Phosphorous White - Copra
	4.3	Dangerous When Wet (Water Reactive)	Substances which by interaction with water becomes spontaneously flammable or to give off flammable gas		- Sodium - Potassium

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

10.11.5 Class 5 – Oxidizing Substances and Organic Peroxides

Name of Class Or Division			Description	Label	Examples
Class 5	5.1	Oxidizing Substances	Substance that yields oxygen readily to stimulate the combustion of other material		- Chemical Oxygen Generator - Bleach - Hydrogen peroxides
	5.2	Organic Peroxides	Organic material (Liquid/Solid) that can be ignited by external flames and then burns with an accelerating rate, Some substances react dangerously with others		- XXXX

10.11.6 Class 6 – Toxic and Infectious Substances

Name of Class Or Division			Description	Label	Examples
Class 6	6.1	Toxic Substances	Liquids or Solids which are dangerous if inhaled swallowed or absorbed through the skin		- Cyanide - Weed killers - Chloroform
	6.2	Infectious Substances	Substances which are known or reasonably expected to contain pathogens that cause disease in human or in animals		- Bacterial Agents - Medical & Clinical waste - Virus

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 17

10.11.7 Class 7 – Radio Active Substances

Name of Class Or Division			Description	Label	Examples
Class 7	Cat 1	Radio Active Substances	Radio Active material with low radiation level on the package surface. Transport Index TI=0		X-ray Materiel Uranium Luminous Paint. Radioactive pharmaceuticals Radio isotopic pace makers -
	Cat 2	Radio Active Substances	TI=>0<1		
	Cat 3	Radio Active Substances	TI = > 1 < 10		

10.11.8 Class 8 – Corrosives Substances

Name of Class Or Division			Description	Label	Examples
Class 8		Corrosives	Liquid or Solid that cause full thickness destruction of intact skin tissue or has a severe rate on other material		- Battery acid - Caustic soda - Mercury

10.11.9 Class 9 – Miscellaneous Dangerous Substances and Articles Including Environmentally Hazardous Substances

Name of Class Or Division	Description	Label	Examples
---------------------------	-------------	-------	----------

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

Class 9	Miscellaneous Dangerous Goods	Substances which presents a danger during air transportation that is not covered by other classes		- Dry Ice - Large Magnets - Internal combustion engines - asbestos
		Electronic articles with a lithium battery		- Lithium/Sodium Batteries/Cells
		Environmentally Hazardous Substances		

10.12 Subsidiary Risks

Some dangerous goods have properties which meet the definition of more than one hazard class or division. The less serious hazard of such substances is described as a subsidiary risk.

10.13 Marking and Labeling

Correct marking and labeling of dangerous goods packagers are important to handle them safely. It will enable to identify the hazard, contents and properly stow them. The hazards can be recognized without relying on accompanying documentation in an emergency

10.13.1 Marking

The shipper is responsible for all marking of exact package of dangerous goods

10.13.2 Labeling

Each package must be of such a size that there is adequate space to affix all required hazard and handling labels

10.14 Hazard labels

Hazard labels are used to identify the nine classes of dangerous goods. A typical hazard label has a diamond shape with the hazard identification symbol on the top half and the class or division number in the bottom corner. The hazard label indicates the type of danger the article may pose. A package with a hazard label must not be allowed in the cabin or cockpit. Should you discover a package with a hazard label in the cabin, check with the passenger and notify the PIC immediately. In some instances, the box may have previously been used to pack dangerous goods, but now contains other harmless material. In this case the label must be removed from the box PIC/Ground staff kept informed.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 19

10.15 Handling Labels

Handling labels are Rectangle in shape In addition to hazard labels, handling labels are used to provide information on the proper handling and stowage of packages of dangerous goods.

10.15.1 Handling label chart

Handling Description	Label
<u>Magnetized Material</u> Package bearing the magnetized material label must not be loaded in such a position that they will have significant effect on the direct reading magnetic compasses of the aircraft or on the master compass detector units. Please note that multiple packages may produce a cumulative effect.	
<u>Cargo Aircraft Only</u> Packages on which the cargo aircraft only (CAO) label appears must not be loaded on a passenger aircraft. This label shall appear on the same surface near the Hazard Label/s.	
<u>Cryogenic Liquid</u> Must be used in addition to division 2.2 hazard label on packages containing cryogenic liquids. Because of the very cold temperature from -150°C to -280°C this can result in water vapor which may look like smoke.	
<u>Package Orientation Label (This side up)</u> Shall always be stored in the upright position	
<u>Keep Away From Heat</u> Shipment shall be protected from direct sun light and all sources of heat and placed in adequately ventilated areas.	

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS	Chapter 10
		Page 20

<u>Battery Powered Wheelchairs and Mobility aid label</u> Used to identify a wheelchair which has had the battery removed. The label is in two parts. Part A remains with the wheelchair/Mobility device and Part B Is used to identify and return the battery.	
<u>Lithium Battery Label</u> The label indicates “Lithium Metal or Ion batteries” as applicable.	
<u>Excepted Package Label</u> DGR in excepted quantities are very small quantities of dangerous goods transported by air.	
<u>Radioactive Material - Excepted Package</u> The information for this package need not appear on the Notification to Captain (NOTOC).	
<u>Carbon Dioxide Solid, Dry Ice Label</u> Used when transporting dry ice over 2.5 Kgs in the cargo hold to segregate live cargo.	
<u>Carbon Dioxide Solid, Dry Ice Label</u> Used when transporting dry ice less than 2.5 Kgs in the cabin of the aircraft. This is a Srilankan Airlines requirement.	

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 21

Limited quantities


Packagers of Selected dangerous goods packed in small quantities under the limited quantity provision. The packing does not need to meet UN specifications. The maximum weight is 30kg,. The maximum weight for the individual containers depends on the type of goods



10.15.2 Marking And Label On Packaging

The package is manufactured performance Tested as per UN specification. UN Specification packaging are normally tested by an institute authorized by government authorities. They bear a UN specification marking.

Example of UN Specification Markings

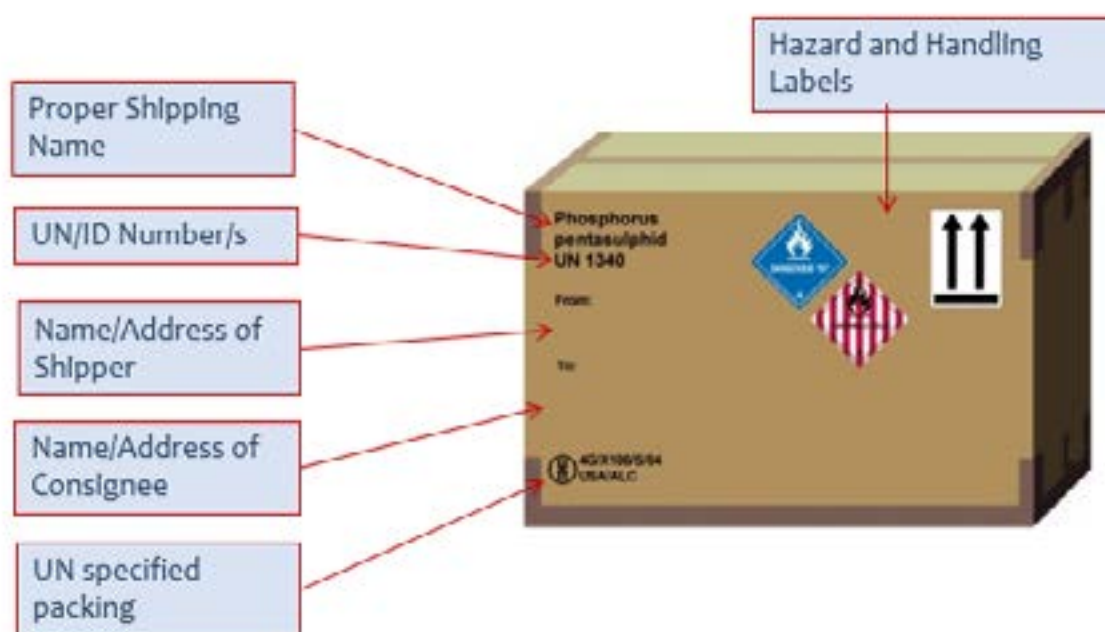

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

10.15.3 Over Pack



An enclosure used by a single shipper to contain one or more packages and to form one handling unit for convenience of handling and stowage. Dangerous goods packages contained in the over pack must be properly packed, marked, labelled, and in proper condition as required by these regulations.


10.16 Provisions for Passengers and Crew Information

Dangerous Goods posters are displayed at security screening points and at check-in counters
Passenger acceptance staff should seek confirmation from the passenger regarding the contents in the baggage

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

10.16.1 Passenger/Crew Information

The following is displayed informing items which are prohibited for air transportation.

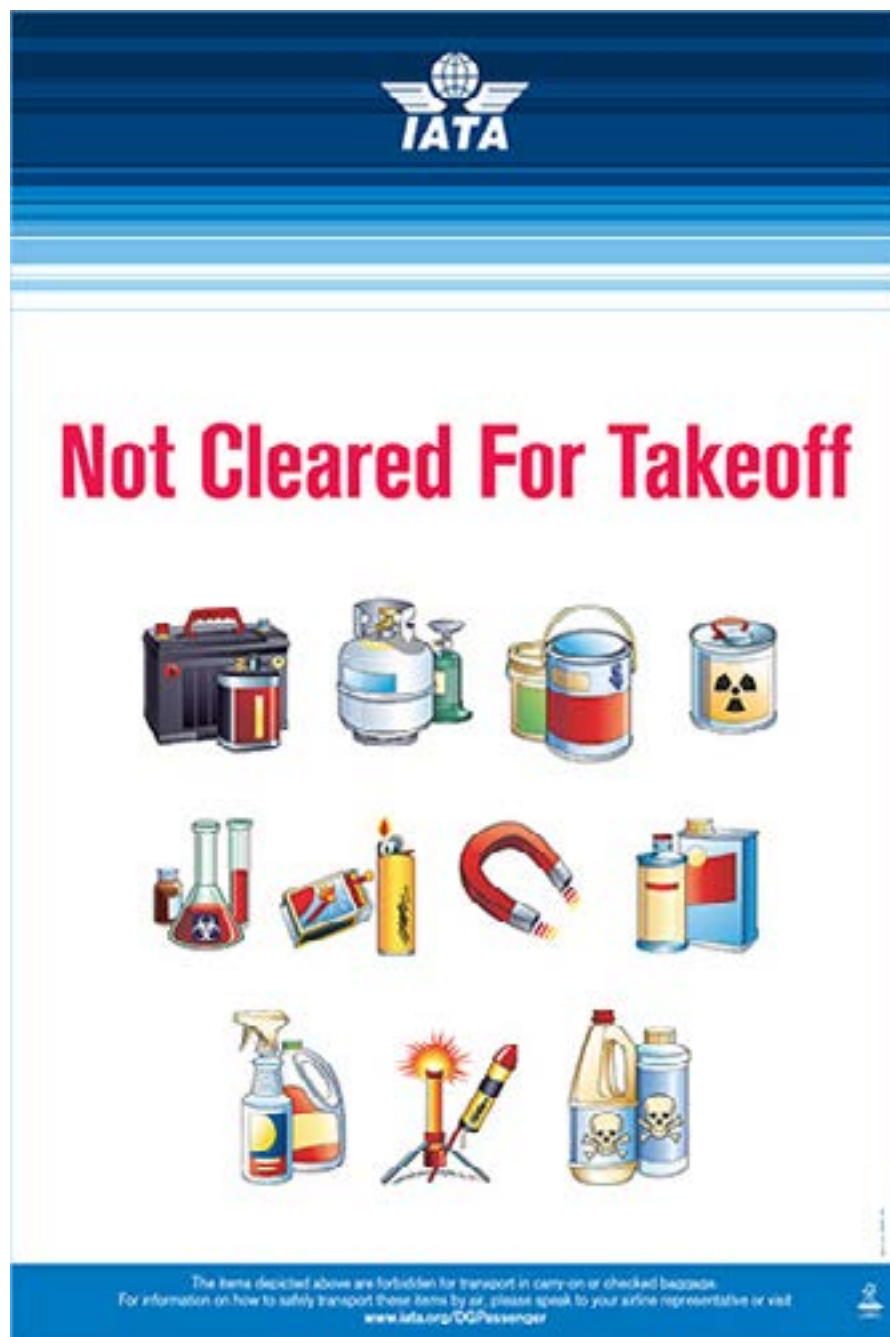

10.16.2 DG items Carried by Passengers /Crew (Table 2.3A)

Dangerous goods must not be carried in or as passengers or crew, checked or carry-on baggage, except as otherwise provided below. Dangerous goods permitted in carry-on baggage are also permitted on one's person except where otherwise specified.



Dangerous Goods Regulations

TABLE 2.3.A
Provisions for Dangerous Goods Carried by Passengers or Crew
(Subsection 2.3)

2

2.3

Dangerous goods must not be carried in or as passengers or crew, checked or carry-on baggage, except as otherwise provided below. Dangerous goods permitted in carry-on baggage are also permitted "on one's person", except where otherwise specified.

The pilot-in-command must be informed of the location				
Permitted in or as carry-on baggage				
Permitted in or as checked baggage				
The approval of the operator is required				
Alcoholic beverages , when in retail packagings, containing more than 24% but not more than 70% alcohol by volume, in receptacles not exceeding 5 L, with a total net quantity per person of 5 L.	NO	YES	YES	NO
Note: <i>Alcoholic beverages containing 24% or less alcohol by volume are not subject to any restrictions.</i>				
Ammunition, securely packaged (in Div. 1.4S, UN 0012 or UN 0014 only), in quantities not exceeding 5 kg gross weight per person for that person's own use. Allowances for more than one person must not be combined into one or more packages.	YES	YES	NO	NO
Avalanche rescue backpack , one (1) per person, containing cartridges of compressed gas in Div. 2.2. May also be equipped with a pyrotechnic trigger mechanism containing no more than 200 mg net of Div. 1.4S. The backpack must be packed in such a manner that it cannot be accidentally activated. The airbags within the backpacks must be fitted with pressure relief valves.	YES	YES	YES	NO
Baggage with installed lithium batteries non-removable batteries exceeding—0.3 g lithium metal or 2.7 Wh.	FORBIDDEN			
Baggage with installed lithium batteries:				
— non-removable batteries. Batteries must contain no more than 0.3 g lithium metal or for lithium ion must not exceed 2.7 Wh;	NO	YES	YES	NO
— removable batteries. Batteries must be removed if baggage is to be checked in. Removed batteries must be carried in the cabin.				
Batteries, spare/loose , including lithium batteries, non-spillable batteries, nickel-metal hydride batteries and dry batteries (see 2.3.5.8) for portable electronic devices must be carried in carry-on baggage only. Articles which have the primary purpose as a power source, e.g. power banks are considered as spare batteries. These batteries must be individually protected to prevent short circuits. Lithium metal batteries: the lithium metal content must not exceed 2 g (see 2.3.5.8.4). Lithium ion batteries: the Watt-hour rating must not exceed 100 Wh (see 2.3.5.8.4). Each person is limited to a maximum of 20 spare batteries. *The operator may approve the carriage of more than 20 batteries. Non-spillable batteries: must be 12 V or less and 100 Wh or less. Each person is limited to a maximum of 2 spare batteries (see 2.3.5.8.5).	NO*	NO	YES	NO
Camping stoves and fuel containers that have contained a flammable liquid fuel , with empty fuel tank and/or fuel container (see 2.3.2.5 for details).	YES	YES	NO	NO
Chemical Agent Monitoring Equipment , when carried by staff members of the Organization for the Prohibition of Chemical Weapons on official travel (see 2.3.4.4).	YES	YES	YES	NO
Disabling devices such as mace, pepper spray, etc. containing an irritant or incapacitating substance are forbidden on the person, in checked and carry-on baggage.	FORBIDDEN			
Dry ice (carbon dioxide, solid) , in quantities not exceeding 2.5 kg per person when used to pack perishables not subject to these Regulations in checked or carry-on baggage, provided the baggage (package) permits the release of carbon dioxide gas. Checked baggage must be marked "dry ice" or "carbon dioxide, solid" and with the net weight of dry ice or an indication that there is 2.5 kg or less dry ice.	YES	YES	YES	NO
e-cigarettes (including e-cigars, e-pipes, other personal vaporizers) containing batteries must be individually protected to prevent accidental activation (see 2.3.5.8.2).	NO	NO	YES	NO
Electro shock weapons (e.g. Tasers) containing dangerous goods such as explosives, compressed gases, lithium batteries, etc. are forbidden in carry-on baggage or checked baggage or on the person.	FORBIDDEN			
Fuel cells containing fuel, powering portable electronic devices (e.g. cameras, cellular phones, laptop computers and camcorders), see 2.3.5.9 for details.	NO	NO	YES	NO
Fuel cell cartridges, spare for portable electronic devices, see 2.3.5.9 for details.	NO	YES	YES	NO
Gas cartridges, small, non-flammable containing carbon dioxide or other suitable gas in Division 2.2. Up to two (2) small cartridges fitted into a self-inflating personal safety device , intended to be worn by a person, such as a life jacket or vest. Not more than two (2) devices per passenger and up to two (2) spare small cartridges per device, for other devices not more than four (4) cartridges up to 50 mL water capacity. (see 2.3.4.2).	YES	YES	YES	NO
Gas cylinders, non-flammable, non-toxic worn for the operation of mechanical limbs . Also, spare cylinders of a similar size if required to ensure an adequate supply for the duration of the journey.	NO	YES	YES	NO
Hair styling equipment containing a hydrocarbon gas cartridge , up to one (1) per passenger or crew-member, provided that the safety cover is securely fitted over the heating element. This hair styling equipment must not be used on board the aircraft. Spare gas cartridges for such hair styling equipment are not permitted in checked or carry-on baggage.	NO	YES	YES	NO



Limitations

TABLE 2.3.A
Provisions for Dangerous Goods Carried by Passengers or Crew
(Subsection 2.3) (continued)

The pilot-in-command must be informed of the location				
	Permitted in or as carry-on baggage			
	Permitted in or as checked baggage			
	The approval of the operator is required			
Insulated packagings containing refrigerated liquid nitrogen (dry shipper), fully absorbed in a porous material containing only non-dangerous goods.	NO	YES	YES	NO
Internal combustion or fuel cell engines, must meet A70 (see 2.3.5.12 for details).	NO	YES	NO	NO
△ Lithium Batteries: Portable electronic devices (PED) containing lithium metal or lithium ion cells or batteries, including medical devices such as portable oxygen concentrators (POC) and consumer electronics such as cameras, mobile phones, laptops and tablets (see 2.3.5.8). For lithium metal batteries the lithium metal content must not exceed 2 g and for lithium ion batteries the Watt-hour rating must not exceed 100 Wh. Devices must be protected from damage and inadvertent activation. Those in checked baggage must be completely switched off. Each person is limited to a maximum of 15 PED. *The operator may approve the carriage of more than 15 PED.	NO*	YES	YES	NO
△ Lithium batteries, spare/loose, including power banks, see Batteries, spare/loose				
Lithium battery-powered electronic devices. Lithium ion batteries for portable (including medical) electronic devices, a Wh rating exceeding 100 Wh but not exceeding 160 Wh. For portable medical electronic devices only, lithium metal batteries with a lithium metal content exceeding 2 g but not exceeding 8 g. Devices must be protected from damage. Devices in checked baggage must be completely switched off.	YES	YES	YES	NO
Lithium batteries, spare/loose with a Watt-hour rating exceeding 100 Wh but not exceeding 160 Wh for consumer electronic devices and PMED or with a lithium metal content exceeding 2 g but not exceeding 8 g for PMED only. Maximum of two spare batteries in carry-on baggage only. These batteries must be individually protected to prevent short circuits.	YES	NO	YES	NO
Matches, safety (one small packet) or a small cigarette lighter that does not contain unabsorbed liquid fuel, other than liquefied gas, intended for use by an individual when carried on the person. Lighter fuel and lighter refills are not permitted on one's person or in checked or carry-on baggage.	NO	ON ONE'S PERSON		NO
Note: "Strike anywhere" matches, "Blue flame" or "Cigar" lighters or lighters powered by a lithium battery without a safety cap or means of protection against unintentional activation are forbidden (see 2.3.5.8.4(e)).				
Mobility Aids: Battery-powered wheelchairs or other similar mobility devices with non-spillable wet batteries, nickel-metal hydride batteries or dry batteries, (see 2.3.2.2).	YES	YES	NO	YES
Mobility Aids: Battery-powered wheelchairs or other similar mobility devices with spillable batteries or with lithium ion batteries (see 2.3.2.3 and 2.3.2.4 for details).	YES	YES	NO	YES
Mobility Aids: Battery-powered wheelchairs or other similar mobility devices with lithium ion batteries where the design of the mobility aid does not provide adequate protection for the battery(ies) (see 2.3.2.4.3 for details).	YES	NO	YES	YES
Non-radioactive medicinal or toiletry articles (including aerosols) such as hair sprays, perfumes, colognes and medicines containing alcohol; and Non-flammable, non-toxic (Division 2.2) aerosols, with no subsidiary hazard, for sporting or home use (see 2.3.5.1).	NO	YES	YES	NO
The total net quantity of non-radioactive medicinal or toiletry articles and non-flammable, non-toxic (Division 2.2) aerosols must not exceed 2 kg or 2 L and the net quantity of each single article must not exceed 0.5 kg or 0.5 L. Release valves on aerosols must be protected by a cap or other suitable means to prevent inadvertent release of the contents.				
Oxygen or air, gaseous, cylinders required for medical use. The cylinder must not exceed 5 kg gross weight.	YES	YES	YES	YES
Note: Liquid oxygen systems are forbidden for transport.				
Permeation devices, must meet A41 (see 2.3.5.13 for details).	NO	YES	NO	NO
Radioisotopic cardiac pacemakers or other devices, including those powered by lithium batteries, implanted into a person or fitted externally.	NO	ON ONE'S PERSON		NO
Security-type equipment (see 2.3.2.6 for details).	YES	YES	NO	NO
Security-type attaché cases, cash boxes, cash bags, etc. incorporating dangerous goods, such as lithium batteries and/or pyrotechnic material, except as provided in 2.3.2.6 are totally forbidden. See entry in 4.2-List of Dangerous Goods.		FORBIDDEN		
Specimens, non-infectious packed with small quantities of flammable liquid, must meet A180 (see 2.3.5.11 for details).	NO	YES	YES	NO
Thermometer, medical or clinical, which contains mercury, one (1) per person for personal use, when in its protective case.	NO	YES	NO	NO
Thermometer or barometer, mercury filled carried by a representative of a government weather bureau or similar official agency (see 2.3.3.1 for details).	YES	NO	YES	YES

Note:

The provisions of Subsection 2.3 and Table 2.3.A may be limited by State or operator variations. Passengers should check with their airline for the current provisions.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 26

10.17 Chemical Substance

The DG chemical substances can be identified by the UN proper shipping name/number or by other means.

Depending on the circumstances it may be possible to obtain information from various national chemical databanks which maintains 24-hour telephone/fax accessibility.

10.18 Dangerous Goods Emergency Procedure

General

The first alert to a dangerous goods spillage or leak may be from a passenger who notices an unusual odor or fumes or who simply identifies an item that is leaking from cabin baggage. When a dangerous good is discovered in the cabin, crew must notify the flight crew immediately.

The cabin crew should ask the passenger concerned to identify the item. The passenger may be able to provide the cabin crew with some guidance on the hazard involved. The cabin crew should try to collect as much information as possible, e.g. check for:

- A dangerous goods label
- Numbers on the packaging
- Written information on the packaging
- Odours
- Fumes
- Smoke
- An effect on passengers.

When assessing an appropriate course of action to be taken in the event of an incident involving dangerous goods, the following should be considered,

Note: These conditions apply whether the aircraft is involved is carrying passengers, cargo, or both.

10.18.1 Dangerous Goods in The Cargo Compartments

The passengers and crew should be evacuated from the aircraft prior to any attempt is made to open the cargo compartment doors. The cargo compartment doors should be opened with the emergency services in attendance.

10.18.2 Flight Crew Procedure

1. The PIC shall land as soon as possible.
2. Use protective breathing equipment (Gas-tight breathing equipment shall be worn when attending to an incident involving fire or fumes)
3. The (NOTOC) is immediately made available to the rescue and firefighting services along with Emergency Response Guidance (ERG)

10.18.3 Cabin Crew Procedure

CCM should take prompt action and move passengers away from the area involved, if necessary, provide wet towels or cloth and give instructions to breathe through them.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 27

10.18.4 Emergency Response Kit (ERK)

In case of leakage/spillage use the items contained in the Emergency Response Kit.

10.18.4.1 Location

- A 330 aircraft - R2 overhead compartment
- A 320 aircraft - L2 overhead compartment (MRE - R2 overhead compartment)
- A 321 aircraft - R4 overhead compartment



10.18.4.2 Improvise Galley Equipment

Many items may be found in galleys that can be used for emergency responses such as, boxes/heat-fire resistant gloves/polyethylene bags/blankets/ towels etc.

10.18.4.3 Protection

Hands should be protected before touching suspicious packages or bottles. Fire-resistant gloves or oven gloves covered by polyethylene bags may provide suitable protection.

10.18.4.4 Reaction

Care should be taken when mopping up spillage or leakage to ensure no reaction is created between what is to be used to mop and the DG item. If reaction is suspected, mopping up should be avoided and the spillage should be covered with polyethylene bags.

10.19 A Spillage or Suspected Dangerous Goods in Powder Form.

1. Items affected should be left undisturbed
2. The spill should not be covered with a fire agent or diluted with water
3. Passengers should be moved away from the area
4. The area should be covered using polyethylene/plastic bags or blankets
5. The area should be kept isolated
6. After landing inform ground staff who shall inform the DG coordinator
7. Qualified personnel shall deal with the item
8. Purser to carry out necessary documentation

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 28

WARNING: DO NOT LEAVE HANDS UNPROTECTED WHEN TOUCHING SUSPICIOUS PACKAGES OR BOTTLES.

CAUTION: IN GENERAL, WATER SHOULD NOT BE USED ON A SPILLAGE OR WHEN FUMES ARE PRESENT AS IT MAY HELP SPREAD THE SPILLAGE OR INCREASE THE RATE OF FUMING. CONSIDERATION SHOULD ALSO BE GIVEN TO THE POSSIBLE PRESENCE OF ELECTRICAL COMPONENTS WHEN USING WATER.

10.19.1 Disembark Passengers/Crew

Even if it has not been necessary to complete an emergency evacuation after landing, passengers and crew should disembark before any attempt is made to open the cargo compartment doors or further action is taken to deal with a dangerous goods incident. The cargo compartment doors should be opened with the emergency services in attendance.

Ground Personnel/Emergency Services should be informed of nature of the item and the location. Pass on any other relevant information by the quickest available means including a copy of the NOTOC.

10.20 Undeclared/Mis-declared DG Items Check List

Srilankan Airlines has to report any undeclared or mis declared dangerous goods discovered in the cargo or in the passenger baggage to the CAASL within 24 hours after occurrence of the incident. Such reports must also be sent to the appropriate authority of the State in which this occurred.

Procedures

Retrieval Prior To Flight

When a DG item is undeclared or mis-declared by a passenger the ground staff should retrieve the item prior to departure. Carry out necessary documentation and inform the DG coordinator.

Retrieval during Flight

When a DG item is undeclared or mis-declared by a passenger and identified by the crew,

1. PIC should be informed immediately,
2. Retrieve item from passenger, place in a thick polyethylene bag and stow in a safe location, (Empty cart/container/overhead compartment)
3. After landing, identify the item to the ground staff who shall inform the DG coordinator
4. Carryout the necessary documentation (Incident/Accident Report)

DG item may be allowed to be carried in acceptable quantities subject to obtaining prior approval from the operator.

10.21 Dangerous Goods Incident/Accident Procedure

Notify PIC

Any incident concerning dangerous goods should be notified immediately to the pilot-in-command who should be kept informed of all actions taken and of their effect. It is essential that the cabin crew and

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 29

the flight crew coordinate their actions and that each is kept fully informed of the other's actions and intentions. Minimizing the spreading of smoke and fumes into the flight deck is critical for the continued safe operation of the aircraft, therefore it is always essential to keep the flight deck door closed. Crew communication and coordination are of utmost importance. The use of the interphone is the primary means of communication unless the interphone system fails.

Identify the Item

Ask the passenger concerned to identify the item and indicate its potential hazards. The passenger may be able to give some guidance on the hazard(s) involved and how these could be dealt with.

In Case of Fire

Use Standard Procedure/Check Use Of Water

Standard emergency procedures shall be used to deal with any fire. In general, water should not be used on a spillage or when fumes are present since it may spread the spillage or increase the rate of fuming. Consideration should also be given to the possible presence of electrical components when using water.

10.21.1 In Case of Spillage or Leakage

Collect emergency response kit and other useful items

Collect emergency response kit and other useful items for use in dealing with the spillage or leakage: A supply of paper towels or newspapers or other absorbent paper or absorbent fabric (e.g. Seat cushion covers, head rest protectors);

Oven gloves or fire-resistant gloves, if available;

At least two large polyethylene waste bin bags; and At least three smaller polyethylene bags, such as those used for duty-free or bar sales or, if none available, airsickness bags

Don rubber gloves and smoke hood

The hands should always be protected before touching suspicious packages or items. Fire-resistant gloves or oven gloves covered by polyethylene bags are likely to give suitable protection. A PBE should always be worn when attending to an incident involving smoke, fumes or fire.

Move passengers away from area and distribute wet towels

The use of therapeutic oxygen bottles or the passenger drop-out oxygen system to assist passengers in a smoke- or fume-filled passenger cabin should not be considered since considerable quantities of fumes or smoke would be inhaled through the valves or holes in the masks. A more effective aid to passengers in a smoke- or fume-filled environment would be the use of a wet towel or cloth held over the mouth and nose. A wet towel or cloth aids in filtering and is more effective at doing this than a dry towel or cloth. Cabin crew should take prompt action if smoke or fumes develop and move passengers away from the area involved and, if possible, provide wet towels and give instructions to breathe through them.

Place dangerous goods item in polyethylene bags

If it is absolutely certain that the item will not create a problem, the decision may be made not to move

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS	Chapter 10
		Page 30

it. In most circumstances, however, it will be better to move the item and this should be done as suggested below. Place the item in a polyethylene bag as follows:
 Prepare two bags by rolling up the sides and placing them on the floor;
 Place the item inside the first bag with the closure of the item, or the point from which it is leaking from its container, at the top;
 Close the first bag while squeezing out the excess air;
 Twist the open end of the first bag and use a bag tie to tie it sufficiently tight to be secure but not so tight that pressure equalization cannot take place;
 Take off the rubber gloves while avoiding skin contact with any contamination on them;
 Place the rubber gloves in the second bag
 Place the first bag (containing the item) in the second bag, which already contains the rubber gloves and secure the open end in the same manner as that used for the first bag.

Stow polyethylene bags

If there is a catering or bar box on board, empty any contents and place the box on the floor, with the door upward. Place the bag(s) containing the item and any soiled towels, etc., in the box and close the door. Take the box or, if there is no box, the bag(s) to a position as far away as possible from the flight deck to a rear inbound toilet. Do not place bag(s) against the pressure bulkhead or fuselage wall. If a rear galley is used, bag(s) can be stowed in an empty waste bin container. The toilet door should be locked from the outside. In a pressurized aircraft, if a toilet is used, any fumes will be vented away from passengers. Receptacle containing the dangerous goods is kept upright or the area of leakage is kept at the top. Ensure that the position of the box or bags will not impede disembarkation from the aircraft

Treat affected seat cushions/covers in the same manner as Dangerous goods item

Seat cushions, seat backs or other furnishings which have been contaminated by a spillage should be removed from their fixtures and placed in a large bin bag or other polyethylene bag, together with any bags used initially to cover them. They should be stowed away in the same manner as the dangerous goods item causing the incident.

Cover spillage on carpet/floor

Cover any spillage on the carpet or furnishings with a waste bag or other polyethylene bags, if available. If not, use airsickness bags opened out so that the plastic side covers the spillage or use the plastic covered emergency information cards. Carpet which has been contaminated by a spillage and which is still causing fumes despite being covered, should be rolled up, if possible, and placed in a large bin bag or other polyethylene bag. It should be placed in a waste bin and stowed, when possible, either in the rear toilet or rear galley. If the carpet cannot be removed it should remain covered by a large bin bag or polyethylene bags, etc., and additional bags should be used to reduce the fumes.

Regularly inspect items stowed away/contaminated

Furnishings

Any dangerous goods, contaminated furnishings or equipment which have been removed and stowed away or covered for safety should be subject to regular inspection.

After landing

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 31

Identify the item

Identify to the Ground Personnel DG Item and where stowed upon arrival. Pass on any other relevant information. Assist the emergency response team in furnishing specific and accurate details of the DG item and behaviour.

Inform the DGR Coordinator

Inform the DGR coordinator the location of DGR item type of hazard experienced ect.

Entry in Maintenance and Cabin Defects Logbook

Make an entry in the aircraft maintenance logbook for maintenance work, and that the emergency response kit or any aircraft equipment used is replenished or replaced.

10.22 PED Fires - Cabin Crew Checklist

Description: - The following checklist is based upon guidance issued in the ICAO Emergency Response Guidance for Aircraft Incidents Involving Dangerous Goods.

In case of fire involving a portable electronic device:

Notify PIC

Any occurrence concerning a fire in the cabin should be notified immediately to the pilot-in-command who should be kept informed of all actions taken and of the effect. It is essential that the cabin crew and the flight crew coordinate their actions and that each is kept fully informed of the other's actions and intentions.

Identify the item

It may not be possible to identify the item (source of fire) right away, especially if the fire has started in a seat pocket or the device is not readily accessible. In this case, firefighting procedures should be applied as a first step. If the item is contained in baggage, the crew's actions would be similar to the actions for a device that is visible or readily accessible.

CAUTION: IN ORDER TO AVOID INJURY FROM A FLASH FIRE, IT IS NOT RECOMMENDED TO OPEN THE AFFECTED BAGGAGE WHEN THERE IS ANY INDICATION OF SMOKE OR FLAMES. HOWEVER, IN CERTAIN SITUATIONS CABIN CREW MEMBERS MAY ASSESS AND DEEM IT NECESSARY TO SLIGHTLY OPEN BAGGAGE TO ALLOW ENTRY OF THE EXTINGUISHING AGENT AND NON-FLAMMABLE LIQUID. THIS SHOULD BE DONE WITH EXTREME CAUTION AND ONLY AFTER DONNING APPROPRIATE PROTECTIVE EQUIPMENT AVAILABLE ON THE AIRCRAFT.

Apply firefighting procedure

Appropriate firefighting and emergency procedures must be used to deal with any fire. The actions detailed in the firefighting procedure should be conducted simultaneously. Extinguisher should be used to extinguish the fire and prevent its spread to additional flammable materials. It is important to wear available protective equipment (e.g. protective breathing equipment, fire gloves) when fighting a fire. If fire develops, cabin crew should take prompt action to move passengers away from the area involved and, if necessary, provide wet towels instructions for passengers to breathe through them. Minimizing the spreading of

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 32

smoke and fumes into the flight deck is critical for the continued safe operation of the aircraft, therefore, it is always essential to keep the flight deck door closed. Communication and coordination are of utmost importance. The use of the interphone

Remove power

It is important to instruct the passenger to disconnect the device from the power supply, if it is deemed safe to do so. A battery has a higher likelihood of catching fire due to overheating during or immediately following a charging cycle, although the effects may be delayed for some period of time. By removing the external power supply from the device, it will be assured that additional energy is not being fed to the battery to promote a fire. Turn off the in-seat power to the remaining electrical outlets until it can be assured that a malfunctioning aircraft system does not contribute to additional failures of the passengers' portable electronic devices. Visually check that power to the remaining electrical outlets remains off until the aircraft's system can be determined to be free of faults, if the device was previously plugged in. The removal of power may occur simultaneously to other cabin crew actions (e.g. obtaining water to douse the device). Depending on the aircraft type, in-seat power may have to be turned off by the flight crew members.

Caution: Do not attempt to remove the battery from the device.

Douse the device with water (or non-flammable liquid)

Water (or other non-flammable liquid) must be used to cool a battery that has ignited to prevent the spread of heat to other cells in the battery. If water is not available, any non-flammable liquid may be used to cool the device.



Note. — Liquid may turn to steam when applied to the hot battery.

Leave the device in its place and monitor for any reignition

A battery involved in a fire can reignite and emit flames multiple times as heat is transferred to other cells in the battery. Therefore, the device must be monitored regularly to identify if there is any indication that a fire risk may still exist. If there is any smoke or indication of fire, the device must be doused with more water (or other non-flammable liquid).

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 33

CAUTION:

A) DO NOT ATTEMPT TO PICK UP OR MOVE THE DEVICE; BATTERIES MAY EXPLODE OR BURST INTO FLAMES WITHOUT WARNING. THE DEVICE MUST NOT BE MOVED IF DISPLAYING ANY OF THE FOLLOWING: FLAMES/FLARING, SMOKE, UNUSUAL SOUNDS (SUCH AS CRACKLING), DEBRIS, OR SHARDS OF MATERIAL SEPARATING FROM THE DEVICE.

B) DO NOT COVER OR ENCLOSE THE DEVICE AS IT COULD CAUSE IT TO OVERHEAT.

C) DO NOT USE ICE OR DRY ICE TO COOL THE DEVICE. ICE OR OTHER MATERIALS INSULATE THE DEVICE, INCREASING THE LIKELIHOOD THAT ADDITIONAL BATTERY CELLS WILL REACH THERMAL RUNAWAY.

WHEN THE DEVICE HAS COOLED

(e.g. APPROXIMATELY 10-15 MINUTES)

The device can be moved with caution following a certain period, once it has cooled down and if there is no evidence of smoke, heat, or if there is a reduction in the crackling or hissing sound usually associated with a lithium battery fire (e.g. after approximately 10-15 minutes). The waiting period may vary based on the device and its size. A suitable empty container (line it with 2 waste bin liners), such as a pot, jug, galley unit or toilet waste bin, must be filled with enough water or non-flammable liquid to completely submerge the device. It is important to wear available protective equipment (e.g. protective breathing equipment, fire gloves), when moving any device involved in a fire. Once the device is completely submerged, the container used must be stowed and, if possible, secured to prevent spillage.



MONITOR THE DEVICE AND THE SURROUNDING AREA FOR THE REMAINDER OF THE FLIGHT

Monitor the device and the surrounding area for the remainder of the flight to verify that the device does not pose further risk.

After landing

Identify the DG item to ground personnel.

where the item is stowed and providing all information about the item.

Inform DG coordinator

Make appropriate entry in the maintenance logbook.

Complete the required documentation, so that the engineering is notified of the event, proper maintenance action is undertaken and the emergency response kit or any aircraft equipment used is replenished or replaced, if applicable.

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS	Chapter 10
		Page 34

10.23 Hidden Dangerous Goods

Articles and Substances under a general description may contain hazardous articles that are not apparent. Such articles may also be found in baggage. With the aim of preventing undeclared dangerous goods from being loaded on an aircraft and passengers from taking on board those dangerous goods which are not permitted in their baggage. Check-in staff shall check with passengers if such items have been packed.

1. Aircraft on ground (AOG) spares
Flares/ extinguishers/paint/oxygen generators
2. Automobiles/automobile parts
Carburettors/fuel in tanks/wet batteries
3. Breathing apparatus
Oxygen cylinders/chemical oxygen generators/liquid oxygen generators
4. Camping equipment
Safety matches/fuel/fire-crackers/camping stoves
5. Chemicals
Sulphuric acid/mercury/adhesives
6. Consolidated consignments/diagnostic
Pathogens containing bacterial agents/contaminated blood/infected medical/Clinical waste.
7. Cryogenic liquid
Refrigerated liquefied gases such as helium/neon/nitrogen
8. Cylinders
Oxygen cylinders/LPG cylinders
9. Dental apparatus
Mercury in equipment/X-ray material
10. Diving equipment
Diving lamps/scuba tanks
11. Electrical equipment
Mercury in switch gear
12. Electrically powered apparatus
Wet batteries/fuel
13. Expeditionary equipment
Flares/fuel/LPG
14. Film crew or media equipment
Fuel in generators/wet batteries/fireworks
15. Frozen food
Dry ice
16. Hot air balloon
LPG/fire extinguishers/cylinders of oxygen
17. Household goods
Bleach/drain cleaners/paint/floor polish
18. Instruments/Laboratory testing equipment
Mercury in Equipment/Alcohol/Sulphuric Acid
19. Machinery parts
Paint/Thinner/Lithium Batteries/Adhesives
20. Magnets and other items of similar material

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 35

Large speakers/metal piping creating a magnetic force

21. Medical supplies

Alcohol/oxygen generators/mercury in equipment

22. Passenger's personal effects/ unaccompanied passenger baggage

Paint/bleach/safety matches/alcohol/fire works

23. Pharmaceuticals

X-ray material/chemotherapy drugs/mercury in equipment/citric acid

24. Repair kits

Paint/adhesives/thinner

25. Samples for testing

Liquid nitrogen/dry ice

26. Swimming pool chemicals

Chlorine/bleach/hydrogen peroxide

27. Tool boxes

Compressed gas for power rivets/aerosol paint/gas cylinders

28. Torches

Oxygen/acetylene gas

29. Vaccines

Dry ice

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

10.24 Documentation

10.24.1 Shippers Declaration for dangerous goods

This document shall be filled up by the consignee whilst handing over the item for shipping

SHIPPER'S DECLARATION FOR DANGEROUS GOODS							
Shipper				Air Waybill No.			
				Page of Pages			
				Shipper's Reference Number (optional):			
Consignee							
Two completed and signed copies of this Declaration must be handed to the operator.				WARNING			
TRANSPORT DETAILS This shipment is within the limitations prescribed for: (delete non-applicable) ☐ PASSENGER AND CARGO AIRCRAFT ☐ CARGO AIRCRAFT ONLY				Airport of Departure 			
Airport of Destination:				Shipment type: (delete non-applicable) ☐ NON-RADIOACTIVE ☐ RADIOACTIVE			
NATURE AND QUANTITY OF DANGEROUS GOODS							
Dangerous Goods Identification					Quantity and type of packing	Packing inst.	Authorization
Proper Shipping Name	Class or Division	UN or ID No.	Pack- ing group	Subsidiary Risk			
Additional Handling Information							
24 hr. Emergency Contact Tel. No.:				shipment is made under the provisions of ICAO			
I hereby declare that the contents of this consignment are fully and accurately described above by the proper shipping name, and are classified, packaged, marked and labelled/placarded, and are in all respects in proper condition for transport according to applicable international and national governmental regulations.					Name/Title of Signatory Place and Date Signature (see warning above)		

10.24.2 Airway Bill

4/30/23, 5:17 PM

Air Waybill Form | Printable Template

Shipper's Name and Address				Not Negotiable Air Waybill Issued By							
				Copies 1, 2 and 3 of this Air Waybill are originals and have the same validity							
Consignee's Name and Address				It is agreed that the goods described herein are accepted in apparent good order and condition (except as noted) for carriage SUBJECT TO THE CONDITIONS OF CONTRACT ON THE REVERSE HEREOF. ALL GOODS MAY BE CARRIED BY ANY OTHER MEANS INCLUDING ROAD OR ANY OTHER CARRIER UNLESS SPECIFIC CONTRARY INSTRUCTIONS ARE GIVEN HEREON BY THE SHIPPER, AND SHIPPER AGREES THAT THE SHIPMENT MAY BE CARRIED VIA INTERMEDIATE STOPPING PLACES WHICH THE CARRIER DEEMS APPROPRIATE. THE SHIPPER'S ATTENTION IS DRAWN TO THE NOTICE CONCERNING CARRIER'S LIMITATION OF LIABILITY. Shipper may increase such limitation of liability by declaring a higher value for carriage and paying a supplemental charge if required.							
Issuing Carrier's Agent Name and City				Accounting Information:							
Agent's AITA Code		Account No.									
Airport of Departure (Addr. of First Carrier) and Requested Routing				Reference Number		Optional Shipping Information					
To	By First Carrier	to	by	to	by	Currency	CHGS Code	WT/VOL PPD	Other PPD COLL	Declared Value for Carriage	Declared Value for Customs
Airport of Destination		Flight Date		For Carrier Use Only		Flight Date		Amount of Insurance		INSURANCE - If carrier offers insurance, and such insurance is requested in accordance with the conditions thereof, indicate amount to be insured in figures in box marked "Amount of Insurance."	
Handling Information											
										SCI	
No. of Pieces RCP	Gross Weight	kg lb	Rate Class	Commodity Item No.	Chargeable Weight	Rate / Charge	Total	Nature and Quantity of Goods (inc. Dimensions or Volume)			
Prepaid		Weight Charge		Collect		Other Charges					
		Valuation Charge									
		Tax									
		Total Other Charges Due Agent									
		Total Other Charges Due Carrier									
Total Prepaid		Total Collect				Signature of Shipper of his Agent					
Currency Conversion Rates		CC Charges in Dest. Currency									
For Carrier's Use only at Destination		Charges at Destination				Executed on (date)		at (place)		Signature of Issuing Carrier or its Agent	
						Total Collect Charges					

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

10.24.3 Notification To Captain (NOTOC)

SPECIAL LOAD - NOTIFICATION TO CAPTAIN

DANGEROUS GOODS AWARENESS FOR FLIGHT DISPATCHERS

Station of loading CMB	Flight number SQ227	Date 19 th November 2005	Aircraft Registration 4R-ADA	Prepared by S A J Jayasekera								
DANGEROUS GOODS												
Station of unloading Weyhill	Proper Shipping Name	Class or Division For Class 1 compl. Group	UN or ID Number	Sub Risk	Number of packages	Net quantity or Transport Index per package	Radio- active material Category	Packing Group	Special Handling Code	C.A.D. (X)	Loaded	ESG CODE
BRU	603 - 19122423	ACETAL	UN 1088		01	2L		II	RFL		AKE 1453UL	23R 3H
BRU	603 - 19122434	ACRIDINE	UN 2713		01	150 Kg		III	RFB	X	Bulk 52	3L
BRU	603 - 19122445	FLAMMABLE LIQUID N.O.S. (Benzene solution)	UN 1993		02	1L		I	RFL		AKE 0300UL	23L 3H
JFK	603 - 19122456	AMMONIUM SULPHIDE SOLUTION	UN 2683	3 6.1	01	1L		II	RCM		AKE 1232UL	41R 8FP
JFK	603 - 19122511	RADIOACTIVE MATERIAL TYPE A PACKAGE SPECIAL FORM	UN 3332		01	T.L. 2	CAT. III		RRV		PAP 3011UL	33P
JFK	603 - 19122522	CONSUMER COMMODITY	UN 8000		07	15Kg			RMD		Bulk 53	9L
*There is no evidence that any damaged or leaking packages containing dangerous goods have been loaded on the aircraft.												
OTHER SPECIAL LOAD												
Station of Unload	Air Waybill Number	Contents and Description	Number of Packages	Quantity	Supplementary Information	Code (see Reverse)	Loaded					
BRU	603 - 19122533	LIVE DOG	01	10Kg	SET TEMP. TO 20 °C	AVI	POSITI ON 51					
Loading Supervisors Signature S A J Jayasekera		Captain's Signature P S Arana		Other Information								


	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 39

10.24.4 Dangerous Goods Emergency Response Guidance

Emergency procedures for flight crew in relation to dangerous goods can be found in the current ICAO publication Emergency Response Guidance (ERG) for aircraft incidents involving Dangerous Goods (doc9481-AN/928), generally referred as Red Book. A copy of this document is available in the EFB. Cabin crew shall use the ERG for reference.



ICAO

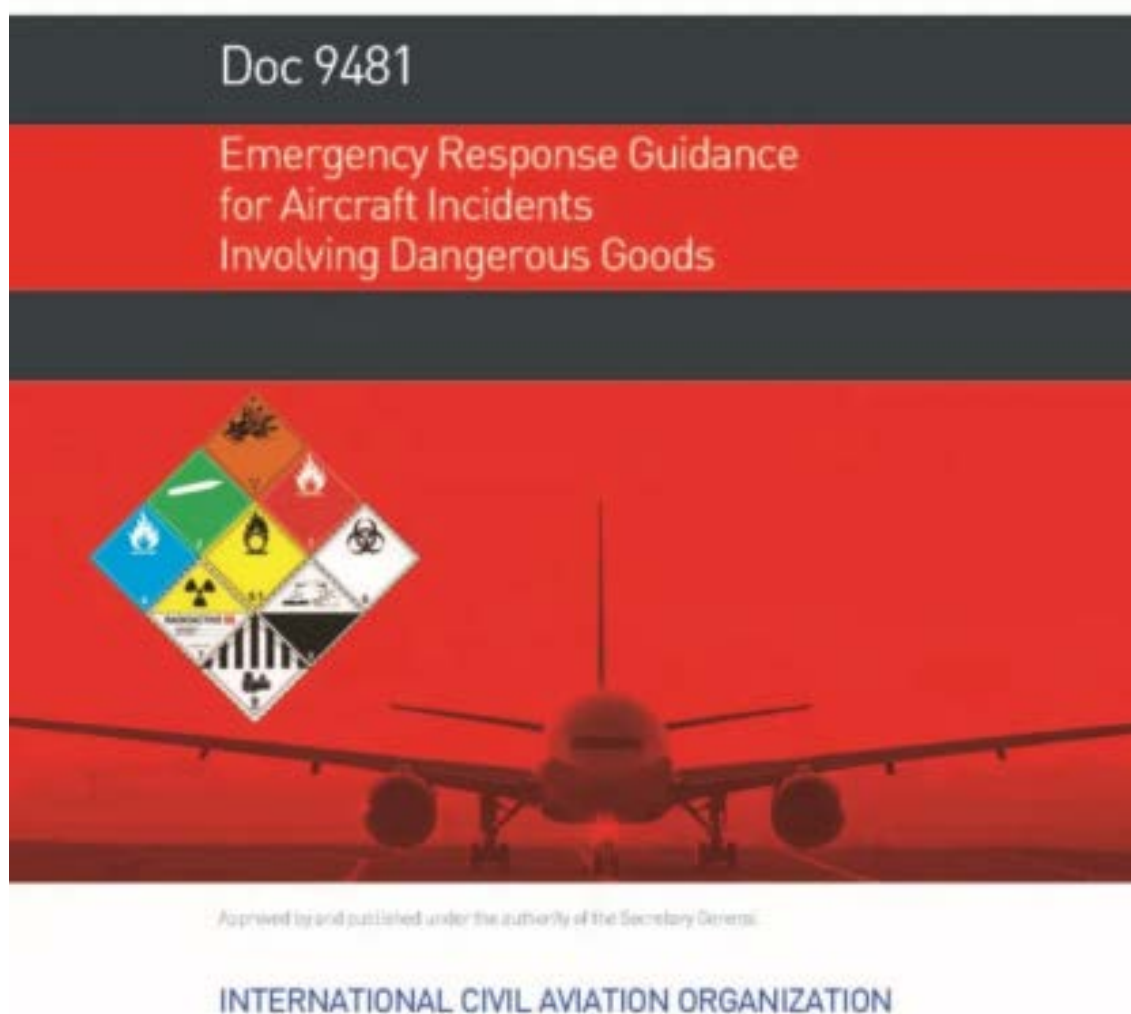

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS	Chapter 10
		Page 40

10.24.5 Power banks carried by passengers and crew for Personal Use

1. Limited to a maximum of two (02) power banks per passenger.
 - a. Lithium-Ion batteries - Watt hour rating equal to or less than 100 Wh.
 - b. Lithium metal batteries - equal to or less than 2g of lithium metal
2. A maximum of two (02) power banks with a watt-hour (Wh) rating exceeding 100 Wh but not exceeding 160 Wh may be carried, subject to operator approval
3. Power banks are forbidden for transport in checked baggage and shall be carried only as carry on baggage
4. Shall not be charged using in seat/inflight power during all phases of flight.
5. Shall not be used to recharge or power other portable electronic device during critical phases of flight. (during taxi, take-off and landing)
6. Not be placed in cabin baggage loaded in the overhead storage compartment. They shall be placed in cabin baggage under the seat or the seat pocket in front.
7. Must be individually protected to prevent short circuiting when not in use (by placement in original retail packaging or by otherwise insulating terminals, e.g. by taping over exposed terminals or placing each power bank in a separate plastic bag or protective pouch).

10.24.5.1 Portable electronic devices/Power Banks/Spare batteries carried by the Flight Crew/Cabin Crew in the performance of their operational duties.

Portable electronic devices, such as electronic flight bags, personal entertainment devices, and credit card readers, containing lithium metal or Lithium-ion cells or batteries and spare lithium batteries for such devices or power banks carried onboard shall meet the above provisions and conditions for the carriage. Flight and cabin crew shall adhere to all regulations and restrictions as stated when carrying such devices to carry out the functions for which they are responsible.

Any portable electronic devices containing lithium metal or lithium-Ion cells or batteries carried on-board for use or Duty-free sale during the flight or series of flights shall meet the provision and conditions for carriage.

Spare lithium batteries and power banks must be individually protected to prevent short circuiting and protected from unintentional activation when not in use.

Power Banks/Spare batteries carried by crew for the purpose of carrying out their operational duties

- a. Lithium metal batteries - lithium content shall not exceed 2g
- b. Lithium-ion batteries shall not exceed a watt hour rating of 100.

Crew members may carry up to two (02) power banks, with each power bank limited to a maximum rating of 100 Wh or 2g and carried in carry-on baggage only

Cabin crew shall ensure passengers are made aware of the applicable requirements through the approved onboard announcement (SEPM Ref 2.15.2.23), monitor compliance with these requirements throughout all phases of flight, and address any non-compliance or safety concerns immediately in accordance with standard operating procedures.

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 41

10.25 Quick Reference – Check list

10.25.1 Suspected dangerous goods in powder form

1. Inform PIC
2. Leave item undisturbed
3. Do not use an extinguisher or a non-flammable liquid if fumes are visible
4. Move passengers away
5. Cover using a non-absorbent material
6. Isolate area
7. After landing inform ground staff who shall inform the DG coordinator. Qualified personnel shall deal with the item
8. Purser - Carry out necessary documentation

10.25.2 Dangerous Goods Incidents/Accident Procedure

Initial Action

1. Notify PIC
2. Identify the item

In Case of Fire

3. Use standard procedures/check use of water

In case of spillage or leakage

4. Collect emergency response kit or other useful items
5. Don rubber gloves and smoke hood
6. Move passengers away from area and distribute wet towels or cloth
7. Place dangerous goods item in polyethylene bags and stow
8. Treat affected items in the same manner as dangerous goods item
9. Cover spillage on carpet/floor
10. Regularly inspect items stowed away and contaminated furnishings

After Landing

11. Identify to ground personnel dangerous goods item
12. Make appropriate entry in maintenance and Cabin Defects log book
13. Inform the DGR Coordinator

10.25.3 PED Fires

1. Inform PIC
2. Identify the item
3. Use standard firefighting procedure
4. Disconnect from electrical outlet if possible or switch off power
5. Douse adjacent cells with water to prevent ignition
6. Do not move the item
7. If item involves aircraft equipment switch off power and check before switching on power for defective systems (High Voltage, Short Circuits)
8. When the device has cooled (after 10-15 mints) fill a container with enough water (or non-flam-

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL	MN/CST/04
		ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS	Chapter 10
		Page 42

mable liquid) and using protective equipment, place the device in the container to completely submerge. Stow in toilet (away from flight deck) and secure the container to prevent spillage.

9. Purser – Make necessary documentation

10.25.4 Lithium battery fire in the flight Deck

On identifying a Lithium Battery fire

1. Flight deck crew shall inform the cabin crew
2. CCM shall ensure all flight crew are on oxygen,
3. Don a PBE/ heat resistant gloves
4. Use a HALON extinguisher to contain/ extinguish the fire
5. Disconnect device from the power outlet
6. If no flames are visible or the fire is extinguished, Remove the device from flight deck
7. If smoke becomes a greater threat – Flight deck crew to initiate smoke removal procedure
8. When the device has cooled (after 10-15 mints) fill a container with enough water (or non-flam-mable liquid) and using protective equipment, place the device in the container to completely submerge. Stow in toilet (away from flight deck) and secure the container to prevent spillage.
9. Monitor regularly
10. On landing identify the item to ground staff
11. Inform DGR coordinator and carry out a log entry

10.25.5 PED inadvertently crushed or damaged in electrically/Mechanically adjustable seat

1. Notify PIC / Other CCMs
2. Obtain information from passenger, To identify the item
3. Where he/she suspects that the item may have dropped or slipped into.
4. If the seat was moved since misplacing the item.
5. Don protective equipment and retrieve item.
6. If smoke or flames appear, Apply PED FIRE checklist.
7. After landing inform ground staff
8. Purser to make necessary documentation.

CAUTION: DO NOT MOVE THE SEAT ELECTRICALLY OR MECHANICALLY WHEN ATTEMPTING TO RETRIEVE THE ITEM.

10.26 Dangerous Goods Unit Coordinator

Email – cargodg@srilankan.com or Dangerous Good Policies Manager – mahesh@srilankan.com

SITA – CMBDGUL

TEL – 00 94 19733 2455 Mobile - 00 94 74444 2455

REPORTING –

Any incident/accident or the finding of undeclared or mis-declared dangerous goods shall be reported to the Dangerous Goods unit Coordinator, An incident/accident form shall be completed, copies of relevant documents and photographs taken shall be attached to EVR or e mailed to cooperate safety

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 43

INTENTIONALLY LEFT BLANK

Revision No	03	Revision Date	17 July 2026
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed

	SAFETY AND EMERGENCY PROCEDURES MANUAL		MN/CST/04
			ED 04/Jun 23
	DANGEROUS GOODS REGULATIONS		Chapter 10
			Page 44

INTENTIONALLY LEFT BLANK

Revision No	00	Revision Date	00
Prepared By	Cabin Safety Training	Approved By	CAASL

Uncontrolled If Copied or Printed