


NOVAYA

DUNLOP CLASSIC

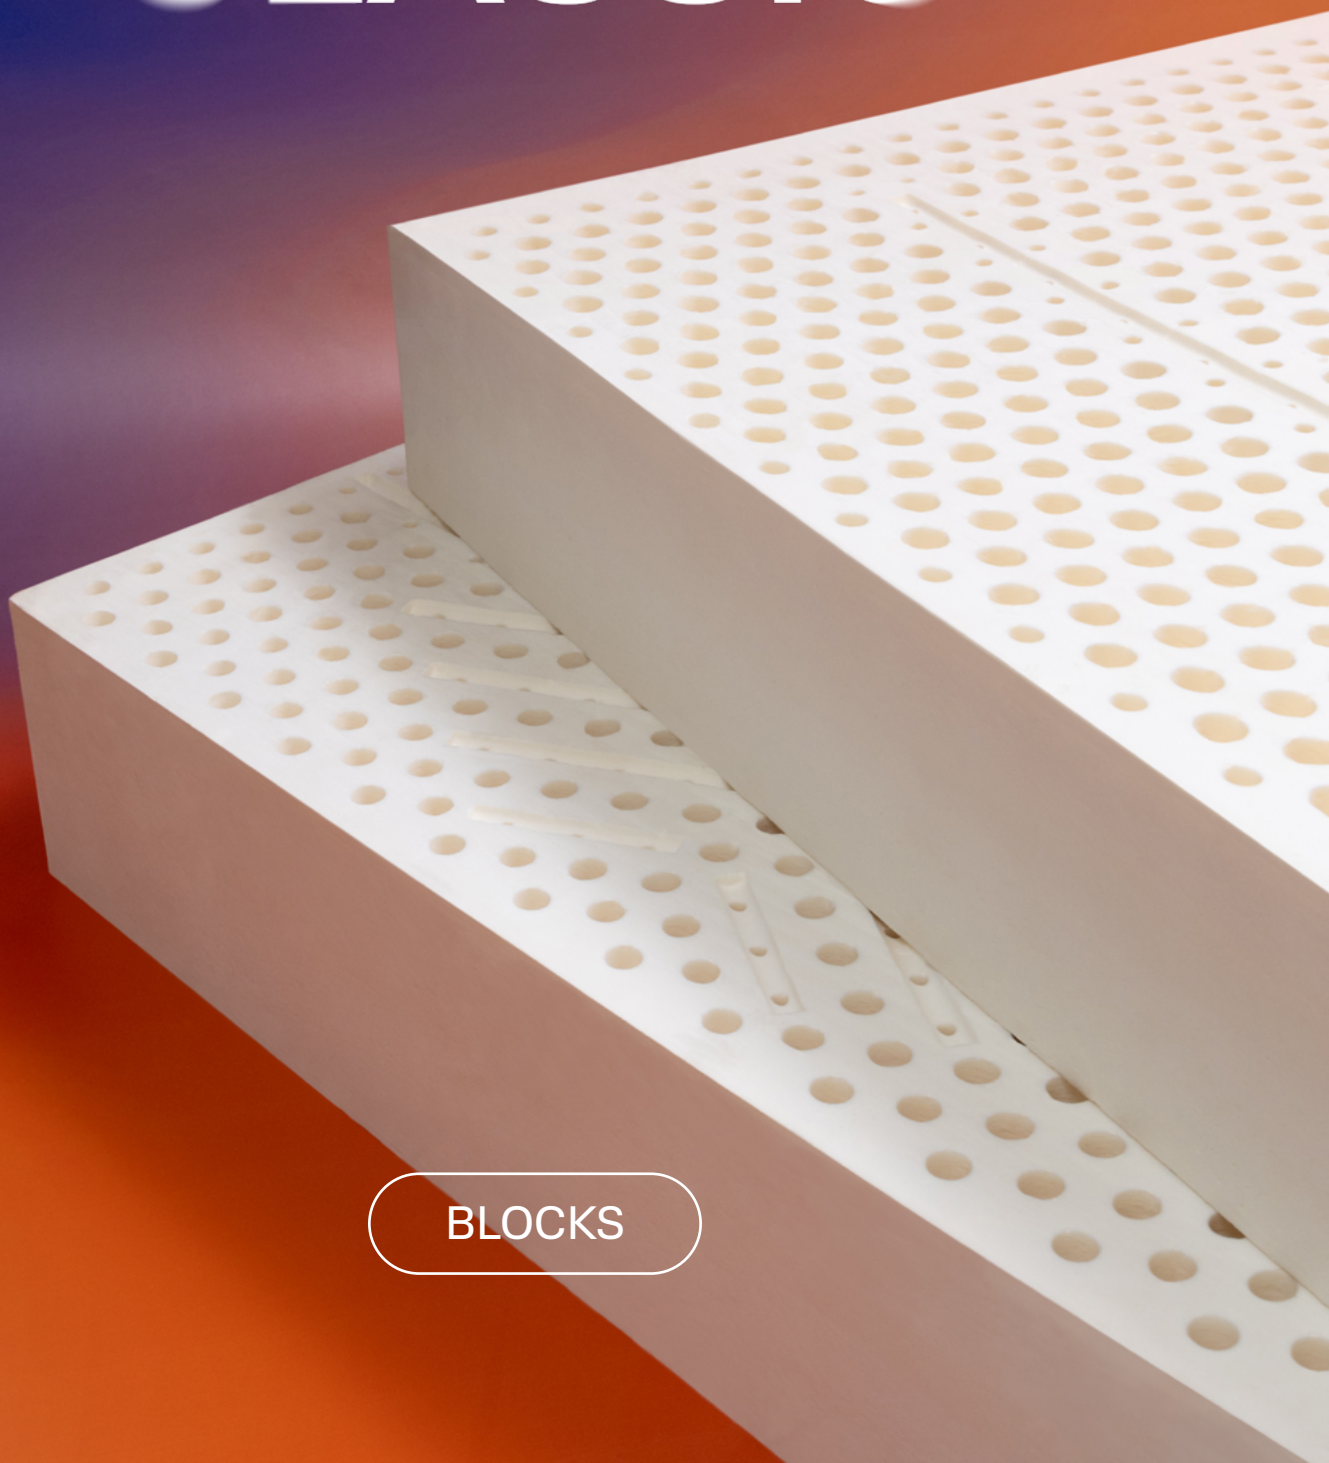

BLOCKS

DUNLOP CLASSIC

BLOCKS




Dunlop

The most popular

Our long-established Dunlop vulcanisation technology guarantees extraordinary quality for a truly exceptional sleep experience. The Dunlop process is based on the principle of a steam oven, where latex is vulcanised at a steady temperature of up to 100°C. Novaya perfected this method through years of investment in R&D and maintaining high-quality standards. We carefully select our raw materials to guarantee premium quality and comfort characteristics. Our classic blend contains 20% natural latex, straight from nature itself.

DUAL

Dual is your introduction to true progressive latex comfort. Thanks to its balanced 3-zone design, it offers excellent sleeping comfort.

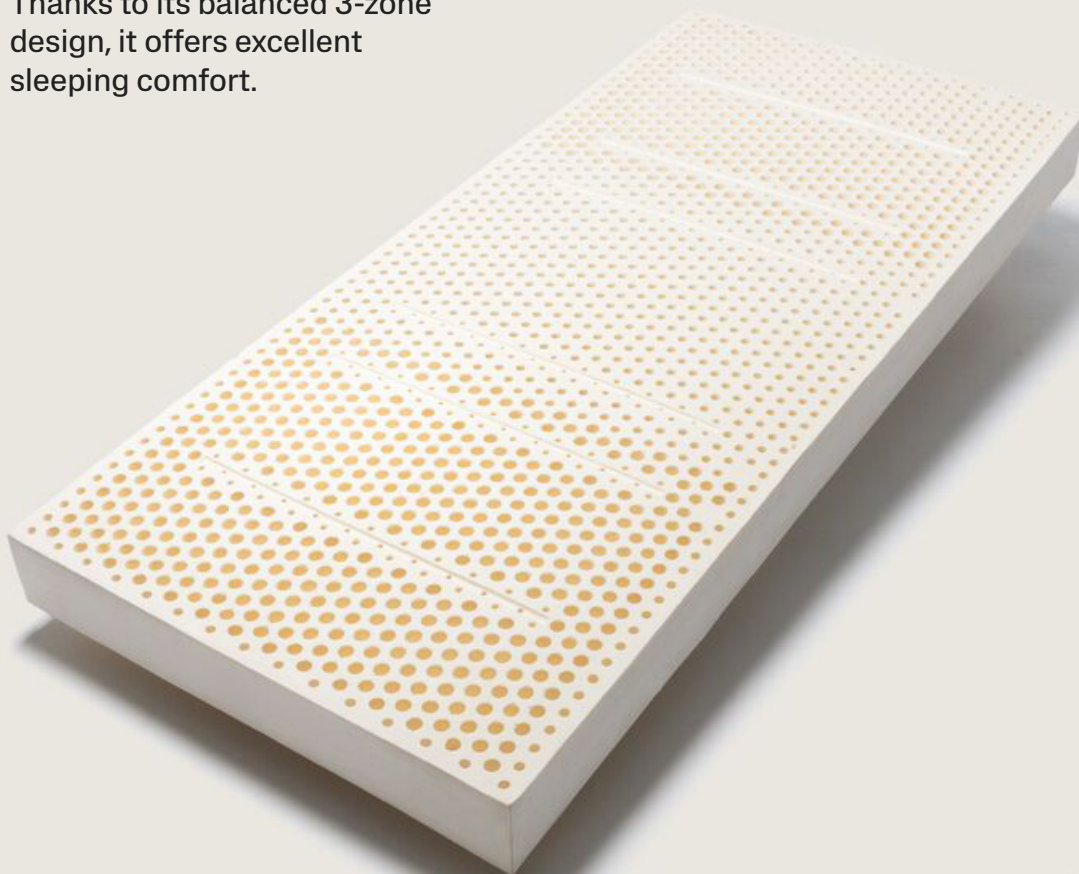

THICKNESS:	10 / 12 / 14 / 16 cm
DENSITY:	55 kg/m ³ (soft) 60 kg/m ³ (medium) 65 kg/m ³ (firm) 70 kg/m ³ (extra firm)
BLEND:	Classic – 20% natural latex
TECHNOLOGY:	Dunlop

DUAL

Density and firmness

Firmness	Height	Soft 55	Medium 60	Firm 65	Extra firm 70
Firmness 25% (kPa) Novaya Quick Method	16 cm	39	49	59	69
	14 cm	37	47	57	67
	12 cm	35	45	55	65
	10 cm	33	43	53	63
Firmness 40% (N)* ISO 2439 (Method B)	16 cm	180	220	260	300
	14 cm	170	210	250	290
	12 cm	160	200	240	280
	10 cm	150	190	230	270

Physical properties*

Property	Norm	Remark	Nominal value
Hysteresis (%)	ISO 2439	Method B	32
Resilience (%)	ISO 8307		40
Sag-factor (-)	ISO 2439	Method B	5,4
Tensile strength (kPa)	ISO 1798		20
Elongation (%)	ISO 1798		80
Compression (%)	ISO 1856	50%, 70°C, 0rh, 22h	5
Dynamic fatigue (%)	ISO 3385	Height loss:	1
		Hardness loss:	14
Dynamic fatigue (%) [durability test]	EN 1957	Height loss:	1%
		Hardness loss:	14
Fire retardant properties	ISO 1021-1	Cigarette test:	NA
	ISO 1021-2	Open flame:	NA

* For product comparison only. The test results are average values, to which tolerances are applicable.

IXAL

With **Ixal**, you are sure of optimal support, due to the reinforced hip zone.



THICKNESS:	15 / 18 cm
DENSITY:	60 kg/m ³ (soft) 65 kg/m ³ (medium) 70 kg/m ³ (firm) 75 kg/m ³ (extra firm)
BLEND:	Classic – 20% natural latex
TECHNOLOGY:	Dunlop

Density and firmness

Firmness	Height	Soft 60	Medium 65	Firm 70	Extra firm 75
Firmness 25% (kPa) Novaya Quick Method	18 cm	38	47	56	66
	15 cm	35	44	53	63
Firmness 40% (N)* ISO 2439 (Method B)	18 cm	170	210	240	280
	15 cm	160	200	230	270


Physical properties*

Property	Norm	Remark	Nominal value
Hysteresis (%)	ISO 2439	Method B	32
Resilience (%)	ISO 8307		40
Sag-factor (-)	ISO 2439	Method B	5,4
Tensile strength (kPa)	ISO 1798		20
Elongation (%)	ISO 1798		80
Compression (%)	ISO 1856	50%, 70°C, 0rh, 22h	5
Dynamic fatigue (%)	ISO 3385	Height loss:	1
		Hardness loss:	14
Dynamic fatigue (%) [durability test]	EN 1957	Height loss:	1
		Hardness loss:	14
Fire retardant properties	ISO 1021-1	Cigarette test:	NA
	ISO 1021-2	Open flame:	NA

* For product comparison only. The test results are average values, to which tolerances are applicable.

DIA 7-ZONE

Our **Dia 7-zone** offers balanced support for an ergonomic sleep.

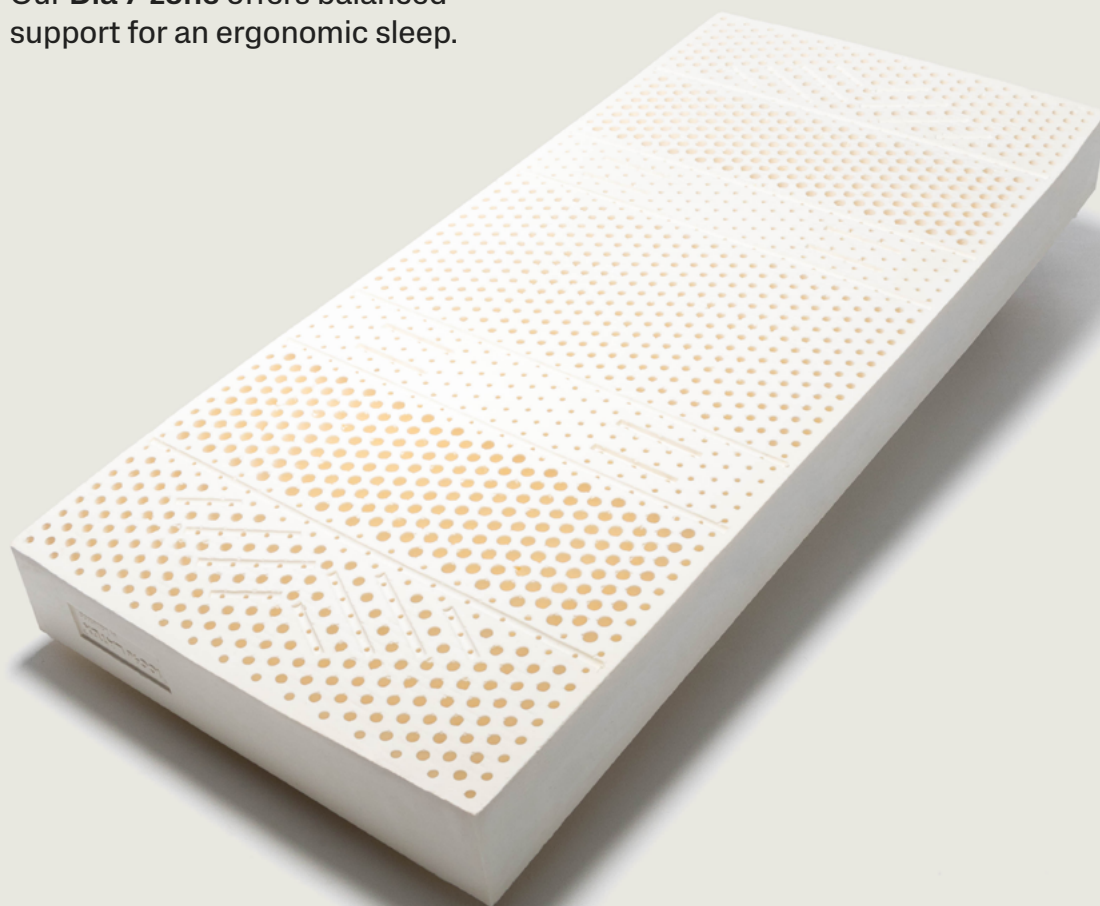

THICKNESS:	16 / 18 / 20 cm
DENSITY:	60 kg/m ³ (soft) 65 kg/m ³ (medium) 70 kg/m ³ (firm) 74 kg/m ³ (extra firm)
BLEND:	Classic – 20% natural latex
TECHNOLOGY:	Dunlop

DIA 7-ZONE

Density and firmness

Firmness	Height	Soft 60	Medium 65	Firm 70	Extra firm 75
Firmness 25% (kPa)* Novaya Quick Method	20 cm	44	53	63	72
	18 cm	42	51	61	70
	16 cm	40	49	59	68
Firmness 40% (N) ISO 2439 (Method B)	20 cm	190	230	270	310
	18 cm	190	220	260	300
	16 cm	180	220	260	290

Physical properties

Property	Norm	Remark	Nominal value
Hysteresis (%)	ISO 2439	Method B	32
Resilience (%)	ISO 8307		40
Sag-factor (-)	ISO 2439	Method B	5,4
Tensile strength (kPa)	ISO 1798		20
Elongation (%)	ISO 1798		80
Compression (%)	ISO 1856	50%, 70°C, 0rh, 22h	5
Dynamic fatigue (%)	ISO 3385	Height loss:	1
		Hardness loss:	14
Dynamic fatigue (%) [durability test]	EN 1957	Height loss:	1
		Hardness loss:	14
Fire retardant properties	ISO 1021-1	Cigarette test:	NA
	ISO 1021-2	Open flame:	NA

* For product comparison only. The test results are average values, to which tolerances are applicable.

PRODUCT TOLERANCES

		Minimum tolerance	Maximum tolerance
Dimensions	Length (%)	-0,5	+1,5
	Width (%)	-0,5	+1,5
	Thickness (mm)	0	+10
Physical properties	Density (kg/m ³)	-5	+5
	Firmness (hPa)	-4	+4
	Firmness (N)	-15	+15
	Compression (%)		<10
	Dynamic fatigue	Loss of height (%)	<5
		Loss of firmness (%)	<25



**STANDARD
100**
1111052
Centexbel

