

NOVAYA


PULSE CLASSIC



SHEETS

PULSE CLASSIC

SHEETS

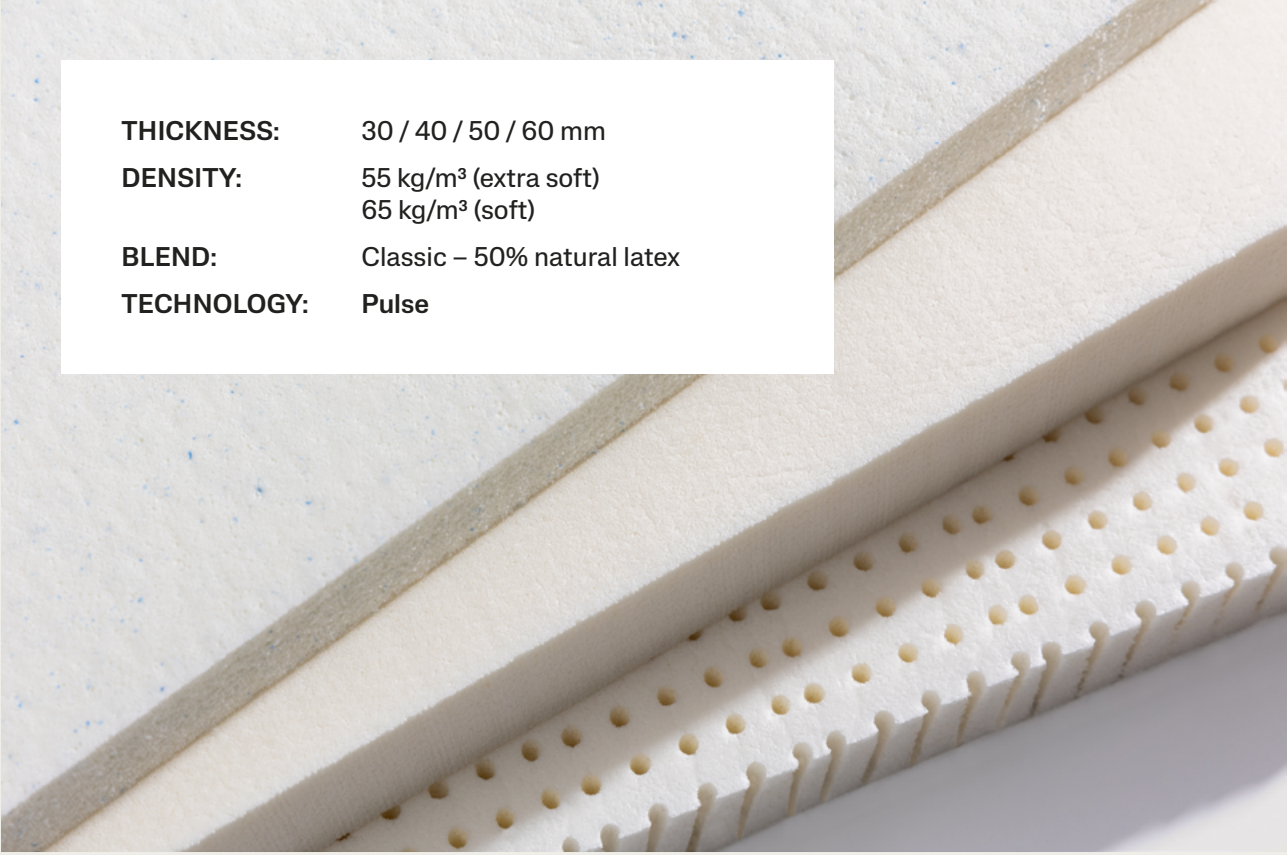

THICKNESS:	30 / 40 / 50 / 60 mm
DENSITY:	55 kg/m ³ (extra soft) 65 kg/m ³ (soft)
BLEND:	Classic – 50% natural latex
TECHNOLOGY:	Pulse



Pulse

The most sustainable

The patented Pulse vulcanisation technology has been developed by Novaya for improved ventilation and resilience. This latest innovation in comfort latex technology draws inspiration from a microwave oven, or dielectric heating. Here, radio waves create friction within the material, allowing vulcanisation from the inside out. The result is an evenly vulcanised latex with improved resilience and breathability. It's also more energy efficient, making it the most sustainable latex technology on the market. Our Classic blend contains a balanced mixture of synthetic latex and natural latex.

AVAILABLE OPTIONS



SOLID

Solid Pulse has a homogeneous cell structure and excellent tensile strength. This prolongs durability and ensures superb ventilation.



MICROPERFORATION

The Microperforation offers a plush and luxurious feel and boosts ventilation.



7-ZONE PERFORATION

The 7-zone perforation is designed for optimal spinal alignment and pressure relief.

ADD-ONS



GELPULSE

By combining the Pulse technology with gel particles, we boost ventilation and make sure the latex feels colder thanks to the increased energy storage within the gel particles.



Density	Thickness	Solid	Micro-perforation	7-zone perforation	Cut to size	Available on roll
55 kg/m ³ (extra soft)	60 mm	•	•	•	Yes	8 m
	50 mm	•	•	•	Yes	8 m
	40 mm	•	•	•	Yes	8 m
	30 mm	•	•	•	Yes	12 m
65 kg/m ³ (soft)	60 mm	• ◦	•	•	Yes	8 m
	50 mm	• ◦	•	•	Yes	8 m
	40 mm	• ◦	•	•	Yes	8 m
	30 mm	• ◦	•	•	Yes	12 m

◦ Available in GelPulse.

PHYSICAL PROPERTIES*

Property	Norm	Remark	Solid		Micro-perforation		7-zone perforation	
Density (kg/m ³)	ISO 845		55	65	55	65	55	65
Firmness 25% (N)	ISO 2439	Method B	35	50	30	40	35	50
Firmness 40% (N)	ISO 2439	Method B	55	75	50	65	55	75
Hysteresis (%)	ISO 2439	Method B	24	23	24	23	24	23
Resilience "ball rebound" (%)	ISO 8307		50	50	50	50	50	50
Sag-factor (-)	ISO 2439		3,2	3,1	3,3	3,3	3,2	3,1
Tensile strength (kPa)	ISO 1798		100	150	100	160	100	150
Elongation (%)	ISO 1798		>400	>400	>400	>400	>400	>400
Compression (%)	ISO 1856	50%, 70°C, 0rh, 22h	6,5	6,5	6,5	6,5	6,5	6,5
Dynamic fatigue (%)	ISO 3385	Height loss:	1	1	1	1	1	1
		Hardness loss:	10	10	10	10	10	10
Dynamic fatigue durability test (%)	EN 1957	Height loss:	1	0	1	0	1	0
		Hardness loss:	14	12	13	12	14	12
Fire retardant properties	EN 597-1	Cigarette test:	NA	NA	NA	NA	NA	NA
	BS 5852-2	Open flame:	NA	NA	NA	NA	NA	NA

* For product comparison only. The test results are average values (measured on a 5 cm topper), to which tolerances are applicable, subject to change.

PRODUCT TOLERANCES*

		Minimum tolerance	Maximum tolerance
Dimensions	Length (mm)	-10	+10
	Width (mm)	-10	+10
	Thickness (mm)	-2	+2
	Borders [head/foot] (mm)	-3	+3
Physical properties	Density (%)	-7	+7
	Firmness (N)	-15	+15
	Compression (%)		< 15
	Dynamic fatigue	Loss of height (%)	<5
		Loss of firmness (%)	<15

* Product tolerances valid if stored below a temperature of 50°C, vacuum packaging of max 6 months and measured after 72 h of unwrapping at room temperature. Measurements need to be performed on a flat surface after releasing tension stress.



**STANDARD
100**
1111052
Centexbel