

Aluminium-Water Combustion for Zero Carbon Marine Shipping: Masters Proposal

Md Nadim Ahmed

December 30, 2025

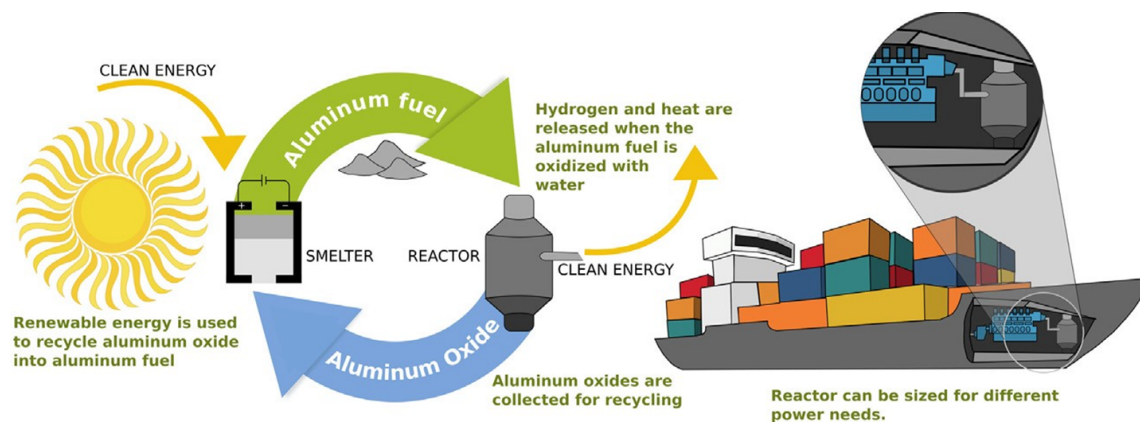


Figure 1: Aluminium powder as maritime shipping fuel (Energy Life-cycle). Adapted from [1]

Abstract

Table of Contents

List of Tables	4
List of Figures	4
1 Research Background	5
1.1 Preliminary Analysis of Electro-Fuels Options	5
1.1.1 High Level Energy Density Analysis	9
1.1.2 Effective Energy Density Analysis	12
1.2 Aluminium-Water Combustion	13
1.3 Reactor Design	13
1.3.1 Low-Temp Metal-Water Reactor	13
1.3.2 High-Temp Metal-Water Reactor	13
1.3.3 Summary and Comparison	13
1.4 Economics of Aluminium Fuel	13
2 Research Questions	14
3 Methodology	15
4 Proposed Project Timeline	16
5 References	17

List of Tables

List of Figures

1	Aluminium powder as maritime shipping fuel (Energy Life-cycle). Adapted from [1]	1
2	Falling cost of solar electricity vs Fossil Fuels [2]	5
3	Falling cost of lithium ion battery packs [3]	6
4	High Level Process Diagram for synthetic hydrocarbon production from renewable electricity [4]	7
5	Metal based electro-fuels as secondary energy carriers [5]	8
6	Simplified Energy Density Analysis. Data Analysis can be found in the Appendix. Adapted from [6]	9
7	Proposed bunkering procedure for metal fuels (iron powder in this specific case) [7]	10
8	Effective Energy Density Analysis. Data Analysis can be found in the Appendix. Adapted from [6]	11

1 Research Background

Overview

Maritime shipping plays a crucial role in global trade, facilitating around 80% of all commerce [8]. This makes it essential for globalization, economic development, and maintaining living standards. However, the sector also contributes significantly to global greenhouse gas emissions, accounting for 2-3% of global emissions and approximately 10% of all transport-related emissions [9, 8].

In response, the International Maritime Organization (IMO) has set ambitious targets to curb emissions from international shipping. By 2030, the IMO aims to reduce annual greenhouse gas emissions by 20-30% compared to 2008 levels, with a more aggressive target of 70-80% reduction by 2040 [10].

1.1 Preliminary Analysis of Electro-Fuels Options

Overview

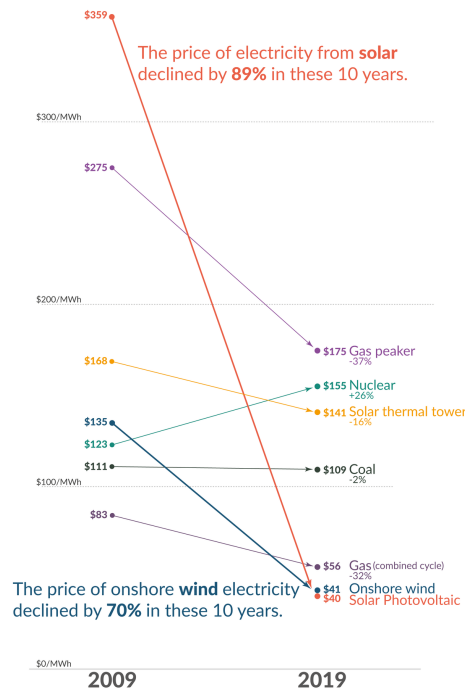


Figure 2: Falling cost of solar electricity vs Fossil Fuels [2]

Recent years have witnessed a dramatic decline in the cost of low-carbon electricity sources, particularly solar and wind power, as illustrated in Figure 2. This cost reduction has significantly enhanced the viability of transitioning to a low-carbon economy, yet substantial challenges persist in the so-called hard-to-abate sectors, among which marine shipping features prominently.

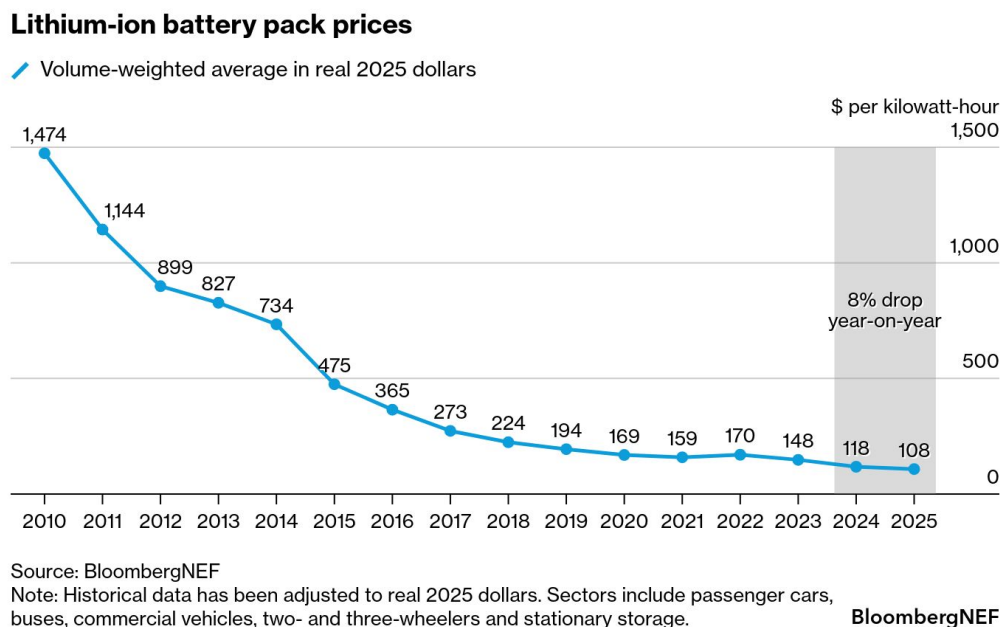


Figure 3: Falling cost of lithium ion battery packs [3]

The predominant method for storing electrical energy remains electrochemical batteries, with lithium-ion technology leading the charge. These batteries have increasingly displaced fossil fuels in passenger vehicles and, more recently, have begun penetrating short and medium-distance trucking applications [11]. This transformation has been driven largely by the precipitous decline in lithium battery prices, as demonstrated in Figure 3. The technology’s reach has even extended to inland shipping routes, where standardized and swappable battery packs are being deployed in China [12]. Major battery manufacturers such as CATL are making substantial investments in these markets, signaling confidence in the technology’s continued expansion [13].

However, despite remarkable advances in both price and energy density, lithium-ion batteries remain largely impractical for deep-sea shipping, which accounts for approximately 70% of marine shipping emissions [14]. The fundamental constraint lies in the current energy density limitations of lithium-ion technology, which ranges from 0.1 to 0.5 kWh/kg [15, 16]—substantially lower than gasoline, which can exceed 10 kWh/kg [17]. This considerable disparity in energy density presents a formidable barrier to the electrification of long-distance maritime transport.

In response to the energy density limitations of lithium-ion batteries, researchers and policymakers have increasingly explored the use of abundant and inexpensive solar electricity to produce alternative fuels, primarily through electrolysis. This approach has given rise to a diverse landscape of electro-fuel options, which can be systematically organized into four broad classifications:

- **Simple electro-fuels** - hydrogen and ammonia, which represent the most straightforward products of electrolytic processes

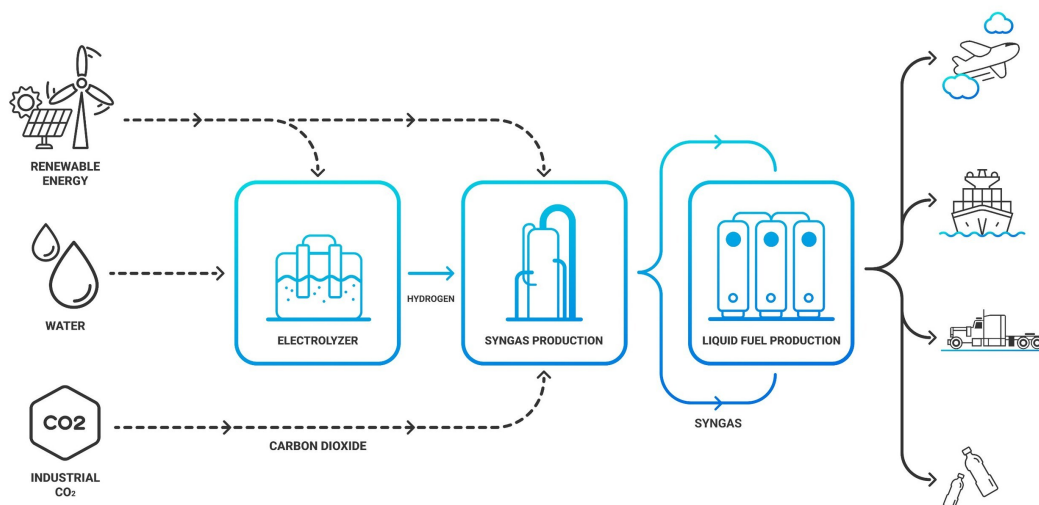


Figure 4: High Level Process Diagram for synthetic hydrocarbon production from renewable electricity [4]

- **Synthetic hydrocarbons** - primarily methane and methanol, whose production pathways are illustrated in Figure 4, which depicts the high-level process for synthesizing these fuels from low-carbon electricity

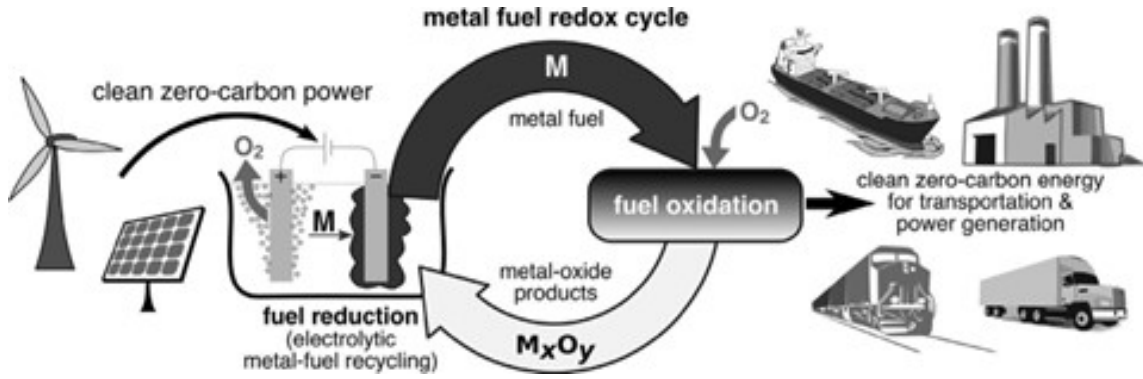


Figure 5: Metal based electro-fuels as secondary energy carriers [5]

- **Metal-based electro-fuels** - including iron, aluminium, magnesium, silicon, and boron. Figure 5 demonstrates the high-level process by which these metal-based electro-fuels can function as recyclable secondary energy carriers, offering a distinctive closed-loop energy storage paradigm
- **Metal hydrides (hydrogen carriers)** - such as MgH_2 , AlH_3 , $LiBH_4$, and $NaAlH_4$, providing an alternative means of storing and transporting hydrogen in a more dense and stable form than its gaseous state

In the following subsections, a preliminary analysis is conducted to compare the mass energy and volumetric energy densities of these various electro-fuel options in order to understand their viability for marine shipping applications.

1.1.1 High Level Energy Density Analysis

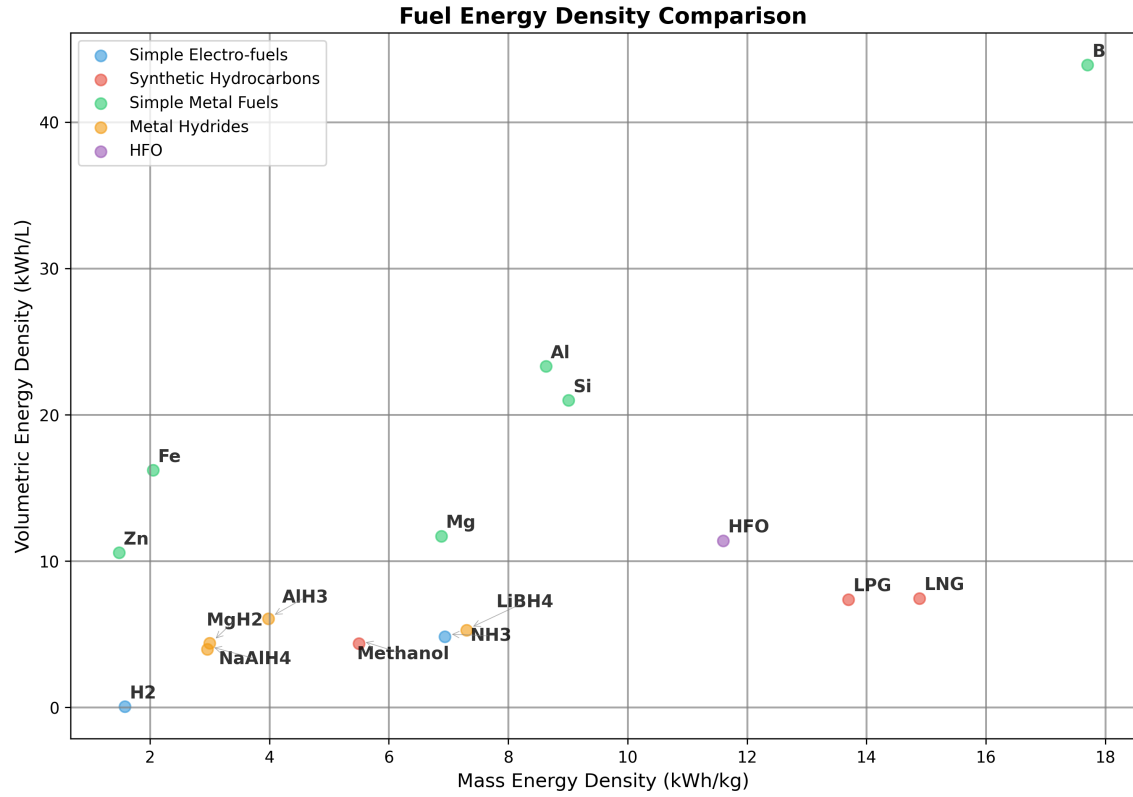


Figure 6: Simplified Energy Density Analysis. Data Analysis can be found in the Appendix. Adapted from [6]

Note: 1) Pressure Cylinder H2 is 25°Celsius 500 bar

2) Liquid NH3 is -33°Celsius 1 bar. Energy needed for cracking for NH3 to H2 is ignored in this table and all subsequent calculations.

Figure 6 presents the fuel energy density calculations for the various electro-fuel options currently under investigation for marine applications. Heavy Fuel Oil (HFO) serves as the reference fuel in these comparisons, as it remains the dominant fuel source for global marine shipping due to its low cost and widespread availability.

Hydrogen, which is being explored as a potential solution for several hard-to-decarbonise sectors including shipping and aviation, requires pressurisation at approximately 500 bar. This compression requirement drastically diminishes the fuel’s energy density, presenting significant challenges for practical implementation. Even methanol, which is considered a relatively straightforward drop-in replacement for marine shipping and has garnered substantial support from major shipping companies such as Maersk [18], exhibits significantly lower mass and volumetric energy densities compared to HFO.

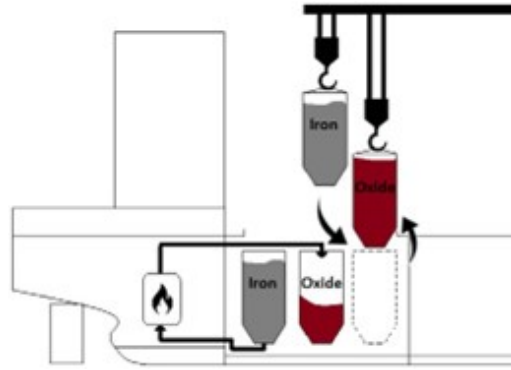


Figure 7: Proposed bunkering procedure for metal fuels (iron powder in this specific case) [7]

As illustrated in Figure 6, metal fuels demonstrate considerable promise in terms of both mass and volumetric energy densities, despite the relatively limited research effort devoted to their development. All metal fuels examined display higher volumetric energy densities than HFO, with boron demonstrating superior performance across all available electro-fuel options and surpassing even HFO itself. However, metal fuels present numerous complications that must be addressed for practical deployment. To make metal fuels economically viable, the metal oxide by-products generated during combustion cannot simply be discharged into the ocean. Instead, these by-products must be retained onboard the vessel and offloaded at ports for subsequent recycling using renewable energy sources, as shown in Fig 5. The bunkering procedure for a metal fuels system is depicted in Figure 7. It is crucial to recognise that energy density calculations which fail to account for the mass and volume of the metal oxide by-products can be highly misleading and do not reflect the true practical performance of these fuel systems.

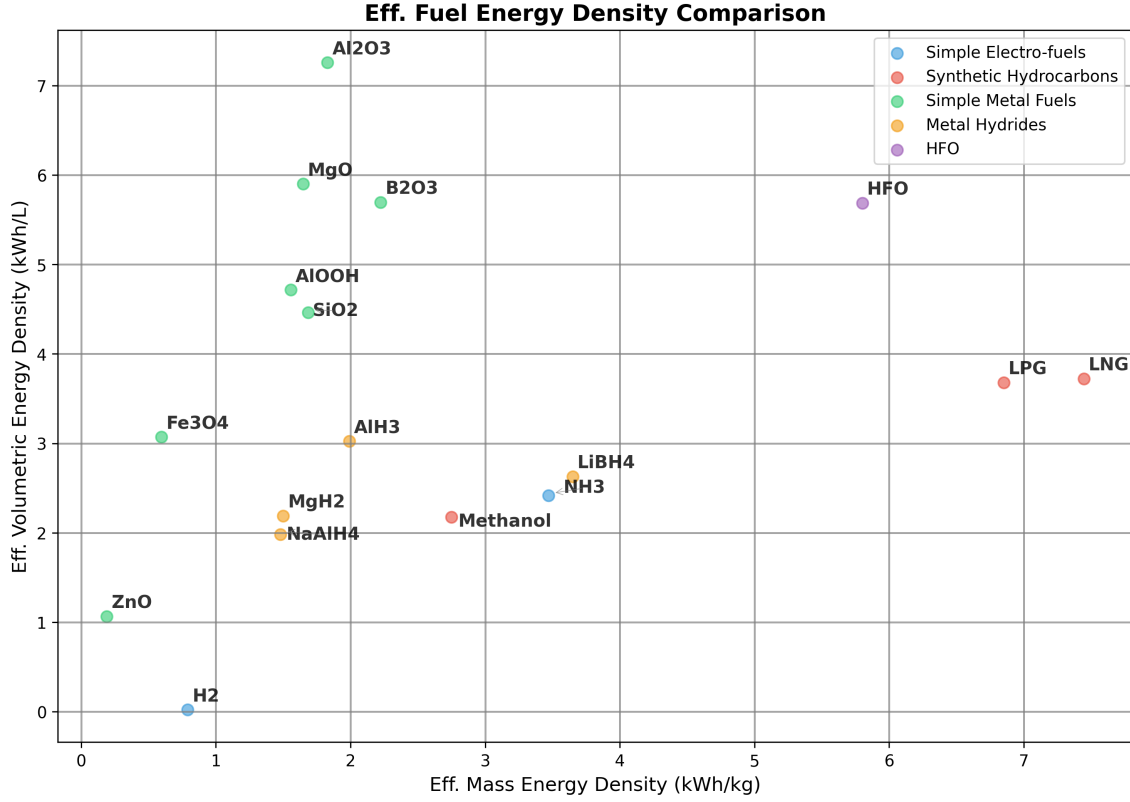


Figure 8: Effective Energy Density Analysis. Data Analysis can be found in the Appendix. Adapted from [6]

- Note: 1) Pressure Cylinder H₂ is 25°Celsius 500 bar*
2) Liquid NH₃ is -33°Celsius 1 bar. Energy needed for cracking for NH₃ to H₂ is ignored in this table and all subsequent calculations.
3) The engine efficiency for hydrogen and hydrocarbon combustion is assumed to be around 50%
4) The engine efficiency for the metal fuels is assumed to be 40%. This number is theoretically as no such system currently exists for marine shipping. More information about the metal combustion will be discussed in the following sections.
5) For the metal hydrides, the energy needed to free the stored hydrogen is not considered in this calculation.

1.1.2 Effective Energy Density Analysis

To gain a more comprehensive understanding of the practicality of the different electro-fuel options, an analysis of effective energy densities must be conducted. Effective energy density is defined as the energy density after accounting for engine efficiency, but in the case of metal fuels, it additionally incorporates the weight and volume associated with carrying the metal oxide by-products post-combustion. Figure 8 presents the results from the effective energy density analysis for the various electro-fuel options available. For metal fuels, the effective energy density represents the worst-case scenario of continuously carrying the by-products post-combustion throughout the voyage. In practice, the effective energy density for metal fuels will likely be higher than these calculations suggest, since the by-products can be partially offloaded at ports for collection and subsequent processing at metal reduction facilities.

It should be noted that this is a highly simplified analysis, as the mass and volume of the engines and metal reactors have been deliberately excluded from consideration. Furthermore, there is currently no real-world commercially available marine engine that utilises metal fuels, and therefore an efficiency of approximately 40% has been assumed for these calculations. The complete methodology and detailed calculations for the effective energy density analysis can be found in the Appendix.

As demonstrated in Figure 8, metal fuels remain competitive with the energy density of HFO even after accounting for the metal oxide by-products, particularly with respect to volumetric energy density. Although the mass energy density of the most promising metal fuel candidates, such as aluminium and silicon, remains lower than that of methanol, it is still substantially higher than commercially available electrochemical batteries. The superior volumetric energy densities are of particular significance, given that in practice the metal fuel system will necessitate two sets of storage tanks—one for storing the fuel and another for storing the by-products. This characteristic is also likely to prove advantageous for marine applications where space is at a premium, such as yachts, cruise ships, and container shipping. In later sections, the viability of using aluminium as a marine fuel is discussed in detail, given its promising performance following the effective energy density calculations.

1.2 Aluminium-Water Combustion

1.3 Reactor Design

Overview

1.3.1 Low-Temp Metal-Water Reactor

1.3.2 High-Temp Metal-Water Reactor

1.3.3 Summary and Comparison

1.4 Economics of Aluminium Fuel

2 Research Questions

3 Methodology

4 Proposed Project Timeline

5 References

- [1] K. A. Trowell, S. Goroshin, D. L. Frost, and J. M. Bergthorson, “Aluminum and its role as a recyclable, sustainable carrier of renewable energy,” *Appl. Energy*, vol. 275, p. 115112, Oct. 2020.
- [2] M. Roser, “Why did renewables become so cheap so fast?,” *Our World in Data*, 2020. <https://ourworldindata.org/cheap-renewables-growth>.
- [3] M. Maisch, “BNEF: Lithium-ion battery pack prices fall to \$108/kWh, stationary storage becomes lowest price segment - Energy Storage — ess-news.com.” <https://www.ess-news.com/2025/12/09/bnef-lithium-ion-battery-pack-prices-fall-to-108-kwh-stationary-storage-becomes-lowest-price-segment/#pid=1>. [Accessed 12-12-2025].
- [4] Infinium, “Infinium™ Enters into Strategic Alliance with Denbury for Ultra-Low Carbon Fuels Projects in Texas, Continuing Development Momentum — prnewswire.com.” <https://www.prnewswire.com/news-releases/infinium-enters-into-strategic-alliance-with-denbury-for-ultra-low-carbon-fuels-projects-in-texas-continuing-development-momentum-301489124.html>. [Accessed 13-01-2025].
- [5] J. M. Bergthorson, S. Goroshin, M. J. Soo, P. Julien, J. Palecka, D. L. Frost, and D. J. Jarvis, “Direct combustion of recyclable metal fuels for zero-carbon heat and power,” *Appl. Energy*, vol. 160, pp. 368–382, Dec. 2015.
- [6] “Combustion of Fuels - Carbon Dioxide Emission — engineeringtoolbox.com.” https://www.engineeringtoolbox.com/co2-emission-fuels-d_1085.html. [Accessed 10-01-2025].
- [7] J. de Kwant, R. Hekkenberg, A. Souflis-Rigas, and A. A. Kana, “Exploring the potential of iron powder as fuel on the design and performance of container ships,” *Int. Shipbuild. Prog.*, vol. 70, pp. 3–28, June 2023.
- [8] H. Ritchie, “Cars, planes, trains: where do co2 emissions from transport come from?,” *Our World in Data*, 2020. <https://ourworldindata.org/co2-emissions-from-transport>.
- [9] H. Ritchie, “Sector by sector: where do global greenhouse gas emissions come from?,” *Our World in Data*, 2020. <https://ourworldindata.org/ghg-emissions-by-sector>.

- [10] “2023 IMO Strategy on Reduction of GHG Emissions from Ships — imo.org.” <https://www.imo.org/en/OurWork/Environment/Pages/2023-IMO-Strategy-on-Reduction-of-GHG-Emissions-from-Ships.aspx>. [Accessed 24-10-2024].
- [11] C. McKerracher, “China’s Clean-Truck Surprise Defies the EV Slowdown Narrative — BloombergNEF — about.bnef.com.” <https://about.bnef.com/insights/clean-transport/chinas-clean-truck-surprise-defies-the-ev-slowdown-narrative/>. [Accessed 12-12-2025].
- [12] M. Barnard, “And So It Begins: 1,000-Kilometer Route Yangtze Container Ship With Swappable Batteries - CleanTechnica — cleantechnica.com.” <https://cleantechnica.com/2023/07/31/and-so-it-begins-1000-kilometer-route-yangtze-container-ship-with-swappable-batteries/>. [Accessed 12-12-2025].
- [13] M. P. Release, “Maersk and CATL Forge Global Strategic Partnership in Supply Chain Electrification and International Logistics — maersk.com.” <https://www.maersk.com/news/articles/2025/10/10/maersk-and-catl-forge-global-strategic-partnership-in-supply-chain>. [Accessed 12-12-2025].
- [14] “The New Energy Trade: Harnessing Australian renewables for global development — superpowerinstitute.com.au.” <https://www.superpowerinstitute.com.au/work/the-new-energy-trade>. [Accessed 26-11-2024].
- [15] B. Dunn, H. Kamath, and J.-M. Tarascon, “Electrical energy storage for the grid: a battery of choices,” *Science*, vol. 334, pp. 928–935, Nov. 2011.
- [16] F. T. Wagner, B. Lakshmanan, and M. F. Mathias, “Electrochemistry and the future of the automobile,” *J. Phys. Chem. Lett.*, vol. 1, pp. 2204–2219, July 2010.
- [17] J. M. Bergthorson, “Recyclable metal fuels for clean and compact zero-carbon power,” *Prog. Energy Combust. Sci.*, vol. 68, pp. 169–196, Sept. 2018.
- [18] “Maersk orders six methanol powered vessels — maersk.com.” <https://www.maersk.com/news/articles/2023/06/26/maersk-orders-six-methanol-powered-vessels>. [Accessed 13-01-2025].