

Aluminium-Water Combustion for Zero Carbon Marine Shipping: PhD Proposal

Md Nadim Ahmed

September 13, 2026

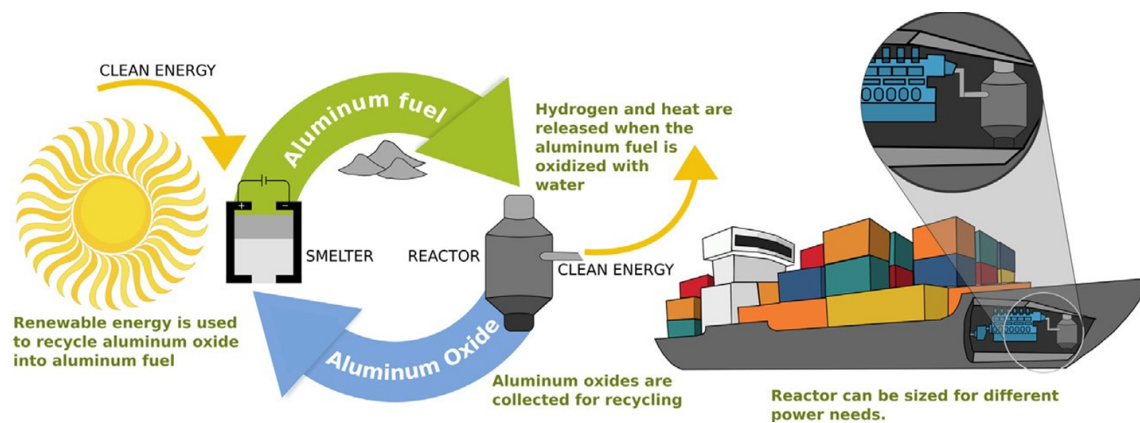


Figure 1: Aluminium powder as maritime shipping fuel (Energy Life-cycle). Adapted from [1]

Abstract

Maritime shipping contributes 2–3% of global GHG emissions, with deep-sea routes consuming approximately 70% of sector fuel. Electrofuel alternatives have lower volumetric energy density than heavy fuel oil, and Li-ion batteries are impractical at ocean scale. This study investigates aluminium-water combustion via a high-temperature metal-water reactor (HT-MWR) as a zero-carbon marine propulsion technology, addressing five literature gaps.

First, no validated engineering requirements dataset exists for aluminium-water propulsion in any marine vessel class. Through semi-structured interviews with superyacht builders, naval architects, classification societies, and vessel owners, this study produces the first such matrix. The superyacht segment is identified as the optimal commercialisation beachhead: unlike container shipping’s decade-long IMO approval process, superyacht classification uses a flexible, risk-based framework, and UHNW client tolerance for a green premium mirrors Tesla’s pathway to deep-sea deployment.

Second, prior fuel comparisons rely on global-average cost and emissions figures that conceal pathway variation. This study produces a pathway-resolved comparison of ammonia, methanol, and aluminium on emissions intensity, carbon-tax-adjusted delivered cost, and infrastructure readiness, benchmarked against heavy fuel oil under three carbon-pricing scenarios and two green-electricity price trajectories.

Third, prior HT-MWR research has addressed only stationary baseload applications. This study provides the first steady-state characterisation under marine propulsion conditions, covering reaction parameter optimisation, particle size screening, and by-product composition across marine-relevant temperature, pressure, and fuel-to-water ranges. Tier 2 investigations extend this to synthetic and natural seawater.

Fourth, no prior work has characterised HT-MWR dynamic behaviour. A microcontroller-based closed-loop controller is developed and validated on a fixed-batch reactor, quantifying response lag, rise time, settling time, overshoot, and stability across discrete power modes. Open-loop data establish the raw plant dynamics—gain, time constant, and dead-time—enabling mode granularity optimisation and bounding battery energy and power requirements for future hybrid-electric integration.

Fifth, a systematic trade-off analysis compares candidate prime movers and thermal integration pathways, using the transient data to specify the minimum viable battery buffer. Together, these contributions establish the technical and commercial foundation for the first prototype aluminium-water marine propulsion system.

Table of Contents

1	Research Background	6
1.1	Preliminary Analysis of Electro-Fuels Options	6
1.1.1	High Level Energy Density Analysis	10
1.1.2	Effective Energy Density Analysis	13
1.2	Aluminium-Water Combustion	14
1.3	Reactor Design	15
1.3.1	Low Temperature Metal-Water Reactors	17
1.3.2	High Temperature Metal-Water Reactor	18
1.3.3	Summary Tables	21
1.4	Reactant Selection: Seawater versus Distilled Water	22
1.5	Economics of Aluminium Fuel	23
1.5.1	The Long Term Trends	23
1.5.2	The Emerging Green Aluminium Supply Chain	24
1.6	Technology Development Pathway	26
1.6.1	Barriers to Entry in Container Shipping	26
1.6.2	Luxury Yachts and Superyachts as an Ideal Beachhead	26
1.6.3	Regulatory Pathway and Certification Advantages	28
1.6.4	Pathway to Broader Adoption	28
2	Research Questions	29
2.1	System Requirements for Yacht Applications	29
2.2	Supply Chain Analysis	30
2.3	Core Reactor Characterisation	32
2.4	Control Systems Development	36
2.5	Engine and Battery System Analysis	38
2.6	Scope of This Research	40
3	Methodology	44
3.1	Industry Research	44
3.2	Supply Chain Analysis	48
3.3	Core Reactor Characterisation	52
3.4	Metal-Water Reactor Control Systems	55
3.5	Engine and Battery System Analysis	60
4	Proposed Project Time-line	66
5	References	74

Appendix A:	Laboratory Safety Protocols and Experimental Plan Verification	80
A.1	Safety Protocols	80
A.1.1	Aluminium Powder Hazards	80
A.1.2	Hydrogen Gas Hazards	80
A.1.3	High-Pressure and High-Temperature Hazards	81
A.1.4	Reactor Fouling Control and Cleaning Protocol	82
A.1.5	General Laboratory Controls	85
A.2	Experimental Plan Verification and University Approval	85
A.2.1	Internal Peer Review	85
A.2.2	University Laboratory Safety Approval	85
Appendix B:	Energy Density Analysis Code	86
B.1	Python Analysis Script	86
B.2	Fuel Dataset	92
Appendix C:	Industry Partnership and Funding Model	97
C.1	Target Partner Categories	97
C.2	Partnership Tiers	97
C.3	What the Project Offers Partners	98
C.4	Governance and Boundaries	98
C.5	Alignment with Project Timeline	99

List of Tables

1	Comparison of different Al–H ₂ O by-product scenarios. Adapted from [11, 12, 23, 32, 13, 1]	19
2	Volumetric Energy Densities of different Al–H ₂ O combustion scenarios. Adapted from [11, 12, 33, 34, 35, 36, 37]	19
3	Comparison of Low Temperature Metal-Water Reactors (LT-MWR) and High Temperature Metal-Water Reactors (HT-MWR)	21
4	Production Pathways, Market Share, and Maturity	31
5	Scope of This Research: In-Scope vs. Out-of-Scope Activities	43
6	Project Timeline Phases	67
7	Go/No-Go Gate Summary	68
8	Target industry partner categories and primary contributions.	98
9	Alignment of partnership activity with project phases.	99

List of Figures

1	Aluminium powder as maritime shipping fuel (Energy Life-cycle). Adapted from [1]	1
2	Falling cost of solar electricity vs Fossil Fuels [5]	6
3	Falling cost of lithium ion battery packs [6]	7
4	High Level Process Diagram for synthetic hydrocarbon production from renewable electricity [14]	8
5	Metal based electro-fuels as secondary energy carriers [15]	9
6	Simplified Energy Density Analysis. Data Analysis can be found in the Appendix. Adapted from [16]	10
7	Proposed bunkering procedure for metal fuels (iron powder in this specific case) [18]	11
8	Effective Energy Density Analysis. Data Analysis can be found in the Appendix. Adapted from [16]	12
9	Simplified Overview of Metal-Water Propulsion System[23]	15
10	Schematic of the three reaction stages of aluminium with water at low temperatures, including a sketch of the initial dry particle for reference. Also sketched is the characteristic hydrogen-production curve showing the induction, rapid oxidation, and quenching stages [13]	16
11	Al–H ₂ O reaction transition diagram extrapolated to 10 MPa. Labels E1-E4 show conditions used for experimental validation [38]	20
12	Aluminium fuel vs other electrofuels and diesel (The bars show the price of energy derived from low-carbon energy carriers, if the input electricity price were set to \$36/MWh (dark blue) or \$26/MWh (light blue). The pale region at the top of each bar represents the uncertainty related to the required inputs.) [1]	23
13	Modern Electric Yachts with Integrated Solar Panels [51]	27
14	The Gotland Horizon X By Austal Panels [52]	27

1 Research Background

Overview

Maritime shipping plays a crucial role in global trade, facilitating around 80% of all commerce [2]. This makes it essential for globalization, economic development, and maintaining living standards. However, the sector also contributes significantly to global greenhouse gas emissions, accounting for 2-3% of global emissions and approximately 10% of all transport-related emissions [3, 2].

In response, the International Maritime Organization (IMO) has set ambitious targets to curb emissions from international shipping. By 2030, the IMO aims to reduce annual greenhouse gas emissions by 20-30% compared to 2008 levels, with a more aggressive target of 70-80% reduction by 2040 [4].

1.1 Preliminary Analysis of Electro-Fuels Options

Overview

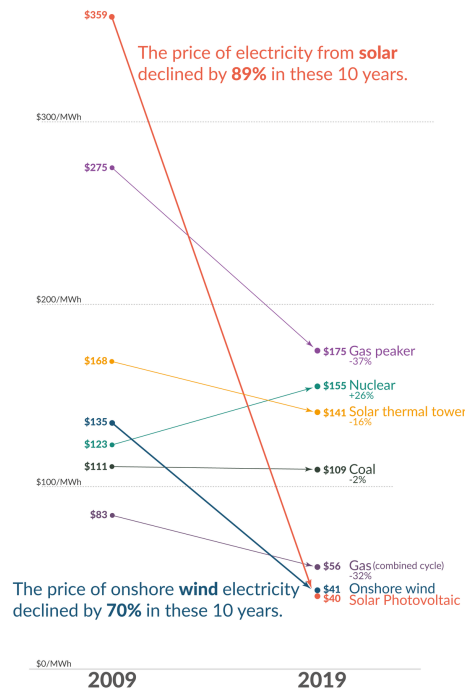


Figure 2: Falling cost of solar electricity vs Fossil Fuels [5]

Recent years have witnessed a dramatic decline in the cost of low-carbon electricity sources, particularly solar and wind power, as illustrated in Figure 2. This cost reduction has significantly enhanced the viability of transitioning to a low-carbon economy, yet substantial challenges persist in the so-called hard-to-abate sectors, among which marine shipping features prominently.

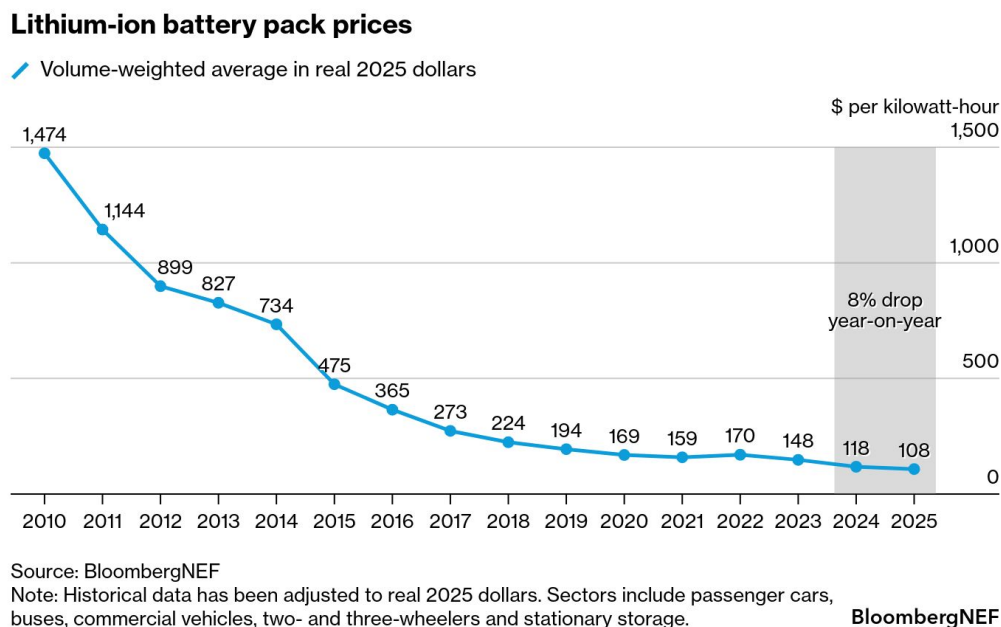


Figure 3: Falling cost of lithium ion battery packs [6]

The predominant method for storing electrical energy remains electrochemical batteries, with lithium-ion technology leading the charge. These batteries have increasingly displaced fossil fuels in passenger vehicles and, more recently, have begun penetrating short and medium-distance trucking applications [7]. This transformation has been driven largely by the precipitous decline in lithium battery prices, as demonstrated in Figure 3. The technology’s reach has even extended to inland shipping routes, where standardized and swappable battery packs are being deployed in China [8]. Major battery manufacturers such as CATL are making substantial investments in these markets, signaling confidence in the technology’s continued expansion [9].

However, despite remarkable advances in both price and energy density, lithium-ion batteries remain largely impractical for deep-sea shipping, which accounts for approximately 70% of marine shipping emissions [10]. The fundamental constraint lies in the current energy density limitations of lithium-ion technology, which ranges from 0.1 to 0.5 kWh/kg [11, 12]—substantially lower than gasoline, which can exceed 10 kWh/kg [13]. This considerable disparity in energy density presents a formidable barrier to the electrification of long-distance maritime transport.

In response to the energy density limitations of lithium-ion batteries, researchers and policymakers have increasingly explored the use of abundant and inexpensive solar electricity to produce alternative fuels, primarily through electrolysis. This approach has given rise to a diverse landscape of electro-fuel options, which can be systematically organized into four broad classifications:

- **Simple electro-fuels** - hydrogen and ammonia, which represent the most straightforward products of electrolytic processes

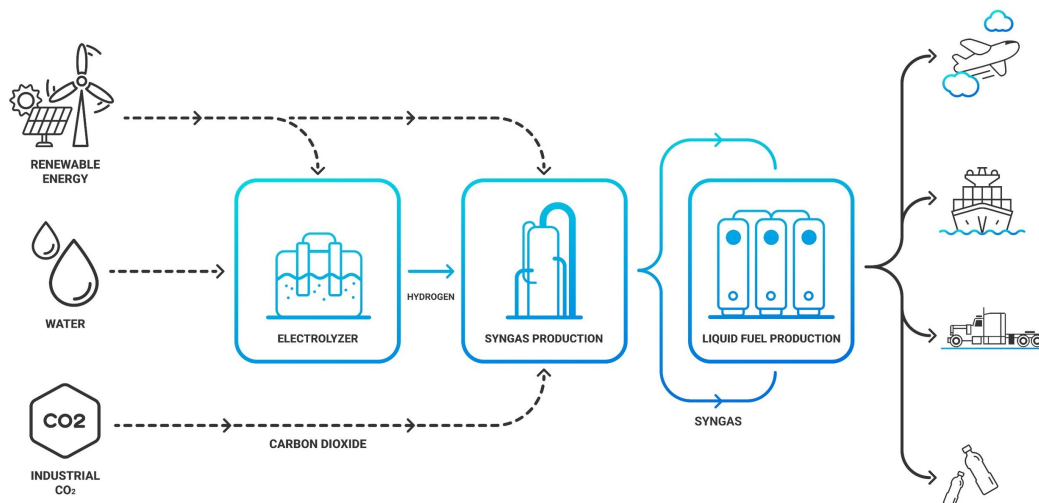


Figure 4: High Level Process Diagram for synthetic hydrocarbon production from renewable electricity [14]

- **Synthetic hydrocarbons** - primarily methane and methanol, whose production pathways are illustrated in Figure 4, which depicts the high-level process for synthesizing these fuels from low-carbon electricity

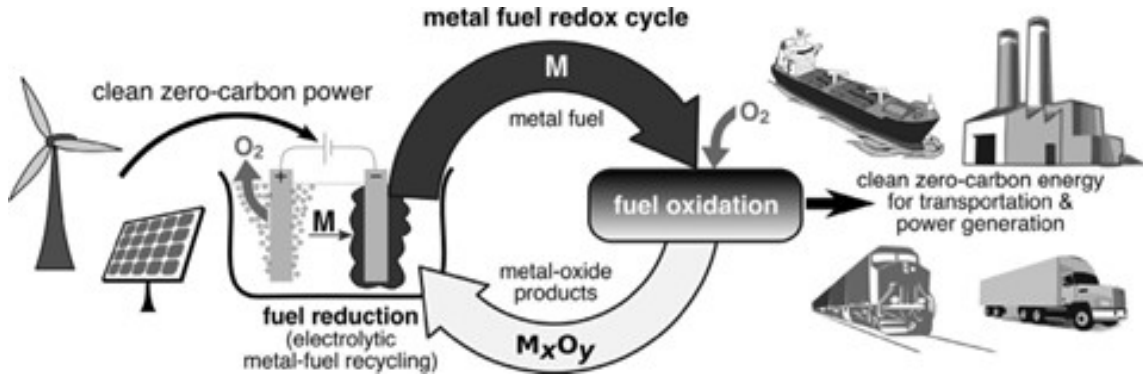


Figure 5: Metal based electro-fuels as secondary energy carriers [15]

- **Metal-based electro-fuels** - including iron, aluminium, magnesium, silicon, and boron. Figure 5 demonstrates the high-level process by which these metal-based electro-fuels can function as recyclable secondary energy carriers, offering a distinctive closed-loop energy storage paradigm
- **Metal hydrides (hydrogen carriers)** - such as MgH₂, AlH₃, LiBH₄, and NaAlH₄, providing an alternative means of storing and transporting hydrogen in a more dense and stable form than its gaseous state

In the following subsections, a preliminary analysis is conducted to compare the mass energy and volumetric energy densities of these various electro-fuel options in order to understand their viability for marine shipping applications.

1.1.1 High Level Energy Density Analysis

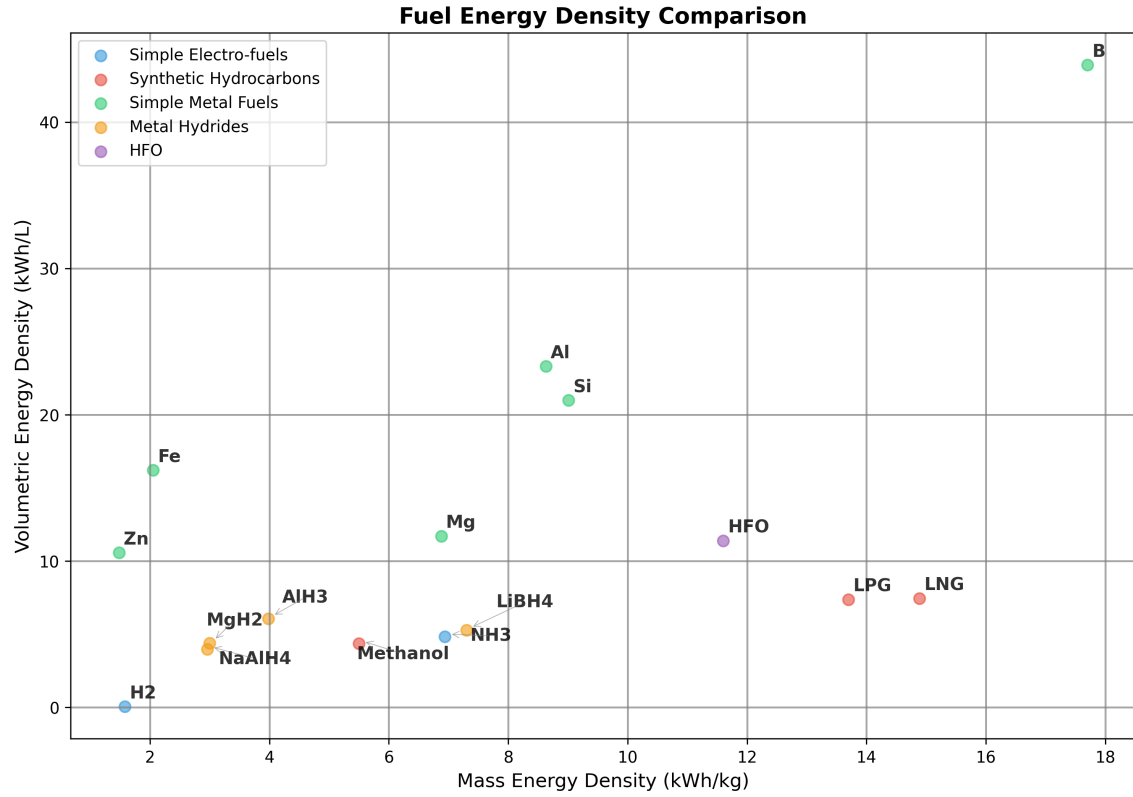


Figure 6: Simplified Energy Density Analysis. Data Analysis can be found in the Appendix. Adapted from [16]

Note: 1) Pressure Cylinder H₂ is 25°Celsius 500 bar

2) Liquid NH₃ is -33°Celsius 1 bar. Energy needed for cracking for NH₃ to H₂ is ignored in this table and all subsequent calculations.

Figure 6 presents the fuel energy density calculations for the various electro-fuel options currently under investigation for marine applications. Heavy Fuel Oil (HFO) serves as the reference fuel in these comparisons, as it remains the dominant fuel source for global marine shipping due to its low cost and widespread availability.

Hydrogen, which is being explored as a potential solution for several hard-to-decarbonise sectors including shipping and aviation, requires pressurisation at approximately 500 bar. This compression requirement drastically diminishes the fuel’s energy density, presenting significant challenges for practical implementation. Even methanol, which is considered a relatively straightforward drop-in replacement for marine shipping and has garnered substantial support from major shipping companies such as Maersk [17], exhibits significantly lower mass and volumetric energy densities compared to HFO.

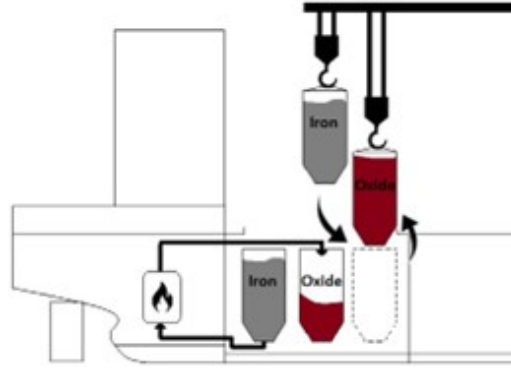


Figure 7: Proposed bunkering procedure for metal fuels (iron powder in this specific case) [18]

As illustrated in Figure 6, metal fuels demonstrate considerable promise in terms of both mass and volumetric energy densities, despite the relatively limited research effort devoted to their development. All metal fuels examined display higher volumetric energy densities than HFO, with boron demonstrating superior performance across all available electro-fuel options and surpassing even HFO itself. However, metal fuels present numerous complications that must be addressed for practical deployment. To make metal fuels economically viable, the metal oxide by-products generated during combustion cannot simply be discharged into the ocean. Instead, these by-products must be retained onboard the vessel and offloaded at ports for subsequent recycling using renewable energy sources, as shown in Fig 5. The bunkering procedure for a metal fuels system is depicted in Figure 7. It is crucial to recognise that energy density calculations which fail to account for the mass and volume of the metal oxide by-products can be highly misleading and do not reflect the true practical performance of these fuel systems.

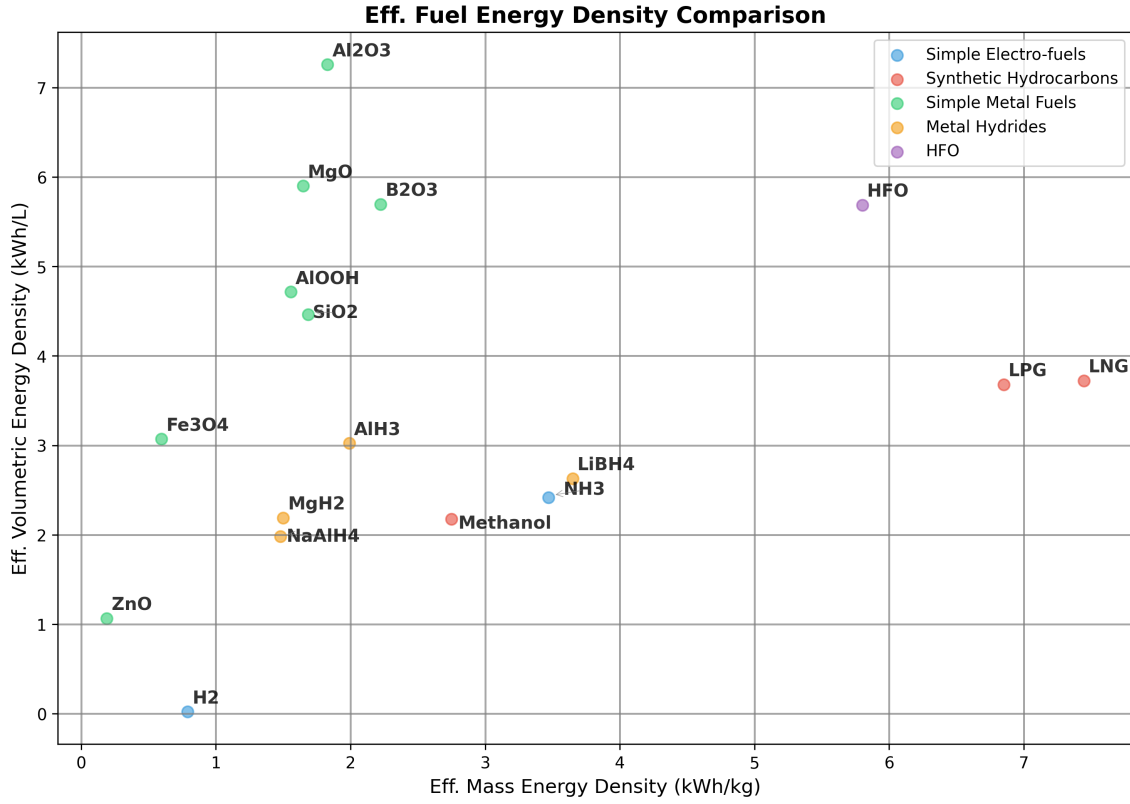


Figure 8: Effective Energy Density Analysis. Data Analysis can be found in the Appendix. Adapted from [16]

Note: 1) Pressure Cylinder H₂ is 25°Celsius 500 bar

2) Liquid NH₃ is -33°Celsius 1 bar. Energy needed for cracking for NH₃ to H₂ is ignored in this table and all subsequent calculations.

3) The engine efficiency for hydrogen and hydrocarbon combustion is assumed to be around 50%

4) The engine efficiency for the metal fuels is assumed to be 40%. This number is theoretical as no such system currently exists for marine shipping. More information about the metal combustion will be discussed in the following sections.

5) For the metal hydrides, the energy needed to free the stored hydrogen is not considered in this calculation.

1.1.2 Effective Energy Density Analysis

To gain a more comprehensive understanding of the practicality of the different electro-fuel options, an analysis of effective energy densities must be conducted. Effective energy density is defined as the energy density after accounting for engine efficiency, but in the case of metal fuels, it additionally incorporates the weight and volume associated with carrying the metal oxide by-products post-combustion. Figure 8 presents the results from the effective energy density analysis for the various electro-fuel options available. For metal fuels, the effective energy density represents the worst-case scenario of continuously carrying the by-products post-combustion throughout the voyage. In practice, the effective energy density for metal fuels will likely be higher than these calculations suggest, since the by-products can be partially offloaded at ports for collection and subsequent processing at metal reduction facilities.


It should be noted that this is a highly simplified analysis, as the mass and volume of the engines and metal reactors have been deliberately excluded from consideration. Furthermore, there is currently no real-world commercially available marine engine that utilises metal fuels, and therefore an efficiency of approximately 40% has been assumed for these calculations. The complete methodology and detailed calculations for the effective energy density analysis can be found in the Appendix.

As demonstrated in Figure 8, metal fuels remain competitive with the energy density of HFO even after accounting for the metal oxide by-products, particularly with respect to volumetric energy density. Although the mass energy density of the most promising metal fuel candidates, such as aluminium and silicon, remains lower than that of methanol, it is still substantially higher than commercially available electrochemical batteries. The superior volumetric energy densities are of particular significance, given that in practice the metal fuel system will necessitate two sets of storage tanks—one for storing the fuel and another for storing the by-products. This characteristic is also likely to prove advantageous for marine applications where space is at a premium, such as yachts, cruise ships, and container shipping. In later sections, the viability of using aluminium as a marine fuel is discussed in detail, given its promising performance following the effective energy density calculations.

1.2 Aluminium-Water Combustion

Using the energy density analysis from the previous sub-section, aluminium metal emerges as the most promising candidate for use in marine applications. Although it cannot match HFO and other fossil fuels in terms of mass energy density, it demonstrates competitive performance with respect to volumetric energy density. The higher volumetric energy density of aluminium fuel is particularly advantageous for marine applications where space is at a premium, such as yachts, cruise ships, and container ships. Additionally, in practice, the vessel will utilise two storage tanks—one for storing the aluminium powder fuel and another for storing the aluminium oxide by-product, which can be collected later at ports or refuelling stations for recycling.

Aluminium offers several other significant advantages that make it an attractive fuel candidate. It is the third most abundant metal in the Earth’s crust, ensuring long-term availability and resource security [1, 19]. Furthermore, aluminium production is already a massive global industry, as the metal’s properties make it exceptionally useful across numerous applications. There exists a well-established electrochemical process for producing aluminium from aluminium oxide, known as the Hall-Héroult process. This industrial process can be rendered entirely zero-carbon if the electricity is sourced from renewable energy and the electrolyzers make use of inert anodes, thereby eliminating carbon emissions from the production cycle [20].



Equation 1 demonstrates how aluminium reacts with water to produce heat and hydrogen gas. Equation 2 subsequently shows how this hydrogen gas can then be combusted to produce water and additional heat. Together, these equations reveal that to utilise the full chemical energy potential of the aluminium-water system, both the heat generated from the metal-water reaction and the heat produced from the hydrogen combustion must be harnessed. This metal-water reaction, also known as wet cycle combustion, has already found application in several specialized domains, including ALICE rockets developed for NASA [21] and underwater propulsion applications employed by the American and Russian militaries [22].

1.3 Reactor Design

Overview

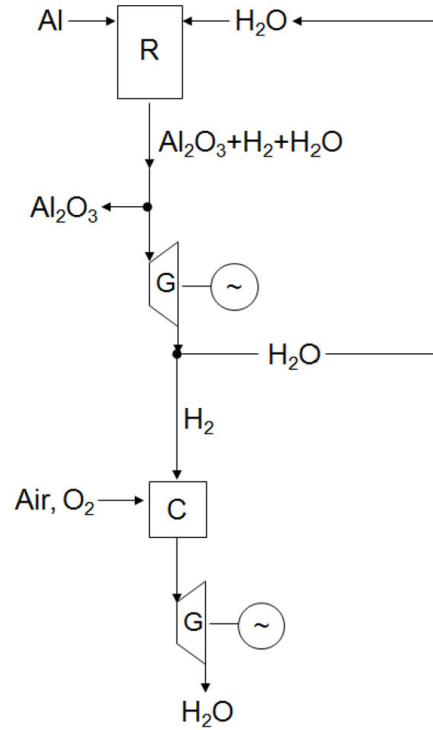


Figure 9: Simplified Overview of Metal-Water Propulsion System[23]

Note: R = metal-water reactor, G = steam generator, C = hydrogen combustion chamber

The metal-water propulsion system, as illustrated in Fig 9, demonstrates a novel approach to maritime propulsion. In this system, seawater from the ocean is mixed with aluminium powder from the fuel tank within a specialized metal-water reactor. The resulting reaction generates three key outputs: hydrogen, thermal heat, and aluminium oxide by-product, with the latter being separated into a dedicated storage tank. The system harnesses energy through two pathways: the thermal heat is utilized to drive a steam engine, while the produced hydrogen can be combusted in a separate chamber to generate high-temperature steam for powering an additional steam engine.

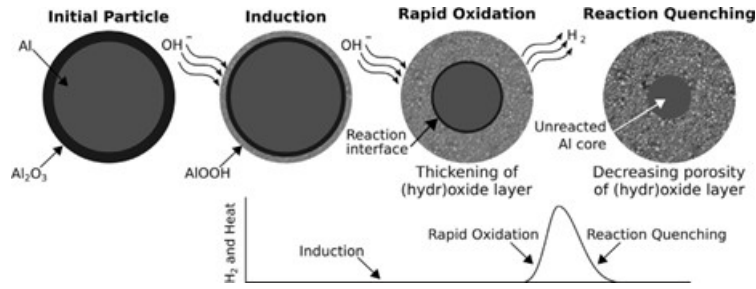


Figure 10: Schematic of the three reaction stages of aluminium with water at low temperatures, including a sketch of the initial dry particle for reference. Also sketched is the characteristic hydrogen-production curve showing the induction, rapid oxidation, and quenching stages [13]

Fig 10 illustrates the reaction pathway for the low temperature aluminium-water reaction, depicting an aluminium particle encased by a thin, inert aluminium oxide coating that must be overcome to facilitate metal-water oxidation. The metal-water reactor design requires careful optimization to achieve appropriate reaction rates for marine propulsion applications, while simultaneously maximizing hydrogen yield to enhance both the efficiency and mass energy density of the aluminium fuel.

The reaction rate and hydrogen yield can be enhanced through:

- Increased temperature and/or pressure conditions
- Reduced aluminium powder particle size
- Reduced aluminium powder to water ratio
- Implementation of various catalysts (detailed in following sub-section) [13, 23, 24]

1.3.1 Low Temperature Metal-Water Reactors

The aluminium-water reaction pathway for hydrogen generation has garnered significant international research attention, with most approaches focusing on nano-sized aluminium powder combined with catalysts at low temperatures. This approach involves reducing the aluminium powder to nano-sized particles and employing various catalytic methods such as alkaline solutions and ball milling the aluminium powder with other metals such as lithium and gallium, or salts such as NaCl. The primary aim of these methods is to increase the exposed surface area of the aluminium particles and prevent the protective layer of aluminium oxide from stopping or slowing down the reaction [25, 24]. This enables the metal-water reaction to take place below 120°C. Companies such as Found Energy are working to facilitate the metal-water reaction at room temperature and pressure [26].

This metal-water reactor design comes with both advantages and disadvantages. One advantage is that the reaction takes place quickly and enables the system to rapidly increase or decrease energy output to meet shifting load demands. However, this design also presents significant disadvantages:

- **High fuel production costs:** The production of nano-sized particles that also need to be ball milled with catalyst metals or salts requires an entire production chain and is likely to increase fuel costs substantially [27].
- **Elevated transport and handling costs:** The high reactivity of the nano-sized particles with water is likely to make transport and handling costs very high, as the metal reacts with water to produce hydrogen, which is a highly combustible gas and can independently contribute to climate change [28]. The higher production and handling costs for the fuel are likely to damage the economic case for this technology, since fuel costs constitute a large percentage of the operating costs for marine shipping, which is also a low-margin industry.

- **Low-grade heat output and reduced energy density:** As discussed in the previous sections, approximately half of the chemical potential energy of the aluminium metal is released as heat when reacted with water (as shown in equations 1 and 2). To maximise the round-trip efficiency of the metal-water reactor, this heat energy must be utilised for engine power. However, in these low-temperature reactors, the heat output is low-grade and unsuitable for use in traditional and high-efficiency steam engines [25]. The low-grade heat could be used by Stirling engines, but these engines have low power-to-weight ratios and have not been mass-produced so far like other heat engines such as diesel or gas turbines have [29]. The low-grade heat could also perhaps be upgraded using heat pumps and used in conjunction with Organic Rankine Cycle engines, but this increases the system complexity and the technology risks for the entire system [30]. The inability to utilise the low-grade heat also reduces the effective mass and volumetric energy density of the metal fuel by half.

Although the low-grade heat cannot be used for engine power, it can be used for other heating applications such as hot water production or indoor spas [31]. These applications are particularly useful in the yacht and cruise ship markets.

1.3.2 High Temperature Metal-Water Reactor

High-temperature metal-water reactors operate at 250–400°C and 15–25 MPa for optimal reaction rates [27]. These reactors can use micron-sized particles instead of nano-sized particles as in the case of low-temperature metal-water reactors. Although high-temperature metal-water reactors have garnered less research focus relative to low-temperature reactors, they come with some significant advantages, especially relating to marine shipping applications:

- **Lower fuel production costs:** Micron-sized particles are much cheaper and simpler to produce industrially compared to nano-sized particles [27, 23, 25].
- **Improved fuel handling and transport:** The micron-sized particles are also inert at room temperature and pressure, as opposed to nano-sized particles which can readily react with water at room temperature (depending on the catalytic process that is being used). Because of the fuel’s inert nature, it makes them easier to transport and handle, which further improves the economic case for these reactors.

- **High-grade heat output and improved energy efficiency:** High-temperature reactors produce high-grade heat output in the form of a steam and hydrogen mixture. This high-grade heat can be used to power high-efficiency steam engines, which nearly doubles the round-trip energy efficiency of aluminium as a secondary energy carrier [25]. It also increases the mass and volumetric energy densities of the aluminium fuel as more useful energy can be created using the same kilogram of fuel.

Fuel Type	Fuel Mass Density (kWh/kg)	Engine Efficiency	By-Product to Fuel Weight Ratio	Final Energy Density (kWh/kg)
Al powder (ref.)	8.61	0.40 (ass.)	x	3.44
Al(OH) ₃ by-product	8.61	0.40 (ass.)	2.89	1.19
AlOOH by-product	8.61	0.40 (ass.)	2.22	1.55
Al ₂ O ₃ by-product	8.61	0.40 (ass.)	1.89	1.82

Table 1: Comparison of different Al–H₂O by-product scenarios. Adapted from [11, 12, 23, 32, 13, 1]

Fuel Type	Volume Density (kg/L)	Final Volumetric Energy Density (kWh/L)
Al powder (ref.)	2.7	9.30
Al(OH) ₃ by-product	2.42	2.88
AlOOH by-product	3.03	4.70
Al ₂ O ₃ by-product	3.97	7.23

Table 2: Volumetric Energy Densities of different Al–H₂O combustion scenarios. Adapted from [11, 12, 33, 34, 35, 36, 37]

- **Superior metal oxide by-product:** The aluminium-water reaction can produce three main by-products: Al(OH)₃, AlOOH, and Al₂O₃. The by-product produced can change the effective mass energy density of the fuel system. The lowest energy density happens with Al(OH)₃, while the highest is with Al₂O₃, as shown in Tables 1 and 2. In Fig 11 we can see that as temperature and pressure increase, the probability of producing Al₂O₃ instead of Al(OH)₃ increases, thus further increasing the effective mass and volumetric energy density of the aluminium fuel system. Al₂O₃ can also be used directly as the input in the Hall-Héroult process, as opposed to Al(OH)₃, which needs to be processed into Al₂O₃ first [31].

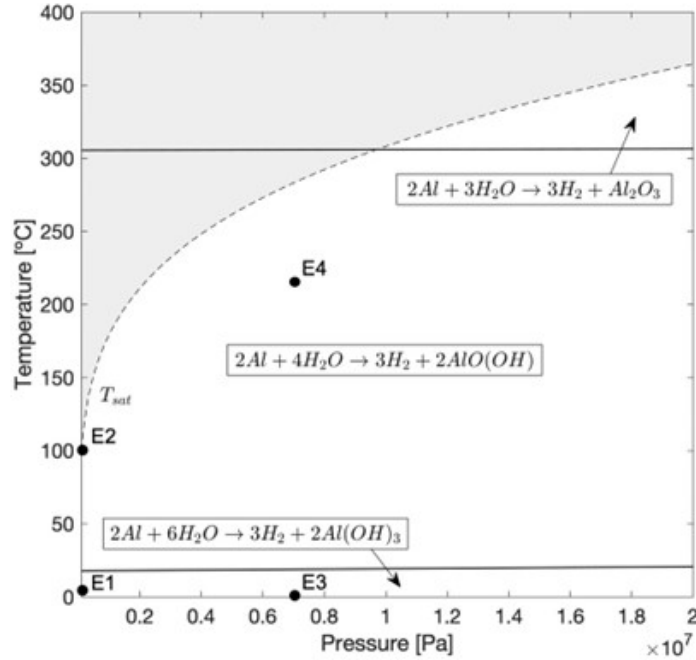


Figure 11: Al–H₂O reaction transition diagram extrapolated to 10 MPa. Labels E1-E4 show conditions used for experimental validation [38]

However, high-temperature reactors come with their own disadvantages:

- **Extended reactor start-up time:** It could take some time for the reactor to heat up, which can be up to 15–30 minutes depending on the size of the reactor. This problem can be mitigated by the use of hybrid electric propulsion using electrochemical batteries that work as a buffer storage system as the reactor heats up. Hybrid electric systems can mitigate the impact on performance and manoeuvrability caused by the longer start-up time. These hybrid electric systems have been widely used in the automotive sector for decades and have already been gaining traction in the marine shipping sector [39]. Hybrid electric designs were also used to manage the longer start-up time for aluminium powder powered submarine and UUV systems that were researched by the American military [22].
- **Higher reactor manufacturing costs:** The reactor for the high-temperature system is likely to be more expensive since it needs to handle the higher temperature and pressure.

1.3.3 Summary Tables

Parameter	LT-MWR	HT-MWR
Particle Size	Nano-sized particles	Micron-sized particles
Catalysts	Range of special alloys (Li, Ga, Hg, etc.)	No catalysts
Temperature and Pressure	Below 120°C (can operate at room temperature depending on catalyst)	250–400°C and 15–25 MPa
Metal By-product	Al(OH) ₃ or AlOOH	AlOOH or Al ₂ O ₃
Worst Case Mass Energy Density	0.60 or 0.78 kWh/kg	1.55 or 1.82 kWh/kg
Worst Case Volumetric Energy Density	1.44 or 2.35 kWh/L	4.70 or 7.23 kWh/L
Thermal Heat Utilization	Difficult due to low temperature	Possible with simple steam turbines
Fuel Production Costs	Higher (smaller particles and ball milling alloys)	Lower (larger particles and low catalysts)
Round-trip Energy Eff.	11–13% (if no heat is utilized)	23–25%
Fuel Transport Costs	Higher (very reactive at room temp.)	Lower (mostly inert at room temperature)
Fuel Handling Safety	Lower	Higher
Reactor Costs	Lower	Higher (to withstand high temperature & pressure)
Reactor Start-up Time	Lower (ability to load follow)	15–30 minutes (better for baseloads)

Table 3: Comparison of Low Temperature Metal-Water Reactors (LT-MWR) and High Temperature Metal-Water Reactors (HT-MWR)

1.4 Reactant Selection: Seawater versus Distilled Water

A key design decision is whether the reactant water comes from the ocean or is supplied as distilled water. While seawater appears attractive, historical precedent and certification pathways favour distilled water for a Generation-1 prototype.

Historical Precedent

Early steamships used seawater directly, but salt scaling and corrosion caused frequent failures as pressures rose. The surface condenser solved this: exhaust steam condensed back to distilled water for reuse. By the 1860s, designs like Alexander Chaplin & Co.'s were used on major lines. The British Admiralty formalised distilled feedwater in the 1880s, and G. & J. Weir built the first marine evaporator in 1884. By 1900, distilled water was standard – driven by reliability, not regulation.

Reactor Implications

Seawater introduces chlorides, sulphates, and biological matter that affect passivation, by-product composition, and fouling. For a Generation-1 system, distilled water offers three advantages:

1. **Simpler design** – predictable reactant enables closed-loop recycling (condensing H_2 exhaust), avoiding variable water quality.
2. **Lower technology risk** – isolates reactor from seawater chemistry, producing clean data comparable to prior McGill and Russian work.
3. **Easier certification** – classification societies prefer well-defined inputs for one-off builds (Section 1.6.3).

Research Prioritisation

The experimental programme (Section 3.3) prioritises distilled water as Tier 1 – the core needed for optimisation, by-product characterisation, and transient control. Seawater experiments are Tier 2 (synthetic) and Tier 3 (natural) – valuable but not required. Just as steamships shifted to distilled water for reliability, the first-generation reactor should follow the same path.

1.5 Economics of Aluminium Fuel

1.5.1 The Long Term Trends

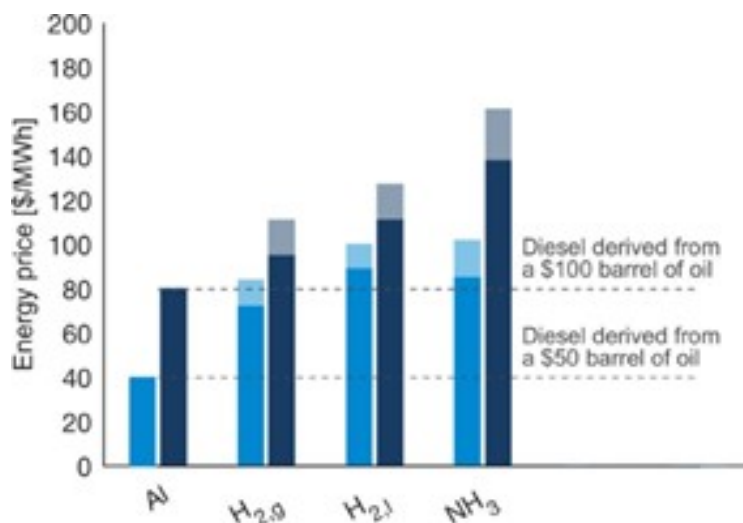


Figure 12: Aluminium fuel vs other electrofuels and diesel (The bars show the price of energy derived from low-carbon energy carriers, if the input electricity price were set to \$36/MWh (dark blue) or \$26/MWh (light blue). The pale region at the top of each bar represents the uncertainty related to the required inputs.) [1]

According to researchers at McGill University, Canada, if both the heat and hydrogen from the aluminium-water reaction are utilized for power generation at 40% efficiency, aluminium’s round-trip efficiency as an electro-fuel reaches approximately 23-25%, making it comparable to hydrogen [40] and superior to ammonia [41].

The cost of electro-fuels like aluminium can be estimated based on electricity prices, while diesel is tied to crude oil prices. As shown in Figure 12, aluminium becomes cost-competitive with diesel when electricity prices fall between \$26-36/MWh and oil prices range from \$50-100 per barrel.

Aluminium also holds a cost advantage over rival electro-fuels such as hydrogen (both gas and liquefied forms) and ammonia. In OECD countries, industrial electricity rates range from \$45-143/MWh, with an average of \$100/MWh [42]. In regions with abundant renewable energy, such as Norway and Quebec, where rates are as low as \$45/MWh and \$27/MWh, aluminium becomes even more competitive in these markets [43].

1.5.2 The Emerging Green Aluminium Supply Chain

The economic case for aluminium as a recyclable energy carrier depends not only on electricity prices and round-trip efficiency, but also on the carbon intensity of aluminium production itself. For decades, the conventional Hall-Héroult process has been highly carbon-intensive for two fundamental reasons:

- **Very high electricity consumption** – Primary aluminium smelting typically requires 14–16 MWh of electricity per tonne of metal produced. In coal-dependent grids, this translates into a large carbon footprint.
- **Consumable carbon anodes** – The anodes used in conventional cells are made of baked carbon. During normal operation, these anodes oxidise to release carbon dioxide directly from the process, not just from the electricity source.

Together, these factors have made virgin aluminium one of the most emission-heavy industrial metals. Furthermore, the Hall-Héroult process was traditionally thought to require stable, inflexible baseload electricity. Aluminium smelters were designed to run continuously at a fixed power draw, making them a poor match for variable renewable electricity from solar and wind power.

However, several recent projects are challenging these long-held assumptions, pointing toward a future green aluminium supply chain that is both low-carbon and grid-interactive.

Photovoltaic direct-current (DC) aluminium smelting in Yunnan, China

A novel DC-powered smelting system has been demonstrated that directly integrates photovoltaic generation with aluminium electrolysis. Key achievements include:

- DC power supply efficiency of at least **98%**, a significant improvement over the $\sim 80\%$ efficiency of traditional AC-coupled photovoltaic systems [44].
- Stabilisation of the electrolytic process by controlling current fluctuations on the DC bus to within $\pm 1.5\%$, overcoming a major technical barrier to direct solar-powered smelting [44].

This technology has already been deployed at **eight plant sites**, with a total installed capacity of **252 MW**, demonstrating that direct solar-powered aluminium production is scaling beyond the laboratory [45].

The EnPot process from New Zealand

The EnPot system provides, for the first time, dynamic control of the heat balance of aluminium smelting pots across an entire potline. Key capabilities include:

- Energy consumption and aluminium production can be increased or decreased by as much as $\pm 30\%$ **almost instantaneously** [46].
- Smelters can reduce power draw during periods of grid stress or low renewable output, and increase draw when surplus renewable electricity is available.
- This transforms the smelter from a passive end-user of power into a “**virtual battery**” for the electricity network, enabling deeper penetration of wind and solar generation [46].

Crucially, the EnPot process is no longer a theoretical concept. It is being deployed in **real-world projects in Germany and China**, proving that flexible aluminium smelting can operate alongside heavy industrial demand and variable renewable grids [47].

Ceramic-based inert anodes

Perhaps the most transformative development is the ongoing commercialisation of inert anodes (ceramic or metal-based) to replace the century-old consumable carbon anodes. Inert anodes do not oxidise during electrolysis, eliminating the direct CO_2 emissions from the anode reaction. When paired with renewable electricity, the entire Hall-Héroult process becomes **completely zero-carbon** [20]. Several consortia (including Rusal, Alcoa, and Rio Tinto’s ELYSIS partnership) are now scaling this technology [48].

Taken together, these three innovations – DC photovoltaic smelting, EnPot’s load-flexible potlines, and inert anodes – are rapidly removing the historical carbon penalty from aluminium production. For the aluminium-water propulsion system proposed in this work, an emerging green aluminium supply chain means that the fuel can be truly low-carbon from well-to-wake, not only during onboard combustion. This strengthens both the environmental and economic case for aluminium as a marine fuel, particularly as renewable electricity becomes cheaper and more widespread.

Section 2.2 extends this single-pathway comparison into a pathway-resolved supply chain analysis that treats each production route separately, combining emissions intensity, carbon-tax-adjusted delivered cost, and infrastructure readiness.

1.6 Technology Development Pathway

1.6.1 Barriers to Entry in Container Shipping

The maritime shipping industry has historically been conservative in its adoption of new propulsion technologies. This reluctance stems from the sector’s high capital costs and persistently low operating margins, which leave little room for experimental or unproven systems. Consequently, any novel engine or fuel system must first obtain certification from the International Maritime Organization (IMO), a process that typically requires extensive operational data and can take up to a decade. This lengthy and expensive approval pathway presents a formidable barrier to the introduction of a completely new fuel–engine combination, even in scenarios where high carbon taxes or stringent emissions regulations might otherwise favour low-carbon alternatives.

Given these challenges, a direct assault on the container shipping market with aluminium-water propulsion is unlikely to succeed in the near term. Moreover, while solar and battery costs are falling sharply, a robust green aluminium production industry has yet to emerge. Realistic projections suggest that at least 10–15 years will be required for this supply chain to mature and for aluminium fuel to reach cost parity with heavy fuel oil (HFO) and other hydrocarbons. Therefore, a beachhead market must be identified—one in which the technology can be developed, demonstrated, and refined through a “learning by doing” process, while generating the operational track record needed for eventual IMO certification. [49]

1.6.2 Luxury Yachts and Superyachts as an Ideal Beachhead

The most promising initial market for aluminium-water propulsion systems is the luxury yacht and superyacht segment. These vessels are typically purchased by Ultra-High-Net-Worth Individuals (UHNWIs), defined as individuals with a net worth of US\$30 million or more. The global UHNWI population is expected to grow by approximately 33% between 2025 and 2030 [50], driving strong demand for bespoke, high-end vessels.

Unlike container shipping, which is a commoditised market driven almost exclusively by cost per tonne-mile, the superyacht market places a premium on product differentiation, innovation, and environmental stewardship. UHNWIs are also more likely to tolerate a significant green premium during the early years of technology development, while the aluminium-water propulsion system is being refined and while green aluminium fuel has yet to reach cost parity with conventional fuels. This tolerance for higher upfront costs provides a critical financial bridge for the technology.



Figure 13: Modern Electric Yachts with Integrated Solar Panels [51]



Figure 14: The Gotland Horizon X By Austal Panels [52]

Indeed, several green yachting options already exist, including fully battery-electric yachts powered by integrated solar panels (as shown in Fig 13). Furthermore, Austal—Australia’s largest shipbuilder—is developing a catamaran ferry called the Gotland Horizon X (as shown in Fig 14), which features a lightweight “green aluminium” hull and can be powered entirely by green hydrogen [52]. These developments indicate a strong and growing appetite for low-carbon, novel vessel designs within the premium marine segment.

1.6.3 Regulatory Pathway and Certification Advantages

Equally important are the regulatory differences between commercial shipping and the superyacht sector. IMO certification for container shipping follows a rigid, top-down process that demands extensive pre-approved data. In contrast, superyacht certification is handled primarily by private classification societies such as Registro Italiano Navale (RINA), Lloyd’s Register (LR), and DNV. These societies employ a flexible, bottom-up, risk-based approach, often engaging in bespoke negotiations with builders and owners. They are specifically equipped to approve novel systems and one-off builds, making them far more accommodating to innovative propulsion technologies [53, 54].

1.6.4 Pathway to Broader Adoption

If aluminium-water combustion systems can be successfully commercialised in the luxury yacht market, the operational data generated will greatly simplify the subsequent IMO certification process for container shipping applications. This strategy mirrors the path taken by Tesla in the automotive industry: the original Tesla Roadster—a high-performance, low-volume sports car—served as a beachhead to develop battery and electric drivetrain technology, generate real-world data, and build brand credibility before moving into mass-market vehicles [55, 49]. By targeting yachts and superyachts as the initial product development segment, the aluminium fuel system can follow an analogous learning-by-doing trajectory, ultimately paving the way for large-scale deployment in deep-sea shipping.

2 Research Questions

2.1 System Requirements for Yacht Applications

While deep-sea shipping remains the ultimate decarbonisation target, accounting for approximately 70% of the industry’s fuel consumption and carbon emissions [10], the luxury yacht and superyacht segment offers an ideal beachhead for the development of aluminium-water propulsion systems. This market allows for iterative technology refinement, real-world operational data collection, and the establishment of flexible regulatory pathways.

However, the performance requirements for an aluminium-water reactor vary significantly across the different classes of superyachts that are popular in the market today. These include motor yachts, sailing superyachts, explorer yachts, and pocket superyachts (24–40 metres). To guide engineering design effectively, the following technical parameters must be systematically determined for each class:

- Minimum mass energy density
- Minimum volumetric energy density
- Power demand profile (minimum, maximum, and average power)
- Minimum range
- Total energy demand between refuelling stops
- Detailed energy demand profile for marine engine operations

2.2 Supply Chain Analysis

Aluminium-water combustion is not the only alternative fuel under consideration for decarbonising maritime shipping. Ammonia and methanol have each attracted substantial backing from industry stakeholders, and both are being actively developed as marine fuels for deep-sea routes. However, the carbon intensity and fuel cost of these alternatives vary widely depending on their production method and feedstock. A single global-average figure for either fuel therefore conceals more than it reveals. Table 4 summarises the principal production pathways for ammonia, methanol, and aluminium, alongside their current market share and maturity.

A comprehensive supply chain analysis requires the following questions to be answered.

1. **Fuel price by production pathway.** What is the delivered price of each of the three fuels, and how does that price change across the different production methods identified in Table 4?
2. **Energy cost in standardised units.** How does the fuel price translate into a cost of energy expressed in \$/MWh, so that fuels with different mass and volumetric energy densities can be compared on a like-for-like basis?
3. **Emissions intensity by production pathway.** What are the greenhouse gas emissions associated with each fuel, and how do those emissions vary depending on the production pathway used?
4. **Carbon-adjusted cost of energy.** Combining the energy cost from question 2 with the emissions intensity from question 3, what is the carbon-adjusted cost of energy in \$/MWh for each pathway?
5. **Infrastructure costs.** What are the infrastructure costs associated with each fuel, covering safety systems, bunkering, and long-term storage? For this component of the analysis, the production method is irrelevant, since the fuels remain chemically identical regardless of how they were produced. Bunkering and storage costs depend instead on the physical characteristics of the fuel as handled — for aluminium, the size of the micron-sized particles — and not on the production pathway of the metal itself.

Understanding all of these costs is essential to estimating the viability of decarbonising the marine shipping sector. Throughout this analysis, all fuel costs and emissions are benchmarked against heavy fuel oil (HFO) as the reference fuel, since HFO remains the incumbent marine fuel against which any alternative must compete.

Pathway	Feedstock / Process	Current Market Share	Notes
Grey ammonia	Natural gas (steam reforming)	~70% [56, 57]	Dominant route worldwide [56, 57]
Brown ammonia	Coal gasification	Most of the remainder [56, 57]	Concentrated in China [56, 57]
Green ammonia	Green hydrogen (electrolysis)	A fraction of 1% [56, 57]	Prominent in industry discussion, marginal in actual supply [56, 57]
Grey methanol	Natural gas	Dominant outside China	—
Brown methanol	Coal gasification	Dominant within China	China’s methanol industry is built almost entirely on coal
Light brown methanol*	Coal gasification + green hydrogen	Small but growing	Retrofits existing coal-to-chemicals plants rather than building new green capacity [58]
Green methanol (“e-methanol”)	Electrolysis + captured CO ₂	Marginal	Still a small share of installed capacity [59]
Brown aluminium	Coal-fired electricity, carbon anode	~50–57% globally; >80% within China	Emits CO ₂ from both the anode and the electricity source [60, 61]
Green-CA aluminium	Green electricity, carbon anode	~30–39% globally	Removes electricity-source emissions; the anode-oxidation floor remains [61]
Green-IA aluminium	Green electricity, inert anode	<0.1%; single demonstration-scale cell	Removes both emissions sources entirely, at an energy cost [48]

Table 4: Production Pathways, Market Share, and Maturity

*Note: *“Light brown” is a descriptive label introduced in this proposal to preserve the colour taxonomy applied to the remaining pathways; it is not an established term in the literature. The underlying process — coal gasification integrated with electrolytic hydrogen to displace part of the hydrogen otherwise derived from coal — is termed green hydrogen-coupled coal-to-methanol (GH-CTM) in the technoeconomic and life-cycle assessment literature.*

2.3 Core Reactor Characterisation

Based on the analysis presented in Section 1.3, this research explicitly adopts the high-temperature metal-water reactor (HT-MWR) as the design architecture under investigation. The case for this choice over low-temperature alternatives rests on four compounding advantages:

1. **Lower fuel production costs.** The HT-MWR operates with micron-sized aluminium particles, which are substantially cheaper and simpler to produce industrially than the nano-sized particles required by low-temperature designs.
2. **Safer and cheaper fuel transport and handling.** Micron-sized particles are inert at room temperature and pressure, unlike nano-sized particles, which can react readily with ambient moisture. This inert character significantly reduces transport and handling costs and improves the overall economic case for aluminium as a marine fuel.
3. **Higher round-trip energy efficiency.** The HT-MWR produces high-grade thermal output—heat at temperatures suitable for use in steam engines and other external heat engines. Harnessing this thermal output alongside the hydrogen combustion effectively doubles the round-trip energy efficiency of the aluminium fuel cycle, and correspondingly increases its effective mass and volumetric energy density, as demonstrated in Section 1.3.
4. **Superior by-product for recycling.** At the elevated temperatures and pressures of the HT-MWR, the aluminium-water reaction preferentially produces Al_2O_3 rather than $\text{Al}(\text{OH})_3$ or AlOOH . As shown in Tables 1 and 2, Al_2O_3 gives the most favourable effective energy density of any by-product scenario. Crucially, it can also be fed directly into the Hall–Héroult recycling process with minimal pre-processing, which reduces costs and complexity across the entire aluminium fuel supply chain.

Reactor Research Deliverables

The experimental programme is structured as a tiered investigation. The core distilled water experiments constitute Tier 1 and are essential for the project’s success. These provide all data required for control system development and battery sizing. Synthetic and natural seawater experiments are designated as Tier 2 and Tier 3 respectively—they are valuable for understanding seawater’s effects but are not required for the primary research objectives. This tiered structure ensures that the thesis remains defensible on distilled water experiments alone, while providing flexibility to extend the work if time and resources permit.

With this scope established, the research decomposes into the following primary questions:

1. Reaction parameter optimisation How do temperature (250–400°C), pressure (up to 25 MPa), aluminium particle size, and fuel-to-water ratio individually and jointly influence hydrogen yield and thermal heat output? The target thermal output is a steam-hydrogen mixture at 400–500°C—the temperature range required to drive external heat engines such as steam turbines. The goal of this investigation is to identify the combination of parameters that delivers stable, controllable output at this temperature while maximising hydrogen yield. As a secondary metric, the cold-start warm-up time from ambient to operating temperature will also be recorded for each optimal setpoint, to inform later battery sizing.

2. Aluminium particle size characterisation The reaction rate of the aluminium-water system increases as particle size decreases, but smaller particles are more expensive to produce and more difficult to handle safely. This investigation will therefore identify the coarsest particle size that still achieves the reaction rates and thermal output required to meet the power demand profile of the target superyacht class identified in Section 2.1, since this coarsest viable size defines the most commercially attractive operating point.

3. By-product composition analysis The by-product produced by the aluminium-water reaction—whether $\text{Al}(\text{OH})_3$, AlOOH , or Al_2O_3 —has a major impact on the practical performance of the fuel system, for two reasons. First, the yacht must carry the by-product in a dedicated storage tank throughout the voyage, so the mass and volume of the by-product directly affects the effective energy density available for propulsion, as shown in Tables 1 and 2. Second, delivering Al_2O_3 rather than $\text{Al}(\text{OH})_3$ to recycling facilities eliminates an intermediate processing step before the Hall–Héroult process, reducing cost and complexity across the supply chain.

This investigation will therefore identify the specific temperature and pressure conditions under which the reaction shifts from producing $\text{Al}(\text{OH})_3$ or AlOOH toward Al_2O_3 as the dominant by-product, and will characterise how fuel-to-water ratio and particle size interact with this shift.

4. Seawater reactant characterisation For a vessel operating at sea, seawater is the naturally available reactant. The ability to use seawater directly as the oxidiser would deliver significant operational and maintenance benefits for aluminium-powered marine vessels. However, seawater introduces chemical variables that distilled water experiments cannot capture:

- Dissolved chloride ions and sulphates, which may modify the passivation behaviour of the aluminium oxide layer and alter the induction, rapid oxidation, and quenching stages of the reaction
- Magnesium and sodium salts, which could affect by-product composition
- Biological matter and suspended particulates, which may affect reactor internals and feed systems over time

This investigation will compare the hydrogen yield and thermal output of the aluminium-water reaction using distilled water versus seawater. Any filtration or pre-treatment required for the seawater intake will be identified and documented, since this information is essential for a proper cost-benefit analysis of seawater as the operational oxidiser. Critically, this investigation is designated as Tier 2—it will be pursued only if the core distilled water experiments are completed ahead of schedule. The thesis remains defensible on distilled water experiments alone.

5. Marine safety systems Aluminium powder introduces a set of hazards that are not commonly encountered in conventional marine fuel systems and are not fully addressed by existing maritime fuel codes:

- **Fire and explosion risk** from highly combustible aluminium dust clouds
- **Hydrogen liberation** from the exothermic reaction of aluminium powder with moisture, presenting both a fire risk and a potential contribution to climate change if vented
- **Chronic inhalation risk**—prolonged exposure to aluminium dust can cause pulmonary fibrosis (aluminosis)
- **Special extinguishing requirements**—water-based extinguishing agents are prohibited in areas where aluminium powder is present; Class D agents and inert atmospheres are required

The development and validation of safety protocols covering bunkering procedures, leak detection, dust control, and emergency response constitutes a distinct research deliverable of this study. These protocols will be developed in consultation with Registro Italiano Navale (RINA), Lloyd’s Register (LR), and DNV, to ensure that the procedures adopted are consistent with the risk-based certification frameworks that will govern eventual onboard deployment, and that the documentation generated is structured to support future certification submissions.

Trade-offs and Design Decisions

As with any engineering system, the experimental results from this research will surface trade-offs that cannot all be optimised simultaneously. All such trade-offs will be transparently documented and justified as part of this study, providing future engineers with the information they need to make informed design decisions as the metal-water propulsion system is developed further toward commercial deployment.

2.4 Control Systems Development

While the experimental characterisation described in Section 2.3 will establish the steady-state and transient behaviour of the HT-MWR under open-loop conditions, a marine propulsion system requires closed-loop regulation. A superyacht’s power demand is not constant; it changes continuously during harbour manoeuvring, coastal transits, and open-sea cruising. To be practically useful, the reactor must be capable of receiving a power setpoint and adjusting its output accordingly, while maintaining safe and stable operation.

However, a full continuous-flow reactor—with real-time fuel injection, dynamic slurry pumping, and continuous by-product extraction—introduces substantial mechanical complexity that is independent of the core thermal and kinetic control problem. Before attempting to regulate a continuous system, it is necessary to demonstrate that the reactor itself can be reliably stabilised at multiple power levels and transition between them with predictable dynamics. This research therefore scopes the control investigation to a *fixed-batch* configuration, in which a known mass of aluminium fuel is loaded at the start of a run and the reaction proceeds until depletion. This simplification isolates the control problem to its essential core—modulating the reaction rate via accessible process variables—while deferring the mechanical engineering of continuous fuel and solids handling to future work.

The control investigation addresses the following primary research questions:

1. **Transient response characteristics.** When a step change in power output is demanded between two operating levels, what are the measured response lag, rise time, settling time, and overshoot or undershoot in hydrogen production and thermal output? How do these dynamic metrics vary depending on the direction of the transition (e.g., increasing power versus decreasing power)?
2. **Stability and controllability limits.** Across the range of output levels required for marine propulsion, does the reactor exhibit stable behaviour, or do certain operating regimes induce oscillatory, sluggish, or runaway tendencies? What is the maximum rate of change of power demand that the reactor can track without violating safe operating limits (e.g., pressure or temperature excursions)?

3. **Comparison against operational requirements.** How do the measured transient response times and stability limits compare against the power demand profiles and manoeuvring requirements established for the target superyacht class in Section 3.1? This comparison determines whether the reactor, in its current configuration, can meet the dynamic performance expected of a marine propulsion system, or whether external buffering (such as battery storage) is essential to bridge the gap.
4. **Mode granularity optimisation.** The number and spacing of discrete power modes is a design choice, not a fixed constraint. What is the optimal mode granularity—for instance, three, five, or a continuously variable strategy—that balances controllability, manoeuvrability, and fuel utilisation? This investigation will assess whether a coarse discretisation is sufficient for smooth propulsion, or whether finer resolution is required to avoid unacceptable lags or instability.

Critically, this research does *not* design the battery buffer system that would compensate for reactor start-up and load-following limitations—that task is identified as future work in Table 5. However, the dynamic characterisation produced here—the measured lag times, ramp rates, and stability boundaries—constitutes the primary quantitative input that future engineers will require to correctly size that battery buffer, select its chemistry, and specify its power electronics. By delivering a validated closed-loop characterisation of the HT-MWR, this research transforms the reactor from a laboratory-scale demonstrator into an engineering subsystem with known, documented performance boundaries.

2.5 Engine and Battery System Analysis

The HT-MWR produces a high-temperature, high-pressure output stream composed of steam and hydrogen gas. This output must ultimately be converted into mechanical shaft power to drive a propeller. The reactor research in Sections 2.3 and 2.4 establishes the thermodynamic state of that output—its temperature, pressure, mass flow rate, and hydrogen fraction—but it does not prescribe how that output should be transformed into propulsion. The choice of power conversion architecture is therefore a critical design decision that affects efficiency, weight, footprint, capital cost, and—most importantly for near-term deployment—regulatory certification risk.

The analysis in this section is explicitly scoped as a *requirements-definition and trade-off study*, not an engineering design. The goal is not to design a specific engine or battery system, but rather to survey the available options, apply a consistent set of selection criteria, and produce a clear, defensible recommendation for the most viable Generation-1 propulsion architecture. Detailed simulation, integration, and prototype testing of the engine and battery systems are explicitly out of scope and are identified as future work in Table 5.

The analysis is guided by a single overarching principle: **minimise technical and certification risk for the metal-water reactor and aluminium fuel system**. The reactor and its fuel cycle are the novel, unproven elements of the propulsion chain. The engine and battery, by contrast, should be as mature, standardised, and readily certifiable as possible. Any complexity or novelty allocated to the prime mover or energy storage subsystem increases the overall system risk and lengthens the pathway to regulatory approval. The analysis therefore deliberately favours components with existing marine service records, established classification society rules, and straightforward integration pathways, even if this means accepting lower thermal efficiency.

The engine and battery analysis addresses the following primary research questions:

1. **Optimal thermal integration pathway.** The steam-hydrogen mixture can be exploited either by direct thermal combustion (burning the hydrogen to superheat the steam for turbine expansion) or by condensing the steam and separating the hydrogen for use in a separate prime mover. Which pathway—direct thermal integration or hydrogen separation—minimises overall system complexity, weight, and certification risk while still meeting the performance requirements of the target superyacht class?

2. **Prime mover selection and interface specification.** Among commercially available, mature marine prime movers suitable for the selected thermal integration pathway, which offers the best combination of technical maturity, certification feasibility, and efficiency for a Generation-1 prototype? What are the critical interface requirements—steam temperature, pressure, flow rate, hydrogen tolerance, and transient ramp-rate limits—that the reactor must deliver to interface with that prime mover? (Speculative or developmental prime movers with limited marine certification will be explicitly deprioritised.)
3. **Battery buffer specification.** Given the quantified reactor start-up and transient lag times from Section 2.4, what are the minimum energy capacity (kWh) and power rating (kW) that a buffer battery must provide to ensure uninterrupted propulsion during mode transitions? Which commercially available marine battery chemistries and form factors are best suited to this duty cycle, and what is the simplest hybrid architecture (e.g., series, parallel, or combined) that meets the buffering requirement with the lowest system risk?
4. **Efficiency target relaxation.** The preliminary analysis in Section 1.1 assumed a 40% engine efficiency for metal fuels, a value derived from theoretical projections rather than real-world demonstration. For a Generation-1 prototype, what is a realistic, defensible efficiency target that balances technical feasibility against commercial viability? More specifically, can the system achieve acceptable performance and economic competitiveness if the prime mover efficiency is relaxed to the 20–30% range, which is more readily attainable with mature, off-the-shelf components?

The outputs of this analysis will be a set of **engineering specifications**—precise interface requirements between the reactor, the prime mover, and the battery buffer—and a **clear architectural recommendation** for the minimum viable Generation-1 propulsion system. By defining these interfaces in terms of commercially available, certifiable components, the analysis reduces the overall technology risk and provides a concrete, actionable roadmap for the next phase of prototype development.

2.6 Scope of This Research

Research Activity	In Scope	Out Scope	How This Study Enables Future Work
Core Reactor Characterisation			
Industry requirements matrix	Yes	—	Defines power, range, and energy density targets that bound all downstream reactor design
Reaction parameter characterisation (T, P, particle size, fuel-to-water ratio)	Yes (Tier 1)	—	Produces the experimental dataset for reactor geometry and operating point selection
By-product composition analysis ($\text{Al}(\text{OH})_3$, AlOOH , Al_2O_3)	Yes (Tier 1)	—	Determines achievable effective energy density and recycling compatibility under real operating conditions
Seawater vs. distilled water reactant comparison	Yes (Tier 2)	—	Establishes whether onboard seawater can be used directly, and specifies any pre-treatment or filtration requirements
Reactor start-up time and transient load characterisation	Yes (Tier 1)	—	Provides the open-loop dynamic data required for control system design and battery buffer specification
Marine safety protocols (bunkering, dust control, emergency response)	Yes	—	Provides the safety evidential basis for future certification submissions to RINA, LR, and DNV
Reactor geometry and material selection	Yes (lab-scale, indicative)	Full-scale design	Lab-scale findings provide the basis for scaled engineering design in future work
Preliminary cost estimation (reactor and aluminium fuel)	Yes (indicative, order-of-magnitude)	Final production costs	High-level estimates inform the economic feasibility case and identify where further cost refinement is needed
Supply Chain Analysis			

Research Activity	In Scope	Out Scope	How This Study Enables Future Work
Pathway-resolved emissions benchmarking across all grey, brown, and green production routes	Yes	—	Produces a single internally consistent emissions intensity comparison for ammonia, methanol, and aluminium against the HFO baseline
Carbon-tax-adjusted delivered cost model	Yes	—	Quantifies delivered cost under three carbon-pricing scenarios: no effective carbon price, current EU ETS trajectory, and adopted IMO Net-Zero Framework
Infrastructure readiness assessment (bunkering standards, safety certification, network extent)	Yes	Detailed bunkering network design	Identifies the current standards and network position for methanol, ammonia, and aluminium powder, bounding the realistic supply-chain timeline
Literature harmonisation to a common currency, base year, and system boundary	Yes	Original LCA or balance-of-plant cost derivation	Converts published techno-economic and life-cycle data into a directly comparable framework; future work can re-derive from first principles once design is fixed
Sensitivity analysis on grid carbon intensity and green electricity price (2030, 2035, 2040)	Yes	—	Identifies the electricity price threshold below which each green pathway becomes cost-competitive against HFO under each carbon-pricing regime
Control Systems			
Closed-loop control system development	Yes (fixed-batch demonstrator)	Production-ready control hardware	Demonstrates thermal and kinetic controllability; quantifies response lags, rise times, and stability boundaries
Microcontroller hardware selection and implementation	Yes	Maritime ruggedisation	Provides a validated testbed for control algorithm development; hardware choices inform future procurement specifications
Power mode transition characterisation	Yes	Optimal controller design	Quantifies the reactor’s dynamic response to step changes, enabling future engineers to size battery buffers and design control systems

Research Activity	In Scope	Out Scope	How This Study Enables Future Work
Mode granularity optimisation	Yes	—	Determines the optimal number and spacing of discrete power modes for marine propulsion, balancing controllability and manoeuvrability
Engine and Battery Analysis			
Thermal integration pathway trade-off (direct vs. separation)	Yes	Detailed separation system design	Identifies the lowest-risk pathway for converting the steam-H ₂ mixture into shaft power
Prime mover survey and selection	Yes (requirements definition)	Engine design or integration	Produces a decision matrix comparing mature, certifiable prime movers (steam turbine, ORC, diesel)
Battery buffer specification	Yes (requirements definition)	Battery system design	Defines minimum energy (kWh) and power (kW) requirements for a marine-certified battery to bridge reactor transients
Hybrid architecture recommendation	Yes (requirements definition)	Hybrid system integration	Recommends the simplest hybrid topology (series, parallel, or combined) that meets buffering requirements with lowest system risk
Efficiency target relaxation analysis	Yes	Efficiency optimisation	Establishes realistic, defensible efficiency targets (20–30%) for a Generation-1 prototype
Out of Scope (Future Work)			
Full-scale reactor design and stress testing	—	Yes	Lab-scale findings from this study provide the basis for scaling engineering design in future work
Continuous-flow reactor (real-time fuel injection & solids handling)	—	Yes	Fixed-batch control data demonstrates fundamental controllability; continuous-flow engineering is a separate mechanical design challenge
Engine and turbine detailed design and integration	—	Yes	Interface specifications (steam temperature, pressure, flow rate) defined here enable future procurement and integration
Battery system detailed design and BMS development	—	Yes	Capacity and power requirements defined here enable future procurement and integration

Research Activity	In Scope	Out Scope	How This Study Enables Future Work
Classification society approval (full-scale)	—	Yes	Safety protocols and experimental datasets developed here form the evidential basis for future certification submissions

Table 5: Scope of This Research: In-Scope vs. Out-of-Scope Activities

3 Methodology

3.1 Industry Research

Research Design

The industry research component of this study seeks to establish the quantitative system requirements and qualitative market context that will bound the subsequent reactor design work. The information required spans two distinct domains: technical parameters such as power demand profiles, energy density targets, range requirements, and refuelling constraints; and contextual parameters such as risk tolerance, segment-specific adoption barriers, and willingness to pay a green premium. No validated dataset exists for either domain in the context of aluminium–water propulsion for superyachts, since the technology itself is novel. A fixed-format survey instrument is therefore inappropriate at this stage — the questions themselves require contextual interpretation and the ability to pursue unexpectedly informative responses in depth, neither of which a questionnaire can accommodate.

Semi-structured interviews are the appropriate method for this type of exploratory technical and commercial research. They ensure that a consistent set of core topics is covered across all participants — enabling structured comparison and synthesis — while preserving the flexibility to probe unexpected responses and allow participants to introduce considerations the researcher had not anticipated [62]. This flexibility is especially important when interviewing across multiple stakeholder groups with different professional languages and priorities, as is the case here.

Stakeholder Groups and Sampling Strategy

Participants will be drawn from four groups, each contributing a different category of information:

1. **Superyacht builders and shipyards** will provide technical data on vessel power systems, structural constraints, and storage configurations across the target vessel classes.
2. **Classification societies** — specifically RINA, Lloyd’s Register, and DNV — will clarify the regulatory pathway for novel propulsion systems, documentation requirements for prototype approval, and specific concerns regarding aluminium powder handling and onboard hydrogen production.
3. **Naval architects** will supply quantitative power demand profiles, range calculations, and energy density constraints for specific vessel classes with a precision that neither builders nor owners can typically provide.

4. **Vessel owners and superyacht management companies** will contribute priorities around operational flexibility, risk tolerance, and the green premium threshold above which an aluminium–water system becomes commercially unacceptable.

Participants within each group will be identified through purposive sampling — a deliberate, non-random selection strategy that targets individuals with specific expertise, roles, or institutional knowledge relevant to the research questions [63]. This is the appropriate sampling strategy when the goal is depth of insight rather than statistical representativeness. Initial contacts will be identified through industry directories, professional networks, and direct outreach to relevant organisations. A snowball sampling component will supplement this within each group: each participant will be asked to suggest other relevant contacts, providing access to practitioners who may not be publicly visible through standard directories. Key industry events — including the Monaco Yacht Show, the Superyacht Forum, and Europort — will be attended where feasible to facilitate direct introductions to potential participants.

The target sample size is four to six participants per stakeholder group, giving a total of 16–24 interviews across the study. Research on thematic saturation in expert interview studies indicates that the majority of core themes are typically identifiable within six interviews in a relatively homogeneous professional population, and that saturation is rarely reached beyond twelve [64]. Since each of the four groups is well-defined in terms of knowledge domain and professional role, a target of four to six per group provides a reasonable expectation of saturation within the first research quarter.

Interview Guide Development

A separate semi-structured interview guide will be developed for each of the four stakeholder groups. Each guide will share a common core covering the topics essential to the requirements matrix but will be adapted in language, technical emphasis, and sequencing to suit each group. The core topics across all guides are:

- Typical energy demand profiles and power output requirements for the target vessel classes, across distinct operational phases including docking, harbour manoeuvring, coastal transit, and offshore cruising
- Total energy demand between planned refuelling stops, and the maximum acceptable refuelling time and downtime per stop
- Onboard space and weight constraints affecting fuel storage, by-product storage, and propulsion system footprint
- Tolerance for novel technology risk and willingness to pay a green premium during the early commercialisation phase of the technology

- Views on the regulatory and certification pathway for a novel propulsion fuel system

The classification society guide will additionally address the documentation required for prototype approval on a one-off build, the operational data needed to support progression toward type approval for series production, and specific regulatory concerns related to aluminium powder bunkering and onboard hydrogen management.

Before deployment with research participants, the guide will be piloted with two individuals who will not be included in the final analytical sample — ideally academics or industry consultants with superyacht or maritime propulsion experience. Piloting serves to identify ambiguous or leading questions, test the logical flow of the session, and calibrate the time required. The guide will be revised based on pilot feedback before the main data collection begins.

Data Collection

All interviews will be conducted by the principal researcher to ensure consistency of facilitation. Where possible, interviews will be held in person at the participant’s place of work, as the professional environment can itself provide contextual information and facilitates rapport. Where in-person meetings are impractical due to geography or scheduling, video-conferencing will be used. Each session will target 45–60 minutes.

Before each interview, participants will receive a written information sheet describing the research purpose, the voluntary nature of participation, the intended use of the data, and their right to withdraw at any time without consequence. Written informed consent will be obtained before the session begins. With consent, all interviews will be audio-recorded and subsequently transcribed verbatim. Where recording is declined — which may occur with some classification society representatives given institutional confidentiality obligations — detailed contemporaneous notes will be taken during the session and written up in full within 24 hours of the interview. All data will be stored in accordance with the university’s research data management policy, with participant identities anonymised in all transcripts and analytical outputs. Organisations may be identified by type (e.g. “a major European classification society”) but not by name in any published output, unless explicit permission is granted.

Data Analysis

Transcripts will be analysed using reflexive thematic analysis, following the six-phase process described by Braun and Clarke [65]: familiarisation with the data, generating initial codes, searching for themes, reviewing themes, defining and naming themes, and producing the final written analysis. This approach is appropriate because the research is fundamentally exploratory — the goal is to identify patterns and points of convergence or divergence across stakeholder perspectives, rather than to test a pre-specified hypothesis.

Two distinct types of output will be extracted from the analysis. First, quantitative parameters — power demand values, range requirements, refuelling time tolerances, storage volume constraints, and energy density targets — will be drawn directly from interview content, tabulated by vessel class, and where multiple participants provide estimates, cross-validated and reconciled to produce working values with documented uncertainty ranges. Second, qualitative themes — covering risk tolerance, green premium thresholds, segment-specific adoption barriers, and regulatory pathway insights — will be synthesised across participant groups, with representative quotations used to illustrate key findings.

To strengthen the credibility of the analysis, member checking will be conducted once the initial thematic analysis is complete [66]. A summary of the key findings and the draft requirements matrix will be shared with at least one participant per stakeholder group for comment and correction before the matrix is finalised. This practice reduces the risk of misinterpretation and ensures that the technical parameters derived from the interviews are recognised as accurate by the domain experts who provided them.

Synthesis into the Requirements Matrix

The outputs of the thematic analysis will be synthesised into a formal requirements matrix — the primary deliverable of the industry research phase. This matrix will document the minimum and maximum values for each technical parameter for each superyacht class investigated, alongside the qualitative constraints and stakeholder priorities identified across the four groups.

The requirements matrix serves two functions within the broader research project. First, it identifies which superyacht class or classes represent the most promising initial deployment target for the aluminium–water propulsion system, based on the combination of regulatory flexibility, risk tolerance, and alignment between operational requirements and the known performance envelope of the HT-MWR. Second, it directly bounds the experimental programme in Section 3.3: the power output targets for the transient load characterisation, the energy density thresholds for the parameter optimisation experiments, and the range requirements constraining by-product storage calculations will all be set by the values documented in this matrix.

3.2 Supply Chain Analysis

This section describes the methodology for the pathway-resolved supply chain comparison introduced in Section 2.2. The analysis is structured around three integrated strands — an emissions pathway benchmarking exercise, a cost model with explicit carbon-tax scenario sensitivity, and a qualitative infrastructure-readiness assessment — addressing the five research questions identified in Section 2.2. The emissions and infrastructure-readiness strands are primarily qualitative and literature-based, while the cost model is quantitative. All three strands share a common set of methodological standards set out below.

Common Methodological Standards

Three standards apply across all three strands.

1. **Emissions boundary consistency.** Published sources sometimes report direct process emissions only, and sometimes cradle-to-gate or well-to-wake figures that include feedstock mining, processing, and upstream energy. This inconsistency is material for fuels such as ammonia and methanol, where well-to-wake accounting can substantially change the ranking against HFO [28]. Every pathway in the final table will be labelled with the boundary it uses, and the analysis adopts a well-to-wake boundary throughout.
2. **Corroboration standard.** Consistent with the cross-validation principle applied to interview data in Section 3.1 [65, 64], every figure in the final model will be corroborated against at least one independent published source before inclusion. Where two sources for the same pathway diverge by more than approximately 20%, a third independent source will be sought; if divergence persists across three sources, the full range will be reported as a sensitivity band rather than a single point estimate. Any figure that cannot be corroborated will be flagged as provisional rather than presented as settled.
3. **Currency and price standardisation.** Each literature-derived figure will be converted to USD and inflation-adjusted to this analysis’s working base year using an appropriate producer price index [42]. This ensures every reported figure is directly comparable regardless of the currency, base year, or plant configuration in which it was originally published. Green methanol is frequently priced in Euros, while light brown methanol is often priced in Yuan; both are converted to USD before inclusion.

Emissions Pathway Benchmarking

The emissions benchmarking strand reconciles the published figures for each pathway into a single, internally consistent comparison table against the HFO baseline.

For aluminium, the three pathways are treated as a function of electricity source and anode chemistry. Brown aluminium — carbon-anode smelting on coal-fired electricity — has a process emissions floor of approximately 1.5 tCO₂ per tonne of aluminium from anode oxidation alone, a figure corroborated across independent academic and industry sources and consistent with the stoichiometry of anode carbon consumption [67], on top of which sits the electricity-related emissions from coal generation. Green-CA aluminium removes the electricity-related component by switching to renewable or hydro power [44, 45], but retains the same anode-oxidation floor, since that floor is independent of electricity source. Green-IA aluminium removes the floor entirely by additionally switching to an inert anode [20, 48]; the resulting electricity energy penalty is taken directly from a recent techno-economic assessment that derives the voltage requirement of an inert-anode cell from first-principles electrochemistry and reports electricity consumption rising from approximately 13 MWh per tonne for conventional carbon-anode smelting to approximately 15 MWh per tonne without a wettable cathode, or approximately 13.3 MWh per tonne with one [68].

For light brown methanol, the emissions benchmarking draws on the same literature-first basis. Several independent process-modelling and life-cycle studies of the GH-CTM pathway report consistent qualitative findings despite differing in plant configuration and system boundary: direct process CO₂ emissions fall by approximately 85–98% relative to the conventional coal-to-methanol baseline [58, 69, 70]. Where the underlying studies report a range rather than a single value, the full range is carried through to the sensitivity analysis rather than collapsed to a central estimate.

Cost Model with Carbon-Tax Sensitivity

Building on the landed-cost structure — production, forward transport, and, for aluminium only, reverse by-product logistics — a carbon-tax-adjusted delivered cost is calculated for each pathway under the three scenarios described below.

Brown and grey pathways for all three fuels draw on licensed commercial pricing sources. Green ammonia, green methanol, and green-IA aluminium present an additional costing challenge, since none of the three currently operates at commercial scale and no licensed market price exists for any of them. Their production cost is instead taken from the published techno-economic literature:

- **Green ammonia:** levelised-cost-of-ammonia modelling that identifies electricity price, electrolyser capital cost, and renewable energy supply mix as the dominant cost drivers for islanded and semi-islanded production [71, 72].
- **Green methanol:** a levelised-cost-of-methanol case study reporting a production cost of approximately double the prevailing conventional methanol price [73].
- **Green-IA aluminium:** the inert-anode cost projections referenced above [68].

Each of these figures is reported in a different currency and base year, and each reflects a specific case-study location or plant configuration rather than a global average; converting them to a common currency and base year using the harmonisation procedure above constitutes the principal costing task for these three pathways, in place of an original balance-of-plant cost derivation.

Carbon-Pricing Scenarios

Three carbon-pricing scenarios are modelled:

- **No effective carbon price.** Continued non-adoption of a global IMO mechanism, consistent with the October 2025 postponement of the IMO Net-Zero Framework adoption vote [74].
- **Current EU ETS trajectory.** Current allowance price ($\sim$ €75–90/tCO₂e as of 2026), tested against the range of published escalation forecasts rather than a single point estimate [75].
- **Adopted IMO Net-Zero Framework.** The Framework’s two-tier remedial unit structure: a Tier 1 price on the shortfall between a ship’s fuel intensity and its “direct compliance” target, and a higher Tier 2 price on any shortfall against the looser “base” target [74].

The third scenario is a materially different calculation from a flat per-tonne carbon tax, since it charges only the intensity shortfall against a declining regulatory trajectory rather than a ship’s total emissions, and this distinction is built into the model directly. This produces a full cost ranking of pathways under each scenario, directly answering the delivered-cost question identified in Section 2.2. Aluminium’s ranking will additionally be reported separately for each of the three pathways — brown, green-CA, and green-IA — since their delivered costs are expected to diverge materially once the balance-of-plant costs, the inert-anode energy penalty, and the electricity-source premium are all accounted for.

Infrastructure Readiness Assessment

The infrastructure-readiness strand assesses each fuel against three criteria: whether a published bunkering standard exists, the maturity of safety certification and classification-society guidance, and the extent of the existing bunkering network.

- **Methanol.** The IGF Code framework is established, and ISO 22120:2026 provides a published bunkering standard [76]. Infrastructure costs can be benchmarked against existing industry guidance.

- **Ammonia.** The IGF Code guidance for ammonia is still under development [77]. Costs are drawn from techno-economic assessments and industry pilot-stage data, accounting for ammonia’s toxicity and corrosivity.
- **Aluminium powder.** No external standard or industry guidance exists. Infrastructure costs are estimated through a reasonable first-principles assessment covering dust control, inert-atmosphere handling, and by-product storage, building on the bunkering procedure for metal fuels developed in earlier work [18]. A sensitivity analysis is conducted across the micron-sized particle grades investigated in this research, since particle size directly determines handling requirements, explosion risk, and storage configuration.

This assessment applies uniformly across all three aluminium pathways, since bunkering and handling requirements for aluminium powder are determined by particle characteristics and combustibility rather than by electricity source or anode chemistry.

Sensitivity Analysis

The full three-strand model will be re-run against variation in the two parameters most likely to shift over the project timeline: grid electricity carbon intensity at the candidate production sites — which for aluminium determines both the brown/green-CA split and the input assumptions for green-IA [46, 47, 44, 45] — and the pace of alternative-fuel bunkering network expansion.

A specific green electricity price sensitivity analysis is conducted for the three green pathways — green ammonia, green methanol, and green-IA aluminium — re-running each pathway’s cost across the range of projected renewable electricity prices for 2030, 2035, and 2040 [43, 42]. This identifies the electricity price threshold below which each green pathway becomes cost-competitive against the HFO baseline under each carbon-pricing scenario.

This matches the “cost modelling” and “sensitivity analysis and write-up” activities scheduled for Phase 1B in the project timeline (Section 4).

Output

The output of this component is a pathway-resolved comparison spanning emissions intensity, carbon-tax-scenario-adjusted delivered cost, and infrastructure readiness for the principal production pathways of all three fuel types plus the HFO baseline. Rather than a single verdict on aluminium versus ammonia versus methanol, this produces a conditional recommendation: the specific combination of production pathway — including which of brown, green-CA, or green-IA aluminium — carbon-pricing regime, and infrastructure timeline under which aluminium-water propulsion represents the strongest economic and practical case, and the combination under which a specific ammonia or methanol supply contract would instead be preferable.

3.3 Core Reactor Characterisation

This section describes the experimental programme for the high-temperature metal-water reactor (HT-MWR) component of this research. The programme is structured to address the steady-state research deliverables identified in Section 2.3, building on the system requirements established through the industry research in Section 3.1.

Reactor Vessel and Instrumentation

The central piece of experimental equipment is a laboratory-scale high-pressure reactor vessel designed to operate at temperatures of 250–400°C and pressures up to 25 MPa. The reactor body will be constructed from SS316L stainless steel, which provides the required tensile strength, corrosion resistance in high-temperature steam environments, and wide commercial availability of pressure-rated fittings. All pressurised components will be specified with pressure ratings exceeding 300 bar at 450°C. For seawater experiments, reactor sections in contact with the fluid will be constructed from or lined with Hastelloy C-276 or Inconel 625 to resist chloride-induced stress corrosion cracking. The reactor will be heated externally using a resistance heater, with thermal insulation applied along its full length to minimise heat loss.

The following instrumentation will be installed as standard across all experiments:

- **Temperature:** Four K-type thermocouples distributed axially along the reactor exterior, with the average reading used as the representative reactor temperature, consistent with the approach of Vlaskin et al. [27]
- **Pressure:** Two calibrated high-pressure transducers — one on the pump inlet and one measuring direct reactor pressure — with continuous high-frequency data logging
- **Real-time gas flow:** A thermal mass flow controller on the gas outlet line, providing continuous volumetric measurement of gas leaving the reactor
- **Hydrogen concentration:** An electrochemical hydrogen sensor positioned in the gas outlet stream and exhaust ventilation line, serving both as a safety monitor and a supplementary yield measurement
- **Slurry injection:** A variable-speed high-pressure plunger pump with remote speed control, enabling precise and adjustable mass flow rates of aluminium–water slurry into the reactor

All sensor outputs will be logged centrally from a remote data acquisition console outside the reactor enclosure.

Aluminium Powder Characterisation

Seven discrete particle size grades will be tested, spanning the 10–500 micrometre range, with target nominal sizes of approximately 10, 25, 50, 100, 200, 350, and 500 μm . These will be selected from commercially available aluminium powder products, covering the size range studied in prior high-temperature aluminium–water research in Russia [27] and Canada [78]. Before use in any reaction experiment, each powder batch will be characterised using:

- **Laser diffraction particle size analysis:** To verify actual size distributions (D10, D50, and D90 values) against nominal supplier specifications
- **Scanning electron microscopy (SEM):** To inspect particle morphology, surface condition, and the native aluminium oxide passivation layer
- **Inductively coupled plasma optical emission spectroscopy (ICP-OES):** To quantify elemental impurities, particularly silicon and iron content

Silicon content will be screened carefully, as Boudreau et al. [78] demonstrated that increasing silicon mass fraction from 0.06% to 0.54% reduced aluminium oxidation rate by an order of magnitude under supercritical water conditions. Only powders with silicon content below 0.1% by mass will be used in the primary parameter optimisation experiments.

Reaction Parameter Optimisation

Experiments will systematically vary temperature (250–400°C), pressure (saturated vapour pressure at each temperature, with supplementary runs up to 25 MPa), water-to-aluminium mass ratio (5, 7, 9, and 12), and all seven particle size grades. Each parameter combination will be repeated a minimum of three times to establish repeatability. The primary measured outputs are:

1. **Hydrogen yield:** Calculated from reactor pressure rise using the ideal gas law and cross-validated against the mass flow controller reading on the gas outlet
2. **Thermal heat output:** Derived from the reactor temperature–time curves recorded by the four thermocouples

The target output condition is a steam–hydrogen mixture at 400–500°C. The coarsest particle size that still achieves this target while meeting the power demand requirements of the superyacht class from Section 3.1 will be identified as the most commercially attractive operating point. The cold-start warm-up time from ambient to operating temperature will also be recorded for each optimal setpoint.

By-product Composition Analysis

Following each experiment, solid products will be extracted, cooled, and vacuum-dried before analysis using two complementary methods:

- **Powder X-ray diffraction (PXRD):** To identify and quantify the crystalline phases present — specifically $\text{Al}(\text{OH})_3$, AlOOH , and the Al_2O_3 polymorphs — with phase proportions quantified by Rietveld refinement of the diffraction patterns
- **Thermogravimetric analysis (TGA):** As a complementary method to cross-validate phase composition based on characteristic mass loss temperatures

Residual unreacted aluminium will also be quantified by PXRD, providing a direct conversion degree measurement alongside the hydrogen yield calculations. By-product phase data will be mapped against the temperature and pressure conditions of each experiment to identify the threshold conditions required to shift the reaction toward Al_2O_3 as the dominant product.

Seawater Reactant Characterisation

Rather than a simple binary comparison between distilled water and seawater, this research defines four distinct water treatment categories to isolate which components of seawater affect the reaction:

- **Category A — Distilled water:** The baseline case
- **Category B — Synthetic seawater:** Distilled water with dissolved salts at open-ocean concentration (≈ 35 g/L, ASTM D1141), isolating ionic effects from biological and particulate contamination
- **Category C — Coarse-filtered natural seawater:** Natural seawater passed through a $50\text{ }\mu\text{m}$ filter, removing organisms and macro-particulates while retaining dissolved ions and fine particles
- **Category D — Fine-filtered natural seawater:** Natural seawater passed through a $50\text{ }\mu\text{m}$ pre-filter followed by a $1\text{ }\mu\text{m}$ membrane filter, removing virtually all suspended particulates while retaining dissolved ions

Natural seawater samples for Categories C and D will be collected at both open-ocean (≈ 35 g/L) and coastal (≈ 15 g/L) salinities. The hydrogen yield, thermal output, and by-product composition for each water type will be compared against the distilled water baseline. The filtration complexity and estimated cost of each category will be documented, enabling a cost-benefit analysis of onboard seawater pre-treatment for a deployed marine system.

Safety, Verification, and Approval

The experimental programme involves concurrent hazards from aluminium powder handling, continuous hydrogen gas production, and high-pressure and high-temperature reactor operation. A comprehensive safety protocol addressing each risk category, together with the plan for independent peer review and formal university approval of the experimental design, is provided in full in the Appendix. In summary, all experimental work will be conducted in a dedicated ventilated enclosure with Class D fire suppression, continuous hydrogen monitoring with automatic equipment interlocks, and a minimum of two researchers present at all times. A detailed laboratory experimental proposal incorporating the full safety protocol, risk register, and reactor specifications will be submitted for independent review by experienced academics and for formal approval by the university’s laboratory safety committee. No high-pressure or high-temperature experimental work will commence before this approval is granted. This comprehensive proposal and its approval will be completed by the end of the first quarter of the research project.

3.4 Metal-Water Reactor Control Systems

Overview

The steady-state characterisation described in Section 3.3 identifies the optimal operating points — temperature, pressure, particle size, and fuel-to-water ratio — that maximise hydrogen yield and thermal output. A marine propulsion system, however, requires dynamic load-following: the reactor must accept a commanded power setpoint and adjust its output automatically while remaining stable and safe. This section describes the methodology for characterising the reactor’s dynamic behaviour and developing a closed-loop control system for the fixed-batch reactor configuration introduced in Section 2.4.

Experimental Configuration: Fixed-Batch Reactor

For the control validation experiments, the reactor is operated in a *fixed-batch mode*. A known mass of aluminium powder (determined from the requirements matrix in Section 3.1) is loaded into the reactor at the start of each run. The reactor is then sealed, purged with nitrogen, and brought to thermal standby temperature. The reaction proceeds until the aluminium is fully consumed. This configuration deliberately excludes real-time fuel injection and continuous by-product extraction, which are deferred to future work. The simplification allows the control investigation to focus purely on thermal and kinetic regulation—the core intellectual challenge—without the confounding mechanical complexities of slurry pumping, nozzle clogging, and solids handling.

Power Mode Definition

The reactor's output will be regulated across **five discrete power modes**, defined as percentages of the rated output determined from the requirements matrix (Section 3.1):

- **0%** — Thermal standby. The reactor is maintained at a minimum temperature (e.g., 250°C) via electrical heater input, but the aluminium-water reaction is suppressed (water injection stopped). This preserves the ability to respond rapidly when higher power is demanded.
- **25%** — Corresponds to harbour manoeuvring, low-speed transit, or docking.
- **50%** — Corresponds to moderate cruising.
- **75%** — Corresponds to high-speed cruising.
- **100%** — Full rated output.

The absolute power targets (in kW thermal and kg H₂/hr) for each mode will be derived from the superyacht power demand profiles established in Section 3.1. The control system's task is to transition between these modes on command, maintaining each mode stably, and to characterise the dynamic behaviour of each transition.

Open-Loop Plant Characterisation (Prerequisite)

Before feedback control can be implemented, the reactor's inherent dynamic response must be quantified without any automated regulation. Using the reactor apparatus described in Section 3.3 — the same thermocouples, pressure transducers, mass flow controller, and hydrogen sensor — step-change tests are performed across the five power modes. Hydrogen production rate is calculated via the pressure-time derivative method (dP/dt) and cross-validated against the mass flow controller reading. For each transition (e.g., 25% to 75%), the following metrics are recorded:

- **Response lag** — Time from the step command to the first detectable change in output.
- **Rise time** — Time from first output change to reaching 90% of the final steady-state value.
- **Settling time** — Time to reach and remain within $\pm 5\%$ of the final steady-state value.
- **Overshoot / undershoot** — Maximum excursion above or below the target value, expressed as a percentage of the target.

- **Steady-state error** — Residual difference between the setpoint and the measured output after settling.

Each pairwise transition ($0 \rightarrow 25$, $0 \rightarrow 50$, $0 \rightarrow 75$, $0 \rightarrow 100$, $25 \rightarrow 50$, $25 \rightarrow 75$, $25 \rightarrow 100$, $50 \rightarrow 75$, $50 \rightarrow 100$, $75 \rightarrow 100$) is repeated at least three times to assess repeatability. The direction of the transition (e.g., 25% to 75% vs. 75% to 25%) is treated separately, as the reactor may exhibit asymmetric behaviour.

This open-loop dataset establishes the raw plant dynamics — the gain, time constant, and dead-time that any future controller must handle. It also provides the baseline against which all closed-loop improvements will be measured.

Actuator Selection

The open-loop data informs the choice of primary control actuator. The reactor has two variables that can be modulated in real-time:

- **Water injection rate:** Controlled via the variable-speed high-pressure plunger pump. The open-loop step tests quantify the gain (change in output per unit change in pump speed), time constant, and linearity of this actuator.
- **Reactor temperature:** Modulated via the electrical resistance heater. Due to thermal inertia, this method has a slow response time — on the order of minutes rather than seconds.

The actuator with the faster, more linear response and shorter time constant will be selected as the primary means of load-following. The slower actuator (temperature) will be investigated as a secondary, coarse-trim actuator for steady-state fine-tuning or thermal standby management. If pump speed modulation alone proves insufficient to meet the transient response requirements from the requirements matrix (Section 3.1), a cascaded strategy may be used — fast adjustments via pump speed with slow temperature trim to compensate for drift as the aluminium is consumed.

Closed-Loop Controller Implementation

A closed-loop controller is implemented on a **microcontroller platform**—either a Raspberry Pi (for higher computational flexibility) or an Arduino-based system (for deterministic, low-latency real-time control). The final choice will be made during the design phase based on required sampling rate, control algorithm complexity, and I/O availability.

Hardware components:

- Microcontroller board (Raspberry Pi 4 or Arduino Due / Teensy 4.0)
- Analogue-to-digital converters (ADCs) for thermocouple and pressure transducer signals

- Digital-to-analogue converters (DACs) or PWM outputs for actuator control
- Signal conditioning boards (thermocouple amplifiers, pressure transducer excitations)
- Power relays / solid-state switches for heater control
- Motor driver / variable-speed drive for the plunger pump
- Isolated communication links (USB, Ethernet, or CAN) to the data acquisition console

The control algorithm itself is **not** a primary research deliverable. The objective is not to design an optimal controller, but to characterise the plant dynamics that any future controller would need to handle. Therefore, a simple **proportional-integral-derivative (PID)** controller will be implemented initially, with gains tuned using the gain and time constant extracted from the open-loop tests. If the plant exhibits significant non-linearity or time-varying behaviour (e.g., as the aluminium is consumed), a gain-scheduled or model-predictive controller may be explored. In all cases, the control scheme will be documented transparently, and the primary data product will be the measured closed-loop response.

Closed-Loop Step-Change Validation

The same step-change test matrix used in the open-loop characterisation is repeated under PID regulation. For each transition, the closed-loop response metrics — lag, rise time, settling time, overshoot, and steady-state error — are recorded and compared directly against the open-loop baselines to quantify the improvement.

Stability and Controllability Limits

To probe the stability envelope, the controller will be subjected to:

- **Large step changes** (e.g., 0% to 100% directly) to determine if the reactor can handle extreme transients without thermal runaway or pressure exceedance.
- **Ramp changes** (linear increase from 25% to 75% over 30, 60, and 120 seconds) to characterise the maximum tolerable slew rate.
- **Repeated cycling** between two modes (e.g., 25% to 75% repeated 5 times) to test for hysteresis or cumulative drift.

In the fixed-batch configuration, the progressive consumption of aluminium and accumulation of by-product introduce time-varying plant dynamics; the stability investigation explicitly characterises how controllability evolves over the course of a batch.

Mode Granularity Optimisation

The choice of five discrete modes is a design assumption, not a fixed constraint. The data from the open-loop and closed-loop transition characterisation will be used to evaluate whether five modes are appropriate. If the reactor can transition smoothly between widely spaced modes (e.g., 25% to 75%) with acceptable lags and overshoot, a **coarser discretisation** (e.g., 0%, 50%, 100%) may be sufficient, simplifying the control system. Conversely, if transitions between distant modes induce instability or unacceptable lag, a **finer discretisation** or a **continuously variable** strategy may be required. The recommendation will be grounded in quantitative data and will explicitly address the trade-off between control complexity and manoeuvrability performance.

Data Analysis and Comparison Against Requirements

The measured transition metrics — both open-loop and closed-loop — will be compared directly against the superyacht power demand profiles and manoeuvring requirements documented in the requirements matrix (Section 3.1). The key comparison is whether, for each power mode transition demanded by a typical sailing profile (e.g., harbour to cruising to docking), the reactor’s measured response lag and rise time fall within the acceptable limits defined by the naval architects and owners.

If the reactor’s response is faster than required, the control system can be simplified (e.g., slower, smoother ramps to reduce wear). If the response is slower than required, the data will quantify exactly how much battery buffering (energy and power) is needed to bridge the gap. Critically, the open-loop data quantifies the minimum required buffer, while the closed-loop data quantifies the achievable performance with control — together, they bound the battery sizing problem.

Limitations and Scope Boundary

This methodology is explicitly limited to **fixed-batch, laboratory-scale** validation. The control system is a **demonstrator**, not a production-ready marine system. The micro-controller hardware and software are chosen for ease of development and data logging, not for maritime ruggedisation or certification. The control algorithm is simplified (PID) and is not intended to be directly transferable to a full-scale vessel. However, the **dynamic response data** produced here — the transfer functions, time constants, and stability boundaries — is independent of the specific controller hardware. It constitutes the fundamental input that future engineers will use to design a ruggedised, certified control system for commercial deployment.

3.5 Engine and Battery System Analysis

Overview

This section describes the methodology for the systematic, comparative analysis of candidate engine and battery architectures for the Generation-1 aluminium-water propulsion system. Unlike the experimental components in Sections 3.3 and 3.4, this analysis is a **literature-based and manufacturer-data-based trade-off study**. It does not involve laboratory work, prototyping, or simulation. The objective is to produce a clear, well-justified architectural recommendation and a set of engineering interface specifications that will guide future prototype development. This is consistent with the scope boundary defined in Table 5, which explicitly identifies engine integration and battery design as future work.

The analysis is guided by the principle of **minimising technical and certification risk** for the aluminium-water reactor and fuel system. The engine and battery should be as mature, off-the-shelf, and readily certifiable as possible.

Step 1 — Definition of Evaluation Criteria

Before comparing any specific technologies, a set of quantitative and qualitative criteria will be defined. These criteria will be used to score each candidate architecture consistently. The criteria are:

1. **Technical maturity** — Has the technology been deployed in marine or adjacent industrial applications for more than 5 years? (Weighted high)
2. **Certification pathway** — Do classification societies (RINA, LR, DNV) have existing rules and guidance? (Weighted highest)
3. **Thermal efficiency** — What is the expected efficiency when operating on the reactor's steam-hydrogen mixture? (Gen-1 target: 20–30%) (Weighted medium)
4. **Power-to-weight ratio** — Is the engine suitable for the weight-constrained environment of a superyacht? (Weighted medium)
5. **Footprint and packaging** — Does the engine fit within the available machinery space? (Weighted low)
6. **Capital cost** — What is the approximate per-kW cost for a unit in the 100–500 kW range? (Weighted low)
7. **Maintenance complexity** — How frequent and costly are scheduled overhauls? (Weighted low)

8. **Sensitivity to hydrogen content** — Can the engine tolerate variations in the steam-H₂ mixture composition? (Weighted high)
9. **Integration effort** — How many additional subsystems are required to interface with the reactor? (Weighted high)

Each criterion will be scored on a 1–5 scale (5 being best), and a weighted sum will be calculated. The weighting factors will be justified explicitly in the thesis, with reference to the industry interview findings (Section 3.1).

Step 2 — Thermal Integration Pathway Trade-Off

The reactor output is a hot mixture of steam and hydrogen gas. Two fundamentally different architectures for converting this output into shaft power will be evaluated:

Option A — Direct thermal integration (non-separation): The steam-H₂ mixture is fed directly into a downstream **combustor** where air is injected to burn the hydrogen. The combustion further superheats the steam, which is then expanded through a turbine. This approach eliminates the need for hydrogen separation, purification, compression, and storage—all of which are expensive, energy-intensive, and hard to certify. This is the preferred pathway for a Generation-1 prototype.

Option B — Hydrogen separation (limited buffer only): The steam is condensed to liquid water, and the gaseous hydrogen is separated for later combustion. However, to minimise system complexity, weight, and certification risk, **hydrogen storage will be strictly limited to a small buffer**—sufficient for no more than 10 minutes of operation at full power. This buffer serves only to smooth transient mismatches between hydrogen production and demand, not as a primary energy store. **Metal hydride storage and large-scale compressed hydrogen storage are explicitly excluded** from consideration for the Generation-1 system, as they introduce prohibitive weight, cost, and certification burdens. The analysis will identify the minimum buffer size required to enable the selected prime mover, but will not design the storage system itself.

The trade-off analysis will compare the two options against the evaluation criteria defined in Step 1. The hypothesis—that Option A (direct thermal integration) is superior for a Generation-1 system—will be tested using the weighted scoring.

Step 3 — Prime Mover Candidate Selection

Based on the outcome of Step 2, a set of mature, commercially available prime movers compatible with the selected thermal integration pathway will be identified. For Option A (direct thermal integration), the candidate prime movers are:

1. **Steam turbines** — Mature technology with extensive marine and industrial service records. Well-matched to the high-temperature steam output. Class society rules are well established. Efficiency in the 20–30% range for small-scale units (100–500 kW).
2. **Organic Rankine Cycle (ORC) engines** — Use an organic working fluid with a lower boiling point than water, enabling efficient power extraction from lower-temperature heat sources. Commercially available in the 50–500 kW range (e.g., Turboden, Ormat, Enertime). Increasingly used in marine waste-heat recovery, but have less extensive marine certification history than steam turbines.
3. **Diesel engines (dual-fuel or hydrogen-enriched)** — Dominant prime mover in the existing marine fleet, with mature certification pathways. Integrating hydrogen into a diesel cycle introduces injection, combustion control, and emissions challenges (particularly NO_x). This option will be retained primarily as a reference case and is expected to score lower than steam turbines on simplicity and certification risk.

Prime movers that are speculative, developmental, or lack marine certification will be **explicitly deprioritised**. These include solid oxide fuel cells, opposed-piston engines, supercritical CO₂ turbines, and Stirling engines. A brief justification for each deprioritised technology will be included in the thesis.

For each candidate prime mover, data on efficiency, power-to-weight, cost, maintenance intervals, and certification status will be gathered from:

- Manufacturer datasheets and technical publications.
- Classification society guidance documents (e.g., DNV-GL, LR, RINA class rules).
- Published literature on small-scale steam and ORC systems.
- Industry interviews (from Section 3.1).

Step 4 — Battery Buffer Specification

The transient response characterisation from Section 3.4 will produce a set of measured lag times, rise times, and ramp rates for the reactor when transitioning between power modes. These data will be used to define the requirements for a buffer battery.

Calculating the required energy and power:

For each measured mode transition, the battery’s required energy and power are determined by the **difference** between what the vessel demands and what the reactor actually produces during the transient. The reactor is never producing zero power—it is always ramping from one level to another—so the battery only needs to supply the **deficit**, not the full demand.

For example, if the vessel demands 150 kW but the reactor is currently producing 50 kW and ramping up, the battery must supply the 100 kW difference. If the reactor takes 30 seconds to complete the ramp, the total energy the battery must deliver is the sum of that 100 kW deficit over the ramp period—significantly less than the energy that would be required if the reactor were completely off. The same logic applies in reverse: if the reactor overshoots and produces more power than demanded, the battery may absorb the excess (charging), which affects its cycle life and cooling requirements.

For each transition, the **peak power deficit** (the largest instantaneous gap between demand and reactor output) defines the required battery power rating (kW). The **total energy deficit** (the sum of the gap over the entire transient) defines the required battery energy capacity (kWh).

Identifying the worst-case transition:

The transition that yields the largest energy requirement defines the minimum energy capacity, while the transition that yields the largest instantaneous power deficit defines the minimum power rating. These worst-case transitions are not necessarily the same—a slow ramp over a long period may require more energy, while a sudden demand step with a long lag may require high instantaneous power.

Applying a safety margin:

A safety margin (e.g., 20%) will be applied to both the energy and power requirements to account for measurement uncertainty, degradation over the battery’s lifetime, and conservative assumptions in the demand profiles.

Surveying commercially available marine batteries:

A systematic survey of marine-certified battery systems will be conducted. Focus will be on **lithium iron phosphate (LFP)** and **nickel manganese cobalt (NMC)** chemistries, as these have existing marine approvals (e.g., DNV-GL type approval, LR certification). Speculative chemistries (solid-state, sodium-ion, lithium-sulphur) announced in press releases but not yet commercially available in marine form will be excluded.

Recommending a hybrid topology:

The simplest hybrid architecture—series, parallel, or combined—that meets the buffering requirements will be recommended. The **series hybrid** (reactor to generator to battery to electric motor) decouples the reactor from the propeller, allowing the reactor to operate at its most efficient steady state while the battery handles transients. This is mechanically simple and will be the default recommendation unless a compelling case for parallel hybrid emerges.

Producing a procurement specification:

The final output will be a specification sheet listing the required battery capacity (kWh), power (kW), nominal voltage, C-rate, cooling requirements, and preferred chemistry. This specification is intended to be handed to a battery supplier for quotation, not to be a detailed engineering design.

Step 5 — Efficiency Target Relaxation

The preliminary energy density analysis in Section 1.1 assumed a 40% engine efficiency for metal fuels, derived from theoretical projections rather than real-world demonstration. For a Generation-1 prototype, this assumption is unrealistic. The methodology for revisiting the efficiency target is:

- **Literature review:** Gather published data on the actual efficiencies of small-scale (less than 1 MW) steam turbines, ORC engines, and diesel gensets. These will typically be in the range of 20–30% for steam turbines and ORC.
- **Consultation with manufacturers:** Where possible, obtain indicative efficiency curves from suppliers for units in the 100–500 kW range.
- **Trade-off analysis:** Compare the effective energy density of the aluminium fuel system (from Tables 1 and 2) using the literature-based efficiencies (20–30%) against competing electro-fuels (hydrogen, ammonia, methanol). If aluminium remains competitive (within a factor of 2 in volumetric energy density), the relaxed target is acceptable.
- **Justification:** The thesis will explicitly argue that a 20–30% efficiency target is sufficient for a proof-of-concept prototype, and that efficiency optimisation can be pursued in later development iterations once the fundamental safety and controllability of the reactor are demonstrated.

Step 6 — Synthesis into an Architectural Recommendation

The outputs of Steps 1–5 will be synthesised into a single, coherent **architectural recommendation** for the Generation-1 propulsion system. This recommendation will specify:

- The selected thermal integration pathway (direct combustion vs. limited separation).
- The recommended prime mover and the reason for its selection.
- The critical interface requirements: steam temperature, pressure, mass flow rate, hydrogen fraction, and allowable transient ramp rates.
- The recommended battery chemistry, capacity (kWh), and power (kW), and the preferred hybrid topology.
- The revised efficiency target and its justification.

The recommendation will be presented as a **decision matrix** and a **narrative summary**, with all assumptions and uncertainties explicitly documented. This is **not** a final engineering design—it is a **feasible and de-risked pathway** for the next phase of research and development.

Limitations and Scope Boundary

This analysis is explicitly **desk-based**. It does not involve:

- Simulation of engine or battery performance.
- Physical testing of any prime mover or battery cell.
- Detailed design of engine control systems, alternators, power electronics, or thermal management.
- Cost-engineering or procurement of any component.

The outputs are **requirements and recommendations**, not designs. They are intended to inform and de-risk subsequent work, which will involve full-scale simulation, prototype integration, and certification testing.

4 Proposed Project Time-line

This research is structured as a single 48-month programme with five Go/No-Go gates, the third of which is a funding decision for reactor equipment. If that gate is not met, the programme concludes at Month 24 with a Master of Philosophy on the strength of the completed research; if it is met, the programme continues through Month 48 to a PhD incorporating the full experimental agenda.

The research timeline is a 48-month, risk-buffered plan built around four structural features:

- **Five go/no-go gates** — explicit decision points at which scope is adjusted if time has been lost.
- **A tiered experiment programme** — Tier 1 (core), Tier 2 (extended), and Tier 3 (optional). The thesis is defensible on Tier 1 alone.

Prioritisation of Experimental Tiers

The experimental programme has been structured to prioritise the most critical data for the project’s primary objectives:

- **Tier 1 (Core)** — Distilled water experiments covering temperature, pressure, particle size, and fuel-to-water ratio optimisation. This tier is essential for the project’s success and provides all data required for control system development and battery sizing.
- **Tier 2 (Extended)** — Synthetic seawater experiments and limited natural seawater tests. These are valuable for understanding seawater’s effects but are not required for the primary research objectives. Tier 2 is pursued if the experimental schedule permits.
- **Tier 3 (Optional)** — Extended natural seawater runs (both coarse-filtered and fine-filtered), long-duration fouling studies, and repeat validation runs. These are conducted only if the project is ahead of schedule.

The tiered structure ensures that the thesis remains defensible on Tier 1 alone, while providing flexibility to extend the work if time and resources permit.

Phase	Months (Gate 3 met)	Months (Gate 3 not met)	Notes
Phase 0: Founda- tion	M1–4	M1–4	Literature review, interview guide de- velopment, peer review of experimen- tal design, safety submission, equipment list and budget finalisation, procurement specification, grant applications begin
Phase 1A: Industry Research (RQ1)	M1–7	M1–7	Pilot interviews, stakeholder interviews, quantitative analysis, requirements ma- trix
Phase 1B: Supply Chain Analysis (RQ2)	M8–18	M8–18	Aluminium fuel cost vs. ammonia and methanol, extending Section 1.5
Phase 2: Reactor Commissioning	M19–24	—	Procurement (begins on funding confir- mation), build, calibration
Phase 3: Core Reactor Characterisation (RQ3)	M25–33	—	Tier 1 (distilled water): tempera- ture/pressure optimisation, particle size screening, by-product analysis, repeat/- validation runs — core deliverable. Tier 2 (synthetic seawater) and Tier 3 (natu- ral seawater) are conditional extensions, pursued if time permits within this win- dow; not required to satisfy Gate 5
Phase 4: Control Systems Develop- ment (RQ4)	M33–45	—	Open-loop plant characterisation, closed-loop implementation, mode gran- ularity optimisation
Phase 5: Engine and Battery System Analysis (RQ5)	M45–47	M19–24	Trade-off analysis; informed by mea- sured RQ3/RQ4 data if Gate 3 is met, or run alongside thesis writing if not
Phase 6: Thesis Writing and Submis- sion	M45–48	M19–24	Concentrated final writing; chapter drafting on completed phases begins ear- lier throughout

Table 6: Project Timeline Phases

Gate	Month	Criterion	If not met
Gate 1	M4	Safety approval granted	Commissioning (Phase 2) start delayed until approval is granted; schedule shifts by the same margin
Gate 2	M7	Requirements matrix finalised (RQ1)	Use provisional targets; revise in thesis
Gate 3	M18	Equipment funding secured	Skip Phases 2–4; proceed directly to Phase 5 (RQ5) and Phase 6, submit at M24 as MPhil. (Funding strategy: Appendix Appendix C:)
Gate 4	M29	Core Reactor Characterisation (RQ3) on track for M33 completion, accounting for any delay carried forward from Phase 2	Reduce particle size grades tested: 7 $\rightarrow$ 4, to complete within the remaining window; Tier 2 and Tier 3 seawater experiments deferred to future work
Gate 5	M33	RQ3 validated and sufficient to define RQ4 conditions	Reduce mode granularity tested to 3 discrete levels: 0%, 50%, 100%
Submission	M24 (Gate 3 not met) / M48 (Gate 3 met)	Thesis submitted	—

Table 7: Go/No-Go Gate Summary


Go/No-Go Gate Summary

Key Scheduling Decisions


- **Grant applications begin at programme start** (Phase 0), in parallel with all other early activity, to maximise the runway before the Gate 3 deadline at M18.
- **Equipment list, budget, and procurement specification are finalised by M1–2** so that ordering can begin the instant Gate 3 is met, whenever that occurs within the M1–18 window — procurement does not wait for a fixed calendar month.
- **Gate 1 (safety approval) proceeds on schedule regardless of Gate 3’s outcome**, since it costs no money and must not become a second bottleneck stacked on top of procurement once funding lands.

- **RQ2 sits inside Phase 1B (M8–18)**; RQ5 is deliberately held until after Phase 4 if Gate 3 is met, since its trade-off analysis benefits from measured reactor performance data rather than projections alone — or paired with thesis writing if Gate 3 is not met.
- **Gate 3 is a hard deadline for abandoning Phases 2–4**, not a fixed start date for them — if funding is confirmed earlier than M18, procurement and the downstream schedule begin immediately.
- **The Phase 2–6 schedule will be revised at the point Gate 3 is met**, since the exact confirmation date determines how much procurement lead time overlaps with the remainder of Phase 1B.
- **The industry partnership model through which Phase 2 equipment funding is sought** is set out in Appendix [Appendix C](#).


Year 1 (Months 1–12)

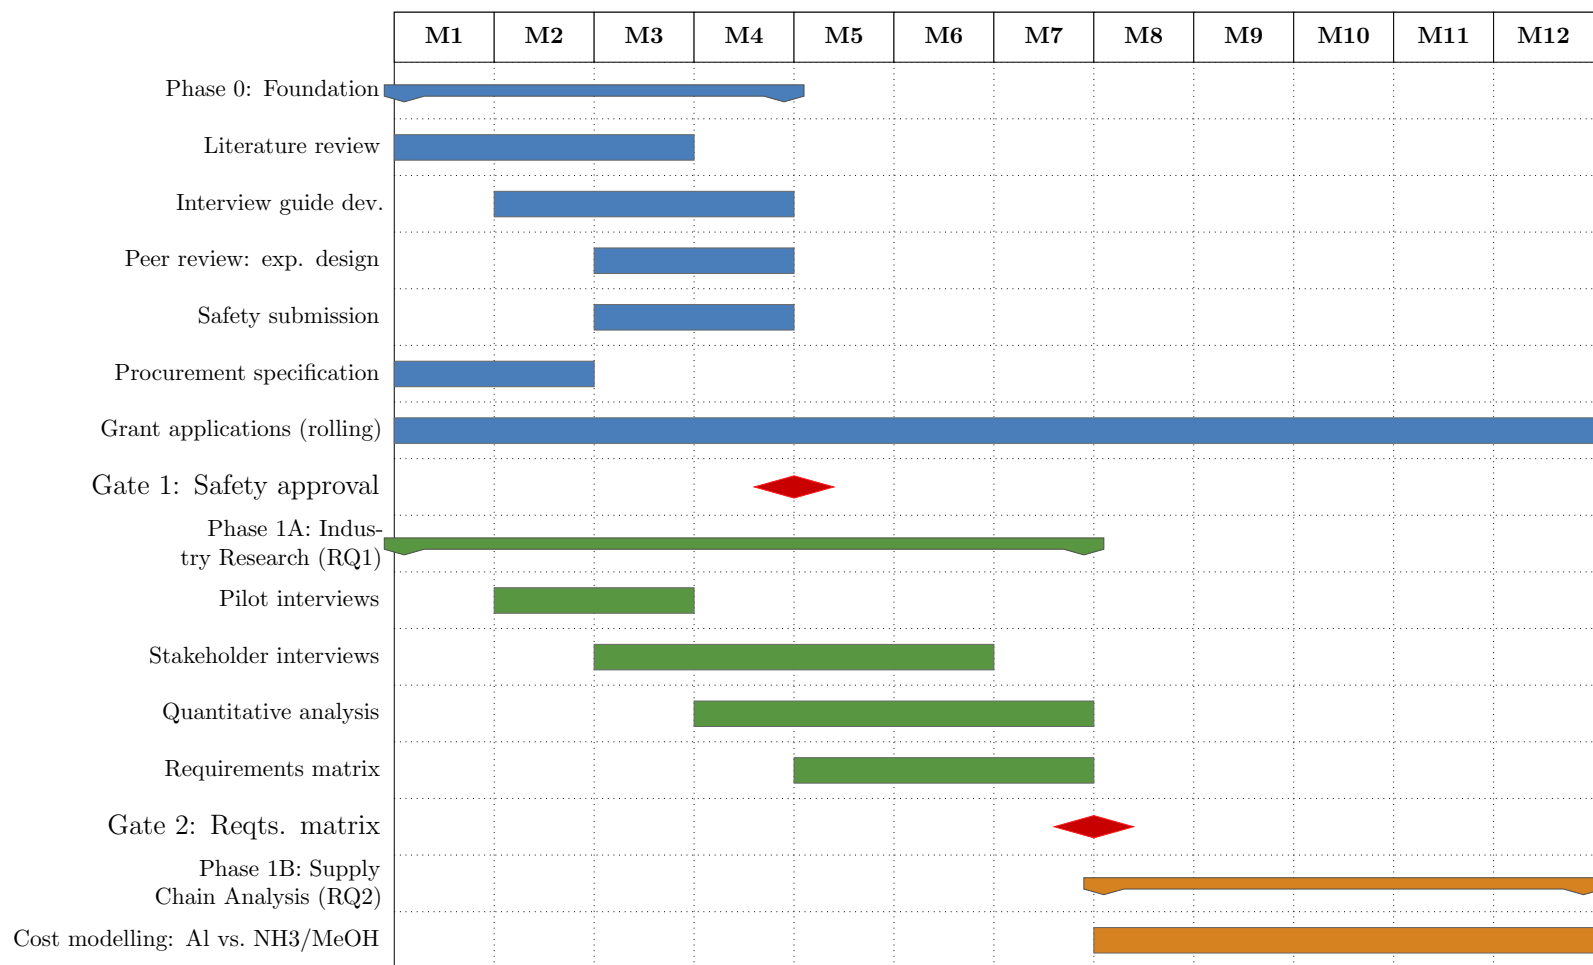


Year 2 (Months 13–24) — Gate 3 Funding Decision at M18

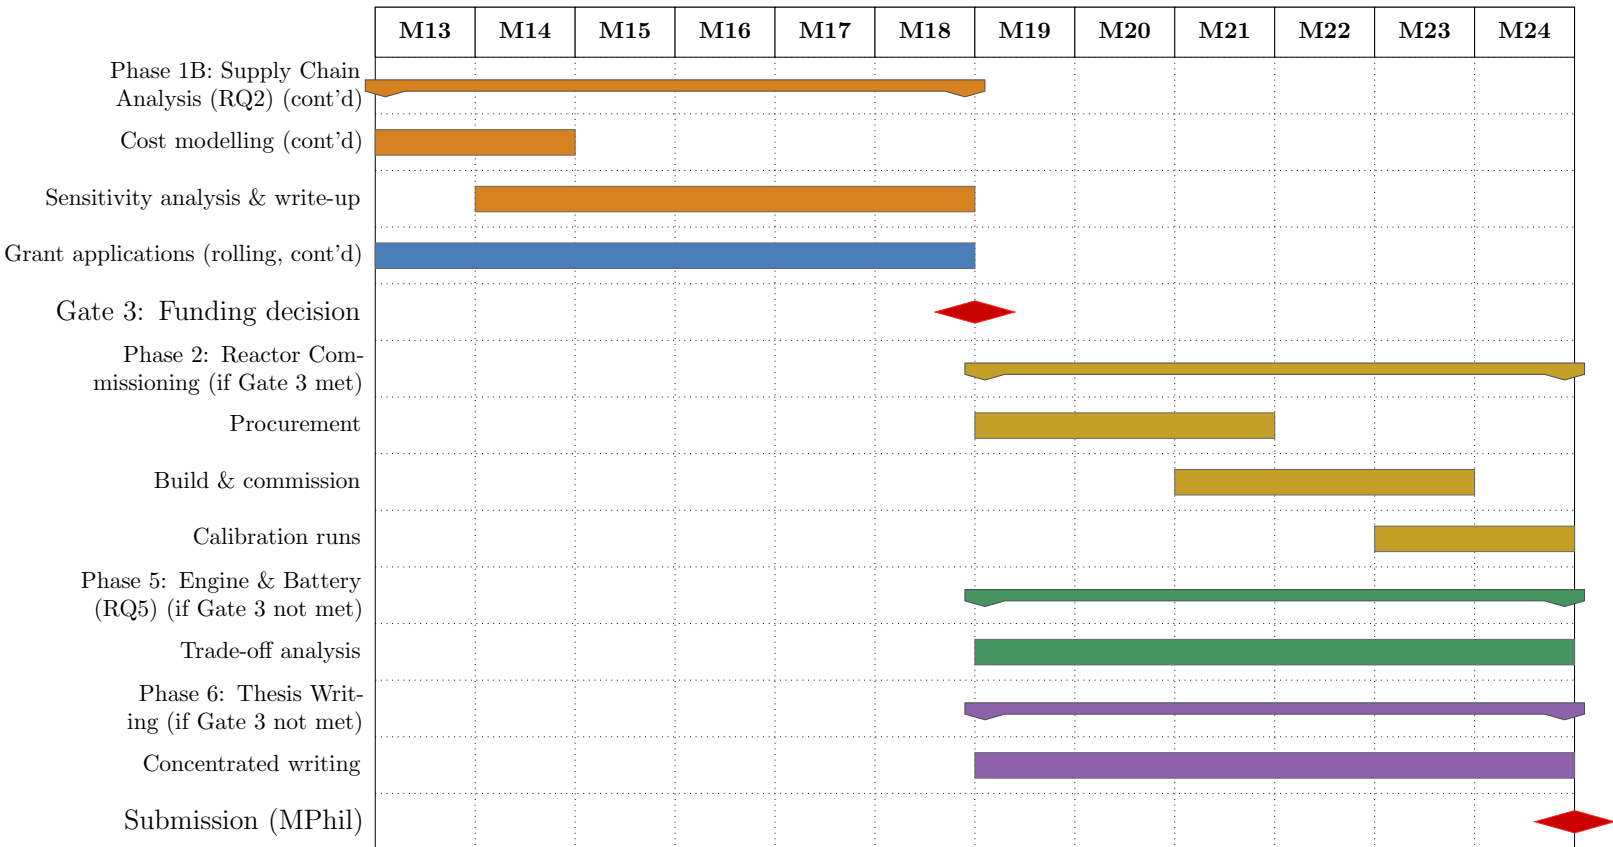

Year 3 (Months 25–36) — PhD Pathway

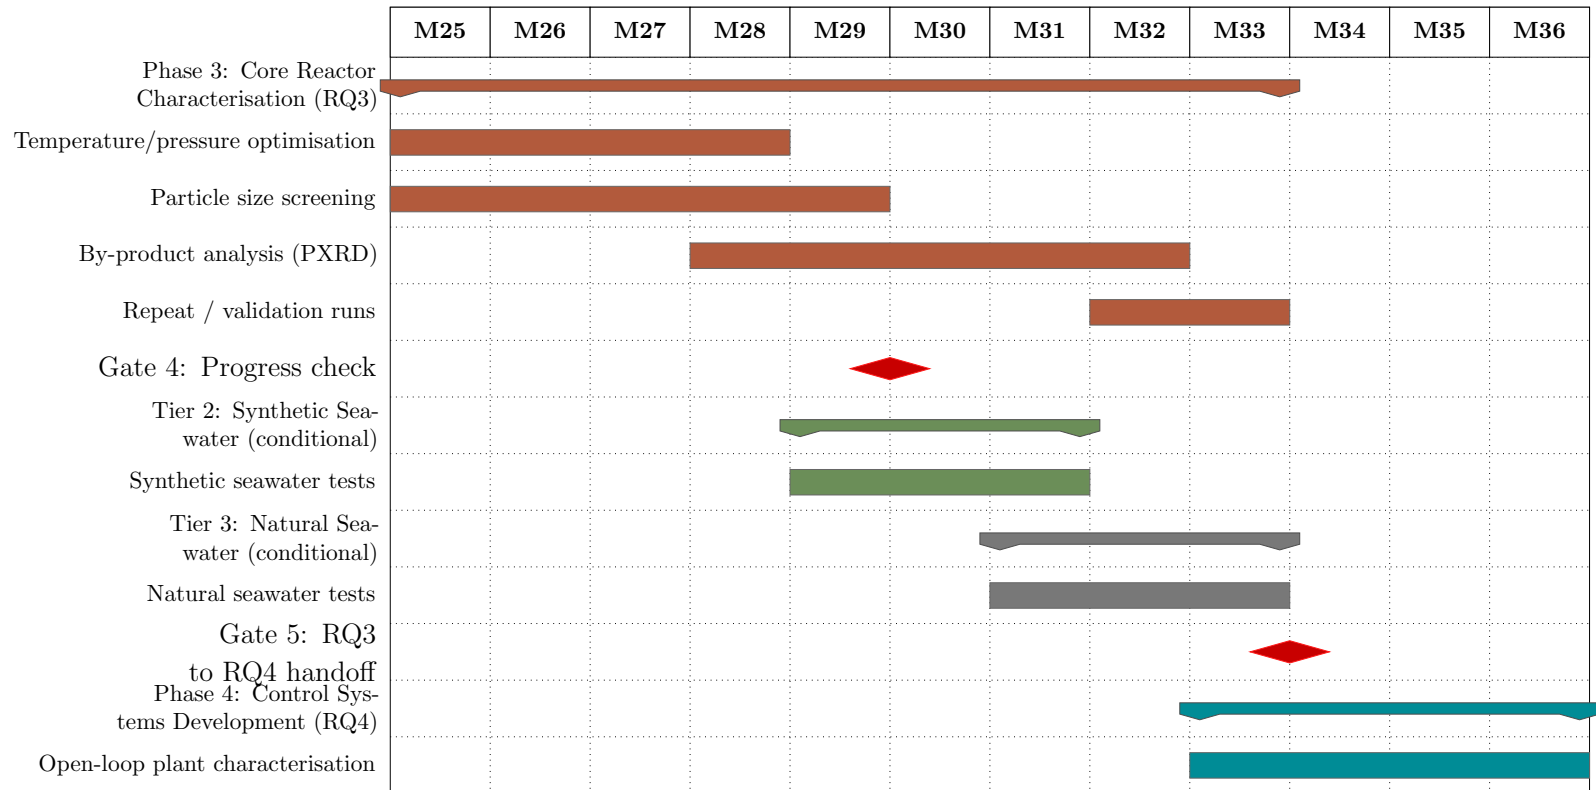

Year 4 (Months 37–48) — PhD Pathway

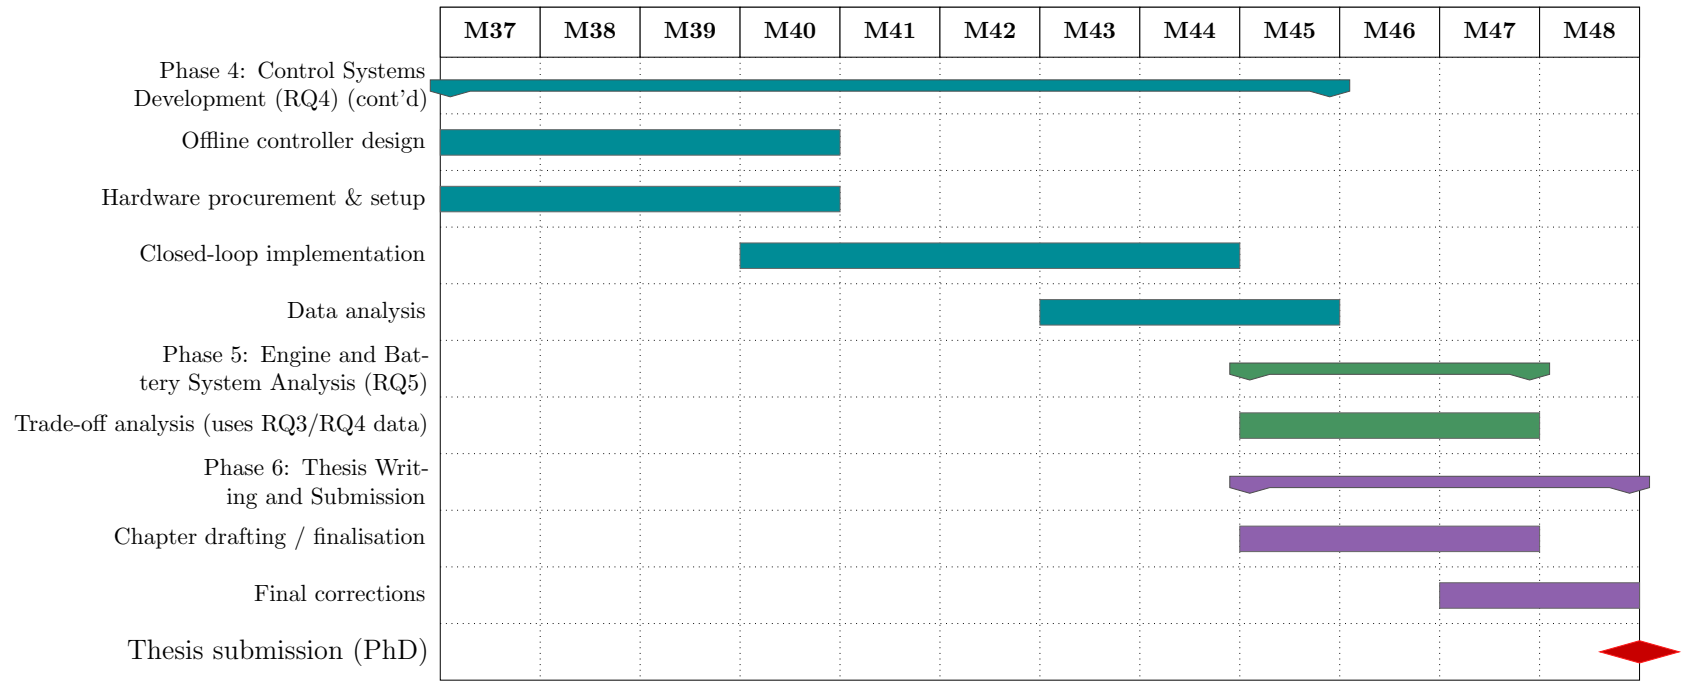

5 References

- [1] K. A. Trowell, S. Goroshin, D. L. Frost, and J. M. Bergthorson, “Aluminum and its role as a recyclable, sustainable carrier of renewable energy,” *Appl. Energy*, vol. 275, p. 115112, Oct. 2020.
- [2] H. Ritchie, “Cars, planes, trains: where do co2 emissions from transport come from?,” *Our World in Data*, 2020. <https://ourworldindata.org/co2-emissions-from-transport>.
- [3] H. Ritchie, “Sector by sector: where do global greenhouse gas emissions come from?,” *Our World in Data*, 2020. <https://ourworldindata.org/ghg-emissions-by-sector>.
- [4] “2023 IMO Strategy on Reduction of GHG Emissions from Ships — imo.org.” <https://www.imo.org/en/OurWork/Environment/Pages/2023-IMO-Strategy-on-Reduction-of-GHG-Emissions-from-Ships.aspx>. [Accessed 24-10-2024].
- [5] M. Roser, “Why did renewables become so cheap so fast?,” *Our World in Data*, 2020. <https://ourworldindata.org/cheap-renewables-growth>.
- [6] M. Maisch, “BNEF: Lithium-ion battery pack prices fall to \$108/kWh, stationary storage becomes lowest price segment - Energy Storage — ess-news.com.” <https://www.ess-news.com/2025/12/09/bnef-lithium-ion-battery-pack-prices-fall-to-108-kwh-stationary-storage-becomes-lowest-price-segment/#pid=1>. [Accessed 12-12-2025].
- [7] C. McKerracher, “China’s Clean-Truck Surprise Defies the EV Slowdown Narrative — BloombergNEF — about.bnef.com.” <https://about.bnef.com/insights/clean-transport/chinas-clean-truck-surprise-defies-the-ev-slowdown-narrative/>. [Accessed 12-12-2025].
- [8] M. Barnard, “And So It Begins: 1,000-Kilometer Route Yangtze Container Ship With Swappable Batteries - CleanTechnica — cleantechnica.com.” <https://cleantechnica.com/2023/07/31/and-so-it-begins-1000-kilometer-route-yangtze-container-ship-with-swappable-batteries/>. [Accessed 12-12-2025].
- [9] M. P. Release, “Maersk and CATL Forge Global Strategic Partnership in Supply Chain Electrification and International Logistics — maersk.com.” <https://www.maersk.com/news/articles/2025/10/10/maersk-and-catl-forge-global-strategic-partnership-in-supply-chain>. [Accessed 12-12-2025].
- [10] “The New Energy Trade: Harnessing Australian renewables for global development — superpowerinstitute.com.au.” <https://www.superpowerinstitute.com.au/work/the-new-energy-trade>. [Accessed 26-11-2024].
- [11] B. Dunn, H. Kamath, and J.-M. Tarascon, “Electrical energy storage for the grid: a battery of choices,” *Science*, vol. 334, pp. 928–935, Nov. 2011.
- [12] F. T. Wagner, B. Lakshmanan, and M. F. Mathias, “Electrochemistry and the future of the automobile,” *J. Phys. Chem. Lett.*, vol. 1, pp. 2204–2219, July 2010.

- [13] J. M. Bergthorson, “Recyclable metal fuels for clean and compact zero-carbon power,” *Prog. Energy Combust. Sci.*, vol. 68, pp. 169–196, Sept. 2018.
- [14] Infinium, “Infinium™ Enters into Strategic Alliance with Denbury for Ultra-Low Carbon Fuels Projects in Texas, Continuing Development Momentum — prnewswire.com.” <https://www.prnewswire.com/news-releases/infinium-enters-into-strategic-alliance-with-denbury-for-ultra-low-carbon-fuels-projects-in-texas-continuing-development-momentum-301489124.html>. [Accessed 13-01-2025].
- [15] J. M. Bergthorson, S. Goroshin, M. J. Soo, P. Julien, J. Palecka, D. L. Frost, and D. J. Jarvis, “Direct combustion of recyclable metal fuels for zero-carbon heat and power,” *Appl. Energy*, vol. 160, pp. 368–382, Dec. 2015.
- [16] “Combustion of Fuels - Carbon Dioxide Emission — engineeringtoolbox.com.” https://www.engineeringtoolbox.com/co2-emission-fuels-d_1085.html. [Accessed 10-01-2025].
- [17] “Maersk orders six methanol powered vessels — maersk.com.” <https://www.maersk.com/news/articles/2023/06/26/maersk-orders-six-methanol-powered-vessels>. [Accessed 13-01-2025].
- [18] J. de Kwant, R. Hekkenberg, A. Souflis-Rigas, and A. A. Kana, “Exploring the potential of iron powder as fuel on the design and performance of container ships,” *Int. Shipbuild. Prog.*, vol. 70, pp. 3–28, June 2023.
- [19] N. Klopčič, I. Grimmer, F. Winkler, M. Sartory, and A. Trattner, “A review on metal hydride materials for hydrogen storage,” *J. Energy Storage*, vol. 72, p. 108456, Nov. 2023.
- [20] H. Kvande and W. Haupin, “Inert anodes for AI smelters: Energy balances and environmental impact,” *JOM (1989)*, vol. 53, pp. 29–33, May 2001.
- [21] G. Risha, T. Connell, R. Yetter, V. Yang, T. Wood, M. Pfeil, T. Pourpoint, and S. Son, “Aluminum-ICE (ALICE) propellants for hydrogen generation and propulsion,” in *45th AIAA/ASME/SAE/ASEE Joint Propulsion Conference & Exhibit*, (Reston, Virigina), American Institute of Aeronautics and Astronautics, Aug. 2009.
- [22] D. F. Waters and C. P. Cadou, “Modeling a hybrid rankine-cycle/fuel-cell underwater propulsion system based on aluminum–water combustion,” *J. Power Sources*, vol. 221, pp. 272–283, Jan. 2013.
- [23] M. S. Vlaskin, G. E. Valyano, A. Z. Zhuk, and E. I. Shkolnikov, “Oxidation of coarse aluminum in pressured water steam for energy applications,” *Int. J. Energy Res.*, vol. 44, pp. 8689–8715, Sept. 2020.
- [24] A. Bolt, I. Dincer, and M. Agelin-Chaab, “A review of unique aluminum–water based hydrogen production options,” *Energy Fuels*, vol. 35, pp. 1024–1040, Jan. 2021.
- [25] J. M. Bergthorson, Y. Yavor, J. Palecka, W. Georges, M. Soo, J. Vickery, S. Goroshin, D. L. Frost, and A. J. Higgins, “Metal-water combustion for clean propulsion and power generation,” *Appl. Energy*, vol. 186, pp. 13–27, Jan. 2017.

- [26] “Technology Works; Found Energy — found.energy.” <https://found.energy/technology-works/>. [Accessed 12-01-2026].
- [27] M. S. Vlaskin, E. I. Shkolnikov, and A. V. Bersh, “Oxidation kinetics of micron-sized aluminum powder in high-temperature boiling water,” *Int. J. Hydrogen Energy*, vol. 36, pp. 6484–6495, June 2011.
- [28] T. Sun, E. Shrestha, S. P. Hamburg, R. Kupers, and I. B. Ocko, “Climate impacts of hydrogen and methane emissions can considerably reduce the climate benefits across key hydrogen use cases and time scales,” *Environmental Science & Technology*, vol. 58, no. 12, pp. 5299–5309, 2024. PMID: 38380838.
- [29] K. Wang, S. R. Sanders, S. Dubey, F. H. Choo, and F. Duan, “Stirling cycle engines for recovering low and moderate temperature heat: A review,” *Renew. Sustain. Energy Rev.*, vol. 62, pp. 89–108, Sept. 2016.
- [30] D. M. van de Bor, C. A. Infante Ferreira, and A. A. Kiss, “Low grade waste heat recovery using heat pumps and power cycles,” *Energy (Oxf.)*, vol. 89, pp. 864–873, Sept. 2015.
- [31] M. Y. Haller, D. Amstad, M. Dudita, A. Englert, and A. Häberle, “Combined heat and power production based on renewable aluminium-water reaction,” *Renew. Energy*, vol. 174, pp. 879–893, Aug. 2021.
- [32] “Energy Density of some Combustibles — The Geography of Transport Systems — transport-geography.org.” <https://transportgeography.org/contents/chapter4/transportation-and-energy/combustibles-energy-content/>. [Accessed 25-11-2024].
- [33] PubChem, “Density, gasoline (nominal: 0.7429 g/ml @ 15 degrees c).” <https://pubchem.ncbi.nlm.nih.gov/substance/483747003>. Accessed: 2024-11-26.
- [34] PubChem, “Aluminum.” <https://pubchem.ncbi.nlm.nih.gov/compound/5359268>. Accessed: 2024-11-26.
- [35] PubChem, “Aluminum hydroxide.” <https://pubchem.ncbi.nlm.nih.gov/compound/10176082>. Accessed: 2024-11-26.
- [36] D. Barthelmy, “Boehmite mineral data.” <http://webmineral.com/data/Boehmite.shtml>. Accessed: 2024-11-26.
- [37] PubChem, “Aluminum oxide.” <https://pubchem.ncbi.nlm.nih.gov/compound/9989226>. Accessed: 2024-11-26.
- [38] P. Godart, J. Fischman, K. Seto, and D. Hart, “Hydrogen production from aluminum-water reactions subject to varied pressures and temperatures,” *Int. J. Hydrogen Energy*, vol. 44, pp. 11448–11458, May 2019.
- [39] M. Kolodziejski and I. Michalska-Pozoga, “Battery energy storage systems in ships’ hybrid/-electric propulsion systems,” *Energies*, vol. 16, p. 1122, Jan. 2023.

- [40] A. Escamilla, D. Sánchez, and L. García-Rodríguez, “Assessment of power-to-power renewable energy storage based on the smart integration of hydrogen and micro gas turbine technologies,” *Int. J. Hydrogen Energy*, vol. 47, pp. 17505–17525, May 2022.
- [41] S. Giddey, S. P. S. Badwal, C. Munnings, and M. Dolan, “Ammonia as a renewable energy transportation media,” *ACS Sustain. Chem. Eng.*, vol. 5, pp. 10231–10239, Nov. 2017.
- [42] “World energy statistics (edition 2018),” Mar. 2019. Title of the publication associated with this dataset: IEA World Energy Statistics and Balances.
- [43] “Electricity rates for business customers — hydroquebec.com.” <https://www.hydroquebec.com/business/customer-space/rates/>. [Accessed 24-10-2024].
- [44] L. Wu, Q. Huo, Q. Liu, J. Yin, and J. Yang, “Multi-time-scale optimization and control method for high-penetration photovoltaic electrolytic aluminum plants,” *Energies*, vol. 18, p. 5840, Nov. 2025.
- [45] S. M. Market, “Yunnan aluminum: Pv power generation dc integration into aluminum production power supply technology is an industry first.” <https://news.metal.com/es/newscontent/103901603-SMM-PV-Yunnan-Aluminum-PV-Power-Generation-DC-Integration-into-Aluminum-Production-Power-Supply-Technology-Is-an-Industr>, 2026. [Accessed 17-05-2026].
- [46] M. Dorreen, L. Wright, G. Matthews, P. Patel, and D. S. Wong, “Transforming the way electricity is consumed during the aluminium smelting process,” in *The Minerals, Metals & Materials Series*, The Minerals, Metals & Materials Series, pp. 15–25, Cham: Springer International Publishing, 2017.
- [47] “EnPot demonstrates power flexibility in China smelter trials — EnPot — enpot.com.” <https://enpot.com/media/news/video>. [Accessed 17-05-2026].
- [48] “ELYSIS achieves breakthrough with commercial-size cell: a first in aluminium production using the inert anode technology — riotinto.com.” <https://www.riotinto.com/en/can/news/releases/2025/elysis-achieves-breakthrough-with-commercial-size-cell>. [Accessed 17-05-2026].
- [49] J. Coelen, “What makes a great beachhead market? — doctormarket.fit.” <https://www.doctormarket.fit/p/what-makes-a-great-beachhead-market>. [Accessed 14-05-2026].
- [50] BERNAMA, “GLOBAL UHNW POPULATION SET TO RISE 33 PCT BY 2030, REPORT FINDS — bernama.com.” <https://bernama.com/tv/news.php/news.php?id=2556029>. [Accessed 14-05-2026].
- [51] “® OFFICIAL Silent Yachts — Solar powered yachts — silent-yachts.com.” <https://silent-yachts.com/>. [Accessed 14-05-2026].
- [52] “Austal in LOI for 130-meter Gotland Horizon X hydrogen-fueled cat - Maritime and Salvage Wolrd News - Latest Ship Technologies — marine-salvage.net.” <https://marine-salvage.net/en/maritime-news/austal-in-loi-for-130-meter-gotland-horizon-x-hydrogen-fueled-cat/>. [Accessed 14-05-2026].

- [53] “Practical guide for approval of ammonia- or hydrogen-fuelled ships — Hellenic Shipping News Worldwide — hellenicshippingnews.com.” <https://www.hellenicshippingnews.com/practical-guide-for-approval-of-ammonia-or-hydrogen-fuelled-ships-2/>. [Accessed 14-05-2026].
- [54] “Why class societies are not just box tickers — boatinternational.com.” https://www.boatinternational.com/boat-presents/rina-classification-society-class-rules?j=586935&jb=6&l=55_{H}{T}{M}{L}&mid=500009995&sfmc_id=417830332&sfmc_sub=417830332&u=13972977&utm_campaign={B}oat+{B}riefing+251124&utm_id=586935&utm_medium=email&utm_source=sfmc&utm_term={W}hy+class+societies+are+not+just+box+tickers+{B}{P}+{A}{R}{T}{I}{C}{L}{E}+{I}{M}{A}{G}{E}. [Accessed 14-05-2026].
- [55] “New case study takes up Tesla’s entry into the auto industry — MIT Sloan — mitsloan.mit.edu.” <https://mitsloan.mit.edu/ideas-made-to-matter/new-case-study-takes-teslas-entry-auto-industry>. [Accessed 14-05-2026].
- [56] International Energy Agency, “Ammonia technology roadmap: Towards more sustainable nitrogen fertiliser production,” tech. rep., IEA, Paris, 2021.
- [57] World Economic Forum, “Net-zero industry tracker 2023: Ammonia,” tech. rep., World Economic Forum, 2023.
- [58] Fuel Cells Works, “China launches first green hydrogen-integrated coal chemicals plant in inner mongolia,” Nov. 2025.
- [59] Straits Research, “Green methanol market size, share, and trends analysis report,” tech. rep., Straits Research, 2025.
- [60] Transition Asia, “Explainer: Aluminium production, demand, and decarbonisation opportunities for the sector,” tech. rep., Transition Asia, 2025.
- [61] European Commission Joint Research Centre, “Decarbonisation options for the aluminium industry,” Tech. Rep. JRC136525, Publications Office of the European Union, Luxembourg, 2024.
- [62] S. Kvale and S. Brinkmann, *InterViews: Learning the Craft of Qualitative Research Interviewing*. Sage, 2 ed., 2009.
- [63] M. Q. Patton, *Qualitative Research and Evaluation Methods*. Sage, 3 ed., 2002.
- [64] G. Guest, A. Bunce, and L. Johnson, “How many interviews are enough? An experiment with data saturation and variability,” *Field Methods*, vol. 18, no. 1, pp. 59–82, 2006.
- [65] V. Braun and V. Clarke, “Using thematic analysis in psychology,” *Qualitative Research in Psychology*, vol. 3, no. 2, pp. 77–101, 2006.
- [66] M. B. Miles, A. M. Huberman, and J. Saldaña, *Qualitative Data Analysis: A Methods Sourcebook*. Sage, 3 ed., 2014.

- [67] D. Dardor, D. Flórez-Orrego, R. Germanier, M. Margni, and F. Maréchal, “Decarbonizing the aluminium industry: a comprehensive review of pathways and process integration perspectives,” *Energy Strategy Reviews*, 2025.
- [68] P. Boudreau, M. Johnson, and J. M. Bergthorson, “Techno-economic assessment of aluminum as a clean energy carrier to decarbonize remote industries,” *Energy Advances*, vol. 3, pp. 1919–1931, 2024.
- [69] D. Wang, W. Meng, H. Zhou, Y. Yang, J. Xie, S. Yang, and G. Li, “Novel coal-to-methanol process with near-zero carbon emission: pulverized coal gasification-integrated green hydrogen process,” *Journal of Cleaner Production*, vol. 339, no. 130500, 2022.
- [70] Y. Zhao, Q. Liu, Y. Duan, Y. Zhang, Y. Huang, L. Shi, J. Wang, and Q. Yi, “A multidimensional feasibility analysis of coal to methanol assisted by green hydrogen from a life cycle viewpoint,” *Energy Conversion and Management*, vol. 270, no. 116289, 2022.
- [71] R. Nayak-Luke, R. Bañares-Alcántara, and I. Wilkinson, “‘green’ ammonia: Impact of renewable energy intermittency on plant sizing and levelized cost of ammonia,” *Industrial & Engineering Chemistry Research*, vol. 57, no. 43, pp. 14607–14616, 2018.
- [72] N. Campion, H. Nami, P. R. Swisher, P. Vang Hendriksen, and M. Münster, “Techno-economic assessment of green ammonia production with different wind and solar potentials,” *Renewable and Sustainable Energy Reviews*, vol. 173, no. 113057, 2023.
- [73] S. Sollai, A. Porcu, V. Tola, F. Ferrara, and A. Pettinau, “Renewable methanol production from green hydrogen and captured CO₂: A techno-economic assessment,” *J. CO₂ Util.*, vol. 68, p. 102345, Feb. 2023.
- [74] DNV, “Decision on the IMO Net-Zero Framework delayed for one year,” tech. rep., DNV, 2025.
- [75] Hapag-Lloyd and Sustainable Ships, “Update on the European Emission Trading System (EU ETS) — full implementation from 2026; EU ETS price forecast — 2026,” 2026.
- [76] International Organization for Standardization, “ISO 22120:2026 — ships and marine technology — specification for bunkering of methanol fuelled vessels.” ISO, Geneva, 2026.
- [77] International Maritime Organization, “Interim guidelines for the safety of ships using ammonia as fuel.” MSC.1/Circ.1687, Feb. 2025.
- [78] P. Boudreau, F. Osorio-MacCready, J. Blanchet, and J. M. Bergthorson, “Reactivity of commercial aluminum alloys in high-temperature water for hydrogen and heat generation,” *Fuel (Lond.)*, vol. 407, p. 137278, Mar. 2026.
- [79] I. Finnie, “Erosion of surfaces by solid particles,” *Wear*, vol. 3, no. 2, pp. 87–103, 1960.
- [80] O. Levenspiel, *Chemical Reaction Engineering*. New York: John Wiley & Sons, 3 ed., 1999.
- [81] R. I. Eremin, V. I. Sizyakov, and V. N. Brichkin, “Dissolution of aluminium hydroxide forms in alkaline solutions,” *Russian Journal of Applied Chemistry*, vol. 77, no. 4, pp. 541–546, 2004.

Appendix A: Laboratory Safety Protocols and Experimental Plan Verification

A.1 Safety Protocols

The experimental programme involves four concurrent categories of hazard. Each must be fully addressed before any laboratory work begins.

A.1.1 Aluminium Powder Hazards

Micron-sized aluminium powder presents four distinct hazards:

- 1. Dust cloud combustion.** Aluminium dust clouds are highly combustible and can detonate if ignited above the minimum ignition energy threshold.
 - All powder transfers will be conducted inside a dedicated enclosed glove box maintained under a dry nitrogen atmosphere.
 - Open flames, electrical sparks, and non-antistatic equipment are strictly prohibited within five metres of all powder handling areas.
- 2. Exothermic reaction with moisture.** Aluminium reacts exothermically with ambient moisture, liberating flammable hydrogen gas.
 - All powder handling will be conducted under inert atmosphere or with active humidity control maintained below 30% relative humidity.
 - The reactor will be nitrogen-purged before each loading operation.
- 3. Inhalation risk (aluminosis).** Chronic inhalation of aluminium dust causes pulmonary fibrosis.
 - P100 full-face respirators are mandatory during all powder handling.
 - An enclosed handling system is preferred wherever practicable.
 - Post-experiment reactor cleaning will be conducted under wet-suppression conditions to prevent dust re-entrainment.
- 4. Prohibition on water-based extinguishers.** Water reacts with aluminium to produce hydrogen and is strictly prohibited as an extinguishing agent in any area where aluminium powder is present.
 - Class D dry-powder extinguishers (copper powder or sodium chloride type) will be stationed at all powder handling positions.

A.1.2 Hydrogen Gas Hazards

Hydrogen has a lower explosive limit (LEL) of 4% in air. The following controls will be maintained throughout all experimental sessions.

Ventilation and monitoring:

- A dedicated forced-ventilation exhaust hood will be installed over the reactor gas outlet, maintaining hydrogen concentration below 1% (25% of LEL) at all monitoring points.
- Electrochemical hydrogen sensors will be positioned in the gas outlet stream and at multiple points within the reactor enclosure.
- Audible alarms will activate at 1% hydrogen concentration.
- Automatic equipment shutdown interlocks will engage at 2%.

Ignition prevention:

- All equipment will be bonded and earthed to prevent static discharge ignition.
- Antistatic flooring will be installed throughout the reactor area.
- Synthetic clothing is prohibited during all experimental sessions.

Containment and disposal:

- All gas line connections will use pressure-rated compression fittings rated to at least twice operating pressure.
- A nitrogen leak check will be performed before every experiment.
- All hydrogen not captured for measurement will be routed through a catalytic oxidiser before venting to atmosphere, eliminating both the ignition risk and the indirect climate impact of hydrogen release.

A.1.3 High-Pressure and High-Temperature Hazards

Pressure vessel integrity:

- All pressurised components will be rated to a minimum of twice the maximum operating pressure (≥ 50 MPa).
- The reactor vessel will undergo third-party hydrostatic pressure testing annually.
- A spring-loaded pressure relief valve set at $1.25\times$ operating pressure will be installed, with an independent secondary burst disc as a redundant protection layer.

Operational controls:

- The reactor will be operated from behind a rated polycarbonate blast shield at all times.
- All reactor external surfaces will be thermally insulated.
- Heat-resistant gloves and a face shield are mandatory during setup and any access to the reactor area during operation.
- A formal cooldown and pressure equalisation protocol will be followed before any reactor valve is opened.

- An interlock will prevent opening any reactor valve while internal pressure exceeds 0.5 MPa.

Steam outlet management:

- All steam outlet lines will be thermally insulated and labelled with appropriate warning markings.
- All steam outlet lines will be routed through a condensate trap before reaching any gas measurement instruments.

A.1.4 Reactor Fouling Control and Cleaning Protocol

Background and justification. The experimental programme uses a continuous-flow architecture: aluminium-water slurry is injected continuously via the variable-speed high-pressure plunger pump, the aluminium-water reaction proceeds within the pressurised reactor vessel, and the product stream — a mixture of hydrogen gas, steam, and aluminium oxide slurry — exits continuously.

Al_2O_3 (corundum) has a Mohs hardness of approximately 9, making it one of the most abrasive ceramic materials encountered in process engineering [79]. In a continuous-flow system it forms continuously at the reaction interface and must be carried out of the reactor by the product stream. The critical fouling locations are:

- **Product outlet valve and withdrawal line** — progressive blockage reduces product withdrawal flow rate and causes reactor pressure to rise at constant injection rate.
- **Slurry injection nozzle** — erosive wear progressively enlarges the nozzle bore, changing the injection flow rate at any given pump speed.
- **Plunger pump head and check valves** — continuous exposure to abrasive slurry at high pressure accelerates wear of valve seats and the plunger seal.

If fouling is not actively managed, it introduces drift in injection rate and reactor pressure during experimental runs, constituting an uncontrolled variable that directly corrupts transient load data [80].

Pre-experiment fouling baseline characterisation

Before the main parameter sweep begins, three to five continuous-flow baseline runs will be conducted at representative steady-state conditions:

- Temperature: 350°C Pressure: 20 MPa
- Particle size: 100 μm Water-to-aluminium mass ratio: 9
- Run duration: minimum 60 minutes at constant pump speed

The following measurements will be recorded at 5-minute intervals throughout each baseline run:

Parameter	Instrument	Fouling indicator
Pump delivery flow rate	Pump speed vs. calibration curve	Injection nozzle or check valve blockage
Reactor pressure	High-pressure transducer	Product outlet blockage
Gas outlet flow rate	Thermal mass flow controller	Product withdrawal line restriction

The rate of drift in each parameter per hour of continuous operation establishes:

1. The maximum safe run duration before a flush is required.
2. Which fouling location is the binding constraint under these conditions.

This is determined empirically before the parameter sweep begins, so that flush intervals are set by evidence rather than assumption.

Between-condition flush protocol


A flush will be performed at the end of every experimental condition — defined as a complete steady-state run plus any transient load modulation sequence at a given combination of temperature, pressure, particle size, and fuel-to-water ratio — before changing to the next set of conditions.

Step 1. Water purge (pressurised). Cease aluminium slurry injection. Continue pumping deionised water at the same flow rate for a minimum of 10 minutes to flush residual Al_2O_3 slurry from the reactor body, product outlet line, and withdrawal valve.

Step 2. Controlled cool-down. Reduce reactor temperature to below 200°C using a controlled heater ramp-down, while maintaining pressure via the back-pressure regulator to prevent flash vaporisation of residual water in the product line.

Step 3. Controlled depressurisation. Once below 200°C , slowly equalise reactor pressure to atmospheric through the back-pressure regulator over a minimum of 15 minutes.

Step 4. Alkaline flush. Circulate a dilute alkaline flush solution (1–2% NaOH in deionised water) at low temperature ($<60^\circ\text{C}$) and atmospheric pressure through the reactor body, product outlet line, and withdrawal valve for 30 minutes. This exploits the amphoteric chemistry of aluminium oxide:



dissolving deposited Al_2O_3 and $\text{Al}(\text{OH})_3$ from internal surfaces [81]. The NaOH concentration is deliberately conservative to avoid corrosive attack on the SS316L reactor body.

Step 5. Deionised water rinse. Flush with a minimum of five system volumes of deionised water. The pH of the final rinse water must be within ± 0.2 of the deionised water baseline (pH ≈ 6.5 – 7.0) before re-pressurisation begins.

Step 6. Blank verification run. Conduct a continuous-flow run using deionised water only (no aluminium) at the target temperature and pressure for the next experimental condition, to:

- Confirm complete removal of alkaline residue.

- Re-establish the thermal steady-state baseline before slurry injection resumes.

Waste Disposal Note

The spent NaOH/NaAlO₂ flush solution is a dilute alkaline waste stream. It will be collected in a labelled chemical waste container and disposed of in accordance with the university's chemical waste management procedures. Chemical-resistant gloves and eye protection are mandatory during all flushing operations.

Pump head and injection nozzle inspection

Component	Frequency	Threshold	Action
Pump delivery flow rate	Start of every session	$> \pm 3\%$ from calibration	Pump head disassembly and inspection
Check valves and plunger seal	End of every experimental day	Any visible wear or deposit	Component replacement
Injection nozzle bore diameter	Start of every experimental week	$> 5\%$ increase from original spec	Nozzle replacement

Note: The pump flow rate tolerance of $\pm 3\%$ is tighter than used in intermittent operation (typically $\pm 5\%$) because the transient load characterisation experiments depend on accurate, stable injection rates throughout sustained continuous-flow runs [80].

Sensor drift monitoring during continuous-flow runs

Because transient load data is collected in real time during sustained runs, sensor drift must be detected and bounded *during* a run, not only between runs:

1. Pressure transducers. The pump inlet transducer and reactor pressure transducer will be cross-checked against each other at the start and end of every run.

- Divergence of $> \pm 2\%$ of full scale at steady state $\rightarrow$ flush before next run.

2. Hydrogen yield cross-validation. The mass flow controller reading on the gas outlet will be cross-validated against the pressure-time derivative method (dP/dt) at steady state at the start of each run.

- Discrepancy of $> \pm 5\%$ between the two methods $\rightarrow$ terminate run, inspect system for fouling or developing leak before continuing.

3. Thermocouple array. The four axial thermocouples will be cross-checked against each other at steady state.

- Any thermocouple deviating $> \pm 5^\circ\text{C}$ from the profile established during the blank calibration run at the same temperature setpoint $\rightarrow$ flag for inspection at end of that run.

A.1.5 General Laboratory Controls

- A minimum of two researchers must be present during all experimental sessions.
- A dedicated safety observer will be assigned for each session, responsible for monitoring all sensor readings in real time and activating the emergency shutdown procedure if any parameter exceeds its safe operating limit.
- Emergency shutdown procedures will be formally documented and prominently displayed within the laboratory.
- All researchers will complete formal training on emergency procedures before participating in any experimental work.

A.2 Experimental Plan Verification and University Approval

The experimental programme described in Section 3.3 represents the high-level research plan appropriate for a Master’s proposal. Before any laboratory work begins, this plan must undergo two independent layers of review.

A.2.1 Internal Peer Review

Process:

1. Following completion of the industry research phase (Months 1–4), the detailed experimental design will be submitted for internal peer review. This submission will include:
 - Reactor vessel specification.
 - Instrumentation layout and calibration methodology.
 - Full experimental sequences for all Tier 1, 2, and 3 experiment streams.
 - The complete safety protocol from Section A.1, including the fouling control procedures in Section A.1.4.
2. Review will be conducted by a panel of at least two independent academics from the university’s mechanical and chemical engineering departments with direct experience in high-pressure reactor systems.
3. All reviewer comments will be formally documented and the experimental plan revised accordingly before being finalised.

Purpose: To identify blind spots in experimental design, instrumentation, and safety provisions that may not be apparent from within the research team.

A.2.2 University Laboratory Safety Approval

Submission requirements:

A comprehensive laboratory experimental proposal will be submitted to the university’s laboratory safety committee and the relevant departmental review body. This submission will include:

- Full safety protocol (this appendix, as revised).
- Risk register covering all four hazard categories in Section [A.1](#).
- Emergency response and shutdown procedures.
- Chemical waste disposal plan for spent NaOH/NaAlO₂ flush solution and aluminium oxide solid waste.
- Detailed reactor specifications including pressure vessel ratings, relief valve sizing, and instrumentation layout.
- Evidence of compliance with applicable pressure vessel standards.
- Reference to the safety framework developed in consultation with RINA, Lloyd's Register, and DNV (Section [2.3](#)).

Hard Stop

No high-pressure or high-temperature experimental work will commence before this approval is formally granted.

Target date: University approval will be completed by the end of Month 4 (Quarter 1 of the research programme), consistent with the Gate 1 milestone in the project timeline.

Appendix B: Energy Density Analysis Code

B.1 Python Analysis Script

```

1  #!/usr/bin/env python3
2  import json
3  import matplotlib.pyplot as plt  # pyright: ignore[reportMissingImports]
4  from adjustText import adjust_text  # pyright: ignore[reportMissingImports]
5
6  # Load the JSON file
7  with open('fuel-dataset.json', 'r') as f:
8      data = json.load(f)
9
10 # Extract fuel data
11 fuels = data['fuels']
12
13 # Calculate effective mass and volumetric energy densities
14 fuel_names = []
15 mass_energy_densities = []
16 volumetric_energy_densities = []
17
18 eff_mass_energy_densities = []
19 eff_volumetric_energy_densities = []

```

```

20
21 categories = []
22
23 for fuel_key, fuel_data in fuels.items():
24     name = fuel_data['name']
25
26     # Skip Coal, H2_Gas, and fuels with metal oxide in name
27     if name == "Coal" or name == "H2_Gas" or name == "CNG":
28         continue
29     if ">" in name: # Skip metal oxide combustion fuels (e.g., "MgH2->MgO")
30         continue
31     # Skip pure metal oxides (Fe3O4, AlOOH, Al2O3, MgO, B2O3, SiO2, ZnO)
32     if "O" in name and any(char.isdigit() or char == "O" for char in name) and
33     ↪ "_ref" not in name:
34         # Check if it's a metal oxide (contains O and numbers/O, but not a
35         ↪ reference)
36         if name in ["Fe3O4", "AlOOH", "Al2O3", "MgO", "B2O3", "SiO2", "ZnO"]:
37             continue
38
39     density = fuel_data['density'] # kg/l
40     mass_energy = fuel_data['mass_energy_density'] # kWh/kg
41     efficiency = fuel_data['engine_efficiency']
42
43     # Calculate volumetric energy density
44     vol_energy = mass_energy * density
45
46     # Clean up metal names
47     display_name = name.replace(" (ref)", "")
48
49     # Replace full metal names with symbols
50     metal_symbols = {
51         "Iron": "Fe",
52         "Aluminium": "Al",
53         "Magnesium": "Mg",
54         "Boron": "B",
55         "Si": "Si",
56         "Zinc": "Zn"
57     }
58     for metal, symbol in metal_symbols.items():
59         if display_name == metal:
60             display_name = symbol
61             break
62
63     # Simplify other fuel names
64     name_simplifications = {
65         "Pressure_Tank_H2": "H2",
66         "Liquid_NH3": "NH3",

```

```

65         "Heavy Fuel Oil": "HFO"
66     }
67     if display_name in name_simplifications:
68         display_name = name_simplifications[display_name]
69
70     # Default calculation
71     eff_mass_energy_density = mass_energy * efficiency
72     eff_volumetric_energy_density = vol_energy * efficiency
73
74     # Determine category for coloring
75     if display_name in ["H2", "NH3"]:
76         category = "Simple Electro-fuels"
77     elif display_name in ["Diesel", "Petrol", "Methanol", "Ethanol", "LNG",
78         ↪ "LPG"]:
79         category = "Synthetic Hydrocarbons"
80     elif display_name in ["Fe", "Al", "Mg", "B", "Si", "Zn"]:
81         category = "Simple Metal Fuels"
82     elif display_name in ["MgH2", "AlH3", "LiAlH4", "NaBH4", "LiBH4", "NaAlH4"]:
83         category = "Metal Hydrides"
84     elif display_name == "HFO":
85         category = "HFO"
86     else:
87         category = "Other"
88
89     fuel_names.append(display_name)
90     mass_energy_densities.append(mass_energy)
91     volumetric_energy_densities.append(vol_energy)
92     eff_mass_energy_densities.append(eff_mass_energy_density)
93     eff_volumetric_energy_densities.append(eff_volumetric_energy_density)
94     categories.append(category)
95
96     # Create scatter plot
97     color_map = {
98         "Simple Electro-fuels": "#3498db", # Blue
99         "Synthetic Hydrocarbons": "#e74c3c", # Red
100        "Simple Metal Fuels": "#2ecc71", # Green
101        "Metal Hydrides": "#f39c12", # Orange
102        "HFO": "#9b59b6" # Purple
103    }
104
105    plt.figure(figsize=(12, 8))
106    for category in color_map.keys():
107        mask = [cat == category for cat in categories]
108        x = [mass_energy_densities[i] for i in range(len(mask)) if mask[i]]
109        y = [volumetric_energy_densities[i] for i in range(len(mask)) if mask[i]]
110        plt.scatter(x, y, s=50, alpha=0.6, color=color_map[category],
111            ↪ label=category)

```

```

110
111 plt.legend(loc='best', fontsize=10)
112
113 # Add labels for each point with adjustText to avoid overlap
114 # Calculate offset distance based on data range
115 x_range = max(mass_energy_densities) - min(mass_energy_densities)
116 y_range = max(volumetric_energy_densities) - min(volumetric_energy_densities)
117 offset_x = x_range * 0.00375 # 0.375% of x range
118 offset_y = y_range * 0.00375 # 0.375% of y range
119
120 texts = []
121 for i, name in enumerate(fuel_names):
122     # Start text at an offset position from the point
123     txt = plt.text(mass_energy_densities[i] + offset_x,
124                   volumetric_energy_densities[i] + offset_y,
125                   name,
126                   fontsize=11, fontweight='bold', alpha=0.8)
127     texts.append(txt)
128
129 # Adjust text positions to avoid overlap with much larger spacing
130 adjust_text(texts,
131             mass_energy_densities, volumetric_energy_densities,
132             arrowprops=dict(arrowstyle='->', color='gray', lw=0.5, alpha=0.6),
133             expand_points=(1.25, 1.25),
134             expand_text=(1, 1),
135             force_points=0.625,
136             force_text=0.625,
137             lim=50,
138             only_move={'points':'xy', 'text':'xy'})
139
140 plt.xlabel('Mass Energy Density (kWh/kg)', fontsize=12)
141 plt.ylabel('Volumetric Energy Density (kWh/L)', fontsize=12)
142 plt.title('Fuel Energy Density Comparison', fontsize=14, fontweight='bold')
143 plt.grid(True, alpha=0.7, linestyle='-', linewidth=1.2, color='grey')
144 plt.savefig('fuel_energy_density.png', dpi=300, bbox_inches='tight')
145 plt.savefig('../images/simplified_fuel_energy_density.png', dpi=300,
146             ↪ bbox_inches='tight')
147
148 print("\nPlot saved as 'fuel_energy_density.png'")
149
150 # Print summary statistics
151 print("\nFuel Energy Density Summary:")
152 print("=" * 70)
153 print(f"{'Fuel':<25} {'Mass (kWh/kg)':<15} {'Volumetric (kWh/L)':<20}")
154 print("=" * 70)
155 for i in range(len(fuel_names)):
156     print(f"{'fuel_names[i]:<25} {'mass_energy_densities[i]:<15.2f}'
157           ↪ {'volumetric_energy_densities[i]:<20.2f}'")

```

```

155 print("=" * 70)
156
157 # Adjust metal fuels to use their oxide effective energy densities
158 metal_oxide_map = {
159     "Fe": "Fe3O4",
160     "Al": ["Al2O3", "AlOOH"], # Al has two oxides
161     "Mg": "MgO",
162     "B": "B2O3",
163     "Si": "SiO2",
164     "Zn": "ZnO"
165 }
166
167 # For Al, we'll need to process both oxides separately
168 adjusted_fuel_names = []
169 adjusted_eff_mass_energy = []
170 adjusted_eff_vol_energy = []
171 adjusted_categories = []
172
173 for i, name in enumerate(fuel_names):
174     if name in metal_oxide_map:
175         # This is a simple metal fuel, replace with oxide(s)
176         oxide_names = metal_oxide_map[name]
177         if not isinstance(oxide_names, list):
178             oxide_names = [oxide_names]
179
180         for oxide_name in oxide_names:
181             # Find the oxide in the original fuels data
182             oxide_fuel = next((fuels[k] for k in fuels if fuels[k]['name'] ==
183                               ↪ oxide_name), None)
184             if oxide_fuel:
185                 oxide_density = oxide_fuel['density']
186                 oxide_mass_energy = oxide_fuel['mass_energy_density']
187                 oxide_efficiency = oxide_fuel['engine_efficiency']
188
189                 adjusted_fuel_names.append(oxide_name)
190                 adjusted_eff_mass_energy.append(oxide_mass_energy *
191                 ↪ oxide_efficiency)
192                 adjusted_eff_vol_energy.append(oxide_mass_energy *
193                 ↪ oxide_efficiency * oxide_density)
194                 adjusted_categories.append(categories[i])
195             else:
196                 # Keep non-metal fuels as is
197                 adjusted_fuel_names.append(name)
198                 adjusted_eff_mass_energy.append(adjusted_eff_mass_energy[i])
199                 adjusted_eff_vol_energy.append(adjusted_eff_vol_energy[i])
200                 adjusted_categories.append(categories[i])

```

```

199 # Replace the original lists with adjusted ones for the second plot
200 fuel_names_for_plot2 = adjusted_fuel_names
201 eff_mass_energy_densities = adjusted_eff_mass_energy
202 eff_volumetric_energy_densities = adjusted_eff_vol_energy
203 categories_for_plot2 = adjusted_categories
204
205 plt.figure(figsize=(12, 8))
206 for category in color_map.keys():
207     mask = [cat == category for cat in categories_for_plot2]
208     x = [eff_mass_energy_densities[i] for i in range(len(mask)) if mask[i]]
209     y = [eff_volumetric_energy_densities[i] for i in range(len(mask)) if
        ↪ mask[i]]
210     plt.scatter(x, y, s=50, alpha=0.6, color=color_map[category],
        ↪ label=category)
211
212 plt.legend(loc='best', fontsize=10)
213
214 # Add labels for each point with adjustText to avoid overlap
215 # Calculate offset distance based on data range
216 x_range = max(eff_mass_energy_densities) - min(eff_mass_energy_densities)
217 y_range = max(eff_volumetric_energy_densities) -
        ↪ min(eff_volumetric_energy_densities)
218 offset_x = x_range * 0.00375 # 0.375% of x range
219 offset_y = y_range * 0.00375 # 0.375% of y range
220
221 texts = []
222 for i, name in enumerate(fuel_names_for_plot2):
223     # Start text at an offset position from the point
224     txt = plt.text(eff_mass_energy_densities[i] + offset_x,
225                   eff_volumetric_energy_densities[i] + offset_y,
226                   name,
227                   fontsize=11, fontweight='bold', alpha=0.8)
228     texts.append(txt)
229
230 # Adjust text positions to avoid overlap with much larger spacing
231 adjust_text(texts,
232             eff_mass_energy_densities, eff_volumetric_energy_densities,
233             arrowprops=dict(arrowstyle='->', color='gray', lw=0.5, alpha=0.6),
234             expand_points=(1.25, 1.25),
235             expand_text=(1, 1),
236             force_points=0.625,
237             force_text=0.625,
238             lim=50,
239             only_move={'points': 'xy', 'text': 'xy'})
240
241 plt.xlabel('Eff. Mass Energy Density (kWh/kg)', fontsize=12)
242 plt.ylabel('Eff. Volumetric Energy Density (kWh/L)', fontsize=12)

```

```

243 plt.title('Eff. Fuel Energy Density Comparison', fontsize=14, fontweight='bold')
244 plt.grid(True, alpha=0.7, linestyle='-', linewidth=1.2, color='grey')
245 plt.savefig('eff_fuel_energy_density.png', dpi=300, bbox_inches='tight')
246 plt.savefig('../images/eff_fuel_energy_density.png', dpi=300,
    ↪ bbox_inches='tight')
247 print("\nPlot saved as 'eff_fuel_energy_density.png'")

```

B.2 Fuel Dataset

```

1  {
2    "fuels": {
3      "HFO": {
4        "name": "Heavy Fuel Oil",
5        "density": 0.98,
6        "mass_energy_density": 11.6,
7        "engine_efficiency": 0.5,
8        "source":
    ↪ "https://www.engineeringtoolbox.com/co2-emission-fuels-d_1085.html"
9      },
10     "Coal": {
11       "name": "Coal",
12       "density": 1.3,
13       "mass_energy_density": 6.67,
14       "engine_efficiency": 0.25,
15       "source":
    ↪ "https://www.engineeringtoolbox.com/co2-emission-fuels-d_1085.html",
16       "notes": "Density calculated as average of 1100-1500 kg/m³"
17     },
18     "H2_Gas": {
19       "name": "H2_Gas",
20       "density": 0.00009,
21       "mass_energy_density": 39.44,
22       "engine_efficiency": 0.5,
23       "notes": "Gaseous hydrogen at standard conditions"
24     },
25     "Pressure_Tank_H2": {
26       "name": "Pressure_Tank_H2",
27       "density": 0.027,
28       "mass_energy_density": 1.58,
29       "engine_efficiency": 0.5,
30       "notes": "Hydrogen in pressure tank, effective energy density is 4% of H2
    ↪ energy density"
31     },
32     "NH3": {
33       "name": "Liquid_NH3",
34       "density": 0.696,
35       "mass_energy_density": 6.94,

```

```

36     "engine_efficiency": 0.5,
37     "notes": "Liquid ammonia, energy density is 17.6% of H2 energy density"
38 },
39 "CNG": {
40     "name": "CNG",
41     "density": 0.16,
42     "mass_energy_density": 14.89,
43     "engine_efficiency": 0.5
44 },
45 "LNG": {
46     "name": "LNG",
47     "density": 0.5,
48     "mass_energy_density": 14.89,
49     "engine_efficiency": 0.5
50 },
51 "Methanol": {
52     "name": "Methanol",
53     "density": 0.791,
54     "mass_energy_density": 5.5,
55     "engine_efficiency": 0.5
56 },
57 "LPG": {
58     "name": "LPG",
59     "density": 0.537,
60     "mass_energy_density": 13.7,
61     "engine_efficiency": 0.5
62 },
63 "Fe_ref": {
64     "name": "Iron (ref)",
65     "density": 7.9,
66     "mass_energy_density": 2.05,
67     "engine_efficiency": 0.4,
68     "notes": "Iron fuel with no by-products"
69 },
70 "Fe304": {
71     "name": "Fe304",
72     "density": 5.15,
73     "mass_energy_density": 1.49,
74     "engine_efficiency": 0.4,
75     "notes": "Iron fuel with Fe304 as by-product, energy density is Fe_ref /
    ↪ 1.38"
76 },
77 "Al_ref": {
78     "name": "Aluminium (ref)",
79     "density": 2.7,
80     "mass_energy_density": 8.63,
81     "engine_efficiency": 0.4,

```

```

82     "notes": "Aluminium fuel with no by-products"
83 },
84 "Al2O3": {
85     "name": "Al2O3",
86     "density": 3.03,
87     "mass_energy_density": 3.89,
88     "engine_efficiency": 0.4,
89     "notes": "Aluminium fuel with Al2O3 as by-product, energy density is
      ↪ Alref / 2.22"
90 },
91 "Al": {
92     "name": "Al",
93     "density": 3.97,
94     "mass_energy_density": 4.57,
95     "engine_efficiency": 0.4,
96     "notes": "Aluminium fuel with Al as by-product, energy density is
      ↪ Alref / 1.89"
97 },
98 "Mg_ref": {
99     "name": "Magnesium (ref)",
100    "density": 1.7,
101    "mass_energy_density": 6.88,
102    "engine_efficiency": 0.4,
103    "notes": "Magnesium fuel with no by-products"
104 },
105 "MgO": {
106     "name": "MgO",
107     "density": 3.58,
108     "mass_energy_density": 4.12,
109     "engine_efficiency": 0.4,
110     "notes": "Magnesium fuel with MgO as by-product, energy density is Mg_ref
      ↪ / 1.67"
111 },
112 "B_ref": {
113     "name": "Boron (ref)",
114     "density": 2.48,
115     "mass_energy_density": 17.702,
116     "engine_efficiency": 0.4,
117     "notes": "Boron fuel with no by-products"
118 },
119 "B2O3": {
120     "name": "B2O3",
121     "density": 2.56,
122     "mass_energy_density": 5.56,
123     "engine_efficiency": 0.4,
124     "notes": "Boron fuel with B2O3 as by-product, energy density is B_ref /
      ↪ 3.1818"

```

```

125 },
126 "Si_ref": {
127     "name": "Si (ref)",
128     "density": 2.33,
129     "mass_energy_density": 9.01,
130     "engine_efficiency": 0.4,
131     "notes": "Silicon fuel with no by-products",
132     "source": "doi:10.1016/j.energy.2005.12.001"
133 },
134 "SiO2": {
135     "name": "SiO2",
136     "density": 2.65,
137     "mass_energy_density": 4.21,
138     "engine_efficiency": 0.4,
139     "notes": "Silicon fuel with SiO2 as by-product, energy density is Si_ref /
    ↪ 2.14"
140 },
141 "MgH2": {
142     "name": "MgH2",
143     "density": 1.46,
144     "mass_energy_density": 3.0,
145     "engine_efficiency": 0.5,
146     "notes": "Metal hydride, energy density is 7.6% of H2_Gas",
147     "source": "https://next-gen.materialsproject.org/materials/mp-23710"
    ↪ "?formula=MgH2&has_props=dos"
148 },
149 "AlH3": {
150     "name": "AlH3",
151     "density": 1.52,
152     "mass_energy_density": 3.98,
153     "engine_efficiency": 0.5,
154     "notes": "Metal hydride, energy density is 10.1% of H2_Gas",
155     "source": "10.17188/1199814"
156 },
157 "LiBH4": {
158     "name": "LiBH4",
159     "density": 0.72,
160     "mass_energy_density": 7.3,
161     "engine_efficiency": 0.5,
162     "notes": "Metal hydride, energy density is 18.5% of H2_Gas",
163     "source": "https://next-gen.materialsproject.org/materials/mp-30209"
    ↪ "?formula=LiBH4&has_props=dos"
164 },
165 "NaAlH4": {
166     "name": "NaAlH4",
167     "density": 1.34,
168     "mass_energy_density": 2.96,

```

```

169     "engine_efficiency": 0.5,
170     "notes": "Metal hydride, energy density is 7.5% of H2_Gas",
171     "source": "https://next-gen.materialsproject.org/materials/mp-23704_
    ↪ ?formula=NaAlH4&has_props=dos#properties"
172 },
173 "MgH2_MgO": {
174     "name": "MgH2->MgO",
175     "density": 3.58,
176     "mass_energy_density": 6.0754,
177     "engine_efficiency": 0.4,
178     "notes": "Metal hydride combustion with MgO as by-product"
179 },
180 "AlH3_AlOOH": {
181     "name": "AlH3->AlOOH",
182     "density": 3.03,
183     "mass_energy_density": 5.8737,
184     "engine_efficiency": 0.4,
185     "notes": "Metal hydride combustion with AlOOH as by-product"
186 },
187 "AlH3_Al2O3": {
188     "name": "AlH3->Al2O3",
189     "density": 3.97,
190     "mass_energy_density": 6.9102,
191     "engine_efficiency": 0.4,
192     "notes": "Metal hydride combustion with Al2O3 as by-product"
193 },
194 "Zn_ref": {
195     "name": "Zinc (ref)",
196     "density": 7.14,
197     "mass_energy_density": 1.48,
198     "engine_efficiency": 0.4,
199     "notes": "Zinc fuel with no by-products"
200 },
201 "ZnO": {
202     "name": "ZnO",
203     "density": 5.61,
204     "mass_energy_density": 0.4748,
205     "engine_efficiency": 0.4,
206     "notes": "Zinc fuel with ZnO as by-product, energy density is Zn_ref /
    ↪ 1.2462"
207 }
208 },
209 "metadata": {
210     "description": "Fuel properties for shipping analysis",
211     "units": {
212         "density": "kg/l",
213         "mass_energy_density": "kWh/kg",

```

```

214     "engine_efficiency": "dimensionless (0-1)"
215 },
216 "notes": [
217     "Effective mass energy density = mass_energy_density * engine_efficiency",
218     "Effective volumetric energy density = effective_mass_energy_density *
    ↪ density",
219     "Metal fuel energy densities from https://www.vibgyorpublishers.org
    ↪ /content/ijmmp/ijmmp-5-056-table2.html",
220     "Metal densities from PubChem for individual chemicals"
221 ]
222 }
223 }

```

Appendix C: Industry Partnership and Funding Model

The experimental programme's Gate 3 decision at Month 18 is a funding decision for the high-pressure reactor vessel, instrumentation, and associated laboratory infrastructure. If that funding is not secured, the programme converts at Month 24 to a Master of Philosophy. Because the equipment combination required by this project — a laboratory-scale HT-MWR with hydrogen-handling and by-product characterisation instrumentation — does not map cleanly onto any existing single grant scheme, industry partnership is expected to constitute the primary route. This appendix sets out the proposed partnership model through which that funding will be sought. All figures, tiers, and terms below are illustrative and subject to the approval of the university's research contracts office before any formal agreement is executed.

C.1 Target Partner Categories

Table 8 identifies the categories of organisation the project will approach, alongside the specific contribution each is best placed to make.

C.2 Partnership Tiers

Partnerships are proposed across three tiers, allowing organisations to engage at whatever level of commitment is appropriate to their interest and internal procedures.

Tier 1 — Knowledge Partner (no financial commitment). The partner contributes one to two hours of engineering or regulatory staff time, typically through a semi-structured interview, to help establish realistic power demand, range, and safety requirements for the requirements matrix. In return, the partner is acknowledged as a contributing industry consultant in the thesis, receives early access to findings as they are produced, and is invited to review the draft requirements matrix for accuracy before publication.

Partner Category	Primary Contribution
Superyacht builders and naval architects	Technical data on vessel power systems, structural constraints, and storage configurations for target vessel classes; integration insights; safety ground truth from adjacent novel-energy projects
Classification societies (RINA, LR, DNV)	Regulatory pathway clarification; feedback on draft safety protocols for aluminium powder handling and onboard hydrogen generation; guidance on prototype-approval documentation
Marine equipment suppliers (prime movers, batteries, fuel cells)	Interface specification for the Generation-1 propulsion architecture; indicative performance data for the trade-off study; procurement pathway for future prototyping
Aluminium producers and recyclers	Fuel supply chain characterisation; by-product acceptance criteria; alignment with emerging green-aluminium production pathways
Industry and government funding programmes	Matched or supplementary funding toward specific equipment or personnel costs; eligibility typically requires a confirmed university placement

Table 8: Target industry partner categories and primary contributions.

Tier 2 — Industry Sponsor. The partner makes a financial contribution toward laboratory equipment or a specific project milestone. In return, the partner receives formal acknowledgment in the thesis and any resulting publications, regular progress briefings, and the opportunity to provide technical input into one or more of the applied studies within the project scope, drawing on the partner’s relevant engineering experience.

Tier 3 — Strategic / Founding Partner. The partner makes a sustained financial contribution across the research programme. In return, the partner receives input into the selection of research priorities within the approved scope, a non-binding expression of intent to discuss a future prototype demonstration once the laboratory-scale work concludes (subject to the university’s standard commercialisation policy), and named partnership in academic publications and any public communications coordinated through the university’s communications office.

C.3 What the Project Offers Partners

The value proposition to industry partners rests on four elements. First, early visibility of a novel propulsion architecture at the pre-competitive stage, when design decisions and interface specifications are still open. Second, the ability to influence those specifications in directions relevant to the partner’s existing or planned product lines. Third, positioning within what may become a commercially significant fuel supply chain if aluminium-water propulsion proves technically and economically viable. Fourth, a credible decarbonisation narrative that aligns with the partner’s published environmental commitments.

C.4 Governance and Boundaries

All agreements will be executed through the university’s research contracts office, and the following terms will apply without exception.

- **Intellectual property.** Ownership of intellectual property arising from the research follows the university’s standard research agreement. Sponsors receive no automatic intellectual property rights, licence, or option by virtue of their sponsorship.
- **Publication.** The researcher retains the right to publish results in the normal way, with the sole exception that sponsors may request a brief pre-publication review for the purpose of identifying confidential information.
- **Academic freedom.** Sponsors may advise on research priorities within the approved scope, but final decisions on research direction, methodology, and interpretation rest with the researcher and supervisor.
- **Non-binding expressions of intent.** Any “first right of engagement” or similar language constitutes a non-binding expression of intent only, and does not create an enforceable option, pre-emption right, or contractual preference. Any future commercialisation is subject to the university’s standard commercialisation procedures.
- **Public communications.** Any public announcement of a partnership, including press releases, social media, and conference presentations, is coordinated with the university’s communications office and requires written consent from both parties before release.
- **Ethics.** All industry interviews are conducted under ethics approval administered by the university’s human research ethics committee, and participant confidentiality is maintained in accordance with the approved protocol (Section 3.1).

C.5 Alignment with Project Timeline

Table 9 maps partnership-tier activity onto the project schedule (Section 4).

Project Phase	Partnership Activity	Objective
Phase 0–1A (M1–M7)	Tier 1 engagement	Establish requirements matrix; identify partner organisations for Tier 2 and Tier 3 discussions
Phase 1B (M8–M18)	Tier 2 and Tier 3 negotiation	Secure equipment funding ahead of Gate 3 (M18) through the university’s research contracts office
Phase 2–4 (M19–M45)	Tier 2 and Tier 3 execution	Deliver progress briefings; execute the applied studies with Tier 2 and Tier 3 input
Phase 5–6 (M45–M48)	Outcome dissemination	Publish findings; explore prototype-demonstration discussions with Tier 3 partners, subject to the university’s commercialisation policy

Table 9: Alignment of partnership activity with project phases.