

# Aluminium-Water Combustion for Zero Carbon Marine Shipping: Masters Proposal

Md Nadim Ahmed

May 19, 2026

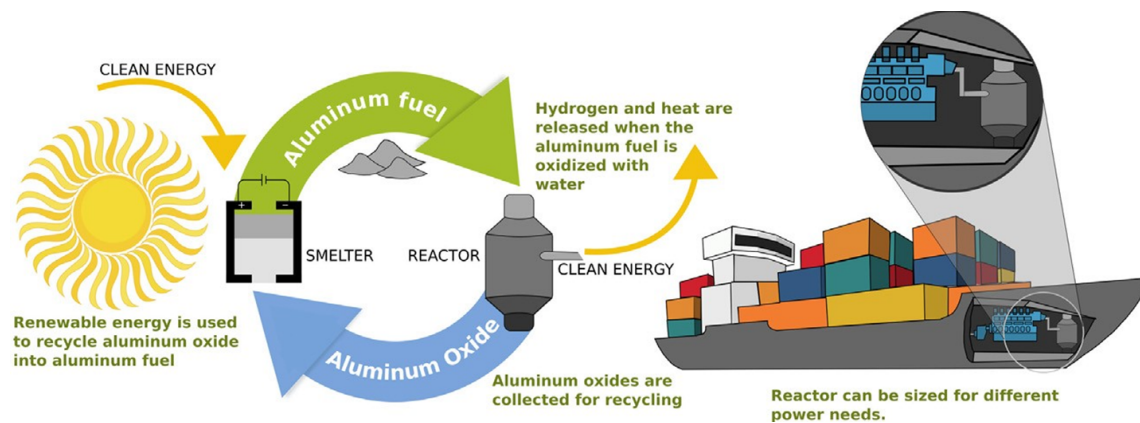


Figure 1: Aluminium powder as maritime shipping fuel (Energy Life-cycle). Adapted from [1]

# Abstract

# Table of Contents

|                                                                     |           |
|---------------------------------------------------------------------|-----------|
| <b>List of Tables</b>                                               | <b>4</b>  |
| <b>List of Figures</b>                                              | <b>4</b>  |
| <b>1 Research Background</b>                                        | <b>6</b>  |
| 1.1 Preliminary Analysis of Electro-Fuels Options . . . . .         | 6         |
| 1.1.1 High Level Energy Density Analysis . . . . .                  | 10        |
| 1.1.2 Effective Energy Density Analysis . . . . .                   | 13        |
| 1.2 Aluminium-Water Combustion . . . . .                            | 14        |
| 1.3 Reactor Design . . . . .                                        | 15        |
| 1.3.1 Low Temperature Metal-Water Reactors . . . . .                | 17        |
| 1.3.2 High Temperature Metal-Water Reactor . . . . .                | 18        |
| 1.3.3 Summary Tables . . . . .                                      | 21        |
| 1.4 Economics of Aluminium Fuel . . . . .                           | 22        |
| 1.4.1 The Long Term Trends . . . . .                                | 22        |
| 1.4.2 The Emerging Green Aluminium Supply Chain . . . . .           | 23        |
| 1.5 Technology Development Pathway . . . . .                        | 25        |
| 1.5.1 Barriers to Entry in Container Shipping . . . . .             | 25        |
| 1.5.2 Luxury Yachts and Superyachts as an Ideal Beachhead . . . . . | 25        |
| 1.5.3 Regulatory Pathway and Certification Advantages . . . . .     | 27        |
| 1.5.4 Pathway to Broader Adoption . . . . .                         | 27        |
| <b>2 Research Questions</b>                                         | <b>28</b> |
| 2.1 System Requirements for Yacht Applications . . . . .            | 28        |
| 2.2 Metal-Water Reactor Design . . . . .                            | 29        |
| <b>3 Methodology</b>                                                | <b>31</b> |
| 3.1 Industry Research . . . . .                                     | 31        |
| 3.2 Metal-Water Reactor Design . . . . .                            | 33        |
| <b>4 Proposed Project Time-line</b>                                 | <b>38</b> |
| <b>5 References</b>                                                 | <b>39</b> |

## List of Tables

|   |                                                                                                                                   |    |
|---|-----------------------------------------------------------------------------------------------------------------------------------|----|
| 1 | Comparison of different Al–H <sub>2</sub> O by-product scenarios. Adapted from [2, 3, 4, 5, 6, 1] . . . . .                       | 19 |
| 2 | Volumetric Energy Densities of different Al–H <sub>2</sub> O combustion scenarios. Adapted from [2, 3, 7, 8, 9, 10, 11] . . . . . | 19 |
| 3 | Comparison of Low Temperature Metal-Water Reactors (LT-MWR) and High Temperature Metal-Water Reactors (HT-MWR) . . . . .          | 21 |
| 4 | Scope boundary for the metal-water reactor research and relation to future work . . . . .                                         | 37 |

## List of Figures

|    |                                                                                                                                                                                                                                                                                                                                        |    |
|----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| 1  | Aluminium powder as maritime shipping fuel (Energy Life-cycle). Adapted from [1] . . . . .                                                                                                                                                                                                                                             | 1  |
| 2  | Falling cost of solar electricity vs Fossil Fuels [12] . . . . .                                                                                                                                                                                                                                                                       | 6  |
| 3  | Falling cost of lithium ion battery packs [13] . . . . .                                                                                                                                                                                                                                                                               | 7  |
| 4  | High Level Process Diagram for synthetic hydrocarbon production from renewable electricity [14] . . . . .                                                                                                                                                                                                                              | 8  |
| 5  | Metal based electro-fuels as secondary energy carriers [15] . . . . .                                                                                                                                                                                                                                                                  | 9  |
| 6  | Simplified Energy Density Analysis. Data Analysis can be found in the Appendix. Adapted from [16] . . . . .                                                                                                                                                                                                                            | 10 |
| 7  | Proposed bunkering procedure for metal fuels (iron powder in this specific case) [17] . . . . .                                                                                                                                                                                                                                        | 11 |
| 8  | Effective Energy Density Analysis. Data Analysis can be found in the Appendix. Adapted from [16] . . . . .                                                                                                                                                                                                                             | 12 |
| 9  | Simplified Overview of Metal-Water Propulsion System[4] . . . . .                                                                                                                                                                                                                                                                      | 15 |
| 10 | Schematic of the three reaction stages of aluminium with water at low temperatures, including a sketch of the initial dry particle for reference. Also sketched is the characteristic hydrogen-production curve showing the induction, rapid oxidation, and quenching stages [6] . . .                                                 | 16 |
| 11 | Al–H <sub>2</sub> O reaction transition diagram extrapolated to 10 MPa. Labels E1-E4 show conditions used for experimental validation [18] . . . . .                                                                                                                                                                                   | 20 |
| 12 | Aluminium fuel vs other electrofuels and diesel (The bars show the price of energy derived from low-carbon energy carriers, if the input electricity price were set to \$36/MWh (dark blue) or \$26/MWh (light blue). The pale region at the top of each bar represents the uncertainty related to the required inputs.) [1] . . . . . | 22 |

|    |                                                          |    |
|----|----------------------------------------------------------|----|
| 13 | Modern Electric Yachts with Integrated Solar Panels [19] | 26 |
| 14 | The Gotland Horizon X By Austal Panels [20]              | 26 |

# 1 Research Background

## Overview

Maritime shipping plays a crucial role in global trade, facilitating around 80% of all commerce [21]. This makes it essential for globalization, economic development, and maintaining living standards. However, the sector also contributes significantly to global greenhouse gas emissions, accounting for 2-3% of global emissions and approximately 10% of all transport-related emissions [22, 21].

In response, the International Maritime Organization (IMO) has set ambitious targets to curb emissions from international shipping. By 2030, the IMO aims to reduce annual greenhouse gas emissions by 20-30% compared to 2008 levels, with a more aggressive target of 70-80% reduction by 2040 [23].

## 1.1 Preliminary Analysis of Electro-Fuels Options

### Overview

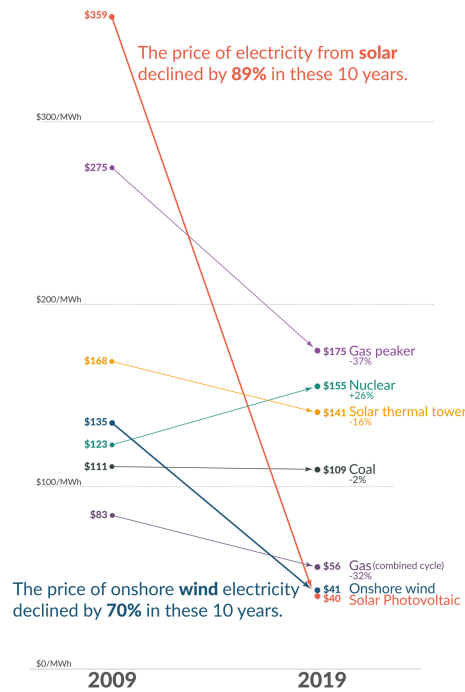


Figure 2: Falling cost of solar electricity vs Fossil Fuels [12]

Recent years have witnessed a dramatic decline in the cost of low-carbon electricity sources, particularly solar and wind power, as illustrated in Figure 2. This cost reduction has significantly enhanced the viability of transitioning to a low-carbon economy, yet substantial challenges persist in the so-called hard-to-abate sectors, among which marine shipping features prominently.

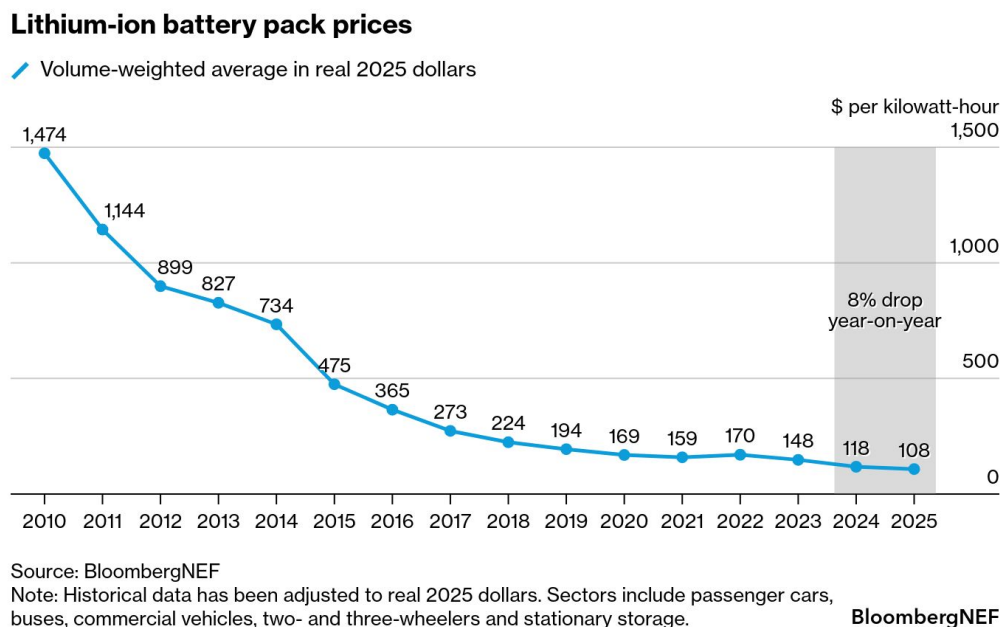


Figure 3: Falling cost of lithium ion battery packs [13]

The predominant method for storing electrical energy remains electrochemical batteries, with lithium-ion technology leading the charge. These batteries have increasingly displaced fossil fuels in passenger vehicles and, more recently, have begun penetrating short and medium-distance trucking applications [24]. This transformation has been driven largely by the precipitous decline in lithium battery prices, as demonstrated in Figure 3. The technology’s reach has even extended to inland shipping routes, where standardized and swappable battery packs are being deployed in China [25]. Major battery manufacturers such as CATL are making substantial investments in these markets, signaling confidence in the technology’s continued expansion [26].

However, despite remarkable advances in both price and energy density, lithium-ion batteries remain largely impractical for deep-sea shipping, which accounts for approximately 70% of marine shipping emissions [27]. The fundamental constraint lies in the current energy density limitations of lithium-ion technology, which ranges from 0.1 to 0.5 kWh/kg [2, 3]—substantially lower than gasoline, which can exceed 10 kWh/kg [6]. This considerable disparity in energy density presents a formidable barrier to the electrification of long-distance maritime transport.

In response to the energy density limitations of lithium-ion batteries, researchers and policymakers have increasingly explored the use of abundant and inexpensive solar electricity to produce alternative fuels, primarily through electrolysis. This approach has given rise to a diverse landscape of electro-fuel options, which can be systematically organized into four broad classifications:

- **Simple electro-fuels** - hydrogen and ammonia, which represent the most straightforward products of electrolytic processes

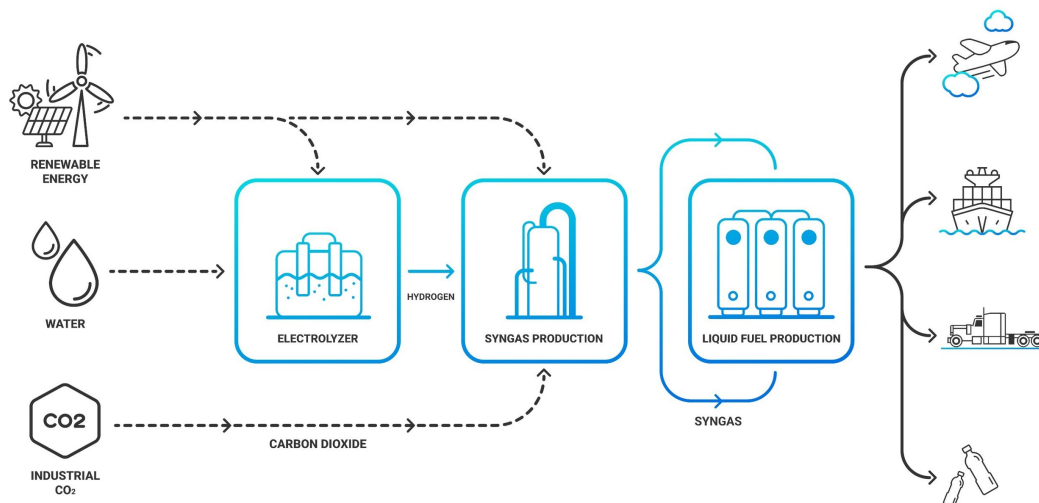


Figure 4: High Level Process Diagram for synthetic hydrocarbon production from renewable electricity [14]

- **Synthetic hydrocarbons** - primarily methane and methanol, whose production pathways are illustrated in Figure 4, which depicts the high-level process for synthesizing these fuels from low-carbon electricity



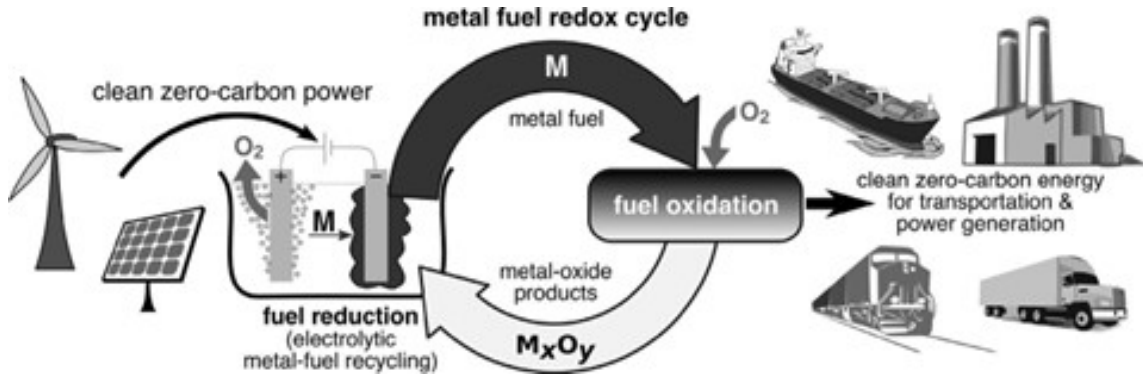


Figure 5: Metal based electro-fuels as secondary energy carriers [15]

- **Metal-based electro-fuels** - including iron, aluminium, magnesium, silicon, and boron. Figure 5 demonstrates the high-level process by which these metal-based electro-fuels can function as recyclable secondary energy carriers, offering a distinctive closed-loop energy storage paradigm
- **Metal hydrides (hydrogen carriers)** - such as MgH<sub>2</sub>, AlH<sub>3</sub>, LiBH<sub>4</sub>, and NaAlH<sub>4</sub>, providing an alternative means of storing and transporting hydrogen in a more dense and stable form than its gaseous state

In the following subsections, a preliminary analysis is conducted to compare the mass energy and volumetric energy densities of these various electro-fuel options in order to understand their viability for marine shipping applications.

### 1.1.1 High Level Energy Density Analysis

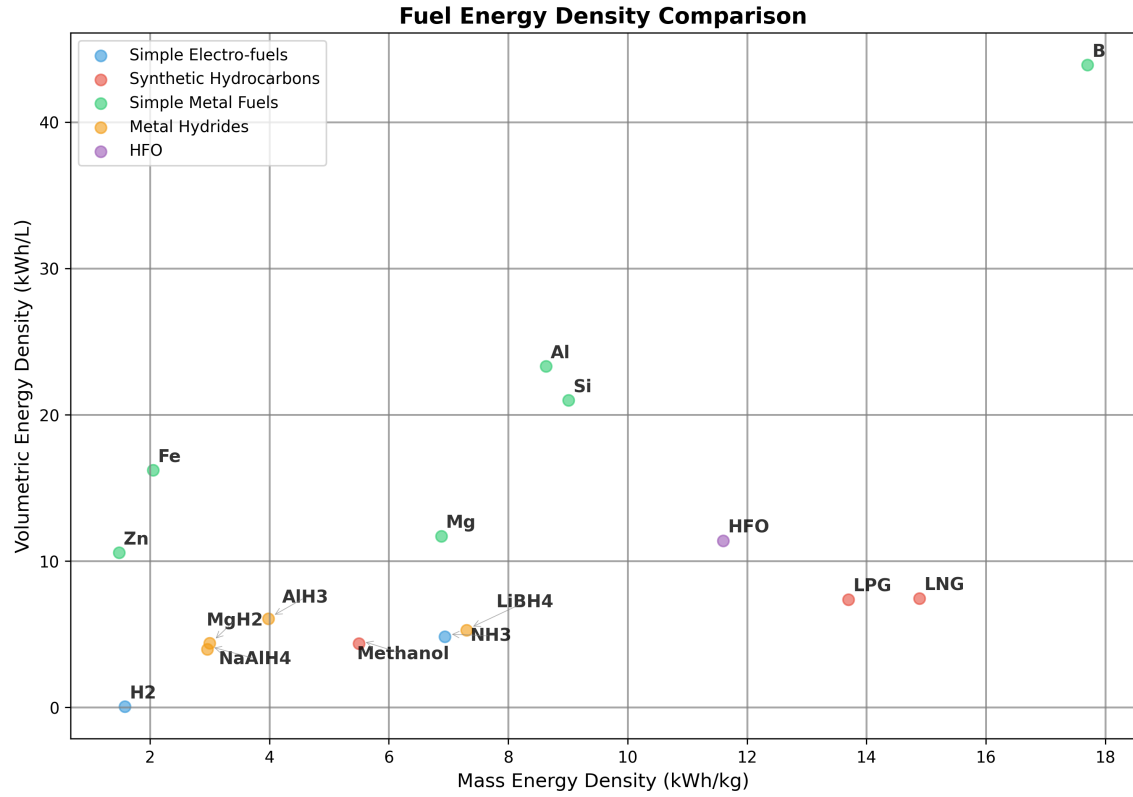


Figure 6: Simplified Energy Density Analysis. Data Analysis can be found in the Appendix. Adapted from [16]

*Note: 1) Pressure Cylinder H2 is 25°Celsius 500 bar*

*2) Liquid NH3 is -33°Celsius 1 bar. Energy needed for cracking for NH3 to H2 is ignored in this table and all subsequent calculations.*

Figure 6 presents the fuel energy density calculations for the various electro-fuel options currently under investigation for marine applications. Heavy Fuel Oil (HFO) serves as the reference fuel in these comparisons, as it remains the dominant fuel source for global marine shipping due to its low cost and widespread availability.

Hydrogen, which is being explored as a potential solution for several hard-to-decarbonise sectors including shipping and aviation, requires pressurisation at approximately 500 bar. This compression requirement drastically diminishes the fuel’s energy density, presenting significant challenges for practical implementation. Even methanol, which is considered a relatively straightforward drop-in replacement for marine shipping and has garnered substantial support from major shipping companies such as Maersk [28], exhibits significantly lower mass and volumetric energy densities compared to HFO.

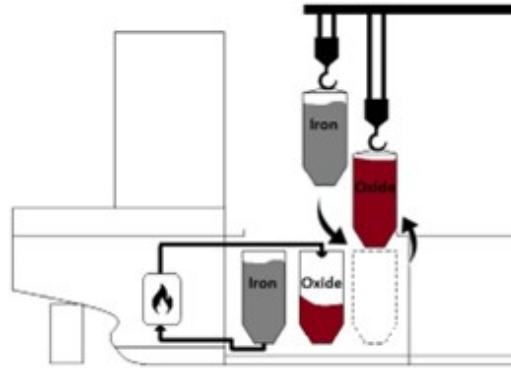


Figure 7: Proposed bunkering procedure for metal fuels (iron powder in this specific case) [17]

As illustrated in Figure 6, metal fuels demonstrate considerable promise in terms of both mass and volumetric energy densities, despite the relatively limited research effort devoted to their development. All metal fuels examined display higher volumetric energy densities than HFO, with boron demonstrating superior performance across all available electro-fuel options and surpassing even HFO itself. However, metal fuels present numerous complications that must be addressed for practical deployment. To make metal fuels economically viable, the metal oxide by-products generated during combustion cannot simply be discharged into the ocean. Instead, these by-products must be retained onboard the vessel and offloaded at ports for subsequent recycling using renewable energy sources, as shown in Fig 5. The bunkering procedure for a metal fuels system is depicted in Figure 7. It is crucial to recognise that energy density calculations which fail to account for the mass and volume of the metal oxide by-products can be highly misleading and do not reflect the true practical performance of these fuel systems.

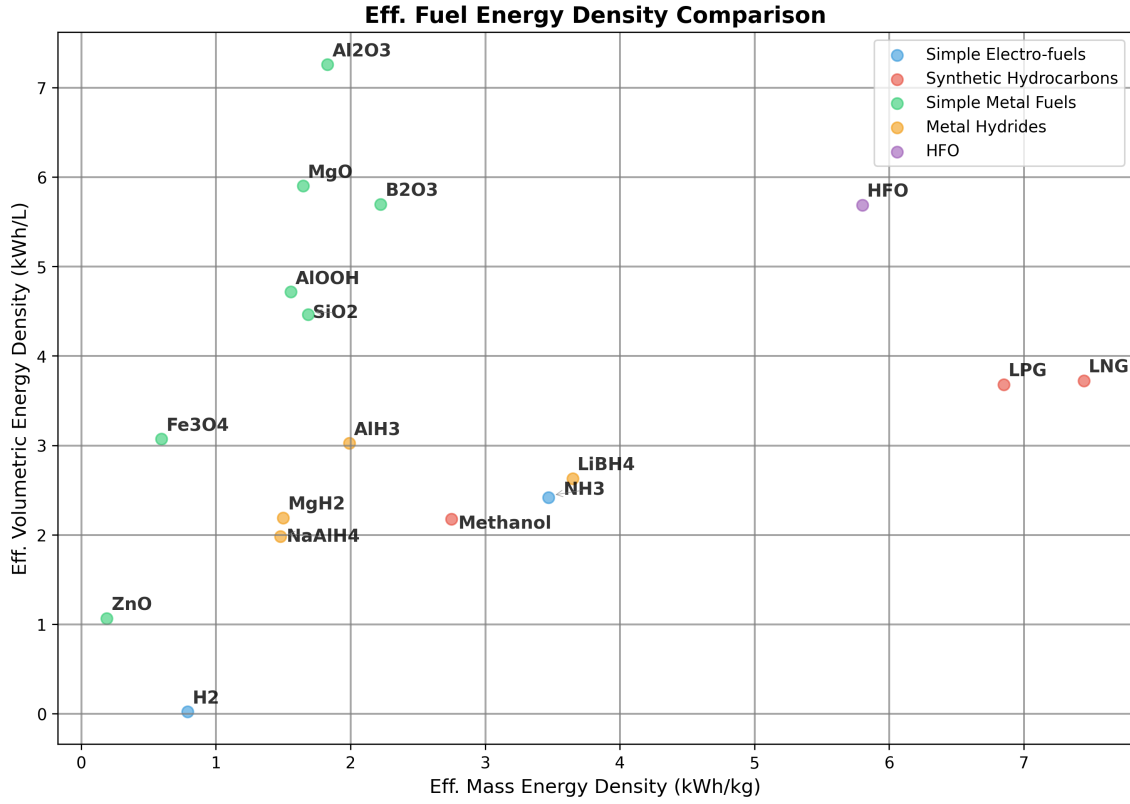


Figure 8: Effective Energy Density Analysis. Data Analysis can be found in the Appendix. Adapted from [16]

*Note: 1) Pressure Cylinder H<sub>2</sub> is 25°Celsius 500 bar*

*2) Liquid NH<sub>3</sub> is -33°Celsius 1 bar. Energy needed for cracking for NH<sub>3</sub> to H<sub>2</sub> is ignored in this table and all subsequent calculations.*

*3) The engine efficiency for hydrogen and hydrocarbon combustion is assumed to be around 50%*

*4) The engine efficiency for the metal fuels is assumed to be 40%. This number is theoretically as no such system currently exists for marine shipping. More information about the metal combustion will be discussed in the following sections.*

*5) For the metal hydrides, the energy needed to free the stored hydrogen is not considered in this calculation.*

### 1.1.2 Effective Energy Density Analysis

To gain a more comprehensive understanding of the practicality of the different electro-fuel options, an analysis of effective energy densities must be conducted. Effective energy density is defined as the energy density after accounting for engine efficiency, but in the case of metal fuels, it additionally incorporates the weight and volume associated with carrying the metal oxide by-products post-combustion. Figure 8 presents the results from the effective energy density analysis for the various electro-fuel options available. For metal fuels, the effective energy density represents the worst-case scenario of continuously carrying the by-products post-combustion throughout the voyage. In practice, the effective energy density for metal fuels will likely be higher than these calculations suggest, since the by-products can be partially offloaded at ports for collection and subsequent processing at metal reduction facilities.


It should be noted that this is a highly simplified analysis, as the mass and volume of the engines and metal reactors have been deliberately excluded from consideration. Furthermore, there is currently no real-world commercially available marine engine that utilises metal fuels, and therefore an efficiency of approximately 40% has been assumed for these calculations. The complete methodology and detailed calculations for the effective energy density analysis can be found in the Appendix.

As demonstrated in Figure 8, metal fuels remain competitive with the energy density of HFO even after accounting for the metal oxide by-products, particularly with respect to volumetric energy density. Although the mass energy density of the most promising metal fuel candidates, such as aluminium and silicon, remains lower than that of methanol, it is still substantially higher than commercially available electrochemical batteries. The superior volumetric energy densities are of particular significance, given that in practice the metal fuel system will necessitate two sets of storage tanks—one for storing the fuel and another for storing the by-products. This characteristic is also likely to prove advantageous for marine applications where space is at a premium, such as yachts, cruise ships, and container shipping. In later sections, the viability of using aluminium as a marine fuel is discussed in detail, given its promising performance following the effective energy density calculations.

## 1.2 Aluminium-Water Combustion

Using the energy density analysis from the previous sub-section, aluminium metal emerges as the most promising candidate for use in marine applications. Although it cannot match HFO and other fossil fuels in terms of mass energy density, it demonstrates competitive performance with respect to volumetric energy density. The higher volumetric energy density of aluminium fuel is particularly advantageous for marine applications where space is at a premium, such as yachts, cruise ships, and container ships. Additionally, in practice, the vessel will utilise two storage tanks—one for storing the aluminium powder fuel and another for storing the aluminium oxide by-product, which can be collected later at ports or refuelling stations for recycling.

Aluminium offers several other significant advantages that make it an attractive fuel candidate. It is the third most abundant metal in the Earth’s crust, ensuring long-term availability and resource security [1, 29]. Furthermore, aluminium production is already a massive global industry, as the metal’s properties make it exceptionally useful across numerous applications. There exists a well-established electrochemical process for producing aluminium from aluminium oxide, known as the Hall-Héroult process. This industrial process can be rendered entirely zero-carbon if the electricity is sourced from renewable energy and the electrolyzers make use of inert anodes, thereby eliminating carbon emissions from the production cycle [30].



Equation 1 demonstrates how aluminium reacts with water to produce heat and hydrogen gas. Equation 2 subsequently shows how this hydrogen gas can then be combusted to produce water and additional heat. Together, these equations reveal that to utilise the full chemical energy potential of the aluminium-water system, both the heat generated from the metal-water reaction and the heat produced from the hydrogen combustion must be harnessed. This metal-water reaction, also known as wet cycle combustion, has already found application in several specialized domains, including ALICE rockets developed for NASA [31] and underwater propulsion applications employed by the American and Russian militaries [32].

## 1.3 Reactor Design

### Overview

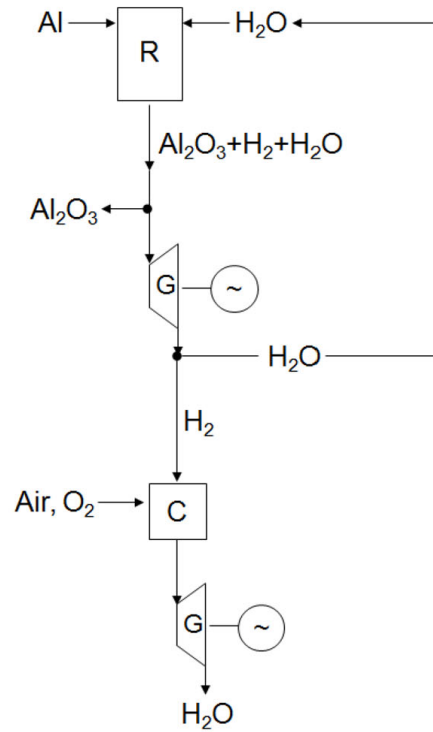


Figure 9: Simplified Overview of Metal-Water Propulsion System[4]

*Note: R = metal-water reactor, G = steam generator, C = hydrogen combustion chamber*

The metal-water propulsion system, as illustrated in Fig 9, demonstrates a novel approach to maritime propulsion. In this system, seawater from the ocean is mixed with aluminium powder from the fuel tank within a specialized metal-water reactor. The resulting reaction generates three key outputs: hydrogen, thermal heat, and aluminium oxide by-product, with the latter being separated into a dedicated storage tank. The system harnesses energy through two pathways: the thermal heat is utilized to drive a steam engine, while the produced hydrogen can be combusted in a separate chamber to generate high-temperature steam for powering an additional steam engine.

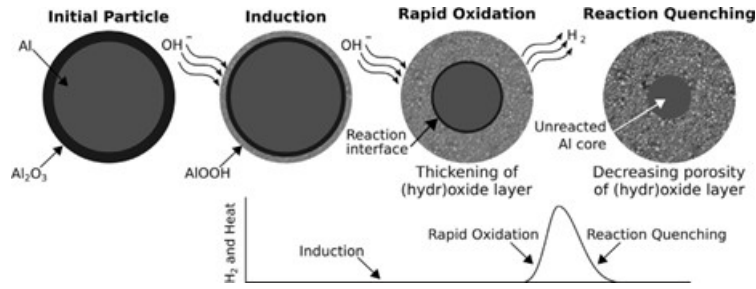


Figure 10: Schematic of the three reaction stages of aluminium with water at low temperatures, including a sketch of the initial dry particle for reference. Also sketched is the characteristic hydrogen-production curve showing the induction, rapid oxidation, and quenching stages [6]

Fig 10 illustrates the reaction pathway for the low temperature aluminium-water reaction, depicting an aluminium particle encased by a thin, inert aluminium oxide coating that must be overcome to facilitate metal-water oxidation. The metal-water reactor design requires careful optimization to achieve appropriate reaction rates for marine propulsion applications, while simultaneously maximizing hydrogen yield to enhance both the efficiency and mass energy density of the aluminium fuel.

The reaction rate and hydrogen yield can be enhanced through:

- Increased temperature and/or pressure conditions
- Reduced aluminium powder particle size
- Reduced aluminium powder to water ratio
- Implementation of various catalysts (detailed in following sub-section) [6, 4, 33]



### 1.3.1 Low Temperature Metal-Water Reactors

The aluminium-water reaction pathway for hydrogen generation has garnered significant international research attention, with most approaches focusing on nano-sized aluminium powder combined with catalysts at low temperatures. This approach involves reducing the aluminium powder to nano-sized particles and employing various catalytic methods such as alkaline solutions and ball milling the aluminium powder with other metals such as lithium and gallium, or salts such as NaCl. The primary aim of these methods is to increase the exposed surface area of the aluminium particles and prevent the protective layer of aluminium oxide from stopping or slowing down the reaction [34, 33]. This enables the metal-water reaction to take place below 120°C. Companies such as Found Energy are working to facilitate the metal-water reaction at room temperature and pressure [35].

This metal-water reactor design comes with both advantages and disadvantages. One advantage is that the reaction takes place quickly and enables the system to rapidly increase or decrease energy output to meet shifting load demands. However, this design also presents significant disadvantages:

- **High fuel production costs:** The production of nano-sized particles that also need to be ball milled with catalyst metals or salts requires an entire production chain and is likely to increase fuel costs substantially [36].
- **Elevated transport and handling costs:** The high reactivity of the nano-sized particles with water is likely to make transport and handling costs very high, as the metal reacts with water to produce hydrogen, which is a highly combustible gas and can independently contribute to climate change [37]. The higher production and handling costs for the fuel are likely to damage the economic case for this technology, since fuel costs constitute a large percentage of the operating costs for marine shipping, which is also a low-margin industry.

- **Low-grade heat output and reduced energy density:** As discussed in the previous sections, approximately half of the chemical potential energy of the aluminium metal is released as heat when reacted with water (as shown in equations 1 and 2). To maximise the round-trip efficiency of the metal-water reactor, this heat energy must be utilised for engine power. However, in these low-temperature reactors, the heat output is low-grade and unsuitable for use in traditional and high-efficiency steam engines [34]. The low-grade heat could be used by Stirling engines, but these engines have low power-to-weight ratios and have not been mass-produced so far like other heat engines such as diesel or gas turbines have [38]. The low-grade heat could also perhaps be upgraded using heat pumps and used in conjunction with Organic Rankine Cycle engines, but this increases the system complexity and the technology risks for the entire system [39]. The inability to utilise the low-grade heat also reduces the effective mass and volumetric energy density of the metal fuel by half.

Although the low-grade heat cannot be used for engine power, it can be used for other heating applications such as hot water production or indoor spas [40]. These applications are particularly useful in the yacht and cruise ship markets.

### 1.3.2 High Temperature Metal-Water Reactor

High-temperature metal-water reactors operate at 250–400°C and 15–25 MPa for optimal reaction rates [36]. These reactors can use micron-sized particles instead of nano-sized particles as in the case of low-temperature metal-water reactors. Although high-temperature metal-water reactors have garnered less research focus relative to low-temperature reactors, they come with some significant advantages, especially relating to marine shipping applications:

- **Lower fuel production costs:** Micron-sized particles are much cheaper and simpler to produce industrially compared to nano-sized particles [36, 4, 34].
- **Improved fuel handling and transport:** The micron-sized particles are also inert at room temperature and pressure, as opposed to nano-sized particles which can readily react with water at room temperature (depending on the catalytic process that is being used). Because of the fuel’s inert nature, it makes them easier to transport and handle, which further improves the economic case for these reactors.

- **High-grade heat output and improved energy efficiency:** High-temperature reactors produce high-grade heat output in the form of a steam and hydrogen mixture. This high-grade heat can be used to power high-efficiency steam engines, which nearly doubles the round-trip energy efficiency of aluminium as a secondary energy carrier [34]. It also increases the mass and volumetric energy densities of the aluminium fuel as more useful energy can be created using the same kilogram of fuel.

| Fuel Type                                 | Fuel Mass Density (kWh/kg) | Engine Efficiency | By-Product to Fuel Weight Ratio | Final Energy Density (kWh/kg) |
|-------------------------------------------|----------------------------|-------------------|---------------------------------|-------------------------------|
| Al powder (ref.)                          | 8.61                       | 0.40 (ass.)       | x                               | 3.44                          |
| Al(OH) <sub>3</sub> by-product            | 8.61                       | 0.40 (ass.)       | 2.89                            | 1.19                          |
| AlOOH by-product                          | 8.61                       | 0.40 (ass.)       | 2.22                            | 1.55                          |
| Al <sub>2</sub> O <sub>3</sub> by-product | 8.61                       | 0.40 (ass.)       | 1.89                            | 1.82                          |

Table 1: Comparison of different Al–H<sub>2</sub>O by-product scenarios. Adapted from [2, 3, 4, 5, 6, 1]

| Fuel Type                                 | Volume Density (kg/L) | Final Volumetric Energy Density (kWh/L) |
|-------------------------------------------|-----------------------|-----------------------------------------|
| Al powder (ref.)                          | 2.7                   | 9.30                                    |
| Al(OH) <sub>3</sub> by-product            | 2.42                  | 2.88                                    |
| AlOOH by-product                          | 3.03                  | 4.70                                    |
| Al <sub>2</sub> O <sub>3</sub> by-product | 3.97                  | 7.23                                    |

Table 2: Volumetric Energy Densities of different Al–H<sub>2</sub>O combustion scenarios. Adapted from [2, 3, 7, 8, 9, 10, 11]

- **Superior metal oxide by-product:** The aluminium-water reaction can produce three main by-products: Al(OH)<sub>3</sub>, AlOOH, and Al<sub>2</sub>O<sub>3</sub>. The by-product produced can change the effective mass energy density of the fuel system. The lowest energy density happens with Al(OH)<sub>3</sub>, while the highest is with Al<sub>2</sub>O<sub>3</sub>, as shown in Tables 1 and 2. In Fig 11 we can see that as temperature and pressure increase, the probability of producing Al<sub>2</sub>O<sub>3</sub> instead of Al(OH)<sub>3</sub> increases, thus further increasing the effective mass and volumetric energy density of the aluminium fuel system. Al<sub>2</sub>O<sub>3</sub> can also be used directly as the input in the Hall–Héroult process, as opposed to Al(OH)<sub>3</sub>, which needs to be processed into Al<sub>2</sub>O<sub>3</sub> first [40].

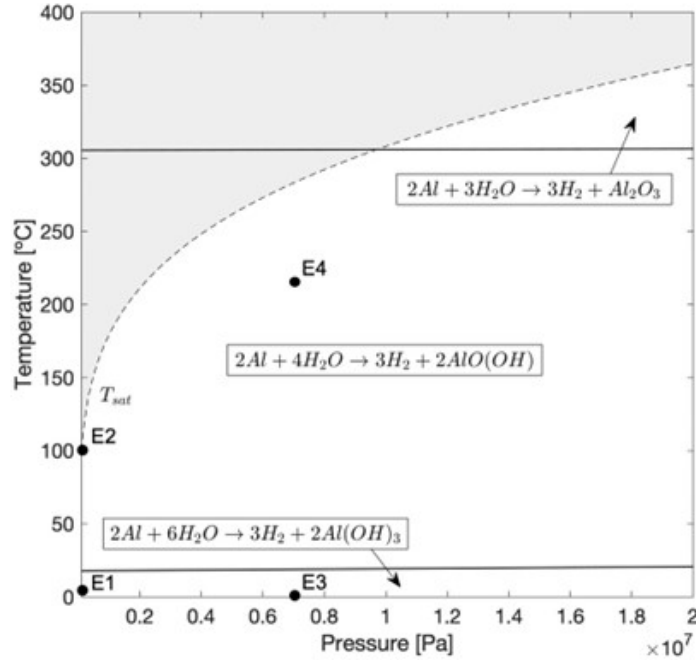


Figure 11: Al–H<sub>2</sub>O reaction transition diagram extrapolated to 10 MPa. Labels E1-E4 show conditions used for experimental validation [18]

However, high-temperature reactors come with their own disadvantages:

- **Extended reactor start-up time:** It could take some time for the reactor to heat up, which can be up to 15–30 minutes depending on the size of the reactor. This problem can be mitigated by the use of hybrid electric propulsion using electrochemical batteries that work as a buffer storage system as the reactor heats up. Hybrid electric systems can mitigate the impact on performance and manoeuvrability caused by the longer start-up time. These hybrid electric systems have been widely used in the automotive sector for decades and have already been gaining traction in the marine shipping sector [41]. Hybrid electric designs were also used to manage the longer start-up time for aluminium powder powered submarine and UUV systems that were researched by the American military [32].
- **Higher reactor manufacturing costs:** The reactor for the high-temperature system is likely to be more expensive since it needs to handle the higher temperature and pressure.

### 1.3.3 Summary Tables

| Parameter                                   | LT-MWR                                                              | HT-MWR                                            |
|---------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------|
| <b>Particle Size</b>                        | Nano-sized particles                                                | Micron-sized particles                            |
| <b>Catalysts</b>                            | Range of special alloys (Li, Ga, Hg, etc.)                          | No catalysts                                      |
| <b>Temperature and Pressure</b>             | Below 120°C (can operate at room temperature depending on catalyst) | 250–400°C and 15–25 MPa                           |
| <b>Metal By-product</b>                     | Al(OH) <sub>3</sub> or AlOOH                                        | AlOOH or Al <sub>2</sub> O <sub>3</sub>           |
| <b>Worst Case Mass Energy Density</b>       | 0.60 or 0.78 kWh/kg                                                 | 1.55 or 1.82 kWh/kg                               |
| <b>Worst Case Volumetric Energy Density</b> | 1.44 or 2.35 kWh/L                                                  | 4.70 or 7.23 kWh/L                                |
| <b>Thermal Heat Utilization</b>             | Difficult due to low temperature                                    | Possible with simple steam turbines               |
| <b>Fuel Production Costs</b>                | Higher (smaller particles and ball milling alloys)                  | Lower (larger particles and low catalysts)        |
| <b>Round-trip Energy Eff.</b>               | 11–13% (if no heat is utilized)                                     | 23–25%                                            |
| <b>Fuel Transport Costs</b>                 | Higher (very reactive at room temp.)                                | Lower (mostly inert at room temperature)          |
| <b>Fuel Handling Safety</b>                 | Lower                                                               | Higher                                            |
| <b>Reactor Costs</b>                        | Lower                                                               | Higher (to withstand high temperature & pressure) |
| <b>Reactor Start-up Time</b>                | Lower (ability to load follow)                                      | 15–30 minutes (better for baseloads)              |

Table 3: Comparison of Low Temperature Metal-Water Reactors (LT-MWR) and High Temperature Metal-Water Reactors (HT-MWR)

## 1.4 Economics of Aluminium Fuel

### 1.4.1 The Long Term Trends

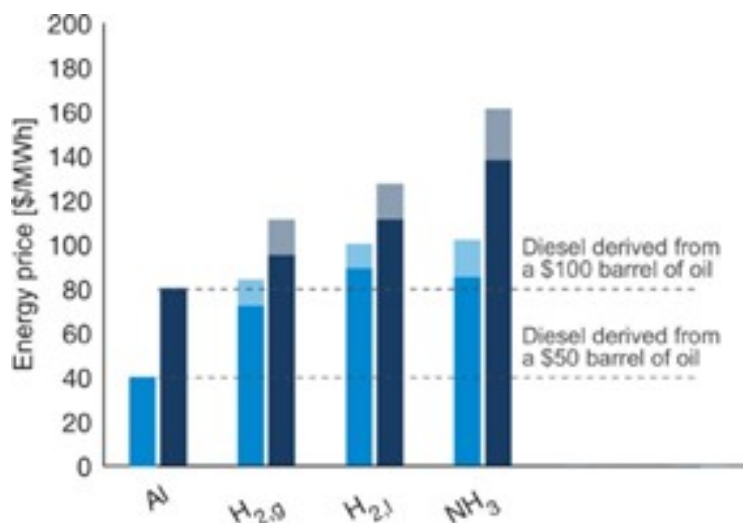


Figure 12: Aluminium fuel vs other electrofuels and diesel (The bars show the price of energy derived from low-carbon energy carriers, if the input electricity price were set to \$36/MWh (dark blue) or \$26/MWh (light blue). The pale region at the top of each bar represents the uncertainty related to the required inputs.) [1]

According to researchers at McGill University, Canada, if both the heat and hydrogen from the aluminium-water reaction are utilized for power generation at 40% efficiency, aluminium’s round-trip efficiency as an electro-fuel reaches approximately 23-25%, making it comparable to hydrogen [42] and superior to ammonia [43].

The cost of electro-fuels like aluminium can be estimated based on electricity prices, while diesel is tied to crude oil prices. As shown in Figure 12, aluminium becomes cost-competitive with diesel when electricity prices fall between \$26-36/MWh and oil prices range from \$50-100 per barrel.

Aluminium also holds a cost advantage over rival electro-fuels such as hydrogen (both gas and liquefied forms) and ammonia. In OECD countries, industrial electricity rates range from \$45-143/MWh, with an average of \$100/MWh [44]. In regions with abundant renewable energy, such as Norway and Quebec, where rates are as low as \$45/MWh and \$27/MWh, aluminium becomes even more competitive in these markets [45].

### 1.4.2 The Emerging Green Aluminium Supply Chain

The economic case for aluminium as a recyclable energy carrier depends not only on electricity prices and round-trip efficiency, but also on the carbon intensity of aluminium production itself. For decades, the conventional Hall-Héroult process has been highly carbon-intensive for two fundamental reasons:

- **Very high electricity consumption** – Primary aluminium smelting typically requires 14–16 MWh of electricity per tonne of metal produced. In coal-dependent grids, this translates into a large carbon footprint.
- **Consumable carbon anodes** – The anodes used in conventional cells are made of baked carbon. During normal operation, these anodes oxidise to release carbon dioxide directly from the process, not just from the electricity source.

Together, these factors have made virgin aluminium one of the most emission-heavy industrial metals. Furthermore, the Hall-Héroult process was traditionally thought to require stable, inflexible baseload electricity. Aluminium smelters were designed to run continuously at a fixed power draw, making them a poor match for variable renewable electricity from solar and wind power.

However, several recent projects are challenging these long-held assumptions, pointing toward a future green aluminium supply chain that is both low-carbon and grid-interactive.

#### **Photovoltaic direct-current (DC) aluminium smelting in Yunnan, China**

A novel DC-powered smelting system has been demonstrated that directly integrates photovoltaic generation with aluminium electrolysis. Key achievements include:

- DC power supply efficiency of at least **98%**, a significant improvement over the  $\sim 80\%$  efficiency of traditional AC-coupled photovoltaic systems [46].
- Stabilisation of the electrolytic process by controlling current fluctuations on the DC bus to within  $\pm 1.5\%$ , overcoming a major technical barrier to direct solar-powered smelting [46].

This technology has already been deployed at **eight plant sites**, with a total installed capacity of **252 MW**, demonstrating that direct solar-powered aluminium production is scaling beyond the laboratory [47].

### The EnPot process from New Zealand

The EnPot system provides, for the first time, dynamic control of the heat balance of aluminium smelting pots across an entire potline. Key capabilities include:

- Energy consumption and aluminium production can be increased or decreased by as much as  $\pm 30\%$  **almost instantaneously** [48].
- Smelters can reduce power draw during periods of grid stress or low renewable output, and increase draw when surplus renewable electricity is available.
- This transforms the smelter from a passive end-user of power into a “**virtual battery**” for the electricity network, enabling deeper penetration of wind and solar generation [48].

Crucially, the EnPot process is no longer a theoretical concept. It is being deployed in **real-world projects in Germany and China**, proving that flexible aluminium smelting can operate alongside heavy industrial demand and variable renewable grids [49].

### Ceramic-based inert anodes

Perhaps the most transformative development is the ongoing commercialisation of inert anodes (ceramic or metal-based) to replace the century-old consumable carbon anodes. Inert anodes do not oxidise during electrolysis, eliminating the direct  $\text{CO}_2$  emissions from the anode reaction. When paired with renewable electricity, the entire Hall-Héroult process becomes **completely zero-carbon** [30]. Several consortia (including Rusal, Alcoa, and Rio Tinto’s ELYSIS partnership) are now scaling this technology [50].

Taken together, these three innovations – DC photovoltaic smelting, EnPot’s load-flexible potlines, and inert anodes – are rapidly removing the historical carbon penalty from aluminium production. For the aluminium-water propulsion system proposed in this work, an emerging green aluminium supply chain means that the fuel can be truly low-carbon from well-to-wake, not only during onboard combustion. This strengthens both the environmental and economic case for aluminium as a marine fuel, particularly as renewable electricity becomes cheaper and more widespread.



## 1.5 Technology Development Pathway

### 1.5.1 Barriers to Entry in Container Shipping

The maritime shipping industry has historically been conservative in its adoption of new propulsion technologies. This reluctance stems from the sector’s high capital costs and persistently low operating margins, which leave little room for experimental or unproven systems. Consequently, any novel engine or fuel system must first obtain certification from the International Maritime Organization (IMO), a process that typically requires extensive operational data and can take up to a decade. This lengthy and expensive approval pathway presents a formidable barrier to the introduction of a completely new fuel–engine combination, even in scenarios where high carbon taxes or stringent emissions regulations might otherwise favour low-carbon alternatives.

Given these challenges, a direct assault on the container shipping market with aluminium-water propulsion is unlikely to succeed in the near term. Moreover, while solar and battery costs are falling sharply, a robust green aluminium production industry has yet to emerge. Realistic projections suggest that at least 10–15 years will be required for this supply chain to mature and for aluminium fuel to reach cost parity with heavy fuel oil (HFO) and other hydrocarbons. Therefore, a beachhead market must be identified—one in which the technology can be developed, demonstrated, and refined through a “learning by doing” process, while generating the operational track record needed for eventual IMO certification. [51]

### 1.5.2 Luxury Yachts and Superyachts as an Ideal Beachhead

The most promising initial market for aluminium-water propulsion systems is the luxury yacht and superyacht segment. These vessels are typically purchased by Ultra-High-Net-Worth Individuals (UHNWIs), defined as individuals with a net worth of US\$30 million or more. The global UHNWI population is expected to grow by approximately 33% between 2025 and 2030 [52], driving strong demand for bespoke, high-end vessels.

Unlike container shipping, which is a commoditised market driven almost exclusively by cost per tonne-mile, the superyacht market places a premium on product differentiation, innovation, and environmental stewardship. UHNWIs are also more likely to tolerate a significant green premium during the early years of technology development, while the aluminium-water propulsion system is being refined and while green aluminium fuel has yet to reach cost parity with conventional fuels. This tolerance for higher upfront costs provides a critical financial bridge for the technology.



Figure 13: Modern Electric Yachts with Integrated Solar Panels [19]



Figure 14: The Gotland Horizon X By Austal Panels [20]

Indeed, several green yachting options already exist, including fully battery-electric yachts powered by integrated solar panels (as shown in Fig 13). Furthermore, Austal—Australia’s largest shipbuilder—is developing a catamaran ferry called the Gotland Horizon X (as shown in Fig 14), which features a lightweight “green aluminium” hull and can be powered entirely by green hydrogen [20]. These developments indicate a strong and growing appetite for low-carbon, novel vessel designs within the premium marine segment.

### 1.5.3 Regulatory Pathway and Certification Advantages

Equally important are the regulatory differences between commercial shipping and the superyacht sector. IMO certification for container shipping follows a rigid, top-down process that demands extensive pre-approved data. In contrast, superyacht certification is handled primarily by private classification societies such as Registro Italiano Navale (RINA), Lloyd’s Register (LR), and DNV. These societies employ a flexible, bottom-up, risk-based approach, often engaging in bespoke negotiations with builders and owners. They are specifically equipped to approve novel systems and one-off builds, making them far more accommodating to innovative propulsion technologies [53, 54].

### 1.5.4 Pathway to Broader Adoption

If aluminium-water combustion systems can be successfully commercialised in the luxury yacht market, the operational data generated will greatly simplify the subsequent IMO certification process for container shipping applications. This strategy mirrors the path taken by Tesla in the automotive industry: the original Tesla Roadster—a high-performance, low-volume sports car—served as a beachhead to develop battery and electric drivetrain technology, generate real-world data, and build brand credibility before moving into mass-market vehicles [55, 51]. By targeting yachts and superyachts as the initial product development segment, the aluminium fuel system can follow an analogous learning-by-doing trajectory, ultimately paving the way for large-scale deployment in deep-sea shipping.

## 2 Research Questions

### 2.1 System Requirements for Yacht Applications

While deep-sea shipping remains the ultimate decarbonisation target, accounting for approximately 70% of the industry’s fuel consumption and carbon emissions [27], the luxury yacht and superyacht segment offers an ideal beachhead for the development of aluminium-water propulsion systems. This market allows for iterative technology refinement, real-world operational data collection, and the establishment of flexible regulatory pathways.

However, the performance requirements for an aluminium-water reactor vary significantly across the different classes of superyachts that are popular in the market today. These include motor yachts, sailing superyachts, explorer yachts, and pocket superyachts (24–40 metres). To guide engineering design effectively, the following technical parameters must be systematically determined for each class:

- Minimum mass energy density
- Minimum volumetric energy density
- Power demand profile (minimum, maximum, and average power)
- Minimum range
- Total energy demand between refuelling stops
- Detailed energy demand profile for marine engine operations

## 2.2 Metal-Water Reactor Design

Metal-water combustion can be calibrated by the following factors:

- Combustion temperature and pressure
- Aluminium powder particle size
- Precise fuel-to-water ratio
- Use of catalysts

However, any practical design must also address the safety hazards of aluminium powder:

- Acute fire and explosion risks due to high dust cloud combustibility.
- Exothermic reaction with moisture, liberating flammable hydrogen.
- Chronic inhalation can cause pulmonary fibrosis (aluminosis).
- Safe handling requires inert atmospheres, rigorous housekeeping, and Class D extinguishing agents (water is strictly forbidden).

For marine environments, proper safety protocols – covering bunkering, leak detection, dust control, and emergency response – must be developed as part of this research.

Compared to traditional diesel (well-understood but carbon-intensive) and other electro-fuels like ammonia (toxic) and hydrogen (highly flammable, prone to embrittlement), aluminium powder offers no acute toxicity or high-pressure storage risks, but its dust and moisture reactivity demand novel marine safety systems. This study will develop and validate those systems alongside the reactor design.

Comprehensive research discussed in previous sections provides nuanced insights into reaction pathways, critically examining their implications for mass energy and volumetric energy densities resulting from the different fuel by-products.

This study aims to establish a rigorous framework for determining optimal metal-water reactor operating parameters for superyacht applications through experimental verification. The reactor design must simultaneously satisfy multifaceted performance criteria, including:

- Compliance with power output requirements for different superyacht classes
- Maximisation of energy density metrics within spatial constraints

- Minimisation of aluminium fuel production costs
- Reduction of reactor start-up time
- Optimisation of reactor manufacturing costs

A central component of this research is the development of a control system with integrated feedback loops to ensure optimal metal-water combustion for hydrogen and heat production. As noted in the research background, high-temperature metal-water reactors require extended start-up periods of 15–30 minutes. To mitigate this limitation and ensure responsive power delivery, the propulsion system will necessarily incorporate electrochemical batteries as a buffer. However, the design and sizing of these batteries are beyond the scope of this project; instead, the focus is on characterising the reactor’s transient behaviour such that future engine development efforts can specify appropriate battery requirements.

Accordingly, the research will investigate and optimise the reactor’s start-up time and dynamic response during mode switching. The goal is to demonstrate that the metal-water reactor can meet the operational and system requirements of commercial superyachts, particularly the need for rapid load changes during manoeuvring and varying cruising demands.

The present study is primarily concerned with the design, construction, and experimental validation of the metal-water reactor and its associated control system. The downstream conversion of reactor outputs (hydrogen and high-grade heat) into mechanical propulsion – including steam engine or turbine selection, as well as battery sizing – is explicitly outside the scope of this work. As with any real-world system, trade-offs need to be made when designing the metal-water reactor for superyacht propulsion. All such trade-offs must be documented and justified as part of this study.

Taken together, the system requirements analysis (Section 2.1) and the metal-water reactor research presented here will form the backbone for subsequent research into engine development and system optimisation for aluminium powder fuel in superyacht propulsion applications.

## 3 Methodology

### 3.1 Industry Research

To develop a robust understanding of system requirements for the superyacht market, this research will involve structured outreach to key industry participants, including yacht builders, classification societies (Registro Italiano Navale, Lloyd’s Register, and DNV), naval architects, and vessel owners (Ultra-High-Net-Worth Individuals). Semi-structured interviews will be conducted with each group and, with consent, recorded for later transcription and thematic analysis.

The interviews will capture the following quantitative and qualitative information:

- Typical energy demand profiles for different superyacht classes (motor yachts, sailing yachts, explorer yachts, and pocket superyachts)
- Minimum and maximum power output requirements during various operational phases (docking, cruising, manoeuvring)
- Expected refuelling costs and maximum acceptable refuelling time per stop
- Total energy demand between planned refuelling stops
- Minimum mass and volumetric energy density targets derived from onboard storage constraints
- Tolerance for novel technology risks and willingness to pay a green premium

Interviews with classification societies will also clarify the regulatory pathway for safety certification of a novel aluminium-fuel propulsion system, addressing:

- The documentation required for prototype approval
- The operational data thresholds needed to move from one-off builds to broader certification
- Specific safety concerns related to aluminium powder handling, hydrogen production, and high-temperature/pressure reactor operation

Understanding these regulatory requirements early will shape the project’s data collection and documentation strategy, ensuring experimental results are recorded in a way that directly supports future certification.

Crucially, conversations with both classification societies and potential customers will help identify which superyacht market segments offer the greatest promise for initial large-scale deployment of this low-carbon fuel system. Factors such as regulatory flexibility, typical cruising ranges, risk tolerance, and willingness to accept a green premium vary considerably across motor yachts, sailing yachts, explorer yachts, and pocket superyachts. By analysing these segment-specific characteristics, the research will prioritise one or more classes as the first target for deployment. This prioritisation then directly narrows the system requirements for the metal-water reactor:

- If explorer yachts emerge as the lead segment, the design will emphasise maximum range and total energy between refuelling stops.
- If pocket superyachts are prioritised, volumetric energy density and compact reactor packaging become paramount.

The insights from all interviews will be synthesised into a formal requirements matrix that will guide the subsequent design and experimental validation of the metal-water reactor.



## 3.2 Metal-Water Reactor Design

Based on the analysis presented in Section 1.3, this research explicitly commits to the high-temperature metal-water reactor (HT-MWR) design path, operating at 250–400°C and 15–25 MPa. The economic, safety, and energy density arguments all point decisively in this direction:

- Micron-sized particles are substantially cheaper to produce than nano-sized alternatives
- The fuel is inert at room temperature and pressure, reducing transport and handling costs
- The high-grade thermal output can be harnessed by steam turbines, nearly doubling the round-trip energy efficiency compared to low-temperature designs

This commitment is placed on record here so that the experimental programme, the requirements matrix from Section 3.1, and the eventual reactor design are all calibrated to the same system architecture.

The core experimental component of this research involves laboratory-scale investigations into aluminium-water reactions under controlled high-temperature and high-pressure conditions. These experiments will systematically vary the parameters known to govern reaction kinetics and by-product composition — temperature, pressure, particle size, and fuel-to-water ratio — in order to characterise the reactor’s performance envelope and identify the operating conditions that best satisfy the superyacht system requirements identified through the industry research described in Section 3.1. All experiments will be meticulously documented, including:

- Reaction temperatures and pressures
- Hydrogen production rates
- Heat output
- By-product composition

This dataset will directly inform reactor geometry, material selection, and control system design in subsequent phases of the broader research programme.

## Aluminium Powder Particle Size

The experiments will systematically explore micron-sized aluminium powder across a particle size range of 10–500 micrometres. As discussed in Section 1.3.2, reaction speed increases with both temperature elevation and particle size reduction, and the optimal particle size represents a trade-off between:

- Reaction rate
- Fuel production cost
- Handling safety

A specific objective of these experiments is to determine the coarsest particle size that can still achieve the reaction rates required to meet the power output demands of the target superyacht class identified through Section 3.1, since larger particles are substantially cheaper to produce and safer to handle.

## Temperature, Pressure, and By-Product Optimisation

As illustrated in Figure 11, increasing temperature and pressure shifts the reaction pathway toward the production of  $\text{Al}_2\text{O}_3$  as the dominant by-product, which — as shown in Tables 1 and 2 — offers the most favourable mass and volumetric energy densities of any by-product scenario, and can be fed directly into the Hall–Héroult process without intermediate processing. The experimental programme will therefore:

- Sweep across the temperature range of 250–400°C and pressures up to 25 MPa
- Identify the threshold conditions under which  $\text{Al}_2\text{O}_3$  becomes the dominant by-product
- Verify that the steam-hydrogen output mixture reaches 440–500°C, the temperature range required for use in high-efficiency steam turbines
- Characterise how fuel-to-water ratio can be used as a lever for modulating power output

The reactor vessel used for laboratory-scale experiments must be designed to withstand pressures exceeding 250 bar. Material selection for the reactor body requires careful consideration to balance structural integrity, corrosion resistance in the presence of high-temperature steam and aluminium oxide slurry, and manufacturing cost — all of which will be documented as part of the design record.

## Distilled Water and Seawater as Reactants

Experiments will use both distilled water and seawater to evaluate which medium yields superior hydrogen and heat generation performance. Seawater is of particular practical relevance for superyacht propulsion, as it would be the readily available reactant during marine operation; however, its chemistry introduces variables that distilled water experiments cannot capture. Specifically, seawater contains:

- Dissolved chloride ions and sulphates, which may modify the passivation behaviour of the aluminium oxide layer and alter the induction period described in Figure 10
- Magnesium and sodium salts, which could affect by-product composition
- Biological matter and suspended particulates, which may affect reactor internals and feed systems over time

These ionic effects will be treated as an explicit experimental variable. Experiments will be conducted at controlled salinity levels — including open-ocean salinity of approximately 35 g/L and coastal values down to 15 g/L — and by-product composition will be characterised separately for distilled water and seawater runs under otherwise identical conditions. The outcomes will inform both the reactor material specification and any filtration or pre-treatment requirements for onboard seawater intake.

## Safety Protocol for Laboratory Experiments

Aluminium powder at micron scale, while substantially less reactive than nano-sized particles, still presents fire, explosion, and inhalation hazards that must be addressed in the experimental design before any combustion testing begins. The laboratory safety protocol will include the following provisions:

- All experiments will be conducted in a dedicated, ventilated enclosure fitted with Class D fire suppression capability; water-based extinguishing agents are strictly prohibited in any area where aluminium powder is handled
- All powder transfers will be performed under inert atmosphere or with appropriate humidity control to prevent inadvertent hydrogen evolution
- Hydrogen production rates will be continuously monitored using calibrated flow sensors, with the test enclosure maintained below the lower flammability limit for hydrogen through active ventilation

- Researchers will wear appropriate respiratory protection during powder handling to guard against aluminium dust inhalation (aluminosis)

The safety protocol will be developed in consultation with the relevant classification societies — Registro Italiano Navale (RINA), Lloyd’s Register (LR), and DNV — to ensure that the procedures adopted in the laboratory are consistent with the risk-based approval frameworks that will govern eventual onboard deployment. This consultation also ensures that the documentation generated during lab-scale testing is structured to support future certification submissions.

### **Scope Boundary and Relation to Future Research**

Given the timeframe of a Master’s research programme, it is essential to define clearly which aspects of the aluminium-water propulsion system fall within the scope of this study and which are deferred to subsequent work. Table 4 formalises this boundary and identifies how the outputs of this study will directly enable each downstream research activity.


The reactor start-up time deserves particular attention as a bridging output between this study and future work. As noted in Section 1.3.2, high-temperature reactors require 15–30 minutes to reach operating conditions, and the mitigation strategy — a hybrid-electric buffer using electrochemical batteries — is well-established in both the automotive sector and prior military aluminium-fuel programmes. The battery sizing and selection for the superyacht system are explicitly outside the scope of this study; however, characterising the reactor’s transient thermal behaviour under realistic start-up conditions is within scope, and this data will be the primary input that enables future work to specify and size the battery buffer correctly.

The outcomes of Section 3.1 and the experimental work described here will together form the backbone for the subsequent research phases into engine development, control system integration, and full-scale system optimisation for aluminium powder propulsion in the superyacht market.

| Research Activity                                                                                       | In Scope         | Out of Scope      | How This Study Enables Future Work                                                                                |
|---------------------------------------------------------------------------------------------------------|------------------|-------------------|-------------------------------------------------------------------------------------------------------------------|
| Industry requirements matrix                                                                            | Yes              | —                 | Defines power, range, and energy density targets that bound all downstream design                                 |
| HT-MWR parameter characterisation (T, P, particle size, fuel-to-water ratio)                            | Yes              | —                 | Produces the experimental dataset for reactor geometry and operating point selection                              |
| By-product composition analysis ( $\text{Al}(\text{OH})_3$ , $\text{AlOOH}$ , $\text{Al}_2\text{O}_3$ ) | Yes              | —                 | Determines achievable energy density and recycling compatibility under real operating conditions                  |
| Seawater vs distilled water reactant comparison                                                         | Yes              | —                 | Establishes whether onboard seawater can be used directly, and specifies any pre-treatment requirements           |
| Reactor geometry and material selection                                                                 | Yes (lab-scale)  | Full-scale design | Lab-scale findings provide the basis for scaled engineering design                                                |
| Reactor start-up time characterisation                                                                  | Yes              | —                 | Defines the battery buffer specification required for hybrid-electric integration                                 |
| Control system development                                                                              | —                | Yes               | Reactor transient data from this study provides the input requirements for control system design                  |
| Steam engine / turbine selection and integration                                                        | —                | Yes               | Steam output conditions characterised here define turbine inlet specifications                                    |
| Battery sizing for hybrid-electric buffer                                                               | —                | Yes               | Start-up time data from this study directly bounds the battery energy and power requirements                      |
| Full-scale stress testing and classification society approval                                           | —                | Yes               | Experimental safety protocols and datasets developed here form the evidential basis for certification submissions |
| Manufacturing cost and spatial footprint estimation                                                     | Yes (indicative) | Detailed design   | High-level estimates from lab-scale work inform the economic feasibility case                                     |

37  
Table 4: Scope boundary for the metal-water reactor research and relation to future work

## 4 Proposed Project Time-line

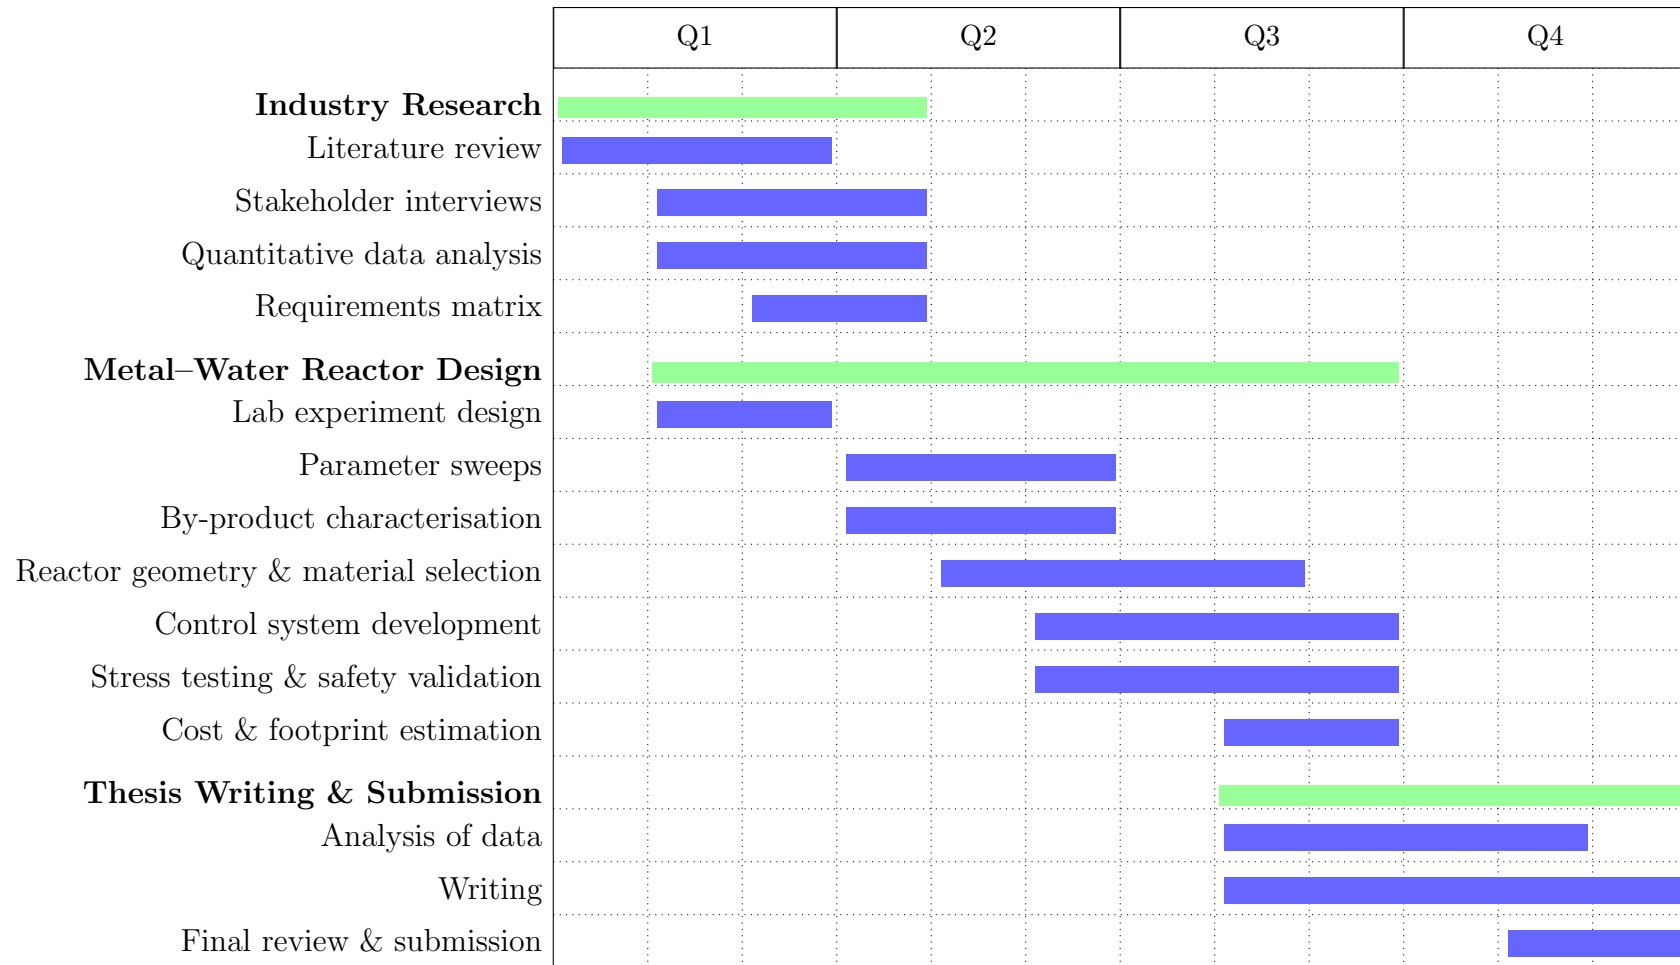

## 5 References

- [1] K. A. Trowell, S. Goroshin, D. L. Frost, and J. M. Bergthorson, “Aluminum and its role as a recyclable, sustainable carrier of renewable energy,” *Appl. Energy*, vol. 275, p. 115112, Oct. 2020.
- [2] B. Dunn, H. Kamath, and J.-M. Tarascon, “Electrical energy storage for the grid: a battery of choices,” *Science*, vol. 334, pp. 928–935, Nov. 2011.
- [3] F. T. Wagner, B. Lakshmanan, and M. F. Mathias, “Electrochemistry and the future of the automobile,” *J. Phys. Chem. Lett.*, vol. 1, pp. 2204–2219, July 2010.
- [4] M. S. Vlaskin, G. E. Valyano, A. Z. Zhuk, and E. I. Shkolnikov, “Oxidation of coarse aluminum in pressured water steam for energy applications,” *Int. J. Energy Res.*, vol. 44, pp. 8689–8715, Sept. 2020.
- [5] “Energy Density of some Combustibles — The Geography of Transport Systems — transportgeography.org.” <https://transportgeography.org/contents/chapter4/transportation-and-energy/combustibles-energy-content/>. [Accessed 25-11-2024].
- [6] J. M. Bergthorson, “Recyclable metal fuels for clean and compact zero-carbon power,” *Prog. Energy Combust. Sci.*, vol. 68, pp. 169–196, Sept. 2018.
- [7] PubChem, “Density, gasoline (nominal: 0.7429 g/ml @ 15 degrees c).” <https://pubchem.ncbi.nlm.nih.gov/substance/483747003>. Accessed: 2024-11-26.
- [8] PubChem, “Aluminum.” <https://pubchem.ncbi.nlm.nih.gov/compound/5359268>. Accessed: 2024-11-26.
- [9] PubChem, “Aluminum hydroxide.” <https://pubchem.ncbi.nlm.nih.gov/compound/10176082>. Accessed: 2024-11-26.
- [10] D. Barthelmy, “Boehmite mineral data.” <http://webmineral.com/data/Boehmite.shtml>. Accessed: 2024-11-26.
- [11] PubChem, “Aluminum oxide.” <https://pubchem.ncbi.nlm.nih.gov/compound/9989226>. Accessed: 2024-11-26.
- [12] M. Roser, “Why did renewables become so cheap so fast?,” *Our World in Data*, 2020. <https://ourworldindata.org/cheap-renewables-growth>.

- [13] M. Maisch, “BNEF: Lithium-ion battery pack prices fall to \$108/kWh, stationary storage becomes lowest price segment - Energy Storage — ess-news.com.” <https://www.ess-news.com/2025/12/09/bnef-lithium-ion-battery-pack-prices-fall-to-108-kwh-stationary-storage-becomes-lowest-price-segment/#pid=1>. [Accessed 12-12-2025].
- [14] Infinium, “Infinium™ Enters into Strategic Alliance with Denbury for Ultra-Low Carbon Fuels Projects in Texas, Continuing Development Momentum — prnewswire.com.” <https://www.prnewswire.com/news-releases/infinium-enters-into-strategic-alliance-with-denbury-for-ultra-low-carbon-fuels-projects-in-texas-continuing-development-momentum-301489124.html>. [Accessed 13-01-2025].
- [15] J. M. Bergthorson, S. Goroshin, M. J. Soo, P. Julien, J. Palecka, D. L. Frost, and D. J. Jarvis, “Direct combustion of recyclable metal fuels for zero-carbon heat and power,” *Appl. Energy*, vol. 160, pp. 368–382, Dec. 2015.
- [16] “Combustion of Fuels - Carbon Dioxide Emission — engineeringtoolbox.com.” [https://www.engineeringtoolbox.com/co2-emission-fuels-d\\_1085.html](https://www.engineeringtoolbox.com/co2-emission-fuels-d_1085.html). [Accessed 10-01-2025].
- [17] J. de Kwant, R. Hekkenberg, A. Souflis-Rigas, and A. A. Kana, “Exploring the potential of iron powder as fuel on the design and performance of container ships,” *Int. Shipbuild. Prog.*, vol. 70, pp. 3–28, June 2023.
- [18] P. Godart, J. Fischman, K. Seto, and D. Hart, “Hydrogen production from aluminum-water reactions subject to varied pressures and temperatures,” *Int. J. Hydrogen Energy*, vol. 44, pp. 11448–11458, May 2019.
- [19] “® OFFICIAL Silent Yachts — Solar powered yachts — silent-yachts.com.” <https://silent-yachts.com/>. [Accessed 14-05-2026].
- [20] “Austal in LOI for 130-meter Gotland Horizon X hydrogen-fueled cat - Maritime and Salvage Wolrd News - Latest Ship Technologies — marine-salvage.net.” <https://marine-salvage.net/en/maritime-news/austal-in-loi-for-130-meter-gotland-horizon-x-hydrogen-fueled-cat/>. [Accessed 14-05-2026].
- [21] H. Ritchie, “Cars, planes, trains: where do co2 emissions from transport come from?,” *Our World in Data*, 2020. <https://ourworldindata.org/co2-emissions-from-transport>.



- [22] H. Ritchie, “Sector by sector: where do global greenhouse gas emissions come from?,” *Our World in Data*, 2020. <https://ourworldindata.org/ghg-emissions-by-sector>.
- [23] “2023 IMO Strategy on Reduction of GHG Emissions from Ships — imo.org.” <https://www.imo.org/en/OurWork/Environment/Pages/2023-IMO-Strategy-on-Reduction-of-GHG-Emissions-from-Ships.aspx>. [Accessed 24-10-2024].
- [24] C. McKerracher, “China’s Clean-Truck Surprise Defies the EV Slowdown Narrative — BloombergNEF — about.bnef.com.” <https://about.bnef.com/insights/clean-transport/chinas-clean-truck-surprise-defies-the-ev-slowdown-narrative/>. [Accessed 12-12-2025].
- [25] M. Barnard, “And So It Begins: 1,000-Kilometer Route Yangtze Container Ship With Swappable Batteries - CleanTechnica — cleantechnica.com.” <https://cleantechnica.com/2023/07/31/and-so-it-begins-1000-kilometer-route-yangtze-container-ship-with-swappable-batteries/>. [Accessed 12-12-2025].
- [26] M. P. Release, “Maersk and CATL Forge Global Strategic Partnership in Supply Chain Electrification and International Logistics — maersk.com.” <https://www.maersk.com/news/articles/2025/10/10/maersk-and-catl-forge-global-strategic-partnership-in-supply-chain>. [Accessed 12-12-2025].
- [27] “The New Energy Trade: Harnessing Australian renewables for global development — superpowerinstitute.com.au.” <https://www.superpowerinstitute.com.au/work/the-new-energy-trade>. [Accessed 26-11-2024].
- [28] “Maersk orders six methanol powered vessels — maersk.com.” <https://www.maersk.com/news/articles/2023/06/26/maersk-orders-six-methanol-powered-vessels>. [Accessed 13-01-2025].
- [29] N. Klopčič, I. Grimmer, F. Winkler, M. Sartory, and A. Trattner, “A review on metal hydride materials for hydrogen storage,” *J. Energy Storage*, vol. 72, p. 108456, Nov. 2023.
- [30] H. Kvande and W. Haupin, “Inert anodes for Al smelters: Energy balances and environmental impact,” *JOM (1989)*, vol. 53, pp. 29–33, May 2001.

- [31] G. Risha, T. Connell, R. Yetter, V. Yang, T. Wood, M. Pfeil, T. Pourpoint, and S. Son, “Aluminum-ICE (ALICE) propellants for hydrogen generation and propulsion,” in *45th AIAA/ASME/SAE/ASEE Joint Propulsion Conference & Exhibit*, (Reston, Virginia), American Institute of Aeronautics and Astronautics, Aug. 2009.
- [32] D. F. Waters and C. P. Cadou, “Modeling a hybrid rankine-cycle/fuel-cell underwater propulsion system based on aluminum–water combustion,” *J. Power Sources*, vol. 221, pp. 272–283, Jan. 2013.
- [33] A. Bolt, I. Dincer, and M. Agelin-Chaab, “A review of unique aluminum–water based hydrogen production options,” *Energy Fuels*, vol. 35, pp. 1024–1040, Jan. 2021.
- [34] J. M. Bergthorson, Y. Yavor, J. Palecka, W. Georges, M. Soo, J. Vickery, S. Goroshin, D. L. Frost, and A. J. Higgins, “Metal-water combustion for clean propulsion and power generation,” *Appl. Energy*, vol. 186, pp. 13–27, Jan. 2017.
- [35] “Technology Works; Found Energy — found.energy.” <https://found.energy/technology-works/>. [Accessed 12-01-2026].
- [36] M. S. Vlaskin, E. I. Shkolnikov, and A. V. Bersh, “Oxidation kinetics of micron-sized aluminum powder in high-temperature boiling water,” *Int. J. Hydrogen Energy*, vol. 36, pp. 6484–6495, June 2011.
- [37] T. Sun, E. Shrestha, S. P. Hamburg, R. Kupers, and I. B. Ocko, “Climate impacts of hydrogen and methane emissions can considerably reduce the climate benefits across key hydrogen use cases and time scales,” *Environmental Science & Technology*, vol. 58, no. 12, pp. 5299–5309, 2024. PMID: 38380838.
- [38] K. Wang, S. R. Sanders, S. Dubey, F. H. Choo, and F. Duan, “Stirling cycle engines for recovering low and moderate temperature heat: A review,” *Renew. Sustain. Energy Rev.*, vol. 62, pp. 89–108, Sept. 2016.
- [39] D. M. van de Bor, C. A. Infante Ferreira, and A. A. Kiss, “Low grade waste heat recovery using heat pumps and power cycles,” *Energy (Oxf.)*, vol. 89, pp. 864–873, Sept. 2015.
- [40] M. Y. Haller, D. Amstad, M. Dudita, A. Englert, and A. Häberle, “Combined heat and power production based on renewable aluminium-water reaction,” *Renew. Energy*, vol. 174, pp. 879–893, Aug. 2021.

- [41] M. Kolodziejski and I. Michalska-Pozoga, “Battery energy storage systems in ships’ hybrid/electric propulsion systems,” *Energies*, vol. 16, p. 1122, Jan. 2023.
- [42] A. Escamilla, D. Sánchez, and L. García-Rodríguez, “Assessment of power-to-power renewable energy storage based on the smart integration of hydrogen and micro gas turbine technologies,” *Int. J. Hydrogen Energy*, vol. 47, pp. 17505–17525, May 2022.
- [43] S. Giddey, S. P. S. Badwal, C. Munnings, and M. Dolan, “Ammonia as a renewable energy transportation media,” *ACS Sustain. Chem. Eng.*, vol. 5, pp. 10231–10239, Nov. 2017.
- [44] “World energy statistics (edition 2018),” Mar. 2019. Title of the publication associated with this dataset: IEA World Energy Statistics and Balances.
- [45] “Electricity rates for business customers — hydroquebec.com.” <https://www.hydroquebec.com/business/customer-space/rates/>. [Accessed 24-10-2024].
- [46] L. Wu, Q. Huo, Q. Liu, J. Yin, and J. Yang, “Multi-time-scale optimization and control method for high-penetration photovoltaic electrolytic aluminum plants,” *Energies*, vol. 18, p. 5840, Nov. 2025.
- [47] S. M. Market, “Yunnan aluminum: Pv power generation dc integration into aluminum production power supply technology is an industry first.” <https://news.metal.com/es/newscontent/103901603-SMM-PV-Yunnan-Aluminum-PV-Power-Generation-DC-Integration-into-Aluminum-Production-Power-Supply-Technology-Is-an-Industr>, 2026. [Accessed 17-05-2026].
- [48] M. Dorreen, L. Wright, G. Matthews, P. Patel, and D. S. Wong, “Transforming the way electricity is consumed during the aluminium smelting process,” in *The Minerals, Metals & Materials Series*, The Minerals, Metals & Materials Series, pp. 15–25, Cham: Springer International Publishing, 2017.
- [49] “EnPot demonstrates power flexibility in China smelter trials &#xBB; EnPot — enpot.com.” <https://enpot.com/media/news/video>. [Accessed 17-05-2026].
- [50] “ELYSIS achieves breakthrough with commercial-size cell: a first in aluminium production using the inert anode technology — riotinto.com.” <https://www.riotinto.com/en/can/news/releases/2025/elysis-achieves-breakthrough-with-commercial-size-cell>. [Accessed 17-05-2026].

- [51] J. Coelen, “What makes a great beachhead market? — doctormarket.fit.” <https://www.doctormarket.fit/p/what-makes-a-great-beachhead-market>. [Accessed 14-05-2026].
- [52] BERNAMA, “GLOBAL UHNW POPULATION SET TO RISE 33 PCT BY 2030, REPORT FINDS — bernama.com.” <https://bernama.com/tv/news.php/news.php/?id=2556029>. [Accessed 14-05-2026].
- [53] “Practical guide for approval of ammonia- or hydrogen-fuelled ships — Hellenic Shipping News Worldwide — hellenicshippingnews.com.” <https://www.hellenicshippingnews.com/practical-guide-for-approval-of-ammonia-or-hydrogen-fuelled-ships-2/>. [Accessed 14-05-2026].
- [54] “Why class societies are not just box tickers — boatinternational.com.” [https://www.boatinternational.com/boat-presents/rina-classification-society-class-rules?j=586935&jb=6&l=55\\_{H}{T}{M}{L}&mid=500009995&sfmc\\_id=417830332&sfmc\\_sub=417830332&u=13972977&utm\\_campaign={B}oat+{B}riefing+251124&utm\\_id=586935&utm\\_medium=email&utm\\_source=sfmc&utm\\_term={W}hy+class+societies+are+not+just+box+tickers+{B}{P}+{A}{R}{T}{I}{C}{L}{E}+{I}{M}{A}{G}{E}](https://www.boatinternational.com/boat-presents/rina-classification-society-class-rules?j=586935&jb=6&l=55_{H}{T}{M}{L}&mid=500009995&sfmc_id=417830332&sfmc_sub=417830332&u=13972977&utm_campaign={B}oat+{B}riefing+251124&utm_id=586935&utm_medium=email&utm_source=sfmc&utm_term={W}hy+class+societies+are+not+just+box+tickers+{B}{P}+{A}{R}{T}{I}{C}{L}{E}+{I}{M}{A}{G}{E}). [Accessed 14-05-2026].
- [55] “New case study takes up Tesla’s entry into the auto industry — MIT Sloan — mitsloan.mit.edu.” <https://mitsloan.mit.edu/ideas-made-to-matter/new-case-study-takes-teslas-entry-auto-industry>. [Accessed 14-05-2026].