


A

B

C

D

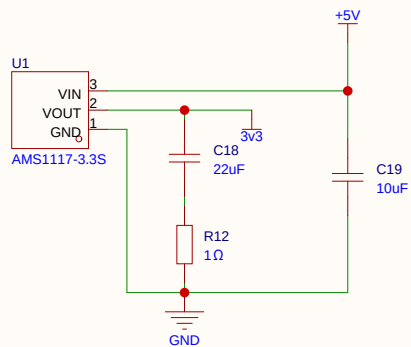

Mode Adjustment

Equalization Setting:



EQ_A/B are the selection pins for the equalization selection for each direction.

Equalizer setting	
EQ_A/B	@ 2.5GHz
0	3 dB
open	6dB (Default)
1	9dB

De-emphasis Setting:

DE_A/B are the selection pins for the de-emphasis selection for each direction.

Output de-emphasis setting	
DE_A/B	De-emphasis
0	0 dB
open	-3.5 dB (default)
1	-6 dB

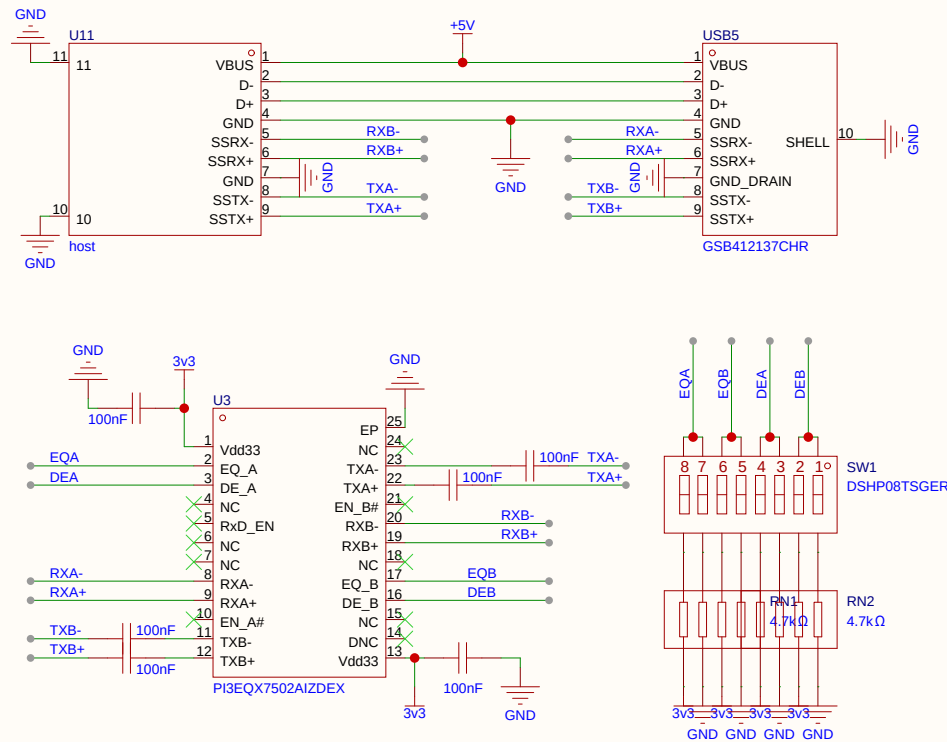

原理图	Schematic2_4		创建日期	2026-08-31
板子	PI3EQX501i		更新日期	2026-08-31
绘制			图页	P1
审阅			USB 3.0 ReDriver 中继板_PI3EQX7502AIZDEX	
			版本	尺寸
			页 1 共 1	
嘉立创EDA		V1.0	A4	嘉立创EDA

A

B

C

D