DRAM RELIABILITY

Mahdi Nazm Bojnordi

Assistant Professor

School of Computing

University of Utah

Overview

- Upcoming deadline

  - March 8th: homework assignment is due

- This lecture

  - Memory errors

  - Error detection vs. correction

  - Memory scrubbing

  - Disturbance errors

Memory Errors

- Any unwanted data change (bit flip)
  - storage cell
  - sensing circuits
  - wires

- Soft errors are mainly caused by
  - Slight manufacturing defects
  - Gamma rays and alpha particles
  - Electrical interference
  - …

Error Detection and Correction

- Main memory stores a huge number of bits
  - Nontrivial bit flip probability
  - Even worse as the technology scales down

- Reliable systems must be protected against errors

- Techniques
  - Error detection
    - parity is a rudimentary method of checking the data to see if errors exist
  - Error correction code (ECC)
    - additional bits used for error detection and correction

Error Correction Codes

- Example: add redundant bits to the original data bits
 - SECDED: Hamming distance (0000, 1111) = 4

Power	Correct	#bits	Comments
Nothing	0,1	1	
Single error detection (SED)	00,11	2	01,10 =>errors
Single error correction (SEC)	000,111	3	001,010,100 => 0 110,101,011 => 1
Single error correction double error detection (SECDED)	0000,1111	4	One 1 => 0 Two 1's => error Three 1's => 1

[adopted from Lipasti]

Error Correction Codes

☐ Reduce the overhead by applying the codes to words instead of bits

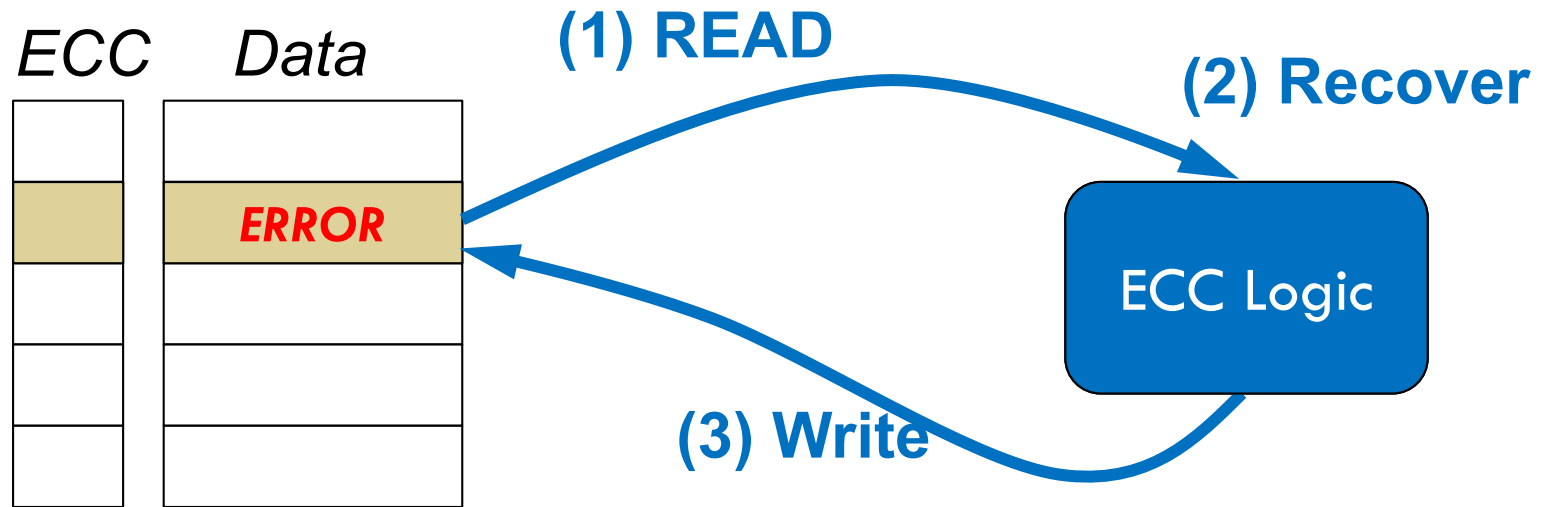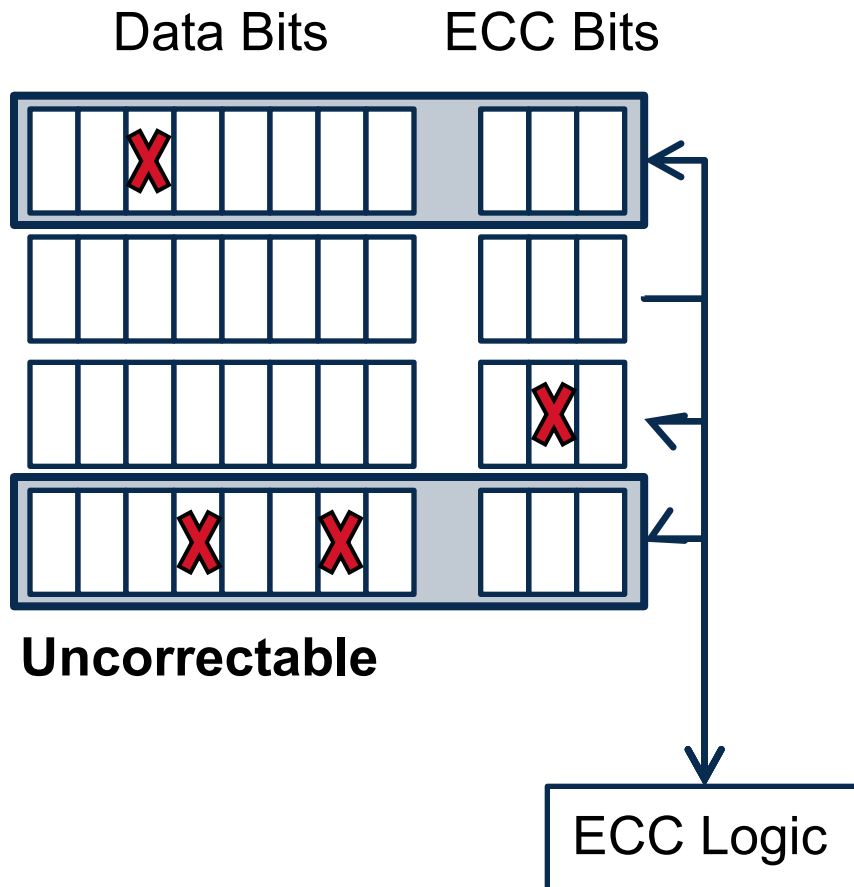| # bits	SED overhead	SECDED overhead
1	1 (100%)	3 (300%)
32	1 (3%)	7 (22%)
64	1 (1.6%)	8 (13%)
n	1 (1/n)	$1 + \log_2 n$ + a little
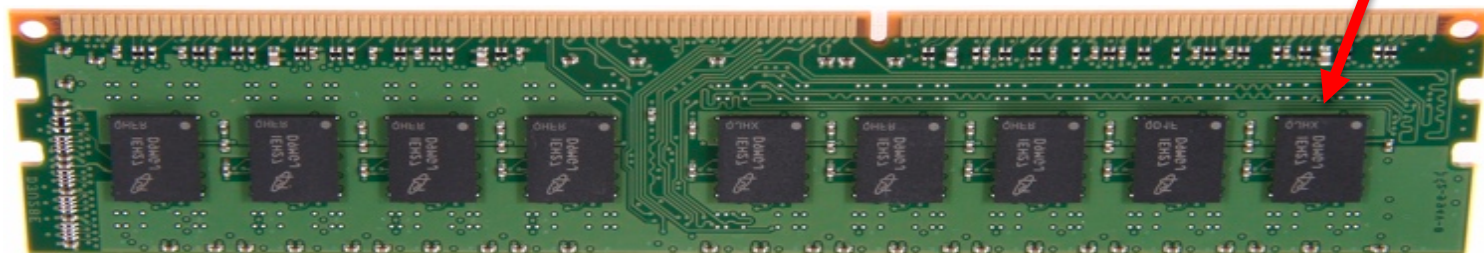
ECC Chip

ECC DIMM (9 x8 chips)

Memory Error Correction

- ECC allows the memory controller to correct cell retention errors and relax memory cell retention requirements.

# Memory Scrubbing

Data Bits   ECC Bits

Uncorrectable

ECC Logic

- ECC can correct a fixed number of errors
- Data can become uncorrectable if ECC is used without scrubbing
- Scrubbing prevents errors from accumulating over time
  - Periodically read all of the memory locations
  - Check ECC, correct errors, and write corrected data back to memory
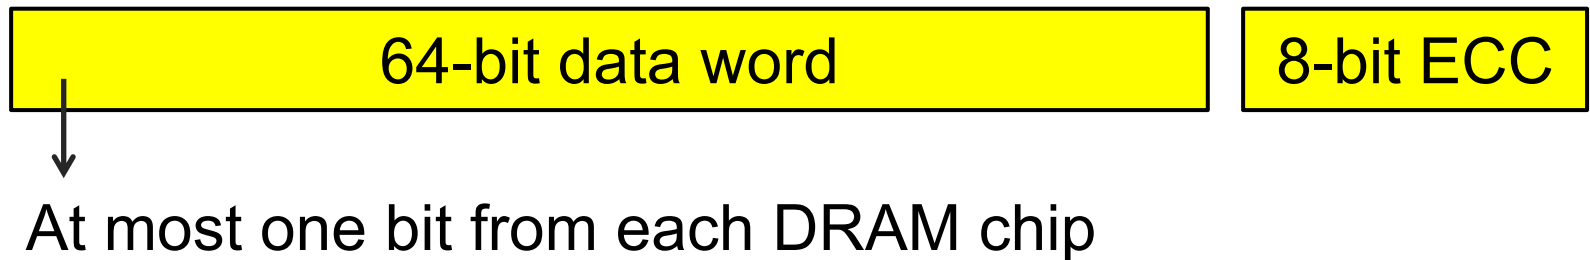
Stronger Error Corrections

□ SECDED Support

| 64-bit data word | 8-bit ECC |
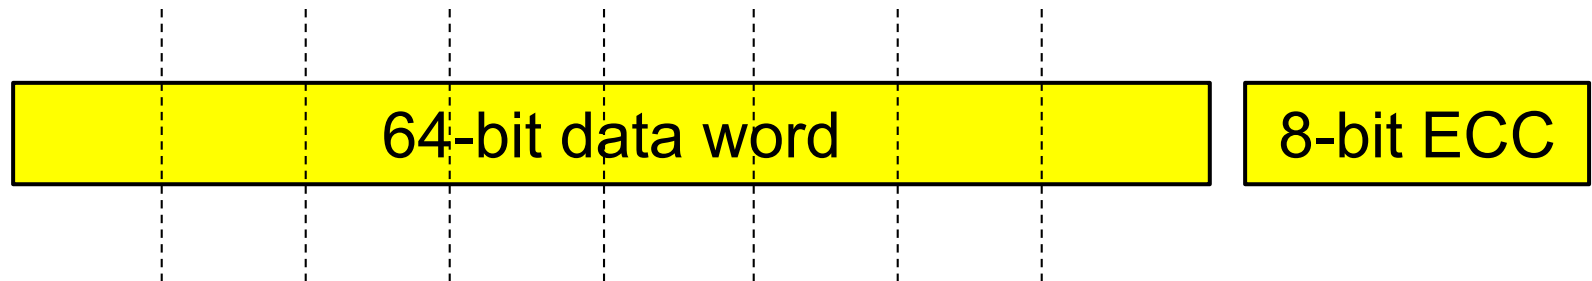
- One extra x8 chip per rank
- Storage and energy overhead of 12.5%
- Cannot handle complete failure in one chip

Stronger Error Corrections

☐ SECDED Support

☐ Chipkill Support

64-bit data word	8-bit ECC

At most one bit from each DRAM chip

- Use 72 DRAM chips to read out 72 bits
- Dramatic increase in activation energy and overfetch
- Storage overhead is still 12.5%

Stronger Error Corrections

☐ SECDED Support

☐ Chipkill Support

8-bit data word	5-bit ECC

At most one bit from each DRAM chip

- Use 13 DRAM chips to read out 13 bits
- Storage and energy overhead: 62.5%
- Other options exist; trade-off between energy and storage

Row Hammer Problem

☐ Repeated row activations can cause bit flips in adjacent rows

Available for: OS X Mountain Lion v10.8.5, OS X Mavericks v10.9.5

Impact: A malicious application may induce memory corruption to escalate privileges

Description: A disturbance error, also known as Rowhammer, exists with some DDR3 RAM that could have led to memory corruption. This issue was mitigated by increasing memory refresh rates.
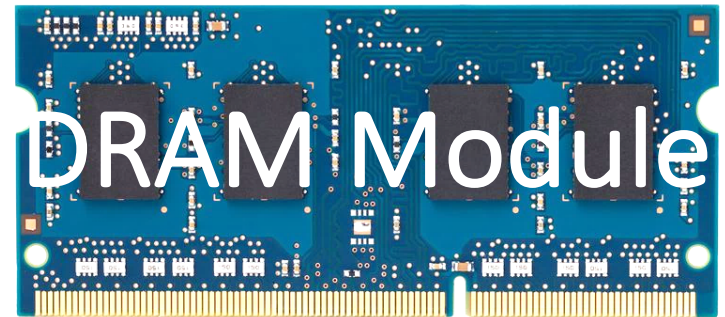
CVE-ID

CVE-2015-3693 : Mark Seaborn and Thomas Dullien of Google, working from original research by Yoongu Kim et al (2014)
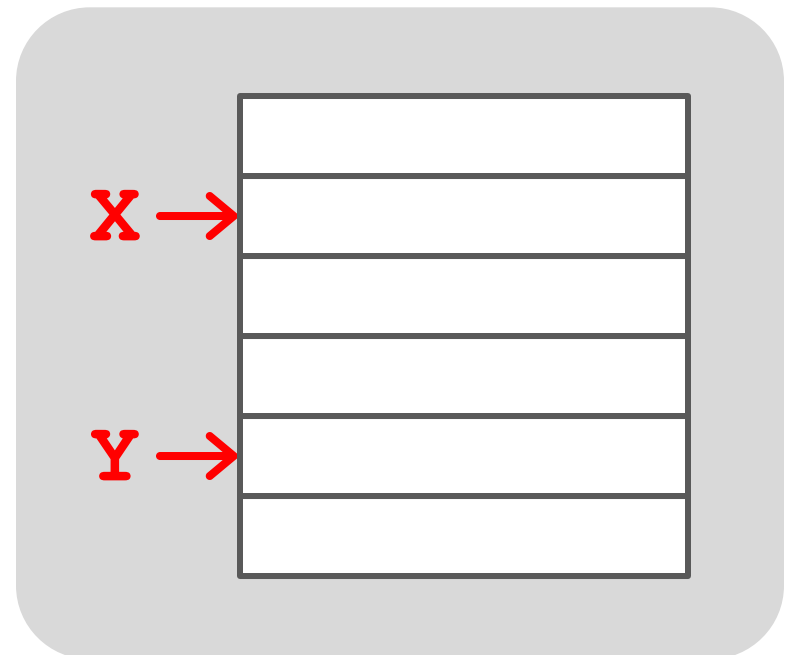
[Apple]

Modern DRAM is Vulnerable
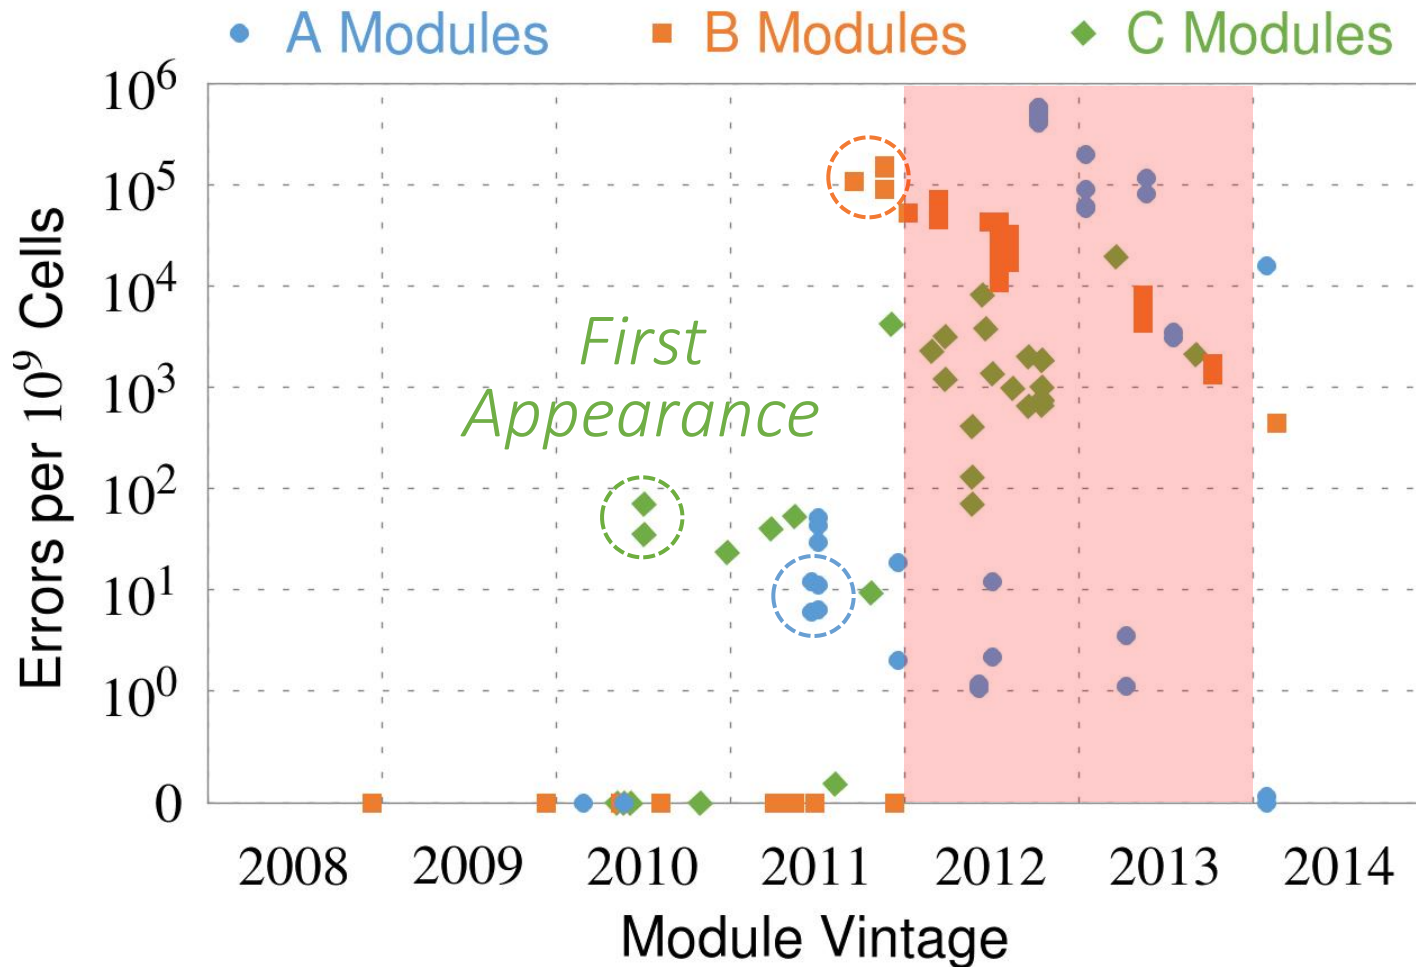
How Program Induces RH Errors?


```
loop:
    mov (X), %eax
    mov (Y), %ebx
    clflush (X)
    clflush (Y)
    mfence
    jmp loop
```

X →
Y →

Sources of Disturbance Errors

□ *Cause 1: Electromagnetic coupling*

    ◘ Toggling the wordline voltage briefly increases the voltage of adjacent wordlines

    ◘ Slightly opens adjacent rows → Charge leakage

□ *Cause 2: Conductive bridges*

□ *Cause 3: Hot-carrier injection*

Confirmed by at least one manufacturer

[slide source:Mutlu]

Basic Solutions

- *Throttle accesses to same row*
  - Limit access-interval: $\geq 500ns$
  - Limit number of accesses: $\leq 128K$ ($=64ms/500ns$)

- *Refresh more frequently*
  - Shorten refresh-interval by $\sim 7x$

Both naive solutions introduce significant overhead in performance and power

[Kim'2014]

Probabilistic Adjacent Row Activation

□ Key Idea

    ▫ After closing a row, we activate (i.e., refresh) one of its neighbors with a low probability: $p = 0.005$

□ Reliability Guarantee

    ▫ When $p=0.005$, errors in one year: 9.4×10^{-14}

    ▫ By adjusting the value of p, we can vary the strength of protection against errors

[Kim'2014]