SIEMENS

SiPass integrated

# ACC-AP

## Door Controller



**The IP-based ACC-AP door controller offers the latest technology with flexible configuration options. It helps in reduction of overall cost for installation and maintenance; and enables strong autonomous operations of field equipment through secure peer-to-peer communications.**

- RS485 connectivity for OSDP readers and FLN devices
- Flat system architecture
- Flexible configuration options
- Auto device discovery

A6V13385887_en_a
05/17/2022

## Features

The ACC-AP IP Door Controller can controlling up to two doors connected to an Internet/Intranet network for communication with the SiPass integrated Access Control system. It can be configured for 1 or 2 doors and programmed with up to 500,000 cardholders.

The ACC-AP offers the ability to connect two OSDP readers to be used for entry or exit and can be placed in different heights to accommodate, for instance, wheelchairs or garage barriers. The inputs and outputs are user configurable to meet most use cases while enabling standard features like distributed intelligence, IP addressing of doors, state-of-the art technology and modern design.


- OSDP Readers: Controller for one or 2 doors (depending on configuration)
- 4 Monitored or Unmonitored Inputs
- 2 Relay Outputs
- 4 Open-collector Outputs
- 1 general-purpose FLN bus to connect to IPM, OPM and 8IO devices
- Capacity for 500,000 users
- Maximum 5 cards per user
- Large offline event buffer with up to 200,000 events
- Anti-passback
- Linux O/S

Only Input/Output devices are supported. No RIM device support available. Inputs and outputs when not assigned to door can be freely used.

## Benefits

- The ACC-AP Door Controller supports structured cabling to the door that helps in utilizing existing cabling runs to save costs.
- Support for up to 750 controllers (planned for expansion in further market packages), gives you the assurance of flexibility in present and easy expandability in future.
- The “OSDP V2 Encryption for Readers” is the latest standard in reader communication, while the “AES 128 Bit Encryption between Server to Controller” offers a high-level security at all times.

## SiPass integrated Hardware Topology with ACC-AP Door Controller

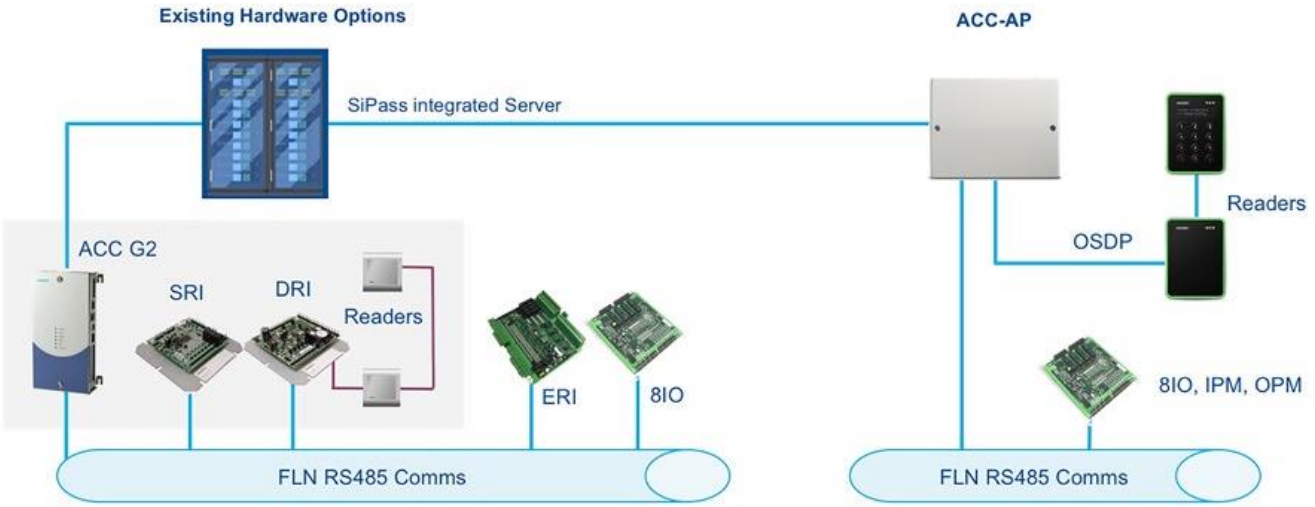



## Integrated Capabilities

### ACC-AP with APERIO Wireless Locks

The Aperio® Wireless Lock technology helps bring down the cost, effort and time required for installation of access control to your site. The system provides seamless integration using the same tools and workflows as existing hardware using the FLN configurator. It also uses existing Access Groups and Access Levels, meaning no new training required for operators.

- Up to 15 Aperio wireless hubs can be connected to the ACC-AP
- Up to 32 wireless Aperio Lock devices can be paired across all the Aperio Hubs connected to one ACC-AP FLN
- Selectable Card Technology for locks
- Support for Custom card format
- Door Frame sensor Input for Aperio Basic Lock
- Privacy Mode for Aperio Basic Lock

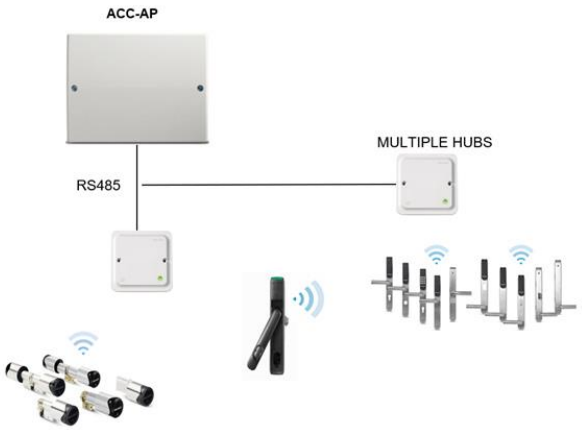



### Wiegand Reader on ACC-AP

The ACC-AP can be used to configure Wiegand Readers. While creating the onboard DRIe device, you can select the *Wiegand Door Set* option and configure further through the *FLN Configuration* dialog in SiPass integrated.

### Multi-Function Interface (MFI) on ACC-AP

The Multi-Function Interface compliments the powerful IP Door controller ACC-AP, allowing for configuration of up to 16 doors with RS485 downstream connected reliability. It can be easily setup and configured through the FLN Configurator and the FLN Field Service Tool in SiPass integrated.

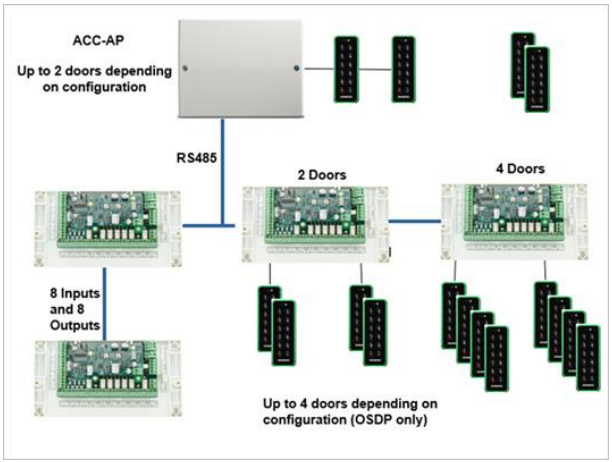


- Up to 4 MFI devices per ACC-AP can be connected, with up to 4 doors per MFI (total of up to 16 doors per ACC-AP)
- MFI I/O Only Mode: I/O device with 8 inputs and 8 outputs. Can be used for general I/O, intrusion, and low level-elevator control.
- MFI Door Controller Mode: Secure OSDP V2 (encrypted) communication between Door Reader and MFI
- 2 Door mode using up to 4 OSDP readers
- 4 Door mode using up to 8 OSDP readers
- Support for global reader manufacturers
- Support for mixed configuration with IPM, OPM, 8IO and IAT in the same FLN bus
- 8 OSDP readers per MFI (no Wiegand support)
  - Fully supervised communication
  - Authenticated
  - Addressable
  - Text messages capability (Display enabled readers)
  - SIA industry standard

### Standard Offline (OSS-SO) Access Management on ACC-AP

The ACC-AP supports the integration of off-line electronic locks through the industry standard OSS Standard Offline (OSS-SO). These battery-powered locks are not connected by a cable and function autonomously. The system consists of the following:

**Host System:** SiPass integrated is used for card configuration, encoding, access and cardholder management, audit trail and reporting.

**Updater:** The ACC-AP is connected to a reader which writes and updates the OSS-SO Access Privileges on the smart card carried by the user.

**Offline Locks (Reader):** The Wireless Locks read from the card and allow or deny access based on the OSS-SO Access Privileges stored in the card. Due to the OSS-SO being an industry standard, locks of different brands can read the same access rights of the card and interpret it in the same way.

- Offline locks function reliably in case of power failure.
- Access rights are stored on the card.

- If a card is lost with valid access rights, the card number can be transported through other cards or a programmer into the “Blacklist” of off-line locks.
- Cards are programmed with a limited validity period, usually no more than 7 days, so that security is completely guaranteed at a card loss after this period.

## Type summary

| Type | Order number | Description |
|---|---|---|
| ACC-AP-NC | S54502-A150-A100-A | Two door IP controller without enclosure |
| ACC-AP | S54502-C150-A100-A | Two door IP controller with enclosure |

## Technical data

| ACC-AP | |
|---|---|
| Reader Connections | Reader connection via OSDP V1 or V2 encrypted |
| Mounting | Requires ≥ 10 mm free area around the housing to de-mount the lid. |
| Tamper Function | There are two types of tamper switches:<br>● Opening the lid<br>● Removing unit from the wall |
| Power Supply | The power supply 12...24V DC, can be either a central source (battery supported) or a local PSU |
| Battery | The supplied “CR2032” battery keeps the Audit Trail data intact for about 30 days during any power fail. |
| Environmental Temperature Range | ● -40...131 °F (-40...55 °C) |

Issued by
Siemens Industry, Inc.
Smart Infrastructure
1000 Deerfield Pkwy
Buffalo Grove IL 60089
+1 847-215-1000

© Siemens Industry, Inc., 2022
Technical specifications and availability subject to change without notice.

Document ID A6V13385887_en_a
Edition 05/17/2022