SIEMENS

Data Sheet
Fire Safety Products

VESDA Series

Intelligent Interface
Model CPY-HLI

ARCHITECT AND ENGINEER SPECIFICATIONS

- **Supports a VESDA network with up to 31 VESDA detectors for continuous operation**
- **Allows for a single point of *Alarm* and *Trouble* reset commands at the MXL-IQ panel**
- **Model XL-IQ will visually and audibly display *Alert* and *Action* alarms of the VESDA network as *Trouble* (pre-alarms) commands, and will visually and audibly display Fire 1 as a latching *Alarm* event**
- **Provides for graphical displays of smoke levels and airflow levels on the Model MXL-IQ liquid-crystal display (LCD)**
- **Supervised connection between Models CPY-HLI and NIM-1W**
- **Surfaced mounted within 6 feet of the Model MXL-IQ enclosure (fixed conduit)**
- **Installer only required to utilize one (1) communication cable to connect VESDA network with Model MXL-IQ**

Model CPY-HLICABLE

Model CPY-HLI
[Intelligent Interface]

Model CPY-HLI
[Removable Faceplate]

- **RS-232 connection between Models MXL-IQ and CPY-HLI**
  - Required for AT&T installations
- **UL 864 9th Edition Listed, ULC Listed; CSFM and NYC Fire Department Approved**

Product Overview

The High-Level Communication Interface (Model CPY-HLI) from Siemens – Fire Safety is a bi-directional communication module that interfaces Siemens Fire Safety's Model MXL-IQ control panel with a VESDA detection network. Model CPY-HLI converts VESDA's communication language to a language that can be understood between the VESDA network and the MXL-IQ panel.

VESDA utilizes an RS–485 communication network in which Model CPY-HLI converts this signal to the RS–232 communication that is needed for Model CPY-HLI to communicate with Model NIM-1W installed in a MXL-IQ panel. Model MXL-IQ will recognize 31 VESDA detectors (Standard or Scanner units), and will be notified of *alarm* and *trouble* commands by address — VESDA zone matches Model MXL-IQ address:

- VESDA Zone 1 is mapped to MXL-IQ address 00X-001 ('X' is device loop number)
- VESDA detectors utilize four (4) indicators of *Alarm*, *Alert*, *Action*, *Fire 1* and *Fire 2* commands
- *Alert* and *Action* are indicated by Model MXL-IQ as *Trouble* commands, and *Fire 1* is indicated by Model MXL-IQ as an *Alarm* event. All VESDA *Trouble* commands are indicated by Model MXL-IQ by zone

Model CPY-HLI is connected to the VESDA network through a RS–485 connection already utilized by the VESDA network.

The dimensions for Model CPY-HLI are 9.5" (24.1cm) length by 7.3" (18 cm) width by 2.167" depth (5.5 cm). The enclosure must be mounted on the wall within 6 feet of the Model MXL-IQ enclosure. A cable (Model CPY-HLICABLE) is used to connect Model NIM-1W with Model CPY-HLI. The cable, which is included with Model CPY-HLI, must be installed within rigid conduit. Moreover, Models CPY-HLI and MXL-IQ must reside within the same room.

SIEMENS Industry, Inc.
Smart Infrastructure - Building Products

Product Overview – (continued)

Model CPY-HLI can be located up to 4000 ft from the VESDA detector in which it is connected. All wiring connections between Models MXL-IQ and CPY–HLI, as well as the VESDA network are supervised.

Model MXL-IQ provides many additional features to a VESDA network such as: a single-point reset, graphical displays and history printing capabilities. A single-point reset allows the VESDA network's *Trouble* and / or *Alarm* commands to be reset from Model MXL-IQ, rather than at each individual detector.

The LCD for Model MXL-IQ provides a graphical illustration by address (zone) of either the VESDA networks smoke levels or airflow levels. Finally, Model MXL-IQ provides the added capability of printing all *alarm* and *trouble* events, as well as smoke level and airflow alarm trip points for each VESDA detector zone.

Details for Ordering

Model	Part Number	Description
CPY-HLI	500-699910	MXL-IQ / VESDA Intelligent Interface [includes fully assembled boards mounted in an enclosure, and is shipped with the appropriate cable]
CPY-HLICABLE	500-699911	Replacement cable for Model CPY-HLI / MXL-IQ connection

Mounting Diagram

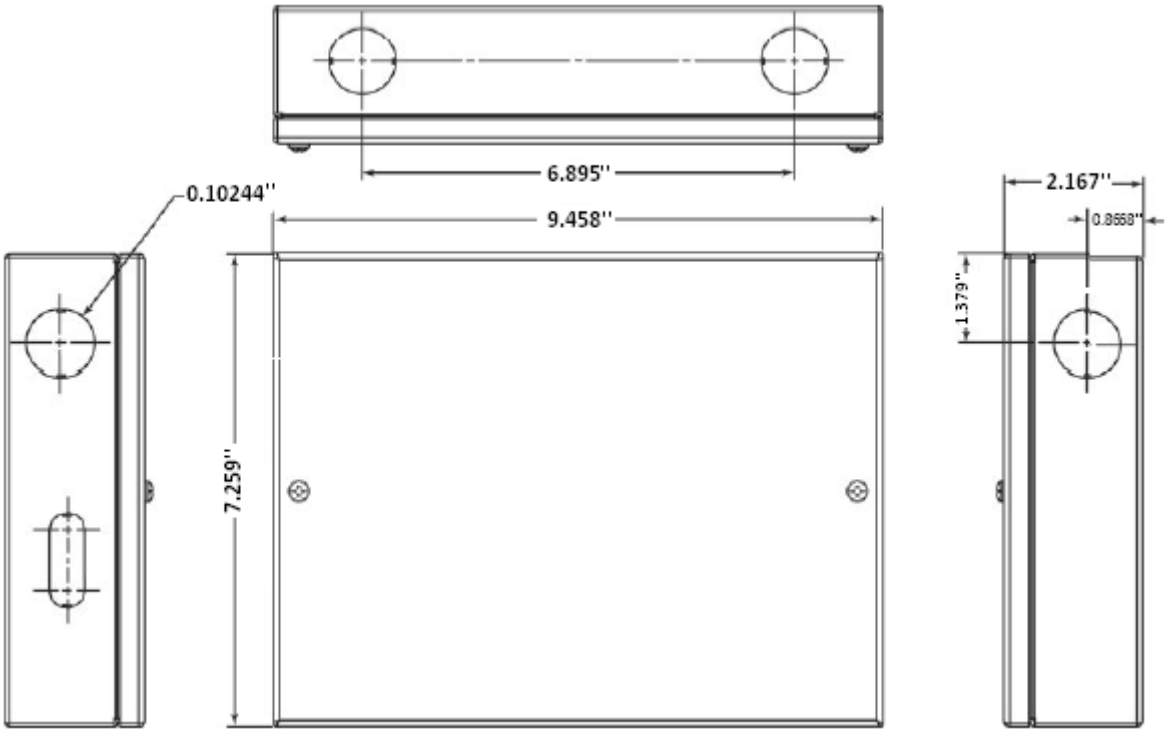

(Shown In Inches)

Notice: This marketing data sheet is not intended to be used for system design or installation purposes. For the most up-to-date information, refer to each product's installation instructions.

SIEMENS Industry, Inc.
Smart Infrastructure - Building Products

Fire Safety
2 Gatehall Drive
Parsippany, NJ 07054
Tel: (973) 593-2600
FAX: (908) 547-6877
URL: www.usa.Siemens.com/Fire

(SII-FS)
Printed in U.S.A.

Fire Safety
2 Kenview Boulevard
Brampton, Ontario
L6T 5E4 / Canada
Tel: (905) 799-9937
FAX: (905) 799-9858

April 2023
(Rev. 2)