ATMO™ 300E-EC

Energy Recovery Ventilator (ERV)

Product #: 466333



* This product earned the ENERGY STAR® by meeting strict efficiency guidelines set by Natural Resources Canada and the US EPA. It meets ENERGY STAR® requirements only when used in Canada.

ATMO	300	E	-	EC
Product Name	Approximate CFM @ 0.4 in. w.g.	Energy Recovery		Electronically Commutated

Powered by EC motors, the ENERGY STAR® and HVI certified ATMO™ 300E-EC fresh air appliance with energy recovery (ERV) uses a water vapor transport, durable, polymer membrane that transfers heat and moisture to the incoming air. This process helps to temper the incoming air and to maintain comfortable humidity levels.

Features

- Fans with backward curved blade impellers
- Electronically commutated (EC) motors
- Electrostatic filters (washable)
- ERV core transfers both heat and humidity
- Removable screw terminal for easy connection with external access
- Multiple speed operation

Specifications

- Duct size – 6 in. (152 mm.)
- Voltage/Phase – 120/1
- Power rated – 235 W
- Amp – 6.4 A
- Average airflow – 301 CFM (142 L/s) @ 0.4 in. wg. (100 Pa)
- Weight – 60 lbs (27 Kg)

Requirements and standards

- UL 1812
- CSA C22.2 no. 113
- CSA F326
- Technical data was obtained from published results of test relating to CSA C439 Standards
- HVI and ENERGY STAR® certified*

Fans

Two (2) electronically commutated motors. EC motors use intelligent technology to reduce energy usage that results in lower operating costs, less maintenance over the lifetime of the unit, and increased longevity of the motor.

Energy Recovery Core

Energy recovery certified core made from water vapor transport, durable polymer, membrane that is highly permeable to humidity. The ERV core is freeze tolerant, water washable, and is certified for mold and bacteria resistance. Core dimensions are 12 in. x 12 in. (305 mm. x 305 mm.) with a 15 in. (381 mm.) depth.

Defrost

A preset defrost sequence is activated at an outdoor air temperature of 14°F (-10°C) and lower. During the defrost sequence, the supply blower shuts down & the exhaust blower switches into high speed to maximize the effectiveness of the defrost strategy. The unit then returns to normal operation, and continues cycle.

Serviceability

Core, filters, fans and drain pan can be easily accessed through latched door. Core conveniently slides out on our new easy glide core guides. 22 in. (559 mm.) of clearance is recommended for removal of core.

Case

22 gauge galvanized steel cabinet with a pre-painted steel corrosion resistant door.

Insulation

Cabinet is fully insulated with 3/4 in. (19 mm) high density expanded polystyrene.

Filters

Two (2), UL900 certified, washable electrostatic panel type air filters 11 7/8 in. (302 mm) x 15 in. (380 mm) x 1/8 in. (3 mm).

Compatible Controls

Compatible with all Fantech controls.

Installation

This appliance can be wall mounted using the mounting bracket or hung from the ceiling with the hanging chain installation kit.

Warranty


7 years on motor, 5 years on electrical components and core.

fantech®
a systemair company

United States 10048 Industrial Blvd. • Lenexa, KS 66215 • 1.800.747.1762 • www.fantech.net
Canada 50 Kanalflakt Way • Bouctouche, NB E4S 3M5 • 1.800.565.3548 • www.fantech.net

Fantech, reserves the right to modify, at any time and without notice, any or all of its products' features, designs, components and specifications to maintain their technological leadership position.


Dimensions & Airflow

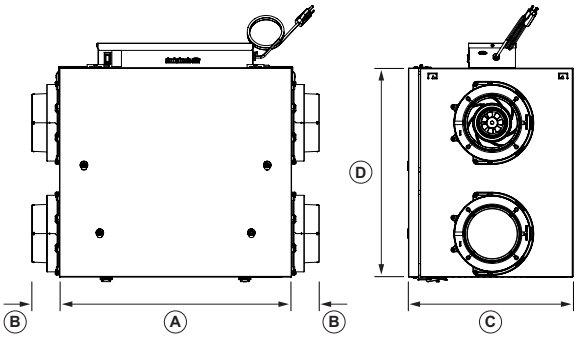


A		B		C		D	
in	mm	in	mm	in	mm	in	mm
23 7/8	606	29 1/2	751	16 15/16	430	21 7/16	546

All units feature three foot plug-in power cord with 3-prong plug.



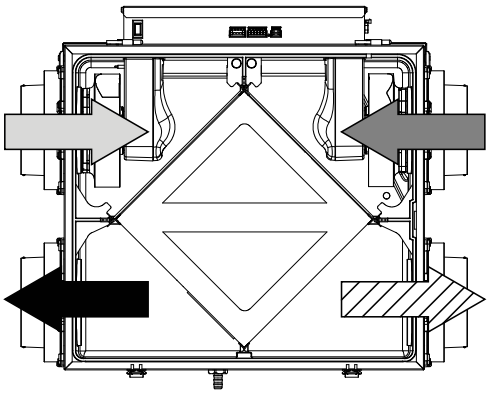

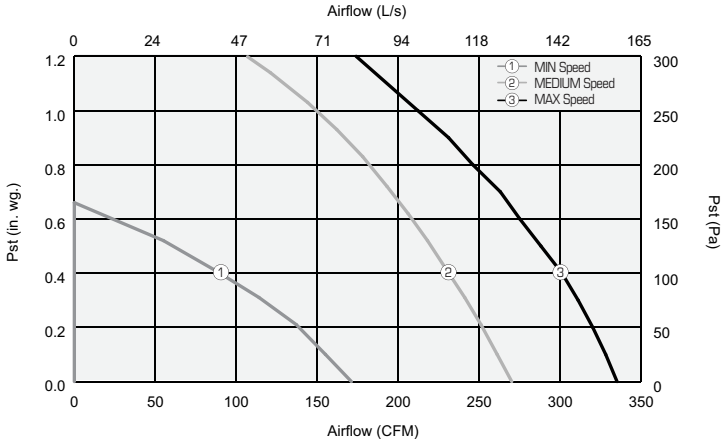

Ventilation Performance

in. wg. (Pa)	0.2 (50)	0.3 (75)	0.4 (100)	0.5 (125)	0.6 (150)	0.7 (175)	0.8 (200)	0.9 (225)	1.0 (250)
	CFM (L/s)	CFM (L/s)	CFM (L/s)	CFM (L/s)	CFM (L/s)	CFM (L/s)	CFM (L/s)	CFM (L/s)	CFM (L/s)
Net supply airflow	320 (151)	311 (147)	301 (142)	288 (136)	275 (130)	263 (124)	246 (116)	231 (109)	212 (100)
Gross supply airflow	322 (152)	314 (148)	303 (143)	290 (137)	278 (131)	265 (125)	248 (117)	233 (110)	214 (101)
Gross exhaust airflow	326 (154)	316 (149)	305 (144)	292 (138)	282 (133)	267 (126)	254 (120)	237 (112)	222 (105)

Energy performance

Heating	Supply temperature		Net airflow		Consumed power	Fan efficacy	Sensible recovery efficiency	Adjusted sensible recovery efficiency	Latent recovery/moisture transfer
	°F	°C	CFM	L/s	W	CFM/W	%	%	
	32	0	64	30	31	2.0	77	80	0.69
	32	0	178	84	95	1.8	67	69	0.52
	32	0	248	117	200	1.2	60	63	0.45
	-13	-25	64	30	35	1.8	63	64	0.55

Cooling	Supply temperature		Net airflow		Consumed power	Fan efficacy	Total recovery efficiency	Adjusted Total recovery efficiency	Latent recovery/moisture transfer
	°F	°C	CFM	L/s	W	CFM/W	%	%	
	95	35	66	31	32	2.0	68	70	0.72
	95	35	178	84	95	1.8	58	60	0.61

Contacts

Submitted by: Date:
Quantity: Model: Project #:
Comments:
Location:
Architect:
Engineer: Contractor:

Distributed by: