SIDE ELEVATION

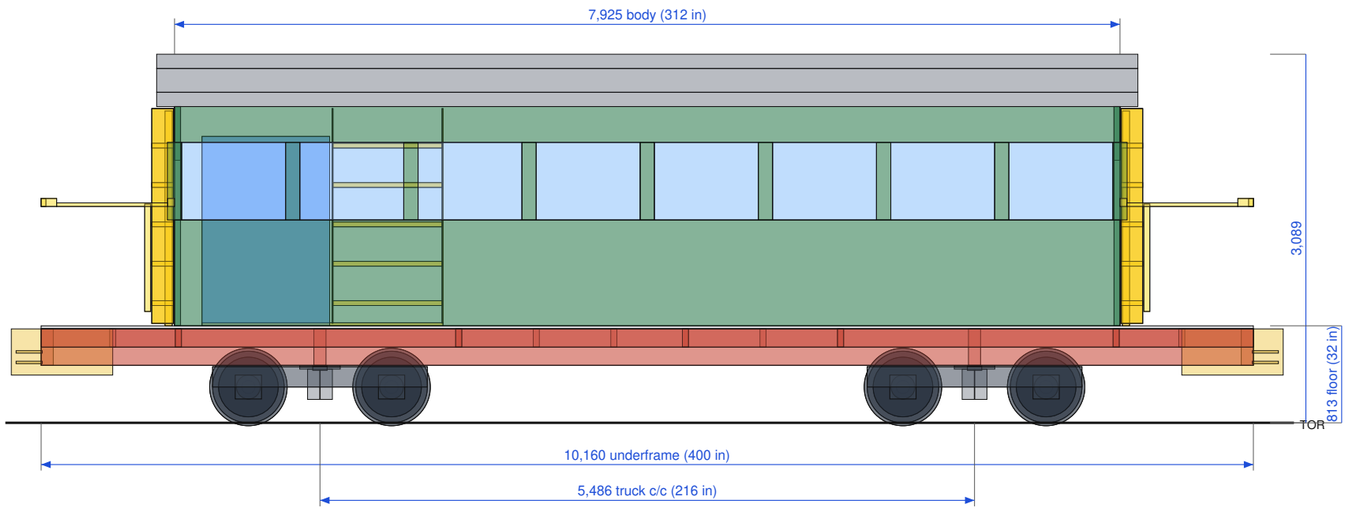

END

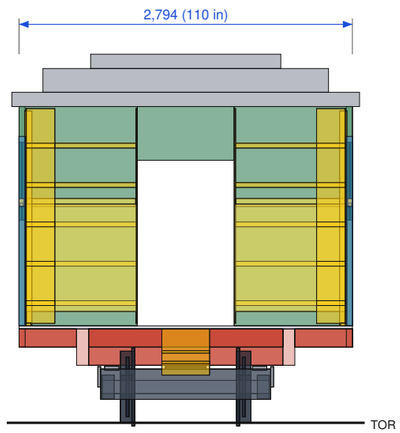

PLAN (roof removed not shown)

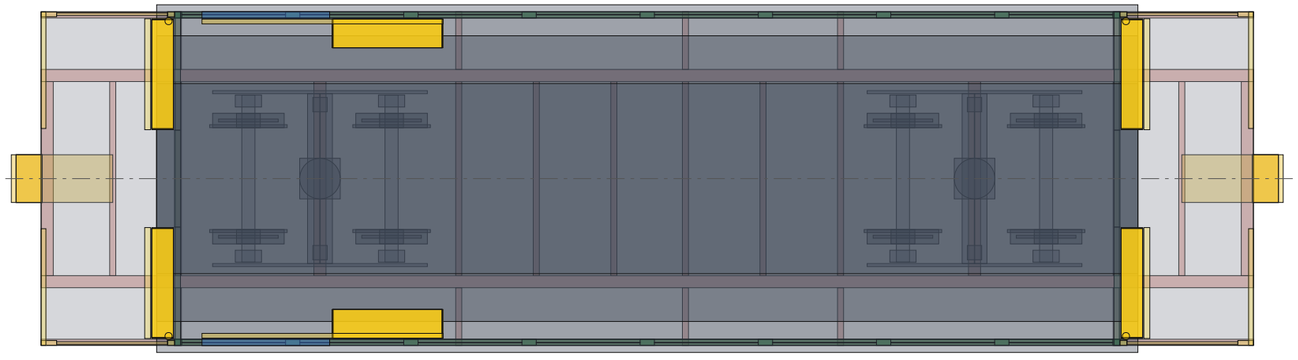

NOTES

Regular: 8 rows 2+2, 32 seats, 24 in aisle (PE/County to confirm).
Accessible: 42 in side doors both sides, 11 seats + 2 bays.
Floor 32 in (813) ARL. Level 32 in platforms OPTIONAL (F08).
Emergency/boarding stairs at EVERY door, both sides (C-304):
S1 at end-platform side openings, S2 at 42 in side doors;
6 x 177 risers to ground, stowed inside body (old steps deleted).
End platforms 44 in with 42 in guards, 2 in sch 40 posts (C10d).
Wind DECIDED: no running in gusts > 40 mph (FS 3.85 empty);
tie-downs when parked outdoors (C11, C11w).
HVAC: mobile-rated roof/underfloor unit AWAIT selection (I-02).
Seats/upholstery: by upholstery trade on C21 bench frames.

PE STAMP / SIGNATURE

(blank - for reviewing NV PE)

UNLESS NOTED: ISO 2768-mK general tolerances
Linear ±0.5 (≤120) / ±0.8 (≤400) / ±1.5 (>400)
Fab. cut ±1.5 · holes pos. ±0.8 · angles ±0.5°
Machined: Ra 3.2 · bores H7/H8 as noted · break edges
GD&T ASME Y14.5-2018 · welds AWS A2.4 / D1.1

PULSIPHER FARMS CHRISTMAS TRAIN — PRELIMINARY, NOT FOR CONSTRUCTION UNTIL PE STAMPED

PULSIPHER FARMS · LOGANDALE, NEVADA · CHRISTMAS TRAIN (PF-CT)

Coach general arrangement (regular; accessible variant noted)

Sheet C-301 · REV L2 · 2026-10-27 · 1:50 at 17x11

Units mm unless noted · Z above top of rail · gauge 914.4 · 3rd-angle

Drawn: owner team 2026-10-27
Checked: _____ Date: ____
Approved (PE): _____