SIDE

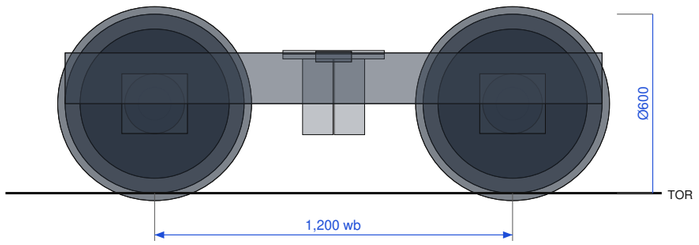

END

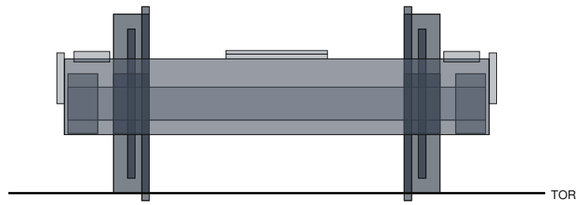

PLAN

NOTES

Sideframes PL25x170 A36; transom 2× HSS10x4x1/4 upright + PL16 cap.
Centre plate Ø340 PL12 with Ø60 centre pin + retaining collar.
Side bearers: replaceable UHMW/bronze pads, 5 mm clearance.
Axleboxes: SKF 22218 E (90x160x40) with KM18/MB18 - retained CW3.
Springs: 8 coils per truck, C5 rates (148 N/mm) AWAIT supplier.
Brake: one air-disc caliper per axle, PAN17-family 325 rotor,
spring-brake chamber; AWAIT ZF/WABCO data.
Hoses: relay valve on body; only 2 moving hoses per truck (fix F10).
Checks: transom 66 MPa, sideframe 80/123 MPa, axle 52 MPa.
Restraint: 2 safety straps truck-to-body (I-08, PE).

PE STAMP / SIGNATURE

(blank - for reviewing NV PE)

UNLESS NOTED: ISO 2768-mK general tolerances
Linear ±0.5 (≤120) / ±0.8 (≤400) / ±1.5 (>400)
Fab. cut ±1.5 · holes pos. ±0.8 · angles ±0.5°
Machined: Ra 3.2 · bores H7/H8 as noted · break edges
GD&T ASME Y14.5-2018 · welds AWS A2.4 / D1.1

PULSIPHER FARMS · LOGANDALE, NEVADA · CHRISTMAS TRAIN (PF-CT)

Coach / tender truck (plate fabricated)

Sheet C-303 · REV L2 · 2026-10-27 · 1:20 at 17x11

Units mm unless noted · Z above top of rail · gauge 914.4 · 3rd-angle

Drawn: owner team 2026-10-27
Checked: _____ Date: ____
Approved (PE): _____

PULSIPHER FARMS CHRISTMAS TRAIN — PRELIMINARY, NOT FOR CONSTRUCTION UNTIL PE STAMPED