


Specifications
(for more details and instructions, refer to the PDF datasheet)

Overvoltage: 4.25V $\pm$ 10mV, delay 1S
Undervoltage: 2.9V $\pm$ 18mV, delay 1S
Cell balancing: 20mA per cell
Maximum continuous discharge: 10A
Overcurrent protection: 15A, delay 180mS
Short-circuit protection: 30A, delay 1mS
Recovery after fault event: Attach charger
Open cell/wire detection: 4.5S delay
Power consumption: 8 μ A typical
Charging current: 5A
Operating temperature: -40 to 85 $^{\circ}$ C


BATT PROTECTION

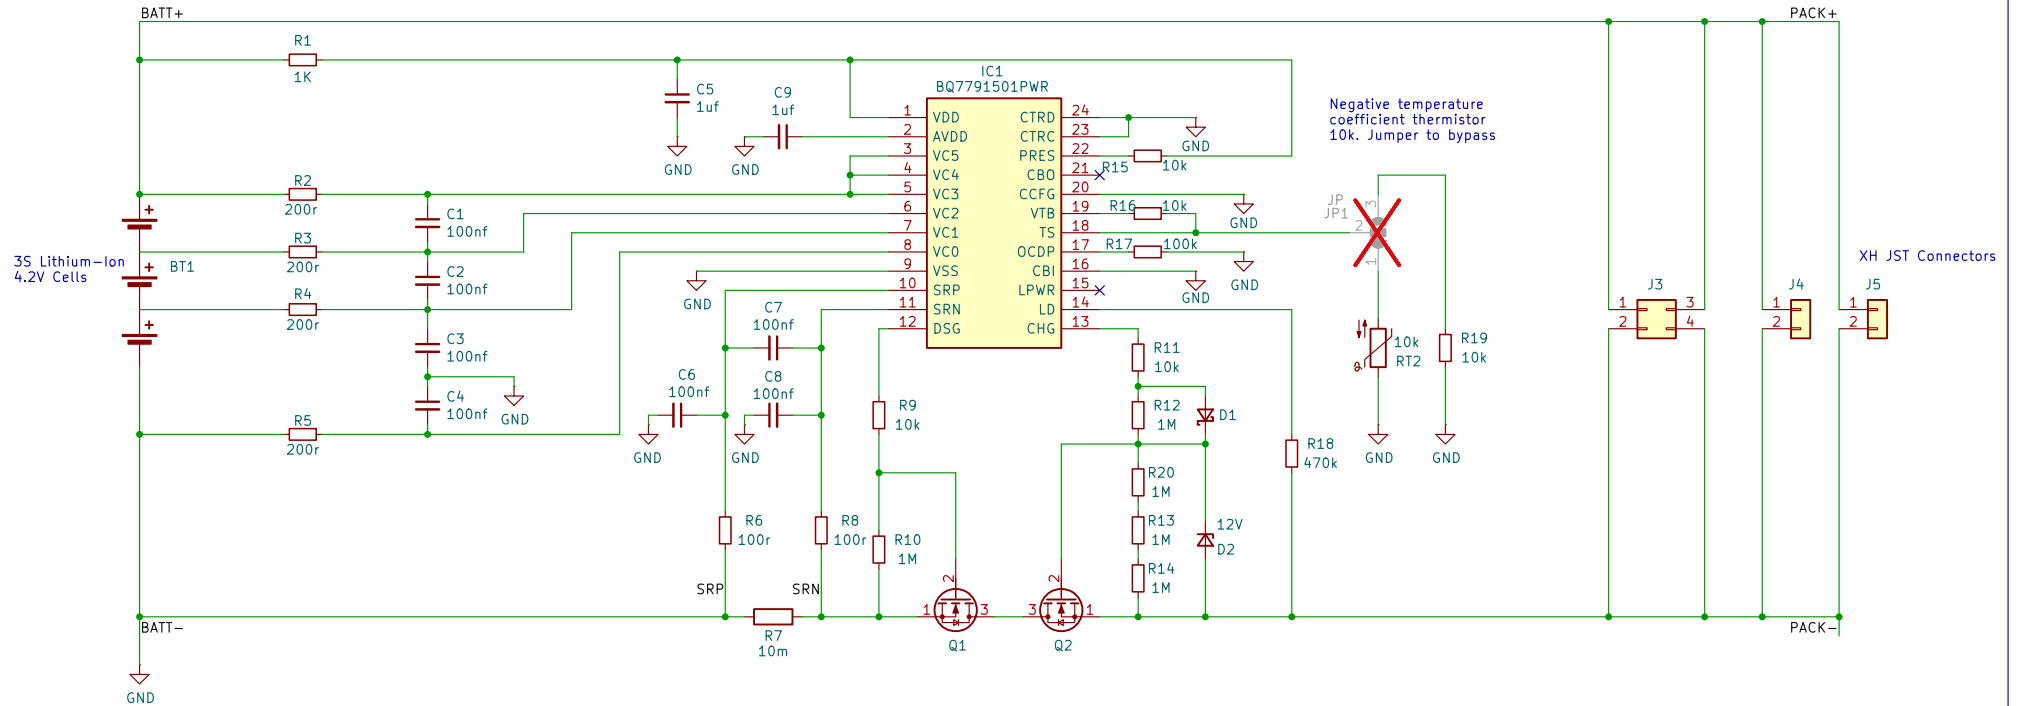

BATT TEMP

Negative temperature
coefficient thermistor
10k

For Solar Charger



H1 H2 H3 H4



Sheet: /

File: ModBee-Battery-Pack-18650-Lilon.kicad_sch

Title: ModBee Battery Pack 18650

Size: A4

Date: 2025-05-16

Rev: 0.01

KiCad E.D.A. 9.0.1

Id: 1/1