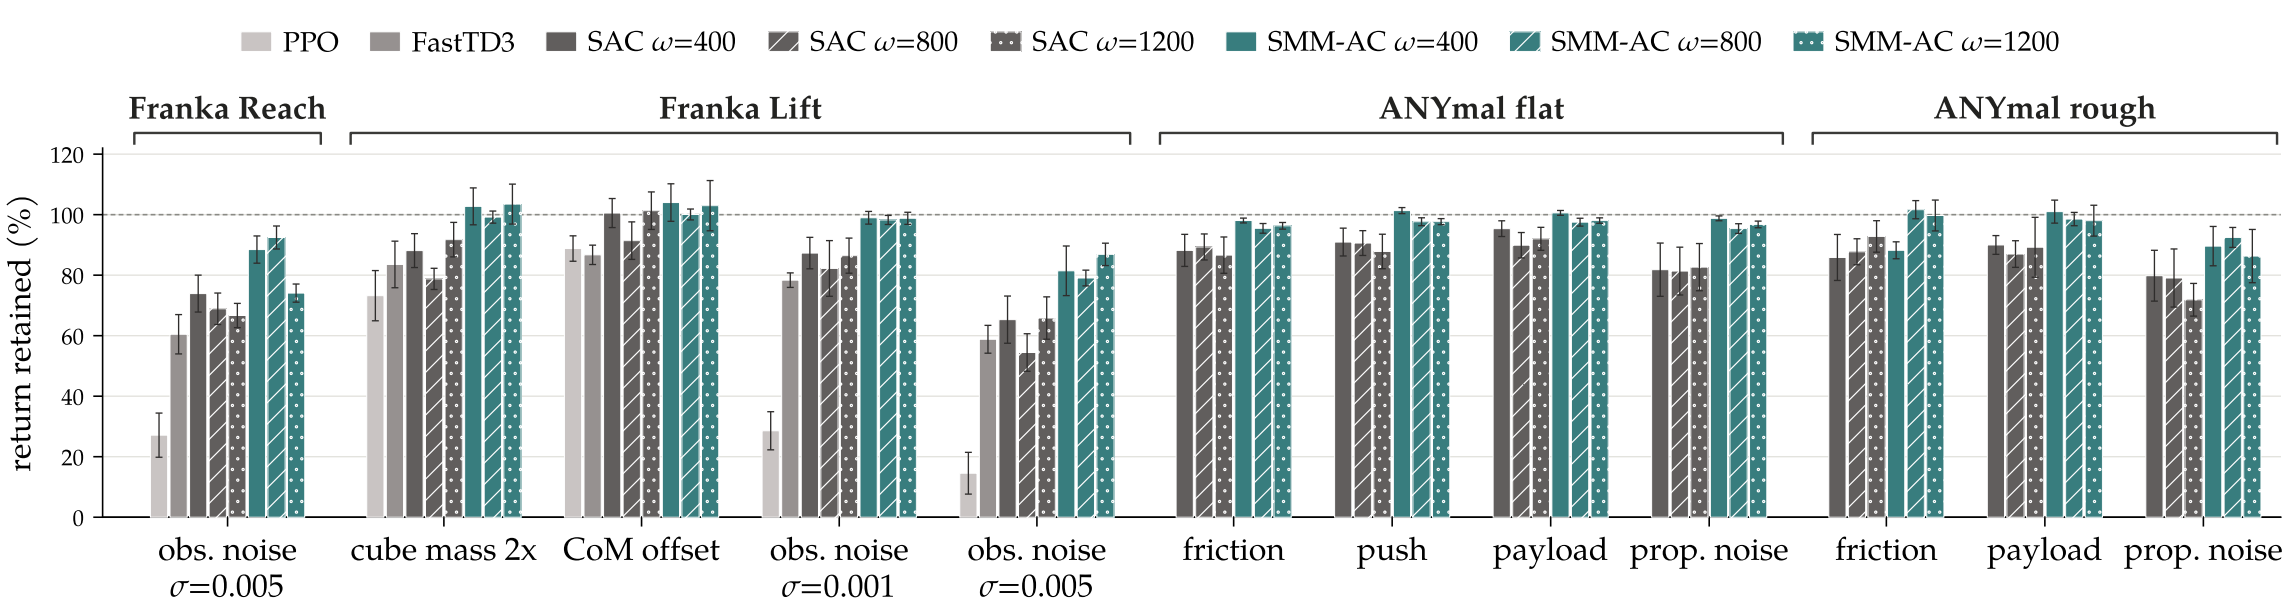

PPO
FastTD3
SAC ω=400
SAC ω=800
SAC ω=1200
SMM-AC ω=400
SMM-AC ω=800
SMM-AC ω=1200
Franka Reach
Franka Lift
ANYmal flat
ANYmal rough
return retained (%)
120
100
80
60
40
20
0
obs. noise σ=0.005
cube mass 2x
CoM offset
obs. noise σ=0.001
obs. noise σ=0.005
friction
push
payload
prop. noise
friction
payload
prop. noise