

P/pyscan[®]

Pyscan

Imagine a shield which you can use with any of your Pycom multinetwork modules. This is what we give you with Pyscan - a leg up to get you off to a great start really quickly. Pyscan fits all Pycom development boards and each contain a number of sensors.

Pyscan Features

- Ambient light sensor
- Barometric pressure sensor
- Humidity
- 3 axis 12-bit accelerometer
- Temperature sensor
- A USB port with serial access
- LiPo battery charger
- MicroSD card compatibility
- Ultra low power operation (~1uA in deep sleep)

Location services supported

- Galileo
- QZSS

Use with Pybytes

Crafted by a group of Pycom back-end experts the Pybytes platform will be everything there needs to be in place to gather, organise and display your data FREE OF CHARGE in the cloud. Regardless of whether you are a company, IoT system architect, or an ambitious tech hobbyist we'll soon get you connected.

With dozens of ready to use templates and libraries soon to be available on the Pycom Exchange, developing a new IoT solution is now easier and faster.

Use the Pymakr Plugins

Plugins for popular code editors to write your MicroPython scripts

Easy Upload

Upload your scripts, and any other files you want to the Pyscan via the FTP server

Locally or remotely


Reset the GPy (you can do it locally, or remotely via Telnet)

Mechanical

Size: 55mm x 35mm x 10mm

Operating Temperature: -40 to +85 Celsius

Weight: 11g

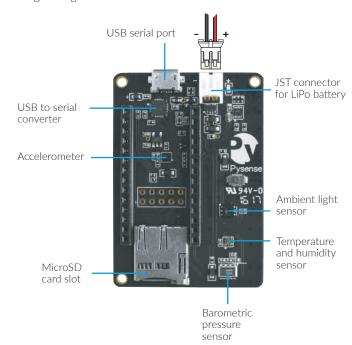

05/12/17