

日本の品質 JAPANESE
QUALITY

YOKOHAMA[®]
VOLT

TETRA CORE PLATE TECHNOLOGY

Active Material recipe developed with 50 years of production experience.




Tetra Core Plate




Massive cranking power abilities.
Superior life cycle.
Excellent structural stability.
Perfect chemical composition

Flawless corrosion result even under the temperatures that is more than double as high (60°C) against the competitors standards (25°C)

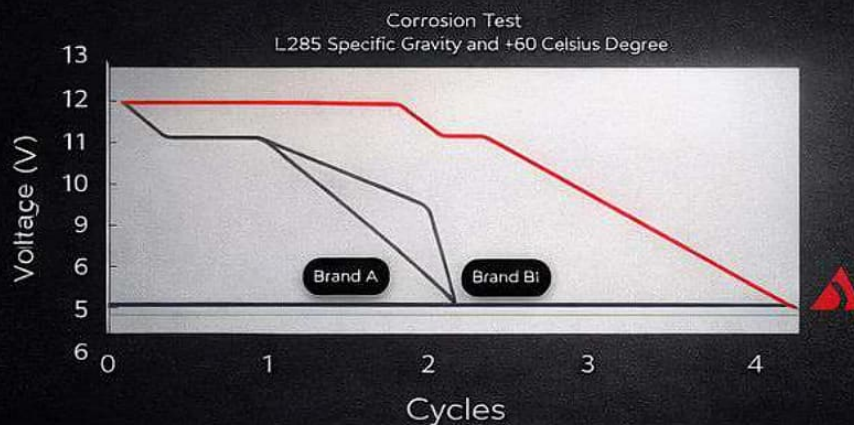

LIFE CYCLE

Excellent Charge Acceptance under all environmental conditions (0°C-25°C-40°C)
Reinforced Cold Cranking Power Capabilities

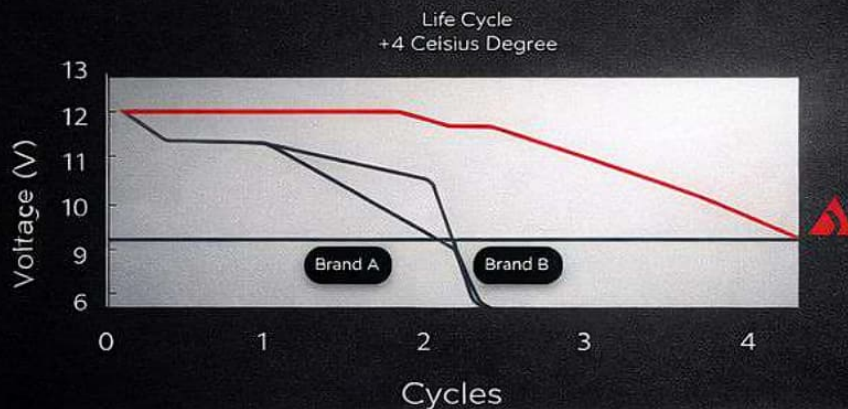

Cranking power enhanced by 32%
for high performance.



Strong structure



Advanced and quick charge
capability



Terminal




Patented closed lid system



Special grid design with
strong positive plates



20% extra performance
with special paste formula

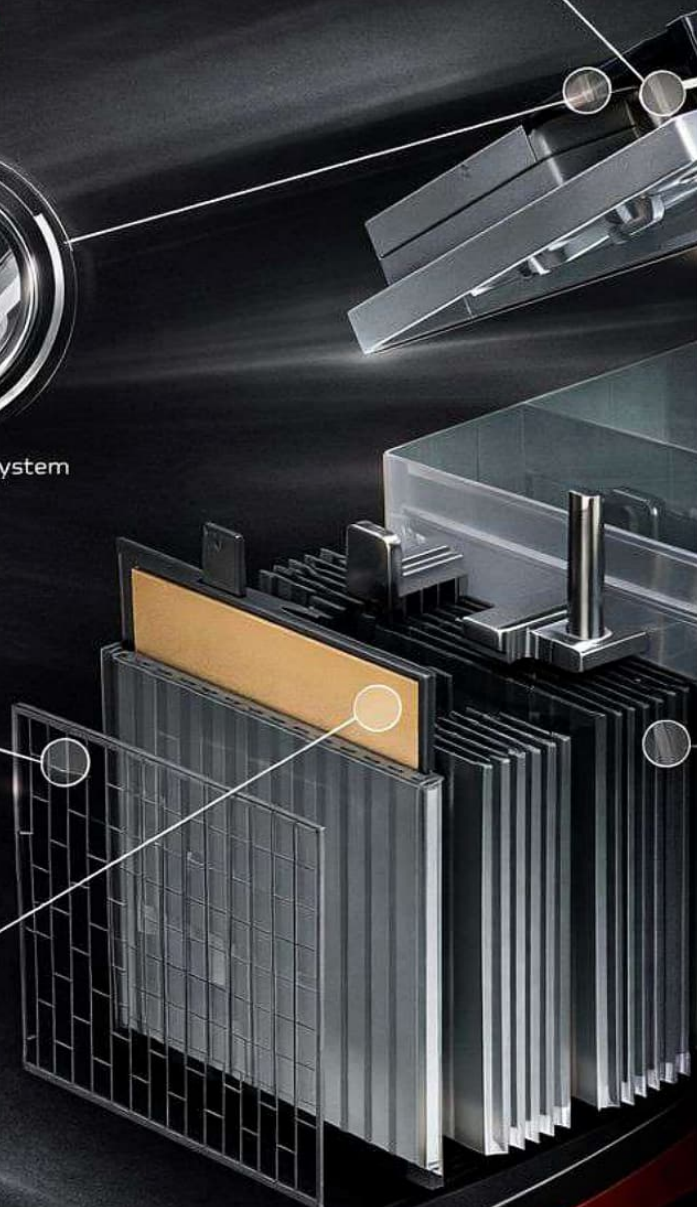



Highest level of product warranty in compliance with af standards including TSE, EN, IIEC, JIS, DIN, IIEC, SAE, etc.



All temperatures from desert heat to freezing cold.



Production in compliance with the OEM Standards



Indicator



Polypropylene case




Premium quality separator


EUROPEAN SERIES



LAYOUT

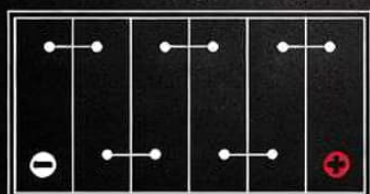

0

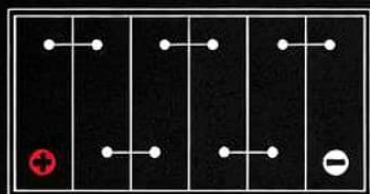

1

TERMINAL



STD



BB




B14

MODEL REF.		CAPACITY		CCA		DIMENSIONS					
BCI	DIN	AH	RC	SAE	A(EN)	LENGTH (MM)	WIDTH (MM)	HEIGHT (MM)	LAY OUT	TERMINAL	HOLD DOWN
-	L0	44	61	370	350	175	175	190	0	STD	B13
99	LB1	36	52	340	330	207	175	175	0	STD	B13
		40	59	380	360	207	175	175	0	STD	B13
		45	70	440	420	207	175	175	0	STD	B13
		47	75	500	450	207	175	175	0	STD	B13
140R	L1	36	52	340	330	207	175	190	0	STD	B13
		40	59	380	360	207	175	190	0	STD	B13
		45	70	440	420	207	175	190	0	STD	B13
		50	75	500	450	207	175	190	0	STD	B13
42,90, 96	LB2	55	86	550	500	207	175	190	0	STD	B13
		36	52	340	330	242	175	175	0	STD	B13
		40	59	380	360	242	175	175	0	STD	B13
		45	70	440	420	242	175	175	0	STD	B13
47	L2	50	75	500	460	242	175	175	0	STD	B13
		55	86	550	500	242	175	175	0	STD	B13
		61	96	640	600	242	175	175	0	STD	B13
		36	52	340	330	242	175	190	0	STD	B13
40,91	LB3	40	59	380	360	242	175	190	0	STD	B13
		45	70	440	420	242	175	190	0	STD	B13
		50	75	500	460	242	175	190	0	STD	B13
		55	86	550	500	242	175	190	0	STD	B13
48	L3	62	96	600	540	242	175	190	0	STD	B13
		64	109	670	640	242	175	190	0	STD	B13
		55	86	560	500	278	175	175	0	STD	B13
		60	96	600	560	278	175	175	0	STD	B13
92	LB4	64	109	640	620	278	175	175	0	STD	B13
		70	114	660	640	278	175	175	0	STD	B13
		72	124	750	720	278	175	175	0	STD	B13
		75	126	720	700	278	175	190	0	STD	B13
94	L4	80	130	750	710	278	175	190	0	STD	B13
		70	114	660	640	315	175	175	0	STD	B13
		75	124	700	680	315	175	175	0	STD	B13
		80	130	750	710	315	175	175	0	STD	B13
93	LB5	84	145	800	760	315	175	175	0	STD	B13
		90	151	860	810	315	175	175	0	STD	B13
		94	165	900	860	353	175	175	0	STD	B13
		100	173	950	900	353	175	175	0	STD	B13
49	L5	105	186	1000	950	353	175	175	0	STD	B13
		80	130	750	710	353	175	190	0	STD	B13
		84	145	800	760	353	175	190	0	STD	B13
		90	151	860	810	353	175	190	0	STD	B13
99	L6	94	165	900	860	353	175	190	0	STD	B13
		100	173	950	900	353	175	190	0	STD	B13
		105	186	1000	950	353	175	190	0	STD	B13
		105	186	1000	950	389	175	190	0	STD	B13


ASIAN SERIES



LAYOUT

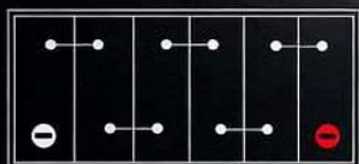

0

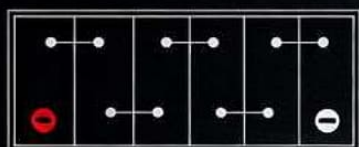

1

*Reverse polarity is available for all types.

TERMINAL



STD



SM

BASE HOLD DOWN (BHD)



B00



B01



B03




B09

MODEL REF.			CAPACITY		CCA		DIMENSIONS					
BCI	JIS	DIN	AH	RC	SAE	A(EN)	LENGTH (MM)	WIDTH (MM)	HEIGHT (MM)	LAY OUT	TERMINAL	HOLD DOWN
-	B20	NS40	36	54	280	250	196	128	225	0	STD/SM	B00/B01
			40	57	320	300	196	128	225	0	STD/SM	B00/B01
			45	70	360	340	196	128	225	0	STD/SM	B00/B01
			50	73	410	380	196	128	225	0	STD/SM	B00/B01
51	B24, NX100	NS60	45	73	410	390	237	128	225	0	STD/SM	B00/B01
			55	89	450	420	237	128	225	0	STD/SM	B00/B01
			60	93	500	460	237	128	225	0	STD/SM	B00/B01
25/35	D23	D23	48	70	430	400	230	172	225	0	STD	B00/B01/B02/B04
			50	75	490	450	230	172	225	0	STD	B00/B01/B02/B04
			55	90	540	500	230	172	225	0	STD	B00/B01/B02/B04
			60	94	590	550	230	172	225	0	STD	B00/B01/B02/B04
			65	108	640	580	230	172	225	0	STD	B00/B01/B02/B04
			70	116	690	640	230	172	225	0	STD	B00/B01/B02/B04
			75	126	700	690	306	173	225	0	STD	B00/B01/B02/B04
24	D26	N50	48	70	430	400	260	173	225	0	STD	B00/B01/B02/B03/B10
			50	75	490	450	260	173	225	0	STD	B00/B01/B02/B03/B10
			55	90	540	500	260	173	225	0	STD	B00/B01/B02/B03/B10
			60	94	590	550	260	173	225	0	STD	B00/B01/B02/B03/B10
			64	108	640	600	260	173	225	0	STD	B00/B01/B02/B03/B10
			75	116	690	630	260	173	225	0	STD	B00/B01/B02/B03/B10
			80	132	790	750	260	173	225	0	STD	B00/B01/B02/B03/B10
27	D31	N70	70	116	650	630	306	173	225	0	STD	B00/B01/B03
			72	126	700	690	306	173	225	0	STD	B00/B01/B03
			80	132	750	720	306	173	225	0	STD	B00/B01/B03
			85	141	760	730	306	173	225	0	STD	B00/B01/B03
			100	189	1000	760	306	173	225	0	STD	B00/B01/B03
GR86		D23	55	90	530	500	230	172	209	0	STD	B01
		N100	95	147	770	740	408	175	229	0	STD	B00
		N100	105	156	850	820	408	175	229	0	STD	B00

AMERICAN SERIES



LAYOUT

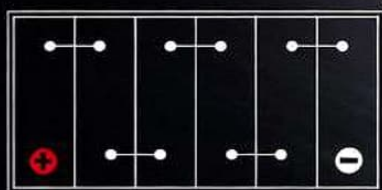

1

TERMINAL



STD



DUAL



SCREW



STANDARD

BASE HOLD DOWN (BHD)



B00

B01

MODEL REF.	CAPACITY		CCA		DIMENSIONS					
BCI	AH	RC	SAE	A(EN)	LENGTH (MM)	WIDTH (MM)	HEIGHT (MM)	LAY OUT	TERMINAL	HOLD DOWN
31/31S/31A/30H	75	126	700	680	330	172	238	1	STD/SCREW	B00
	80	132	750	710	330	172	238	1	STD/SCREW	B00
	85	151	850	800	330	172	238	1	STD/SCREW	B00
	95	171	950	910	330	172	238	1	STD/SCREW	B00
	105	192	1000	950	330	172	238	1	STD/SCREW	B00
65	70	116	680	650	670	288	189	1	STD/SCREW	B00
	75	124	710	700	670	288	189	1	STD/SCREW	B00
	80	131	760	740	670	288	198	1	STD/SCREW	B00

HEAVY DUTY




LAYOUT



TERMINAL



BASE HOLD DOWN (BHD)

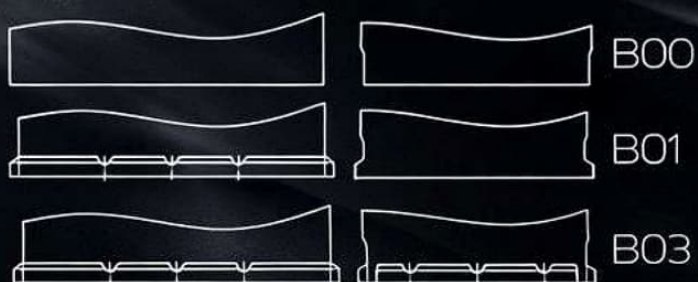

Heavy Duty Series - SMF (Sealed Maintenance Free)

MODEL REF.		CAPACITY		CCA		DIMENSIONS					
BCI	DIN	AH	RC	SAE	A(EN)	LENGTH (MM)	WIDTH (MM)	HEIGHT (MM)	LAY OUT	TERMINAL	HOLD DOWN
-	A(D4)	120	223	870	860	513	189	223	3	STD	B00/B03
-	A(D4)	135	256	980	950	513	189	223	3	STD	B00/B03
4D	B(D5)	150	290	1040	980	513	223	223	3	STD	B00/B03
4D	B(D5)	165	324	1090	1080	513	223	223	3	STD	B00/B03
4D	B(D5)	180	360	1200	1130	513	223	223	3	STD	B00/B03
8D	C(D6)	200	407	1250	1230	518	276	242	3	STD	B00
8D	C(D6)	210	432	1250	1280	518	276	242	3	STD	B00
8D	C(D6)	225	468	1310	1330	518	276	242	3	STD	B00

*Reverse polarity is available for all types,

Heavy Duty Series - MF (With Plugs)

-	-	H3	90	158	650	600	324	175	227	0	STD	B03
-	-	H4	105	190	760	700	346	175	230	0	STD	B03
-	-	D2	105	190	760	700	349	175	235	0	STD	B00/B01
-	-	D2	110	201	820	750	349	175	235	0	STD	B00/B01
-	-	D2	115	212	870	800	349	175	235	0	STD	B00/B01
A* HD	-	A(D4)	120	223	870	800	513	189	223	3	STD	B00/B03
	-	A(D4)	135	256	980	900	513	189	223	3	STD	B00/B03
	-	A(D4)	145	278	1040	950	513	189	223	3	STD	B00/B03
	-	A(D4)	150	290	1040	950	513	189	223	3	STD	B00/B03
B* HD	4D	B(D5)	150	290	1040	950	513	223	223	3	STD	B00/B03
	4D	B(D5)	165	324	1090	1000	513	223	223	3	STD	B00/B03
	4D	B(D5)	180	360	1200	1100	513	223	223	3	STD	B00/B03
C* HD	8D	C(D6)	200	407	1250	1150	518	276	242	3		B00
	8D	C(D6)	210	432	1250	1180	518	276	242	3		B00
	8D	C(D6)	225	468	1310	1200	518	276	242	3		B00
	8D	C(D6)	240	505	1310	1250	518	276	242	3		B00

Super Heavy Duty Series - MF (With Plugs)

B* SHD	4D	B(D5)	150	290	1040	950	513	223	223	3	STD	B00/B03
C* SHD	8D	C(D6)	200	407	1310	1200	518	276	242	3	STD	B00
	8D	C(D6)	210	432	1310	1200	518	276	242	3	STD	B00
	8D	C(D6)	225	468	1360	1250	518	276	242	3	STD	B00
	8D	C(D6)	240	505	1360	1250	518	276	242	3	STD	B00

*Reverse polarity is available for all types,



Tank Series - MF (With Plugs)

Nato	6TL	D7	100	179	680	640	286	270	230	2	STD	B00
Nato	6TL	D7	125	234	850	800	286	270	230	2	STD	B00

MARINE SERIES



LAYOUT

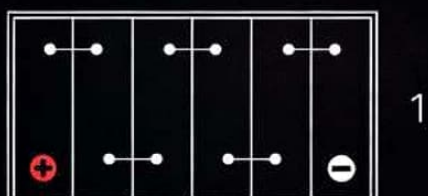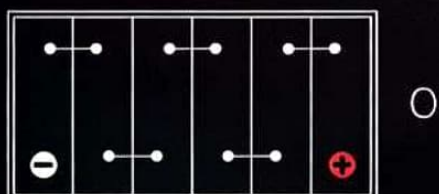

TERMINAL



BASE HOLD DOWN (BHD)




MODEL REF.			CAPACITY		CCA		DIMENSIONS						
BCI	JIS	DIN	AH	RC	SAE	A(EN)	LENGTH (MM)	WIDTH (MM)	HEIGHT (MM)	LAY OUT	TERMINAL	HOLD DOWN	LID
31			85	151	850	800	330	172	238	1	Dual	B00	SMF/MF
			95	171	950	900	330	172	238	1	Dual	B00	SMF/MF
			105	192	1000	950	330	172	238	1	Dual	B00	SMF/MF
24	D26	N50	70	116	690	640	306	173	225	Q/1	Dual	B00	SMF
			72	126	730	690	260	173	225	Q/1	Dual	B00	SMF
			80	132	790	750	260	173	225	Q/1	Dual	B00	SMF
27	D31	N70	82	146	800	770	306	173	225	Q/1	Dual	B00	SMF
			85	151	840	800	306	173	225	Q/1	Dual	B00	SMF
			90	164	880	840	306	173	225	Q/1	Dual	B00	SMF
			95	172	920	880	306	173	225	Q/1	Dual	B00	SMF


EFB START&TOP SERIES & SIGNATURE LINE



LAYOUT

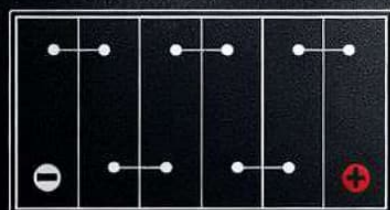

0

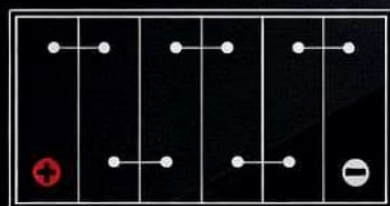

1

TERMINAL



STD

BASE HOLD DOWN



B00



B01



B1B

Start & Stop EFB	Group No	AH	RC	SAE	A(EN)	LENGTH (MM)	WIDTH (MM)	HEIGHT (MM)	LAY OUT	TERMINAL	HOLD DOWN
	L1	50	102	570	520	207	175	190	0	STD	B13
47	L2	60	112	650	600	242	175	190	0	STD	B13
	L2B	60	112	650	600	242	175	175	0	STD	B13
48	L3	70	137	770	720	272	175	190	0	STD	B13
	L3B	70	137	770	720	272	175	175	0	STD	B13
94	L4	85	162	840	790	315	175	190	0	STD	B13
92	L4B	85	162	840	790	315	175	175	0	STD	B13
49	L5	100	179	890	840	353	175	190	0	STD	B13
25/35	D23	70	122	650	600	230	172	225	0	STD	B00
24	N50	70	122	650	600	260	170	225	0	STD	B00
27	N70	100	150	800	800	260	170	225	0	STD	B00
	D5	190	395	1150	1100	513	223	223	3	STD	B00
	D6	240	505	1300	1250	518	276	242	3	STD	B00

AGM	Group No	VOLTAGE	CAPACITY C20	CCA A EN (-18°C)	LENGTH (MM)	WIDTH (MM)	HEIGHT (MM)	ARRANGEMENT	POLE HEAD TYPE	HOLD DOWN
	L1	12	50	480	207	175	190	0	01	B13
	L2	12	60	680	242	175	190	0	01	B13
	L3	12	75	740	277	175	190	0	01	B13
	L4	12	80	800	315	175	190	0	01	B13
	L5	12	95	850	353	175	190	0	01	B13
	L6	12	105	920	389	175	190	0	01	B13

日本の品質 JAPANESE
QUALITY

YOKOHAMA[®]
VOLT

MODEL PETROL ÜRÜNLERİ OTOMOTİV SANAYİ TİCARET LİMİTED ŞİRKETİ

www.modelgrup.com

sales@modelgrup.com