BenQ MX764
Digital Projector

PICTURE BY
DLP
TEXAS INSTRUMENTS

USB (type A, 2x)
USB (mini B)
LAN
RS232
AC Socket
Security
(bar and slot)

HDMI
Monitor Out
Computer In (2x)
S-video / Video
Audio L/R
Audio In (2x)
Microphone in
Audio Out
DC 12V

1024×768
XGA

4200
ANSI Lumens

Contrast
5300:1

10W Speaker x 2

USB

LAN

DLP
3D
READY
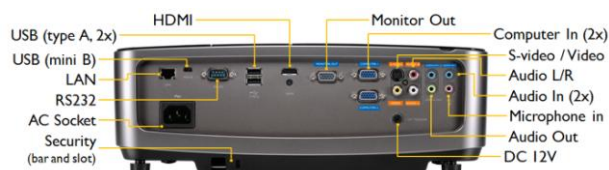
RoHS

All our projectors
are RoHS compliant

Display Technology	DLP® by Texas Instruments®	
Native Resolution	XGA (1024 x 768)	
Resolution Supported	VGA (640 x 480) to UXGA (1600 x 1200)	
Brightness	4200 ANSI Lumens	
Contrast Ratio	5,300:1 (Full on / Full off)	
Image Size	40" to 300"	
Throw Ratio	1.4 (70" @ 2 meter)	
Zoom Ratio	1.6	
Keystone correction	1D, Vertical +/- 40 degrees (auto / manual)	
Lens	F = 2.45 ~ 3.07	
Lamp Life*	300W, 2500 / 3000 hours (Normal / Economic mode)	
Lamp Warranty	12 months or 2,000 cumulative hours whichever comes first	
Operational Noise	35 / 30 dB (Normal / Economic mode)	
Displayable Colours	Full 1.07 billion color palette	
Aspect Ratio	4:3 native, 5 aspect ratio selectable	
Horizontal Frequency	31 ~ 102 kHz	
Vertical Scan Rate	23 ~ 120 Hz	
Interface	Computer in (D-sub 15pin) x 2 (shared with Component)	Speaker 10W x 2 HDMI V1.3 x 1
	Monitor out (D-sub 15pin) x 1	LAN (RJ45) x 1 (LAN Control & LAN Display)
	Composite Video in (RCA) x 1	USB (Type A) x 2
	S-Video in (Mini DIN 4pin) x 1	(USB Reader & Keyboard / Mouse & Wireless Dongle)
	Audio in (Mini Jack) x 2	USB (Type Mini B) x 1
	Audio L/R in (RCA) x 2	(USB Display & Download & Page up/down)
	Audio out (Mini Jack) x 1	DC 12V Trigger (3.5mm Jack) x 1
	Microphone in (Mini Jack) x 1	RS232 (DB-9pin) x 1
Compatibility	Video Compatibility	NTSC / PAL / SECAM
	HDTV Compatibility	480i / 480p / 576i / 576p / 720p / 1080i / 1080p
	3D Compatibility	PC: 120Hz Frame Sequential 3D for resolutions up to XGA PC: 60Hz Top-bottom 3D for resolutions up to SXGA+ Video: 60Hz Frame Sequential 3D for resolutions up to 480i
Dimensions (HxWxD)	120.5 x 339 x 252 mm	
Weight	Net weight: 3.3 kg.	Gross weight: 4.7 kg.	
Auto Switching Power Supply	100 to 240 VAC, 50/60 Hz	
Power consumption	406W, Standby <0.5W	
On Screen Display Languages	Arabic / Bulgarian / Croatian / Czech / Danish / Dutch / English / Finnish / French / German / Greek / Hindi / Hungarian / Indonesian / Italian / Japanese / Korean / Norwegian / Polish / Portuguese / Romanian / Russian / Simplified Chinese / Spanish / Swedish / Thai / Traditional Chinese / Turkish (28 Languages)	
Application Modes	Dynamic / Presentation / sRGB / Cinema / User 1 / User 2	
Functions	BrilliantColor™	High Altitude Mode
	Closed Captioning	Quick Auto Search
	3D Color Management	Wall Color Correction
	Digital Zoom (x2)	Blank
	Freeze	Auto Off
	HDTV Compatible	Security Password
	SRS Certified	Security Bar + K-locker slot
	USB Display + Reader	LAN Control + Display
	Windows 7 Certified	Presentation Timer
Accessories Included	Quick Start Guide	VGA (D-sub 15pin) Cable
	User Manual CD	Power Cord
	Remote Control w/ Battery	
Accessories Optional	Wireless USB dongle	Presentation Plus
	3D Glasses	Spare Lamp Kit

Lamp life results will vary depending on environmental conditions and usage.

All specifications are subject to change without notice. Available models (specs inc.) may vary from different regions.

BenQ