

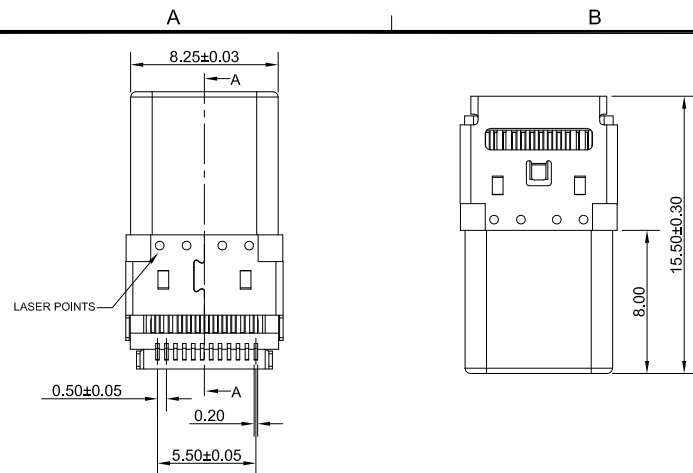




SECTION: A-A

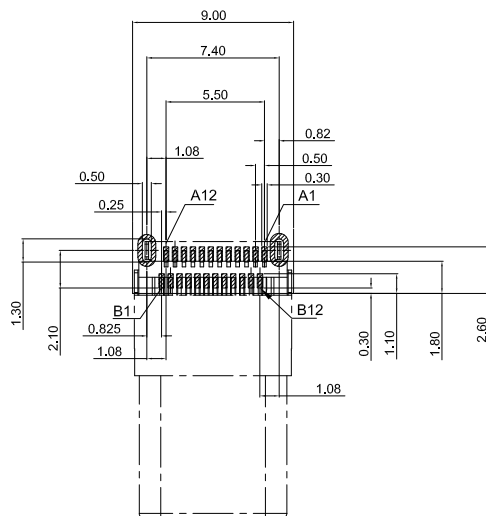

RECOMMENDED P.C.B. LAYOUT
T=0.80 OR 1.00mm

TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$



Unless otherwise specified, Tolerance:	
X.	±0.30
X.x	±0.20
X.xx	±0.15
X.xxx	±0.10
Angles	±3°

NOTE:

- ### 1. Electrical Characteristics:

Current Rating: 5A For Pin(A4,A9,B4,B9)

Current Rating. 5A For Pin (A4, A9, B4,
1.25A For Others Pin

Insulation Resistance: 100MΩ Min.

Contact Resistance:40 mΩ Max.

Dielectric Withstanding Voltage:100V/AC

- ## 2. Mechanical Characteristics: 1 Minute

Insertion Force: 5~20N

Extraction Force: Initial: 8~20N

After durability: 6~20N

Durability :10000 Cycles

3. Salt Spray :24H

4. Operating Temperature: -45°C TO +85°C

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2-	RX2+	GND
GND	RX1+	RX1-	VBUS	SBU2	D-	D+	CC2	VBUS	TX2-	TX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
⑥	Shield	1	Stainless Steel			Bright Nickel Plating					
⑤	Housing	4	LCP			Color: Black					
④	Latch	1	Stainless Steel			_____					
③	Contact	24	Copper Alloy			3u" gold plated on Contact area, Matte Tin plated on Solder tails, Nickel underplating over all					
②	Emc Spring	2	Stainless Steel			_____					
①	Shell	1	Stainless Steel			Bright Nickel Plating					
ITEM	NAME	QTY.	MATERIAL			DESCRIPTION					

G-Switch Electronic (HongKong) CO.,Ltd.

DESIGN Li Qingqi	DATE 2022.04.22	Molde code: GT-USB-8012A		
CHECKED	DATE			
APPROVED	DATE			
http://www.dg-switch.com TEL:0769-82388879		REV.: X1	SCALE: 4:1	UNIT: mm
		SIZE: A4	SHEET: 1/1	