


First Approach depend on ISR

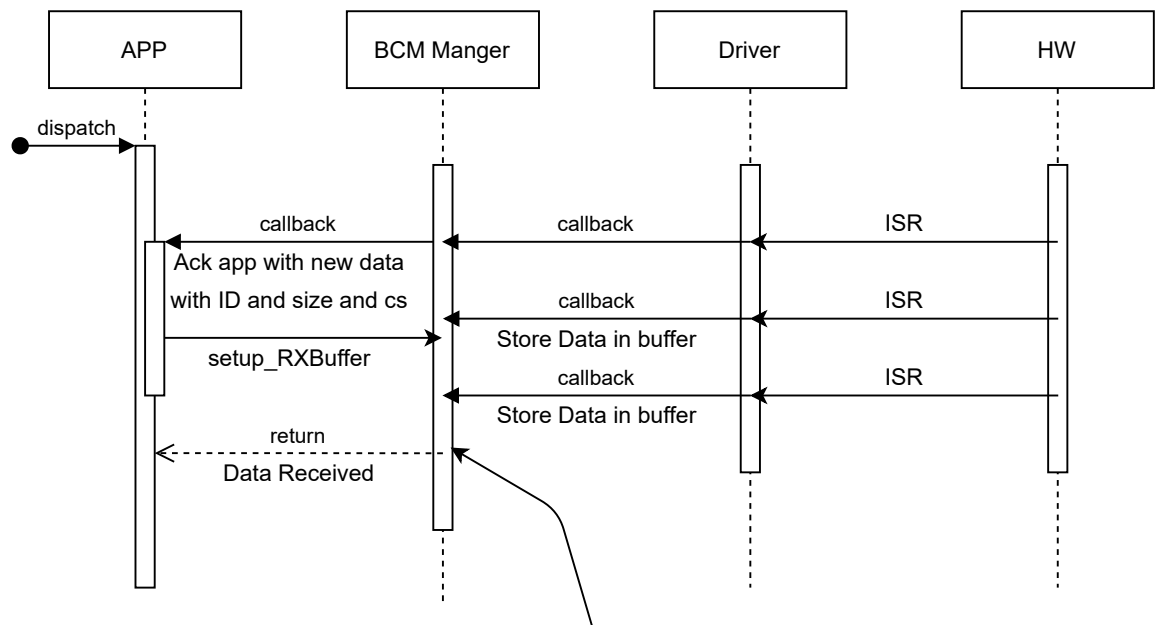

At the end of transmission BCM cal CS and ack App


Callback is the mainfunction of BCM manager

Second Approach using timer

$DR = (500 * 1024) / (8) = 64000B/sec$

$P = (2000) / (64000) = 31.25\ ms$

App call mainfunction at constant rate

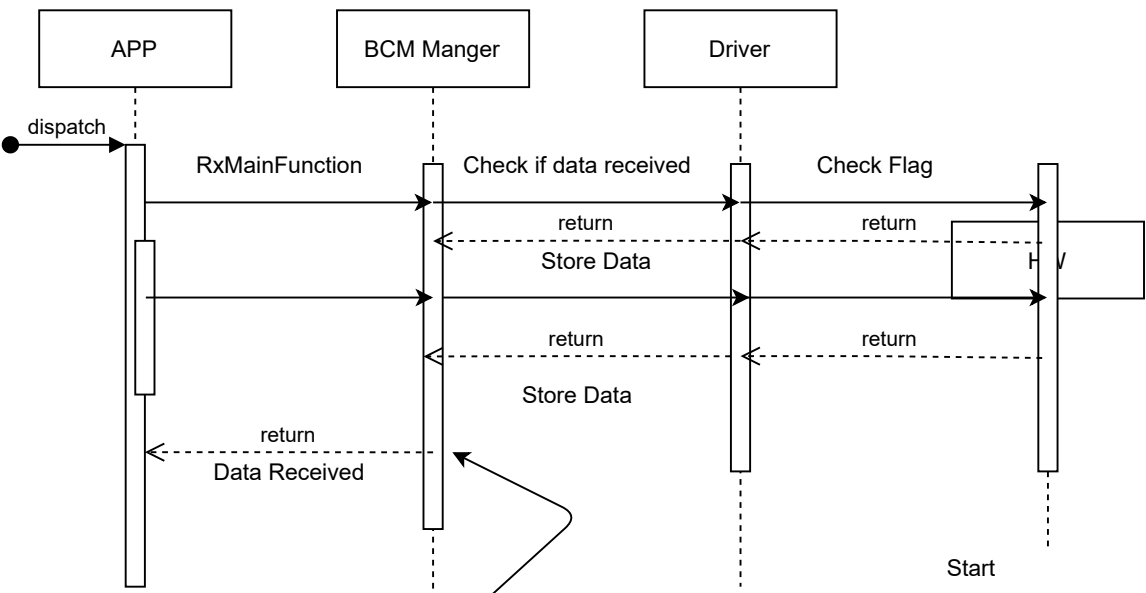

At the end of transmission BCM cal CS and ack App

