



Program Flow Chart

Helper Functions:


T6963_init:

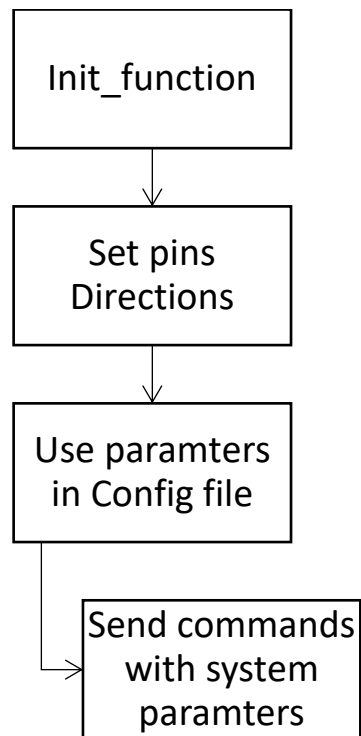


T6963_Busy (Check if GLCD ready to take commands):

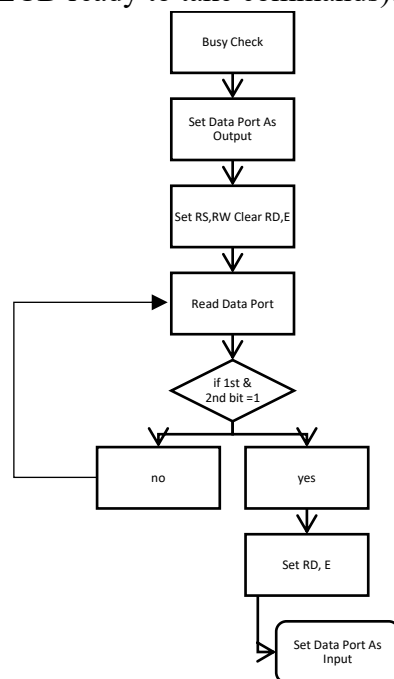


T6963_Send command (send commands to the GLCD):

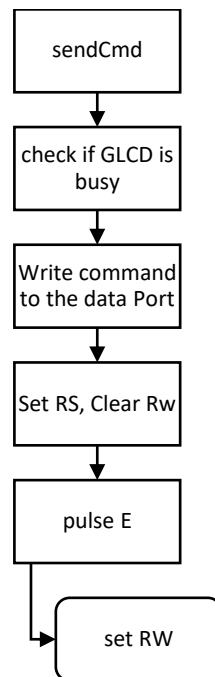


T6963_Send Data (Send Data to the GLCD):

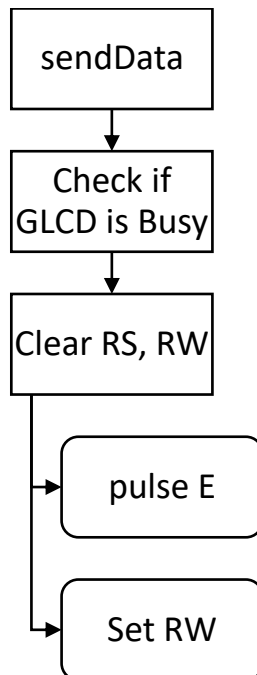


T6963_setBit (SET A specific bit at specified at current address):

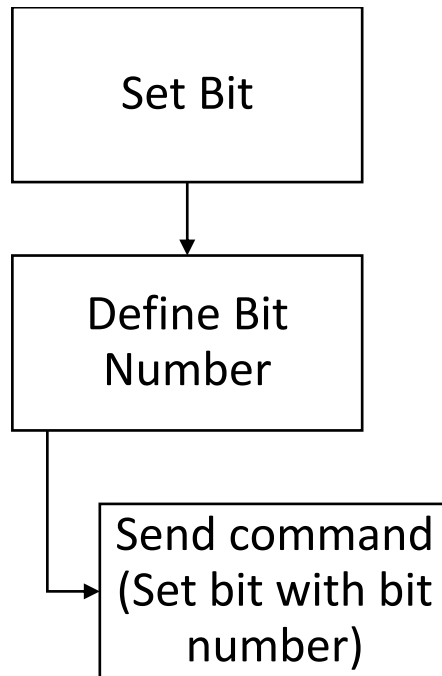


T6963_clrBit (Clear A specific bit at specified at current address):

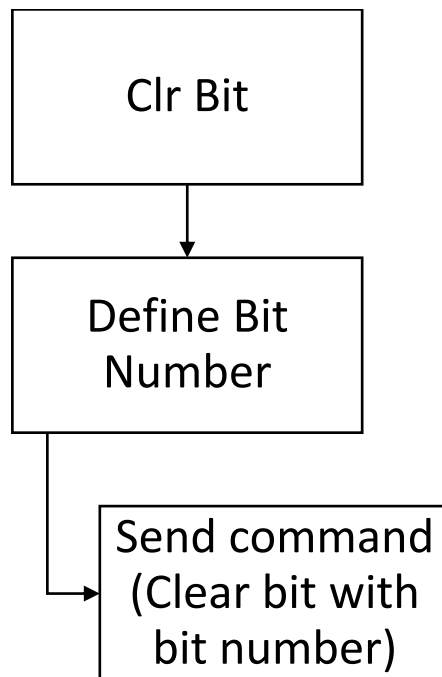


T6963_sendChar (Write character at current address):

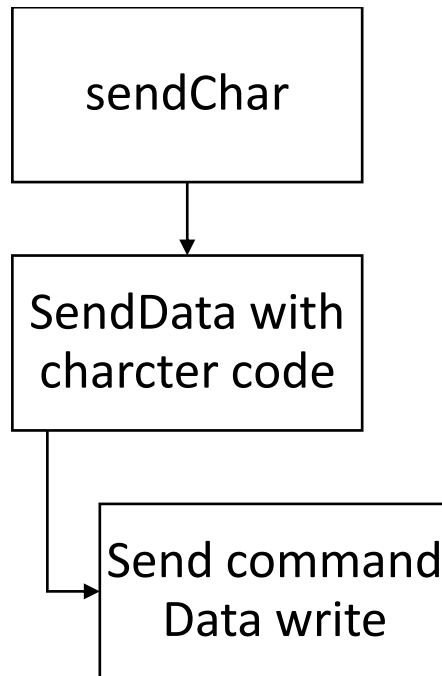


T6963_sendDis (Change whole screen byte):

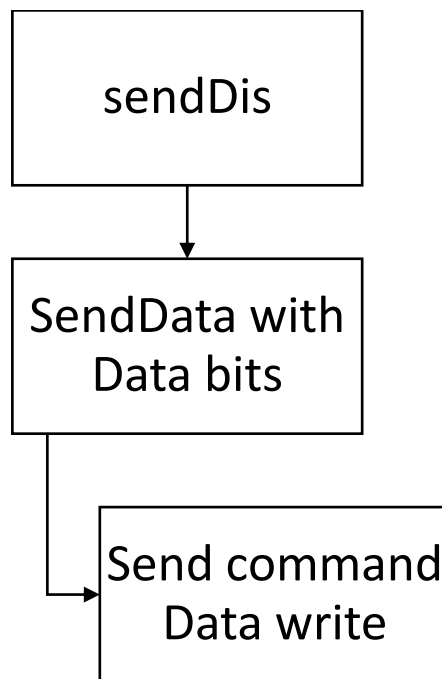

T6963_drawLine (Draw a line on screen):

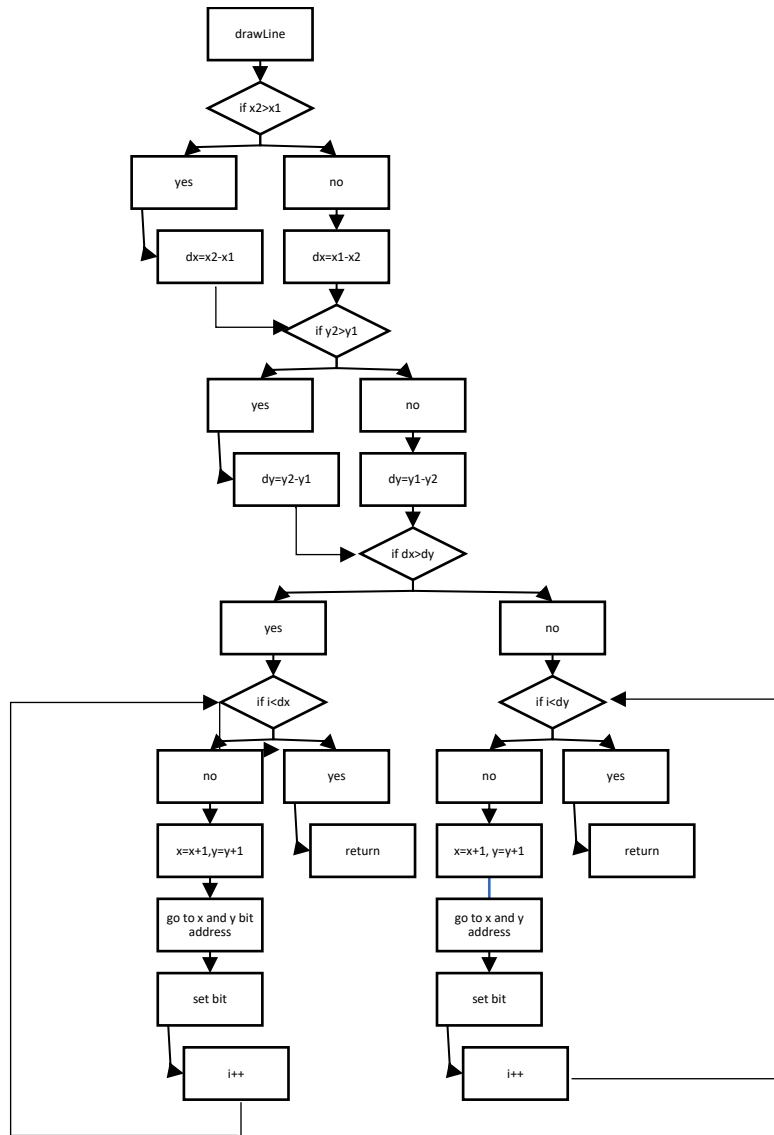

T6963_delLine (delete line):

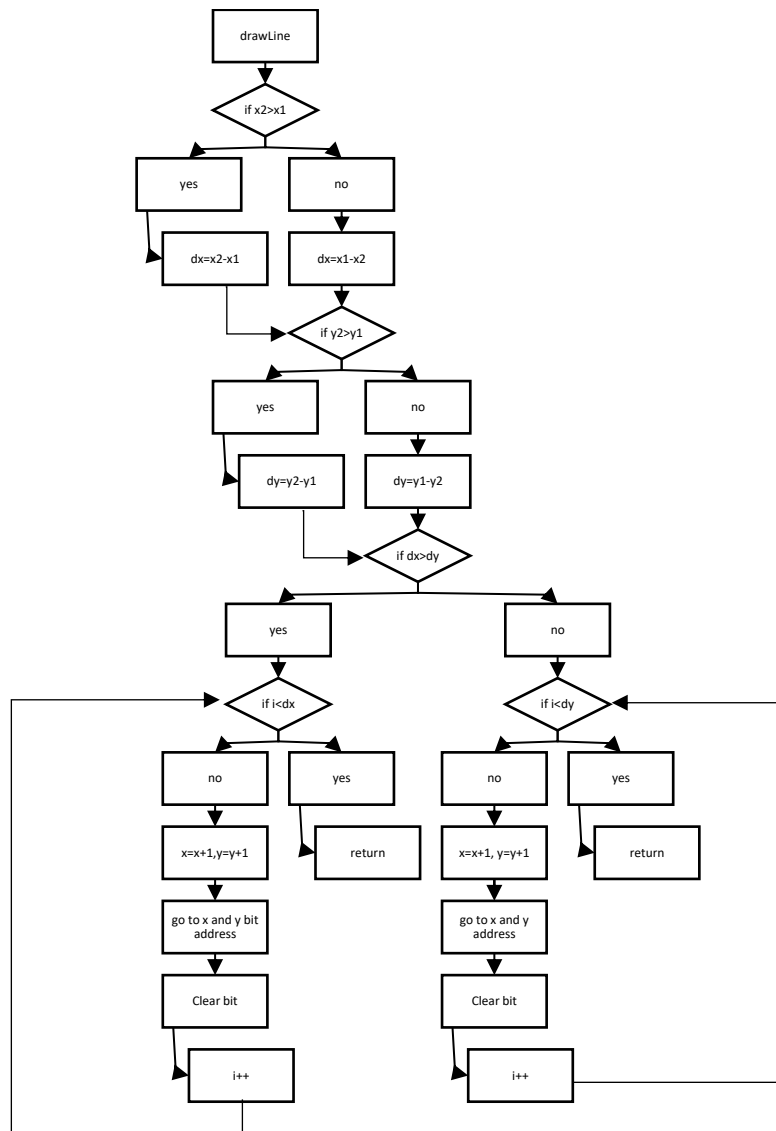

Main Program:

