


## Configure VLANs, VTP

- 1- Configure Switch VTP => Serve, Client, Transparent
- 2- Configure Switch VTP => Domain, Password For Server, Client, Transparent
- 3- Give Network => 192.168.10.0/24 For Vlan 10 & 192.1468.20.0/24 For Vlan 20
- 4- Configure Switch For Vlan 10 & 20

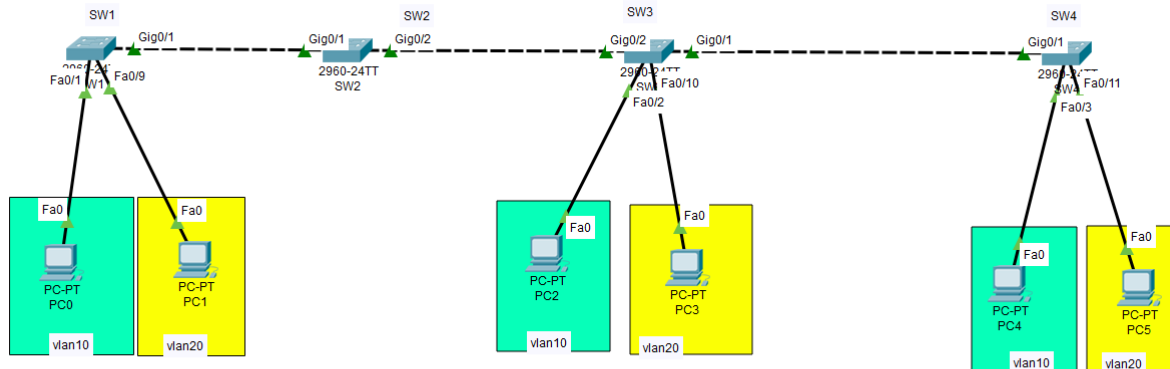

- Configure Switch For VTP For SW1

```
Sw1>enable
SW1#conf t
SW1(config)#int g0/1
SW1(config-if)#switchport mode trunk
SW1(config-if)#exit
SW1(config)#vtp mode server
SW1(config)#vtp domain CCAN
SW1(config)#vtp password cisco
```

- Configure Switch For VTP For SW2

```
SW2>enable
SW2#conf t
SW2(config)#int g0/1
SW2(config-if)#switchport mode trunk
SW2(config-if)#exit
SW2(config)#int g0/2
SW2(config-if)#switchport mode trunk
SW2(config-if)#exit
SW1(config)#vtp mode Client , Transparent
SW1(config)#vtp domain CCAN
SW1(config)#vtp password cisco
```

- Configure Switch For VTP For SW3

```
SW3>enable
SW3#conf t
SW3 (config)#int g0/2
SW3 (config-if)#switchport mode trunk
SW3 (config-if)#exit
SW3 (config)#int g0/1
SW3 (config-if)#switchport mode trunk
SW3 (config-if)#exit
SW3 (config)#vtp mode Client
SW3 (config)#vtp domain CCAN
SW3 (config)#vtp password cisco
```

- Configure Switch For VTP For SW4

```
SW4>enable
SW4#conf t
SW4 (config)#int g0/1
SW4 (config-if)#switchport mode trunk
SW4 (config-if)#exit
SW4 (config)#vtp mode Client
SW4 (config)#vtp domain CCAN
SW4 (config)#vtp password cisco
```

- Configure Switch For Vlan 10

```
SW>en
Sw#conf t
SW(config)#VLAN 10
SW(config)#Name IT
SW(config)#int f0/1, f0/2, f0/3
Sw(config-if)# switchport access vlan 10
Sw(config-if)#do wr
```

- Configure Switch For Vlan 20

```
SW>en
Sw#conf t
SW1(config)#VLAN 20
SW(config)#Name SALES
SW(config)#int f0/9, f0/10, f0/11
Sw(config-if)# switchport access vlan 20
Sw(config-if)#do wr
SW(config)#int g 0/1
Sw(config-if)# switchport mode trunk
Sw(config-if)#do wr
```

==> SW1#show VTP status

- Go To Computer Give IP (192.168.10.0 & 192.168.20.0)

