

DHCP Server On Cisco Router with VLAN and Router on A Stick

- 1- Give Ip Computer 192.168.10.10 & 192.1468.20.10
- 2- Configure Switch For Vlan 10 & 20
- 3- Configure Router
- 4- Go To Computer Give dhcp

-
- Configure Switch For Vlan 10

```
SW>en
Sw#conf t
SW(config)#VLAN 10
SW(config)#Name IT
SW(config)#int f0/1
Sw(config-if)# switchport access vlan 10
Sw(config-if)#do wr
```

- Configure Switch For Vlan 20

```
SW>en
Sw#conf t
SW(config)#VLAN 20
SW(config)#Name SALES
SW(config)#int f0/1
Sw(config-if)# switchport access vlan 20
Sw(config-if)#do wr
```


```
SW(config)#int g 0/1
Sw(config-if)# switchport mode trunk
Sw(config-if)#do wr
```

- Configure Router

```
R1>en
R1#conf t
R1(config)#int g0/0.10
R1(config-subif)#encapsulation dot1Q 10
R1(config-subif)#ip add 192.168.10.1 255.255.255.0
R1(config-subif)#no shutdown
R1(config-subif)#do wr
==➔ R1#show ip interface brief
```

```
R1(config)#ip dhcp pool 10
R1(dhcp-config)#network 192.168.10.0 255.255.255.0
R1(dhcp-config)#default-router 192.168.10.1
R1(dhcp-config)#dns-server 8.8.8.8
R1(config)#ip dhcp excluded-address 192.168.10.1 192.168.10.20
```

Here we write the entire network
Here we write default Getaway
Here we write dns-server
Here exception ip

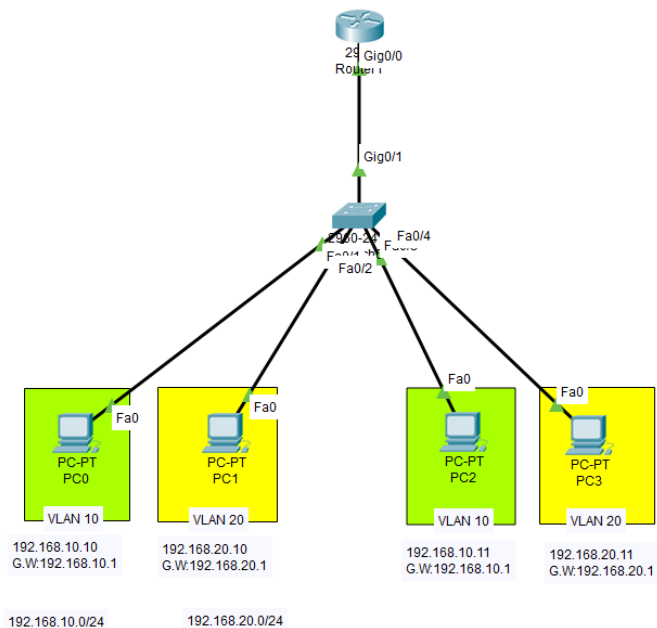

Time: 00:49:50



Copper Straight-Through