

Inter Vlan Routing (Router On A Stick)

- 1- Give Ip Computer 192.168.10.10 & 192.1468.20.10
- 2- Configure Switch For Vlan 10 & 20
- 3- Configure Router
- 4- Go To Computer Give Getaway

-
- Configure Switch For Vlan 10

```
SW>en
Sw#conf t
SW(config)#VLAN 10
SW(config)#Name IT
SW(config)#int f0/1
Sw(config-if)# switchport access vlan 10
Sw(config-if)#do wr
```

- Configure Switch For Vlan 20

```
SW>en
Sw#conf t
SW(config)#VLAN 20
SW(config)#Name SALES
SW(config)#int f0/1
Sw(config-if)# switchport access vlan 20
Sw(config-if)#do wr
```

```
SW(config)#int g 0/1
Sw(config-if)# switchport mode trunk
Sw(config-if)#do wr
```

- Configure Router

```
R1>en
R1#conf t
R1(config)#int g0/0.10
R1(config-subif)#encapsulation dot1Q 10
R1(config-subif)#ip add 192.168.10.1 255.255.255.0
R1(config-subif)#no shutdown
R1(config-subif)#do wr
```


==> R1#show ip interface brief

- Go To Computer Give Getaway(192.168.10.1)

And repeat For Subinterfaces



Logical Physical x: 0, y: 291

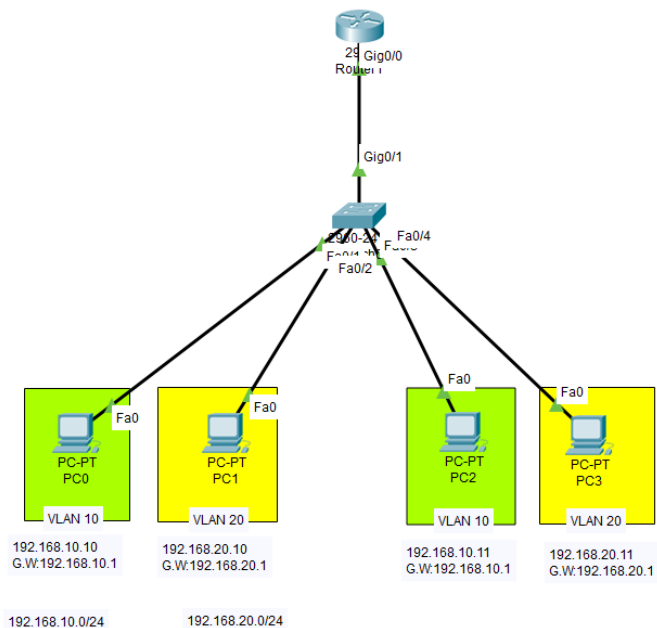

Time: 00:49:50



Copper Straight-Through