💡 **Highlight project**

Project for interconnecting cisco course

Make this configuration to this network

basic configuration for all devices PCs, Switches, Router and Server hostname

Subnet mask for all network /24

1-Use any routing protocol

2- Make routing between all VLANs

**3-make port security on your devices at Network 11.0.0.0/24**

4-enable spanning Tree protocol (pvst) sw2 root for vlan20 and sw3 root for vlan40

5-make device on network192.168.4.0/24 obtain auto TCP/IP from DHCP on the router R1

6- make devices on network192.168.1.0/24 obtain auto TCP/IP from DHCP on the router R1

7-make access Control list to prevent host1 on switch 5 from access browsing on server 1

8-pating on R1 9-save your configuration
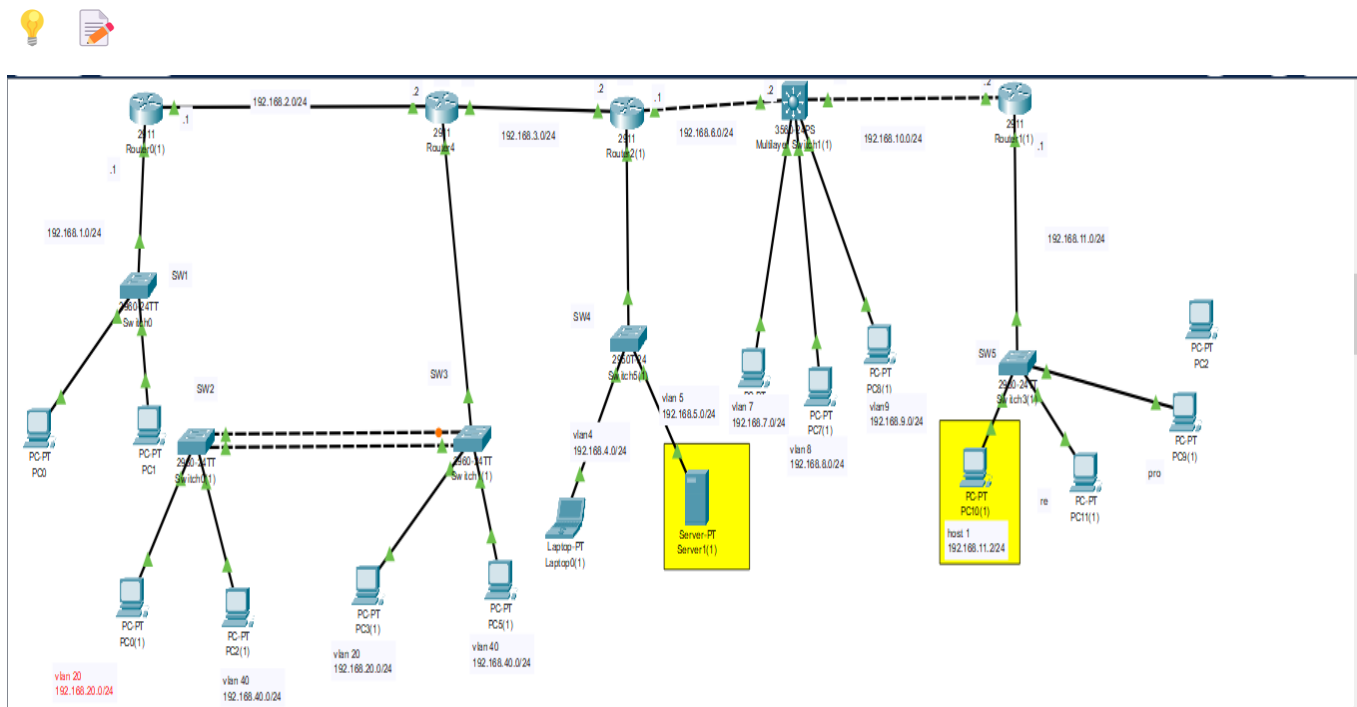
https://drive.google.com/file/d/1AKBkfz32zYVIEulAVWc__v5OA8xnBK1N/view?usp=drive_link