


PHASE BARRIERS INCR. CLEAR. AND CREEPAGE
DIST. FOR SIZE: S00/S0



General technical data:

product brandname		SIRIUS
Product designation		phase barrier
Design of the product		phase barrier for 3RV2
Ambient temperature		
• during operation	°C	-20 ... +70
• during storage	°C	-50 ... +80

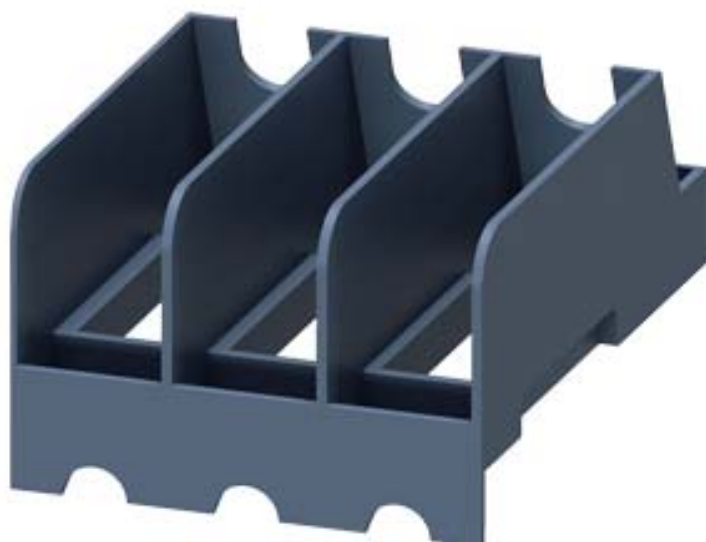



Installation/ mounting/ dimensions:

Mounting type		clip-on
Width	mm	44.8
Height	mm	29.3
Depth	mm	60.6

Certificates/ approvals:

Certificate of suitability		CE / UL / CSA / CCC
----------------------------	--	---------------------

Declaration of Conformity	Test Certificates	Shipping Approval
 EG-Konf.	Typprüfbescheinigung/Werkszeugnis spezielle Prüfbescheinigungen	 ABS  BUREAU VERITAS  LRS

Shipping Approval	other
 PRS  RINA  RMRS	Umweltbestätigung Bestätigungen  VDE

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2928-1K>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2928-1K>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2928-1K&lang=en

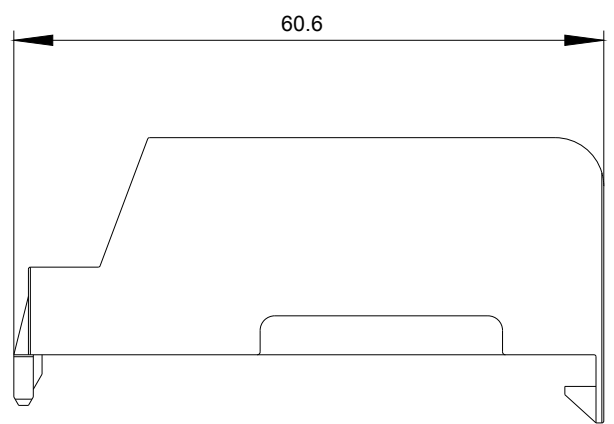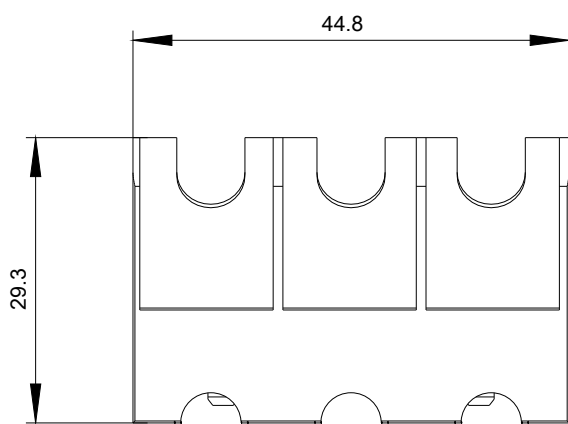

last modified:

02/20/2017