
SIEMENS

Data sheet 3RV2925-5AB

3-PHASE INFEED TERMINAL, FOR 3-PHASE BUSBARS, CONNECTION FROM ABOVE, SIZE S00/S0

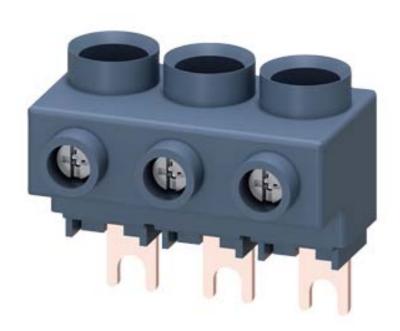

General technical data:				
product brandname		SIRIUS		
Product designation		Three-phase feeder terminal		
Design of the product		from above, size S0/S00		
Size of the circuit-breaker		S00, S0		
Protection class IP on the front		IP20		
Insulation voltage with degree of pollution 3 rated value	V	690		
Ambient temperature				
during storage	°C	-50 + 80		
during operation	°C	-20 +60		
Ampacity maximum	Α	63		

Installation/ mounting/ dimensions:		
Width	mm	44.5
Height	mm	39
Depth	mm	27.2

Connections/ Terminals:	
Type of electrical connection for main current circuit	screw-type terminals

Type of connectable conductor cross-sections

- for main contacts
 - solid
 - stranded
 - finely stranded
 - with core end processing
- at AWG conductors for main contacts

1x (2.5 ... 16 mm²)

1x (2.5 ... 25 mm²)

1x (2.5 ... 16 mm²)

1x (10 ... 4)

Certificates/ approvals:

Certificate of suitability

CE / UL / CSA / CCC

General Product Approval	Declaration of	Test Certificates	Shipping
	Conformity		Approval









spezielle Prüfbescheinigunge



Shipping Approval







LRS







other Railway

Bestätigungen

Umweltbestätigung



Schwingen/Schocke

<u>n</u>

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrymall


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2925-5AB

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

 $\underline{\text{https://support.industry.siemens.com/cs/ww/en/ps/3RV2925-5AB}}$

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2925-5AB&lang=en

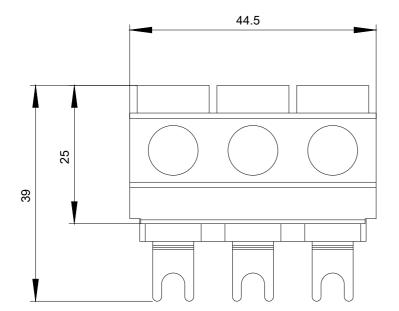



last modified: 02/20/2017