SIEMENS

Data sheet 3RV2902-2DB0

VOLTAGE RELEASE, AC 20...24V, 50/60HZ, 100% ED, AC 20...70V, 50/60HZ, 5SEC ED, DC 20...70V, 5SEC ED, WITH SPRING-L. CONNECTION, FOR CIRCUIT-BREAKERS 3RV2



General technical data	
product brandname	SIRIUS
Product designation	shunt release
Size of the circuit-breaker	S00, S0, S2
Suitability for use	motor circuit breaker
Protection class IP on the front	IP20
Design of short-circuit protection	fuse
Degree of pollution	3
Insulation voltage rated value	690 V
Insulation voltage with degree of pollution 3 rated value	690 V
Ambient temperature	
during storage	-50 +80 °C
 during operation 	-20 +60 °C
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	F
Equipment marking acc. to DIN EN 61346-2	F

Auxiliary circuit

Number of NC contacts for auxiliary contacts	0
instantaneous contact	
Number of NO contacts for auxiliary contacts	0
instantaneous contact	
Number of NO contacts for auxiliary contacts leading	0
contact	
Number of CO contacts of auxiliary contacts	0
instantaneous contact	
Control circuit/ Control	
Type of voltage of the control supply voltage	AC
Control supply voltage frequency	
• 1	
— Initial rated value	50 Hz
— Final rated value	60 Hz
Control supply voltage	
• 1	
— at AC	
 — at 50 Hz Initial rated value 	20 V
— at 50 Hz Final rated value	24 V
— at 60 Hz Final rated value	24 V
— at 60 Hz Initial rated value	20 V
Installation/ mounting/ dimensions	
Mounting type	snap-on mounting
Width	18.5 mm
Height	90 mm
Depth	68 mm
Certificates/approvals	
Certificate of suitability	CE / UL / CSA

General Product Approval

Declaration of Conformity

Test Certificates

Shipping Approval







spezielle Prüfbescheinigunge n Typprüfbescheinigu ng/Werkszeugnis



Shipping Approval













other

Railway

Umweltbestätigung

Bestätigungen



Schwingen/Schocke

n

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2902-2DB0


Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2902-2DB0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

 $\underline{\text{https://support.industry.siemens.com/cs/ww/en/ps/3RV2902-2DB0}}$

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2902-2DB0&lang=en

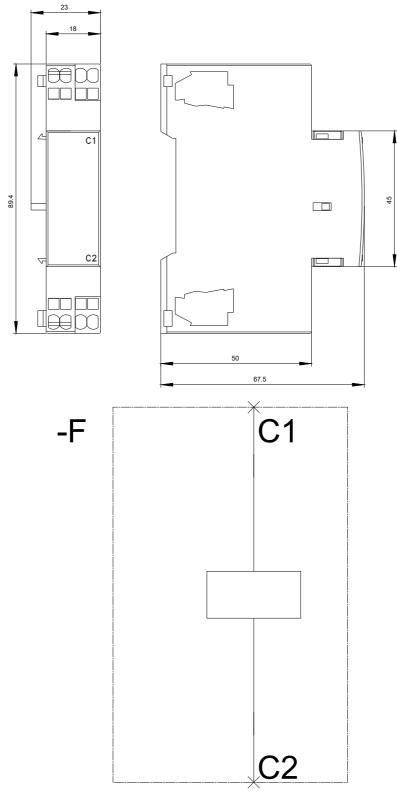

last modified: 11/11/2016