# **SIEMENS**

Data sheet 3RV2902-1AV0

UNDERVOLTAGE RELEASE, AC 400V/50HZ, AC 440V/60HZ W. SCREW CONNECTION; FOR CIRCUIT-BREAKERS 3RV2



| General technical data  |                       |
|---|-----------------------|
| product brandname   | SIRIUS                |
| Product designation   | undervoltage release  |
| Size of the circuit-breaker   | S00, S0, S2           |
| Suitability for use   | motor circuit breaker |
| Protection class IP on the front  | IP20                  |
| Design of short-circuit protection  | fuse                  |
| Degree of pollution   | 3                     |
| Insulation voltage rated value  | 690 V                 |
| Insulation voltage with degree of pollution 3 rated value                           | 690 V                 |
| Ambient temperature   |                       |
| during storage  | -50 +80 °C            |
| <ul> <li>during operation</li> </ul>  | -20 +60 °C            |
| Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750 | F                     |
| Equipment marking acc. to DIN EN 61346-2  | F                     |

| Number of NC contacts for auxiliary contacts instantaneous contact | 0                |
|--|------------------|
| Number of NO contacts for auxiliary contacts instantaneous contact | 0                |
| Number of NO contacts for auxiliary contacts leading contact       | 0                |
| Number of CO contacts of auxiliary contacts instantaneous contact  | 0                |
| Control circuit/ Control   |                  |
| Type of voltage of the control supply voltage                      | AC               |
| Control supply voltage frequency                                   |                  |
| • 1  |                  |
| <ul> <li>Initial rated value</li> </ul>                            | 50 Hz            |
| — Final rated value  | 60 Hz            |
| Control supply voltage   |                  |
| • 1  |                  |
| — at AC  |                  |
| — at 50 Hz rated value   | 400 V            |
| — at 60 Hz rated value   | 440 V            |
| Installation/ mounting/ dimensions                                 |                  |
| Mounting type  | snap-on mounting |
| Width  | 18.5 mm          |
| Height   | 90 mm            |
| Depth  | 68 mm            |
| Certificates/approvals   |                  |
| Certificate of suitability   | CE / UL / CSA    |

#### **General Product Approval**

# Declaration of Conformity

#### **Test Certificates**

## Shipping Approval







spezielle Prüfbescheinigunge n Typprüfbescheinigu ng/Werkszeugnis



### **Shipping Approval**













other

Railway

Umweltbestätigung

Bestätigungen



Schwingen/Schocke

n

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2902-1AV0


Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2902-1AV0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

 $\underline{\text{https://support.industry.siemens.com/cs/ww/en/ps/3RV2902-1AV0}}$ 

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2902-1AV0&lang=en">http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2902-1AV0&lang=en</a>

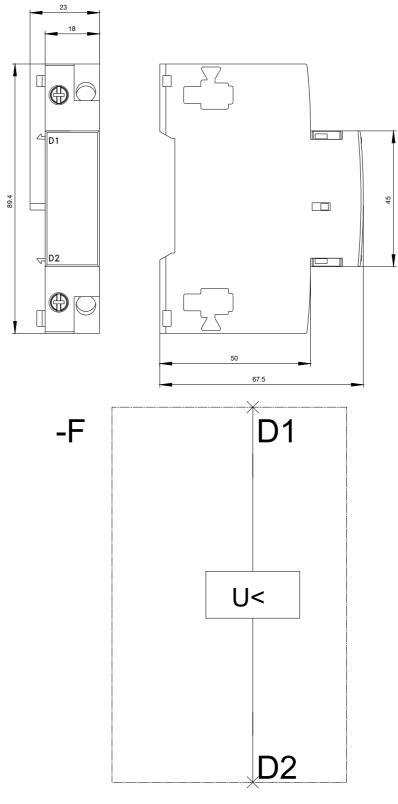

last modified: 11/11/2016