
SIEMENS

Data sheet 3RV2925-5EB

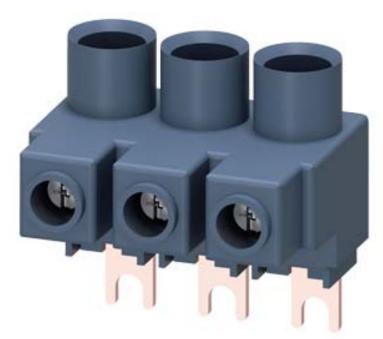

3-PHASE INFEED TERMINAL FOR 3-PHASE BUSBARS, FOR SELF-PROTECTED COMBINATION MOTOR CONTROLLER (TYPE E), FOR CIRCUIT-BREAKERS 3RV SIZE S00/S0,

product brandname		SIRIUS
Product designation		Three-phase feeder terminal
Design of the product		from above, Type E, size S0/S00
Size of the circuit-breaker		S00, S0
Protection class IP on the front		IP20
Insulation voltage with degree of pollution 3 rated value	V	690
Ambient temperature		
during storage	°C	-50 + 80
• during operation	°C	-20 +60
Ampacity maximum	Α	63

Installation/ mounting/ dimensions:			
Width	mm	44	
Height	mm	44.5	
Depth	mm	32	

Connections/ Terminals:	
Type of electrical connection for main current circuit	screw-type terminals

Type of connectable conductor cross-sections

- for main contacts
 - solid
 - stranded
 - finely stranded

General Product Approval

- with core end processing
- at AWG conductors for main contacts

1x (2.5 ... 16 mm²)

1x (2.5 ... 25 mm²)

1x (2.5 ... 16 mm²)

1x (10 ... 4)

Certificates/ approvals:

Certificate of suitability

CE / UL / CSA / CCC

Test Certificates

Shipping Approval







Declaration of

Conformity



Typprüfbescheinigu ng/Werkszeugnis



Shipping Approval





reg







other

Railway

Bestätigungen

Umweltbestätigung



Schwingen/Schocke

<u>n</u>

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrymall


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2925-5EB

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2925-5EB

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2925-5EB&lang=en





last modified: 02/20/2017