



SIGNALING SWITCH,
FOR CIRCUIT-BREAKERS 3RV2. W. SCREW
CONNECTION,

General technical data:

Product brand name		SIRIUS
Product designation		signaling switch
Design of the product		separate tripped signal and short circuit alarm, 1 NO + 1 NC each
Size of the circuit-breaker		S0, S2, S3
Protection class IP / frontal/front side		IP20
Ambient temperature		
• during storage	°C	-50 ... 80
• during the operating phase	°C	-20 ... 60

Auxiliary circuit:

Number of NC contacts / for auxiliary contacts		
• instantaneous switching		1
Number of NO contacts / for auxiliary contacts		
• instantaneous switching		1
Number of changeover contacts / of the auxiliary contacts		
• non-delayed		0
Operating current / of the auxiliary contacts		
• at AC-12		
• at 24 V	A	10

- at 230 V
- at 400 V
- at 690 V
- maximum
- at AC-15
 - at 24 V
 - at 230 V
 - at 690 V
 - at 400 V
- at DC-13
 - at 24 V
 - at 110 V
 - at 125 V
 - at 220 V
 - at 250 V

A	10
A	10
A	10
A	10
A	6
A	4
A	1
A	3
A	2
A	0.5
A	0.5
A	0.25
A	0.25

Installation/mounting/dimensions:

Type of mounting		plug-in fixing
Width	mm	18
Height	mm	90
Depth	mm	68

Connections:

Design of the electrical connection

- for auxiliary and control current circuit

screw-type terminals

Type of connectable conductor cross section

- for auxiliary contact
 - solid
 - stranded wire
 - with wire end processing
- for AWG conductors / for auxiliary contacts

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)

2x (18 ... 14)

Certificates/approvals:

Verification of suitability	CE / UL / CSA / CCC
------------------------------------	---------------------


General Product Approval




Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

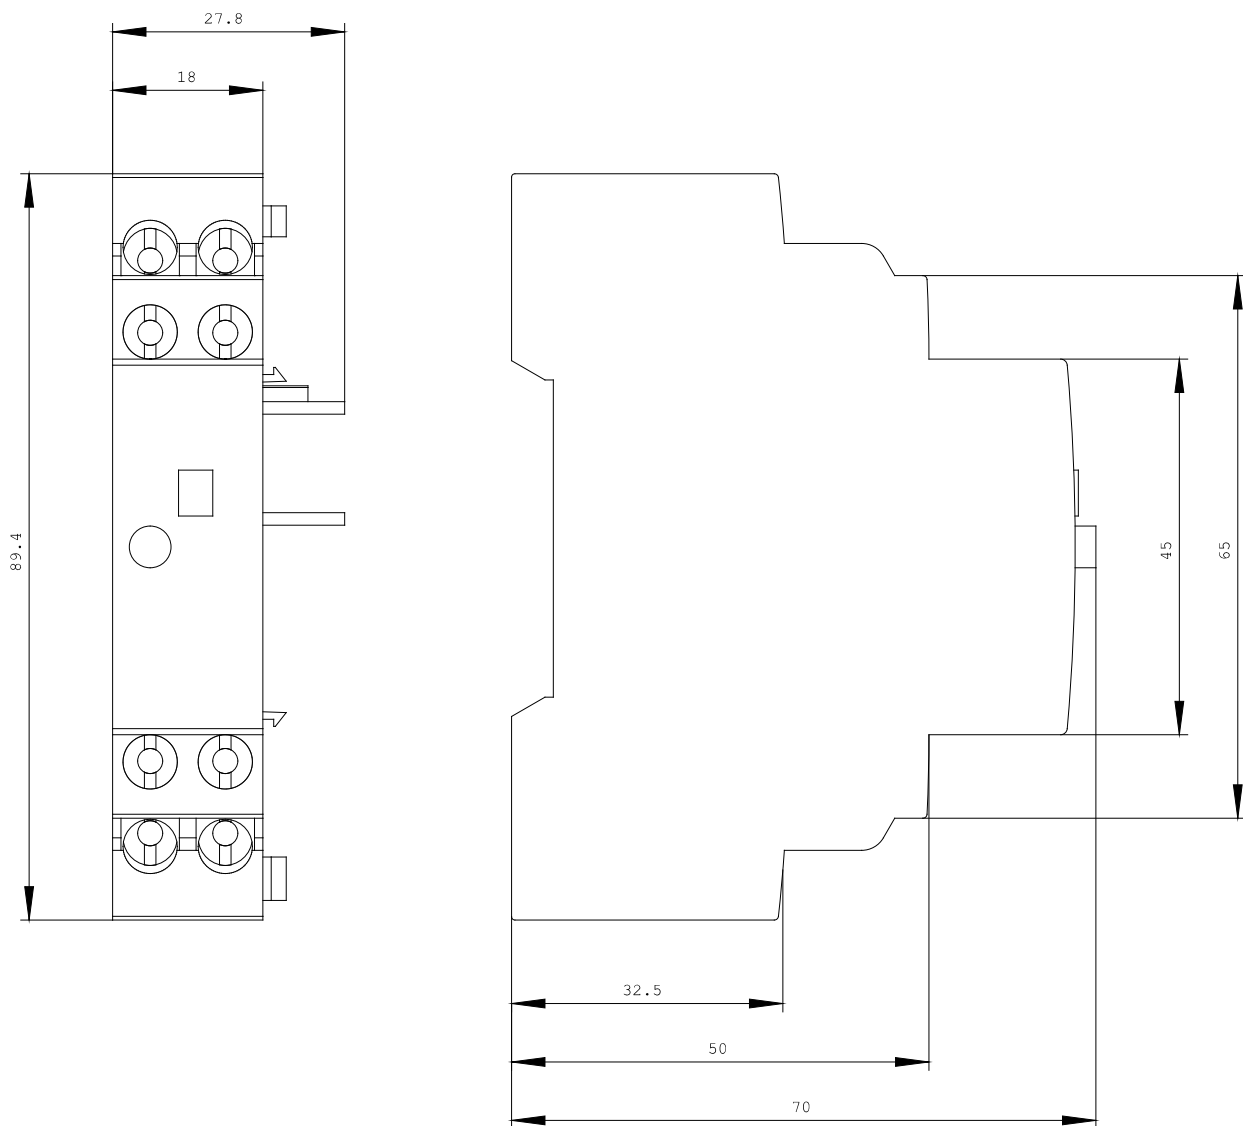

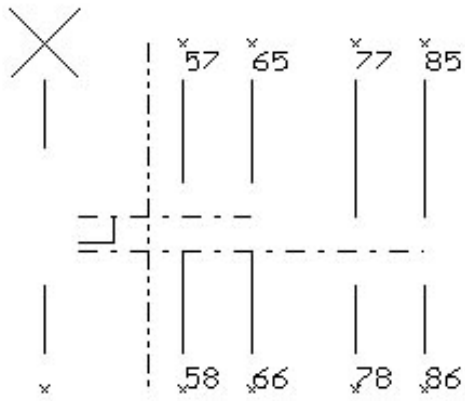

last change:

Sep 6, 2010