











CABLE CONNECTOR SIZE S00 SPRING-L.
CONNECTION



General technical data:		
product brandname		SIRIUS
Product designation		Connection plug
Design of the product		Size S00
Size of the circuit-breaker		S00
Protection class IP on the front		IP20
Ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +60
Ampacity maximum	A	16
Installation/ mounting/ dimensions:		
Width	mm	44.8
Height	mm	40.2
Depth	mm	79.6
Certificates/ approvals:		
Certificate of suitability		CE / UL / CSA / CCC

General Product Approval			Test Certificates	Shipping Approval	
			spezielle Prüfbescheinigungen n		
CSA	UL			ABS	

Shipping Approval				other	
				Umweltbestätigung	Bestätigungen
LRS	PRS	RINA	RMRS		

other	Railway
	Schwingen/Schocke n
VDE	

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2917-5AA00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2917-5AA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2917-5AA00&lang=en

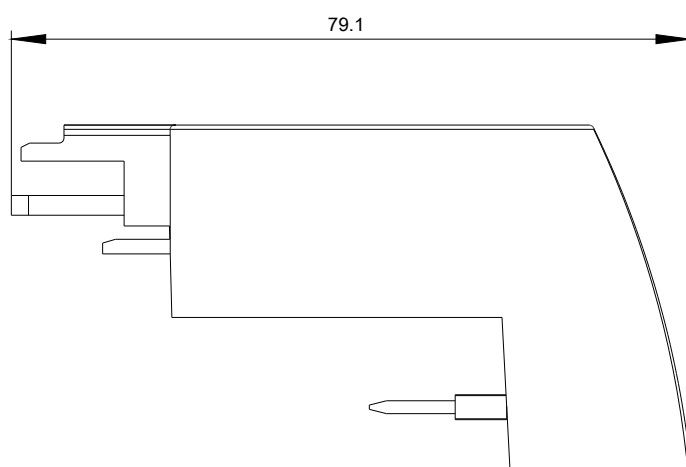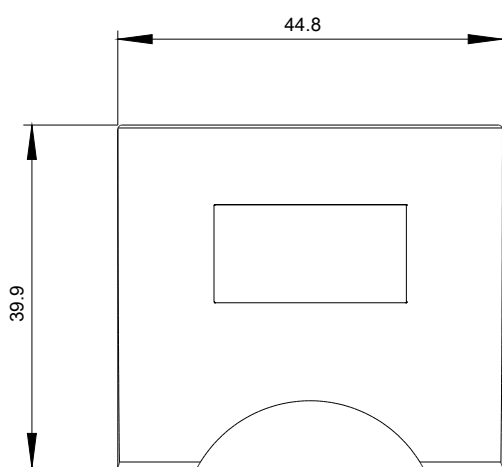

last modified:

02/20/2017