




Logical Physical x: 253, y: 11

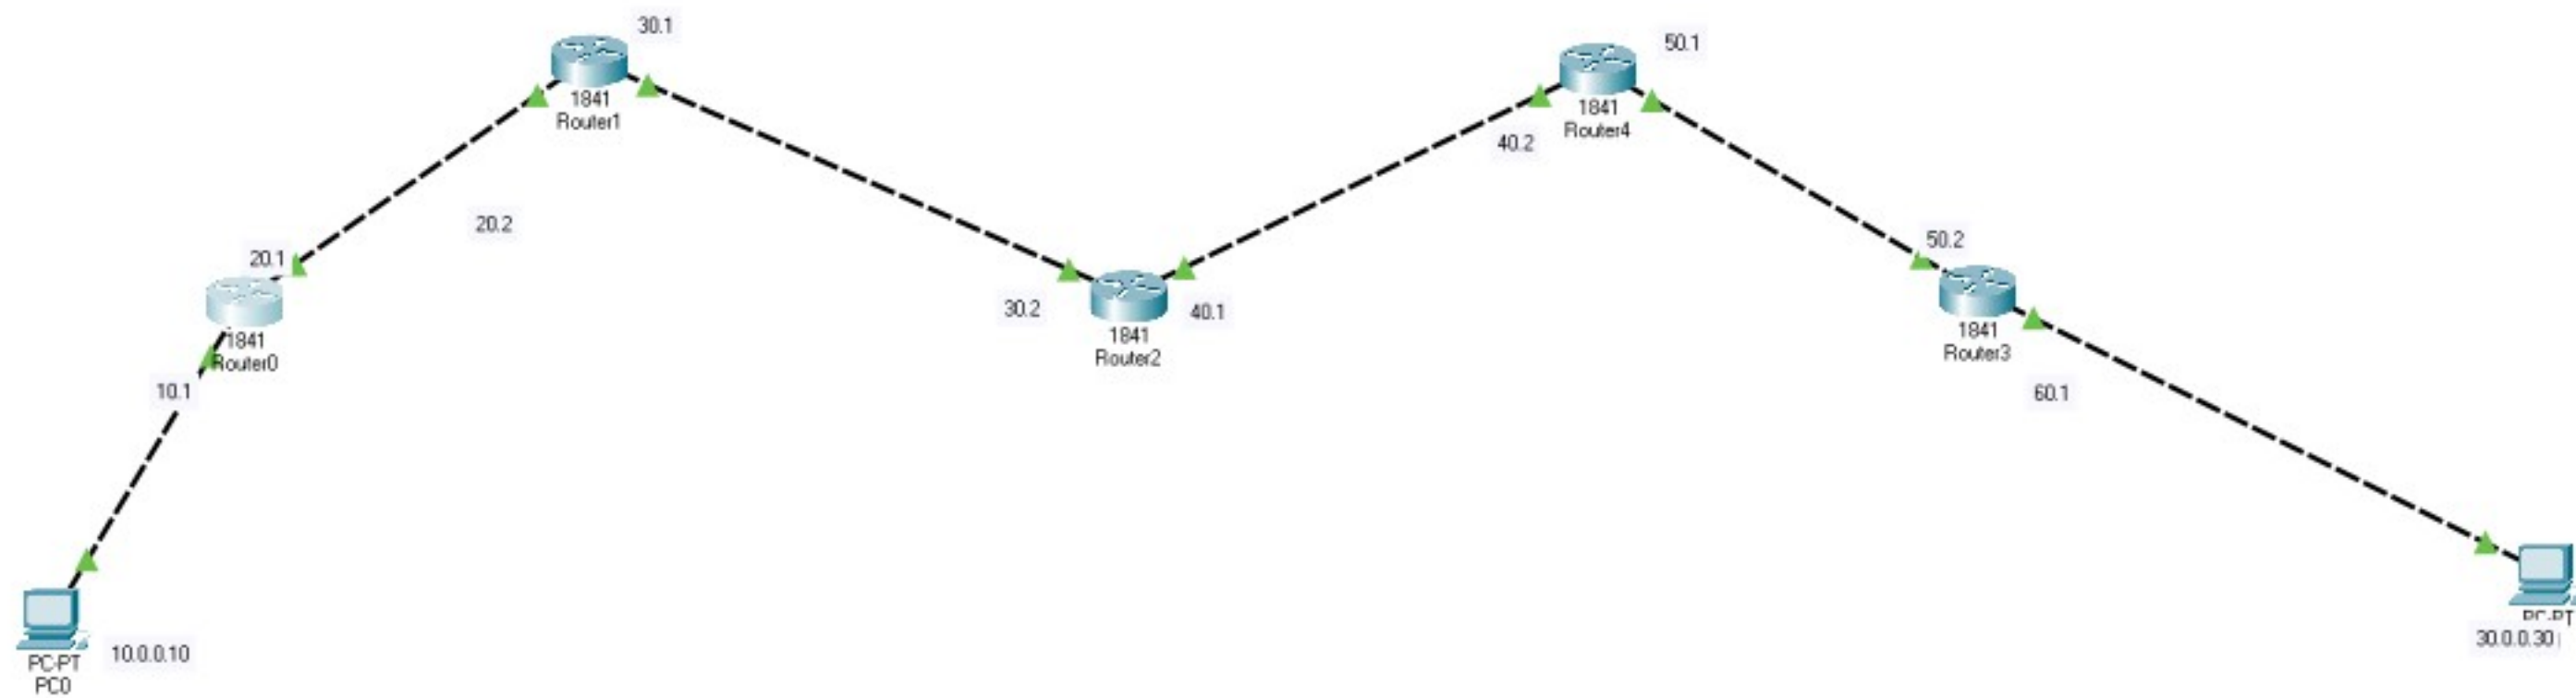

PC0

PhysicalConfigDesktopProgrammingAttributes

IP Configuration

InterfaceFastEthernet0

IP Configuration

☐ DHCP

☒ Static

IPv4 Address10.0.0.10

Subnet Mask255.0.0.0

Default Gateway10.0.0.1

DNS Server0.0.0.0

IPv6 Configuration

☐ Automatic

☒ Static

IPv6 Address /

Link Local AddressFE80::2E0:B0FF:FE79:5D62

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

AuthenticationMD5

Username

Password

PC1

PhysicalConfigDesktopProgrammingAttributes

IP Configuration

InterfaceFastEthernet0

IP Configuration

☐ DHCP

☒ Static

IPv4 Address60.0.0.20

Subnet Mask255.0.0.0

Default Gateway60.0.0.1

DNS Server0.0.0.0

IPv6 Configuration

☐ Automatic

☒ Static

IPv6 Address /

Link Local AddressFE80::203:E4FF:FEA4:D048

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

AuthenticationMD5

Username

Password

IOS Command Line Interface

to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at:
<http://www.cisco.com/wwl/export/crypto/tool/stqrg.html>

If you require further assistance please contact us by sending email to
export@cisco.com.

Cisco 1841 (revision 5.0) with 114688K/16384K bytes of memory.
Processor board ID FTX0947Z18E
M860 processor: part number 0, mask 49
2 FastEthernet/IEEE 802.3 interface(s)
191K bytes of NVRAM.
63488K bytes of ATA CompactFlash (Read/Write)
Cisco IOS Software, 1841 Software (C1841-ADVIPSERVICESK9-M), Version 12.4(15)T1, RELEASE SOFTWARE (fc2)
Technical Support: <http://www.cisco.com/techsupport>
Copyright (c) 1986-2007 by Cisco Systems, Inc.
Compiled Wed 18-Jul-07 04:52 by pt_team

Press RETURN to get started!

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

```
Router>
Router>en
Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route
```

Gateway of last resort is not set

```
C    10.0.0.0/8 is directly connected, FastEthernet0/0
C    20.0.0.0/8 is directly connected, FastEthernet0/1
S    30.0.0.0/8 [1/0] via 20.0.0.2
S    40.0.0.0/8 [1/0] via 20.0.0.2
S    50.0.0.0/8 [1/0] via 20.0.0.2
S    60.0.0.0/8 [1/0] via 20.0.0.2
```

Ctrl+F6 to exit CLI focus

Copy

Paste

IOS Command Line Interface

A summary of U.S. laws governing Cisco cryptographic products may be found at:
<http://www.cisco.com/wwl/export/crypto/tool/stqrg.html>

If you require further assistance please contact us by sending email to
export@cisco.com.

Cisco 1841 (revision 5.0) with 114688K/16384K bytes of memory.
Processor board ID FTX0947Z18E
M860 processor: part number 0, mask 49
2 FastEthernet/IEEE 802.3 interface(s)
191K bytes of NVRAM.
63488K bytes of ATA CompactFlash (Read/Write)
Cisco IOS Software, 1841 Software (C1841-ADVIPSERVICESK9-M), Version 12.4(15)T1, RELEASE SOFTWARE (fc2)
Technical Support: <http://www.cisco.com/techsupport>
Copyright (c) 1986-2007 by Cisco Systems, Inc.
Compiled Wed 18-Jul-07 04:52 by pt_team

Press RETURN to get started!

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

```
Router>en
Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route
```

Gateway of last resort is not set

```
S    10.0.0.0/8 [1/0] via 20.0.0.1
C    20.0.0.0/8 is directly connected, FastEthernet0/0
C    30.0.0.0/8 is directly connected, FastEthernet0/1
S    40.0.0.0/8 [1/0] via 30.0.0.2
S    50.0.0.0/8 [1/0] via 30.0.0.2
S    60.0.0.0/8 [1/0] via 30.0.0.2
```

Router#

Ctrl+F6 to exit CLI focus

Copy

Paste

IOS Command Line Interface

A summary of U.S. laws governing Cisco cryptographic products may be found at:
<http://www.cisco.com/wwl/export/crypto/tool/stqrg.html>

If you require further assistance please contact us by sending email to
export@cisco.com.

Cisco 1841 (revision 5.0) with 114688K/16384K bytes of memory.
Processor board ID FTX0947Z18E
M860 processor: part number 0, mask 49
2 FastEthernet/IEEE 802.3 interface(s)
191K bytes of NVRAM.
63488K bytes of ATA CompactFlash (Read/Write)
Cisco IOS Software, 1841 Software (C1841-ADVIPSERVICESK9-M), Version 12.4(15)T1, RELEASE SOFTWARE (fc2)
Technical Support: <http://www.cisco.com/techsupport>
Copyright (c) 1986-2007 by Cisco Systems, Inc.
Compiled Wed 18-Jul-07 04:52 by pt_team

Press RETURN to get started!

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

```
Router>en
Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route
```

Gateway of last resort is not set

```
S    10.0.0.0/8 [1/0] via 30.0.0.1
S    20.0.0.0/8 [1/0] via 30.0.0.1
C    30.0.0.0/8 is directly connected, FastEthernet0/0
C    40.0.0.0/8 is directly connected, FastEthernet0/1
S    50.0.0.0/8 [1/0] via 30.0.0.1
      [1/0] via 40.0.0.2
S    60.0.0.0/8 [1/0] via 40.0.0.2
```

Router#

Ctrl+F6 to exit CLI focus

Copy

Paste

☐ Top

IOS Command Line Interface

A summary of U.S. laws governing Cisco cryptographic products may be found at:
<http://www.cisco.com/wwl/export/crypto/tool/stqrg.html>

If you require further assistance please contact us by sending email to
export@cisco.com.

Cisco 1841 (revision 5.0) with 114688K/16384K bytes of memory.
Processor board ID FTX0947Z18E
M860 processor: part number 0, mask 49
2 FastEthernet/IEEE 802.3 interface(s)
191K bytes of NVRAM.
63488K bytes of ATA CompactFlash (Read/Write)
Cisco IOS Software, 1841 Software (C1841-ADVIPSERVICESK9-M), Version 12.4(15)T1, RELEASE SOFTWARE (fc2)
Technical Support: <http://www.cisco.com/techsupport>
Copyright (c) 1986-2007 by Cisco Systems, Inc.
Compiled Wed 18-Jul-07 04:52 by pt_team

Press RETURN to get started!

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

```
Router>
Router>en
Router#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route
```

Gateway of last resort is not set

```
S    10.0.0.0/8 [1/0] via 40.0.0.1
S    20.0.0.0/8 [1/0] via 40.0.0.1
S    30.0.0.0/8 [1/0] via 40.0.0.1
C    40.0.0.0/8 is directly connected, FastEthernet0/0
C    50.0.0.0/8 is directly connected, FastEthernet0/1
S    60.0.0.0/8 [1/0] via 50.0.0.2
```

Router#

Ctrl+F6 to exit CLI focus

Copy

Paste

☐ Top

IOS Command Line Interface

Press RETURN to get started!

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up

Router>

Router>

Router>en]

^

% Invalid input detected at '^' marker.

Router>en

Router#show ip route

Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP

D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area

N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2

E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP

i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area

* - candidate default, U - per-user static route, o - ODR

P - periodic downloaded static route

Gateway of last resort is not set

S 10.0.0.0/8 [1/0] via 50.0.0.1

S 20.0.0.0/8 [1/0] via 50.0.0.1

S 30.0.0.0/8 [1/0] via 50.0.0.1

S 40.0.0.0/8 [1/0] via 50.0.0.1

C 50.0.0.0/8 is directly connected, FastEthernet0/0

C 60.0.0.0/8 is directly connected, FastEthernet0/1

Router#