

# CrystalWay 19021 CG-S JSB

## Exit Sign Panel Luminaires



Wall-surface mounting



Ceiling-surface mounting



Wire suspension kit




Recessed base




Add-on housing



Concrete box



Add-on housing



### CrystalWay 19021 CG-S JSB

- Exclusive Exit sign panel luminaire with LED technology
- Concise design with highly transparent frame and replaceable inner screen-printed pictograms
- Includes set of pictograms (arrow right, left, down, up, blind) for the most common applications
- Only one order number for wall or ceiling mounting
- Expandable with extensive accessories, e.g. housing for ceiling recessing, wire suspension, pictograms for 90° wall mounting
- Unobtrusive, thin & slim electronic base (Height: only 22mm)
- Optimal recognition via high luminance of white contrast colour > 500 cd/m<sup>2</sup> according to DIN 4844-1 / ISO 3864-1 (for bright surroundings), and high uniformity L<sub>min</sub>/L<sub>max</sub> > 0.8
- Reduced battery costs due to of especially low power consumption
- Low operating costs due to of low effective power of 1.6W only.
- Minimum maintenance effort and increased safety via use of LEDs with high service life (50,000 hours)
- Shortened inspection effort due to CEWA GUARD Technology
- Automatic function monitoring of up to 20 luminaires per circuit
- Reduced installation expenditures by STAR Technology

|                                                                    |                                            |
|--------------------------------------------------------------------|--------------------------------------------|
| Viewing distance                                                   | 20 m                                       |
| Luminous flux $\Phi_E/\Phi_{Nenn}$ at end of rated operating time  | 100 %                                      |
| Housing material                                                   | Polycarbonat                               |
| Housing colour                                                     | RAL 9003                                   |
| Weight                                                             | 0.4 kg                                     |
| Type of mounting                                                   | Wall and ceiling mounting                  |
| Connection terminals                                               | 2 x 3 x 2.5 mm <sup>2</sup>                |
| Connection voltage                                                 | 220 – 240 V AC, 50/60 Hz<br>176 – 275 V DC |
| Power consumption mains operation (apparent power/effective power) | 3.5 VA / 1.6 W                             |
| Current consumption- battery operation (220 V)                     | 7 mA                                       |
| Permissible ambient temperature                                    | -20 °C to +40 °C                           |
| Light source                                                       | LED strip                                  |

### Ordering details

| Type                      | Scope of supply                                              | Order-No.     |
|---------------------------|--------------------------------------------------------------|---------------|
| CrystalWay 19021 CG-S JSB | including pictogram set (Arrow right, left, down, up, blank) | CW-19021CGS-J |

### Ordering details - Accessories


| Type                                                                                            | Order-No. |
|-------------------------------------------------------------------------------------------------|-----------|
| Wire suspension kit, 20 m + 30 m                                                                | LUM10560  |
| Recessed base, for ceiling mounting, 20 m                                                       | LUM10561  |
| Recessed base with cover, for ceiling mounting, 20 m                                            | LUM10563  |
| Recessed base with cover, for combination with wire suspension, 20 m                            | LUM10563S |
| Concrete box (suitable for recessed base with cover), 20 m                                      | LUM10565  |
| Add-on housing for CrystalWay 20 m for expanded spatial conditions, for wiring and cable infeed | LUM10567  |
| Pictogram PU, ISO 7010, 20 m                                                                    | LUM10573  |
| Pictogram PL, ISO 7010, 20 m                                                                    | LUM10574  |
| Pictogram PR, ISO 7010, 20 m                                                                    | LUM10575  |
| Pictogram PA, ISO 7010, 20 m                                                                    | LUM10577  |
| Pictogram PU vertical, ISO 7010, 20 m                                                           | LUM10584  |
| Pictogram PL vertical, ISO 7010, 20 m                                                           | LUM10585  |
| Pictogram PR vertical, ISO 7010, 20 m                                                           | LUM10586  |

# CrystalWay CG-S JSB


## Exit Sign Panel Luminaires

Dimensions in mm, viewing distance 20 m


Wall-surface mounting

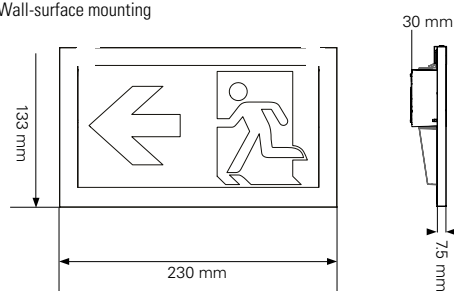


Concrete box

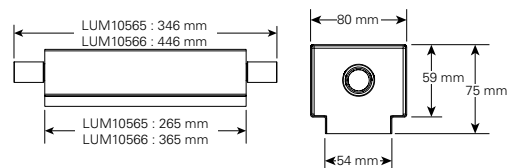

Ceiling-surface mounting

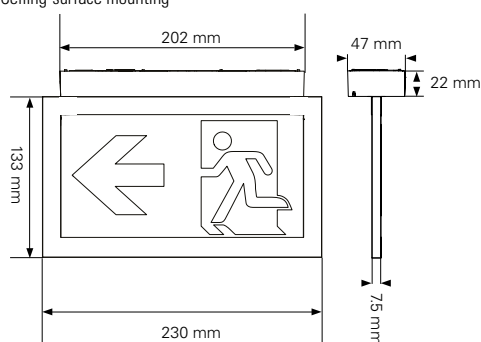


Add-on housing

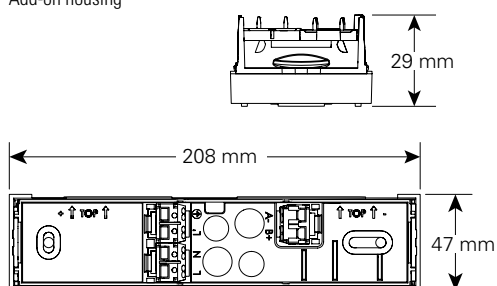


Dimensions in mm, viewing distance 30 m (XL)

Wall-surface mounting

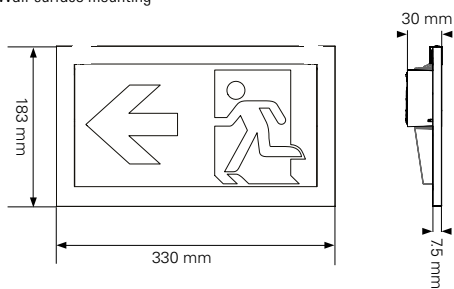

Concrete box

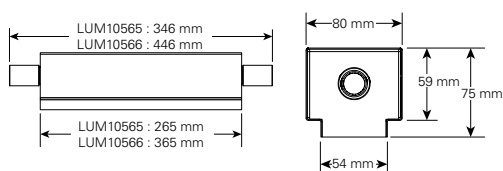

Ceiling-surface mounting

