


GuideLed SL 13011.2, 13021.2 CG-S

Safety Luminaires for Escape Route Lighting




GuideLed SL 13011.2 CG-S

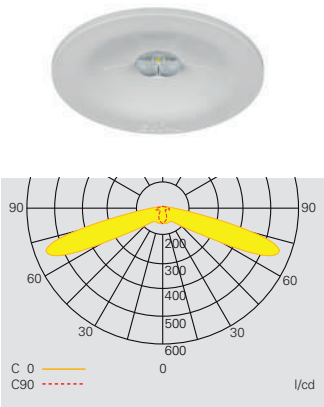

Light distribution curve
GuideLed SL 13011.2 CG-S recessed
with asymmetric optics

GuideLed SL 13021.2 CG-S

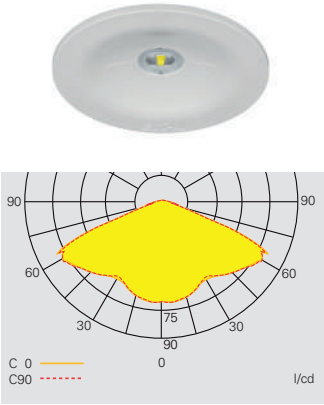

Light distribution curve
GuideLed SL 13021.2 CG-S recessed
with symmetric optics

Square bezel for
GuideLed SL 130x1.2 CG-S



GuideLed SL 13011.2, 13021.2 CG-S


- Safety luminaire with LED technology for recessed mounting
- Unobtrusive, discrete appearance with round design and low installation depth of only 40 mm
- Conversion to square design with optional bezel to fit to the ceiling plan if necessary
- Special LED optics ensure especially efficient escape route illumination or uniform anti-panic illumination for mounting heights between 2.5 and 7 m
- Spacing up to 32 m from luminaire to luminaire with optics for escape route illumination (for 1 lx)
- Spacing up to 13.7 m from luminaire to luminaire with optics for antipanic illumination (for 1 lx)
- Minimum service requirement due to high service life of the LEDs (up to 100.000 hours)

Luminous flux Φ_N	Asymmetric optics 300 lm Symmetric optics 320 lm
Luminous flux Φ_E/Φ_N at end of rated operating time	100%
Housing material	Polycarbonate, aluminium
Housing colour	White RAL 9016
Weight	0.25 kg
Type of mounting	Recessed mounting
Terminals	Clamp terminal 2 x 3 x 2.5 mm ²
Connection voltage	220 – 240 V AC, 50/60 Hz 176 – 275 V DC
Current consumption- battery operation (220 V)	20 mA
Power consumption mains operation (apparent power/effective power)	8.0 VA / 3.9 W
Inrush current	1.5 A
Permissible ambient temperature	-20°C to +40°C
Light source	HighPower LED 1 x 2.2 W (4000 K / CRI 70)

Ordering details

Type	Scope of supply	Order No.
GuideLed SL 13011.2 CG-S	GuideLed SL 13011.2 CG-S, round recessed mounting luminaire, with asymmetric optics for exit route lighting, 4000 K, LED-Supply and CG-S technology (20 addresses) in a plastic enclosure* with strain relief	40071356730
GuideLed SL 13021.2 CG-S	GuideLed SL 13021.2 CG-S, round recessed mounting luminaire, with symmetric optics for anti-panic or open area lighting, 4000 K, LED-Supply and CG-S technology (20 addresses) in a plastic enclosure* with strain relief	40071356731
Square bezel	Square bezel GuideLed SL 130x1.x CG-S	40071354488
Plastic enclosure	Plastic enclosure for installation in concrete (suitable from 160 mm ceiling depth), for GuideLed SL 130x1.x CG-S	40071353169

Dimensions in mm

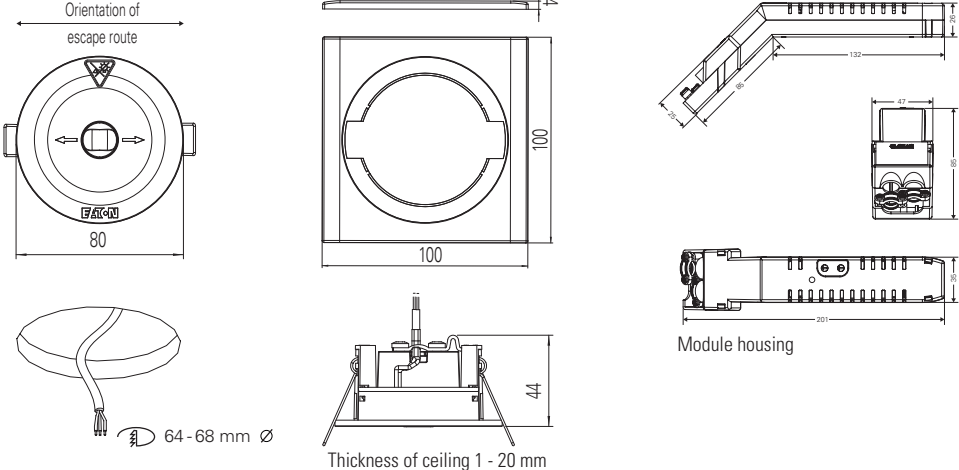

* Degree of protection of the luminaire: IP41 (Once installed in the ceiling, the luminaire face is rated IP41)
Degree of protection of module enclosure: IP20