


SafeLite CG-S JSB


Safety and Exit Sign Luminaires with High Ingress Protection



SafeLite




SafeLite - Dimensional drawings (mm)

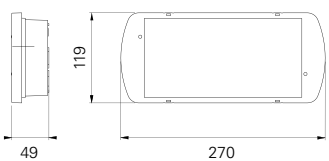

Recessed base




Recessed base - Dimensional drawings (mm)

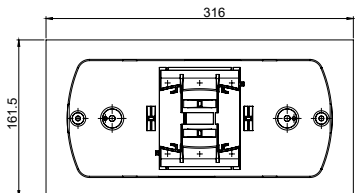


Cone diffuser



Cone diffuser - Dimensional drawings (mm)

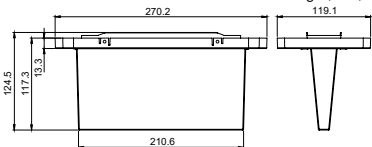

90° Wall bracket

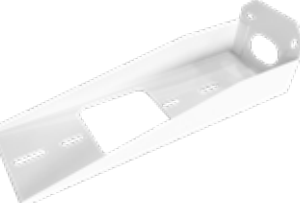

SafeLite CG-S JSB

- LED safety luminaire for all applications (Escape route, Anti-panic, Exit sign)
- First fix base for ease of installation
- High impact resistant (IK07) and high degree of protection (IP65)
- Recessed mounting optional
- Minimum service requirement due to high service life of the LEDs (up to 50,000 hours)
- Shortened inspection effort due to CEWA GUARD technology
- Automatic function monitoring of up to 20 luminaires per circuit
- Reduced installation expenditure with STAR technology
- Freely programmable mixed operation of the switching modes per luminaire in one circuit

Viewing distance	20 m
Luminous flux Φ_N	200 lm, 400 lm
Luminous flux Φ_E/Φ_N at end of rated operating time	100%
Housing material	Polycarbonate, (850 °C glow wire resistant)
Housing colour	RAL9003
Weight	0.5 kg
Type of mounting	Wall or ceiling surface mounting, Option: Recessed base for ceiling
Connection Terminals	2 x 2.5 mm ² (screwless connectors)
Connection voltage	220 – 240 V AC 50/60Hz, 176 – 275 V DC
Current consumption – battery operation (220 V)	11 mA (200 lm) 17 mA (400 lm)
Power consumption mains operation (apparent power / effective power)	5.6 VA / 2.8 W (200 lm) 7.6 VA / 4.3 W (400 lm)
Inrush current	1.5 A
Permissible ambient temperature	-20°C to +40°C
Light source	LED strip

Ordering details


Type	Scope of supply	Order No.
SafeLite CG-S JSB (200 lm)	Luminaire housing IP65, including LED-supply with CG-S technology and LED-circuit board, for exit route lighting or exit signage with optional pictograms *	SL2-M65F0FCGS-J
SafeLite CG-S JSB (400 lm)	Luminaire housing IP65, including LED-supply with CG-S technology and LED-circuit board, for exit route lighting	SL2-M65J0JCGS-J

Accessories

Type	Order No.
Set of 3 adhesive pictograms (L, R, D) ISO format, 20 m	SL23A
Set of 3 pictogram foils to insert inside luminaire (L, R, D) ISO format, 20 m	SL23I
Cone diffuser*, 20 m	SL2CD
Recessed Base, Plastic, RAL 9003, 20 m	SL2RB
Wire guard, 20 m	SL2PG
90° Wall bracket	EL-BR1

1) optional

*Pictograms have to be ordered separately



Light distribution curve


Planning assistance for SafeLite CG-S JSB 200 lm for E = 1.0 lx (0.5 lx)

Measuring height 0.02 m, maintenance factor MF = 80 %, battery operation

Mounting height [m]	Type of mounting	L1	L2	L3	L4
2.5	Ceiling mounting	3.6 (4.5)	8.9 (10.1)	3.6 (4.5)	9.0 (10.8)
3.0	Escape route center	3.8 (4.8)	9.7 (11.4)	3.8 (4.8)	9.6 (11.8)
3.5		3.9 (5.1)	10.2 (12.5)	3.9 (5.1)	10.2 (12.6)
4.0		3.9 (5.3)	10.6 (13.4)	3.9 (5.3)	10.5 (13.3)
4.5		3.8 (5.4)	10.8 (14.0)	3.8 (5.4)	10.8 (13.9)
5.0		3.7 (5.5)	11.0 (14.4)	3.7 (5.5)	11.0 (14.4)
5.5		3.5 (5.5)	11.0 (14.8)	3.5 (5.5)	11.0 (14.8)
6.0		3.2 (5.5)	11.0 (15.1)	3.2 (5.5)	10.9 (15.1)
6.5		2.8 (5.4)	10.8 (15.4)	2.8 (5.4)	10.8 (15.3)
7.0		2.1 (5.3)	10.5 (15.5)	2.2 (5.3)	10.5 (15.5)
7.5		1.0 (5.1)	10.2 (15.6)	1.2 (5.1)	10.2 (15.5)
2.5	Ceiling mounting	3.2 (3.5)	6.9 (7.7)	3.0 (3.4)	6.8 (7.6)
3.0	Room illumination	3.2 (3.8)	7.6 (8.6)	3.2 (3.8)	7.9 (8.8)
3.5		2.8 (4.2)	8.0 (9.7)	3.6 (4.0)	9.1 (9.6)
4.0		2.9 (3.9)	8.9 (9.9)	3.4 (4.6)	9.4 (11.3)
4.5		2.9 (4.2)	9.7 (11.1)	3.0 (4.5)	9.7 (11.7)
5.0		2.7 (4.1)	10.2 (11.8)	2.7 (4.6)	10.1 (12.5)
5.5		2.4 (3.7)	10.5 (12.2)	2.5 (4.8)	10.5 (13.4)
6.0		2.2 (3.9)	10.7 (13.2)	2.2 (4.3)	10.7 (13.5)
6.5		2.0 (3.2)	10.9 (13.3)	1.9 (4.5)	10.8 (14.5)
7.0		1.7 (3.6)	11.0 (14.3)	1.7 (3.7)	10.9 (14.3)
7.5		1.3 (3.3)	11.0 (14.7)	1.5 (3.4)	11.0 (14.7)
8.0		1.0 (3.0)	11.0 (14.9)	1.1 (3.2)	11.0 (15.0)
8.5		0.7 (2.9)	10.9 (15.2)	0.7 (2.8)	10.9 (15.1)
9.0		0.8 (2.5)	10.6 (15.4)	0.7 (2.5)	10.6 (15.3)
9.5		0.6 (2.2)	9.8 (15.5)	0.7 (2.3)	10.4 (15.4)
10.0		0.6 (1.9)	10.3 (15.6)	0.6 (2.0)	8.6 (15.5)

SafeLite CG-S JSB

Safety and Exit Sign Luminaires with High Ingress Protection



Light distribution curve


Planning assistance for SafeLite CG-S JSB 400 lm for E = 1.0 lx (0.5 lx)

Measuring height 0.02 m, maintenance factor MF = 80 %, battery operation

Mounting height [m]	Type of mounting	L1	L2	L3	L4
2.5	Ceiling mounting	4.4 (5.2)	10.4 (12.2)	4.3 (4.7)	9.5 (10.1)
3.0	Escape route center	4.7 (5.7)	11.5 (13.5)	4.7 (5.4)	10.9 (11.8)
3.5		5.0 (6.2)	12.4 (14.7)	5.1 (6.1)	12.1 (13.3)
4.0		5.2 (6.5)	13.1 (15.8)	5.3 (6.5)	13.0 (14.7)
4.5		5.3 (6.8)	13.7 (16.7)	5.4 (6.9)	13.8 (16.0)
5.0		5.4 (7.1)	14.2 (17.6)	5.5 (7.2)	14.4 (17.2)
5.5		5.4 (7.3)	14.6 (18.3)	5.5 (7.4)	14.9 (18.1)
6.0		5.4 (7.5)	14.9 (18.9)	5.5 (7.6)	15.1 (18.9)
6.5		5.4 (7.6)	15.2 (19.5)	5.4 (7.7)	15.4 (19.7)
7.0		5.3 (7.7)	15.3 (20.0)	5.3 (7.8)	15.5 (20.4)
7.5		5.1 (7.7)	15.4 (20.4)	5.1 (7.8)	15.6 (20.9)
8.0		4.9 (7.7)	15.4 (20.8)	4.9 (7.8)	15.6 (21.2)
8.5		4.6 (7.7)	15.3 (21.1)	4.6 (7.8)	15.5 (21.4)
9.0		4.2 (7.6)	15.2 (21.4)	4.2 (7.7)	15.4 (21.6)
9.5		3.7 (7.5)	15.0 (21.5)	3.8 (7.6)	15.2 (21.8)
10.0		3.1 (7.4)	14.8 (21.7)	3.1 (7.5)	14.9 (21.9)
2.5	Ceiling mounting	3.9 (4.9)	9.2 (11.3)	3.2 (3.1)	8.0 (8.2)
3.0	Room illumination	3.2 (5.3)	9.7 (12.2)	3.7 (3.7)	9.6 (9.7)
3.5		3.6 (5.2)	10.6 (12.9)	3.8 (4.3)	10.6 (11.3)
4.0		3.9 (4.9)	11.4 (13.8)	3.8 (4.6)	11.4 (12.6)
4.5		4.1 (4.6)	12.1 (14.2)	3.7 (5.1)	12.0 (14.2)
5.0		4.1 (4.9)	12.6 (15.1)	3.8 (5.1)	12.5 (15.1)
5.5		4.1 (5.4)	13.1 (16.2)	3.7 (4.9)	13.0 (15.7)
6.0		4.0 (5.7)	13.5 (17.1)	3.7 (4.7)	13.5 (16.2)
6.5		4.0 (5.5)	13.9 (17.2)	3.6 (5.2)	13.9 (17.2)
7.0		3.9 (5.5)	14.3 (17.8)	3.3 (5.1)	14.2 (17.7)
7.5		3.7 (5.6)	14.5 (18.3)	3.2 (5.1)	14.5 (18.2)
8.0		3.6 (5.5)	14.8 (18.7)	2.9 (5.1)	14.7 (18.7)
8.5		3.4 (5.5)	14.9 (19.2)	2.7 (4.9)	15.0 (19.1)
9.0		3.2 (5.4)	15.2 (19.5)	2.3 (4.9)	15.1 (19.6)
9.5		2.9 (5.3)	15.2 (19.9)	2.3 (4.7)	15.3 (19.9)
10.0		2.7 (5.2)	15.4 (20.3)	2.2 (4.4)	15.3 (20.2)

Accessories

Wire guard - ensures high degree of protection



SL2PG	SafeLite 20m, Wire guard
O-EL-GRID	SafeLite 30m, Wire guard



Recessed base - For full recessed mounting, compatible IP42 & IP65 variants, can be associated to double side diffusers

SL2RB	SafeLite 20m, RecesBase
SL3RB	SafeLite 30m, RecesBase
SL2RBRC	SafeLite 20m, RecesBase Round Corner



Recessed box

SL2WB	SafeLite 20m, Wall Base
-------	-------------------------



Opal diffuser

SL2OP	SafeLite Opal Diffuser**
-------	--------------------------

**Light decrease around 5%, measured values upon request



Wall bracket

EL-BR1	SafeLite 20m, 90° Wall Bracket
--------	--------------------------------



Double side cone diffuser - compliant with EN1838

SL2CD	SafeLite 20m, Cone Diffuser*
SL3CD	SafeLite 30m, Cone Diffuser*
SL2DC3I	SafeLite 20m, Cone Diffuser, 3 Inside pictograms included

*Pictograms have to be ordered separately (or re use ones delivered with luminaires).



Double side plexi diffuser

SL2PPD	SafeLite 20m, Plexi Plate, one side, Down
SL2PPDD	SafeLite 20m, Plexi Plate, double side, Down
SL2PPLR	SafeLite 20m, Plexi Plate, double side, Left & Right
SL3PPD	SafeLite 30m, Plexi Plate, one side, Down
SL3PPDD	SafeLite 30m, Plexi Plate, double side, Down
SL3PPLR	SafeLite 30m, Plexi Plate, double side, Left & Right



Set of adhesive exit legends

ISO7010 format

SL23A	SafeLite ISO 20m, 3x Adh (Left, Right, Down)
SL33A	SafeLite ISO 30m, 3x Adh (Left, Right, Down)
SL24A	SafeLite ISO 20m, 4x Adh (Left, Right, Down, Up)
SL34A	SafeLite ISO 30m, 4x Adh (Left, Right, Down, Up)
SL210DI	SafeLite ISO 20m, 10x Adh pictograms Arrow Down