


## Product description

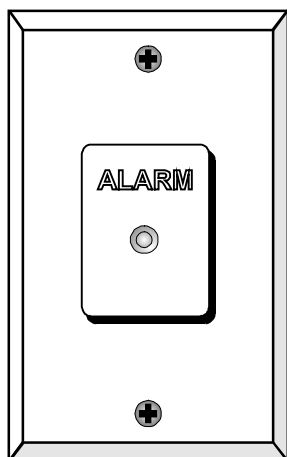

### Description

The Remote LED Alarm Indicator (LED) is a component of the Signature Series. This polarized device provides visual indication when a detector initiates an alarm. A clear lens, light emitting diode pulses on and off in case of an alarm condition.

The LED can ONLY be used with the Standard Detector Base, Model SB or SB4. It is NOT compatible with any other bases.

### Specifications

LED type: Clear lens, red light emitting diode

Luminous intensity: 65 mcd

Operation: Pulses on alarm condition

Resistance per wire: 10  $\Omega$  max.

Operating power  
Voltage: 3 Vdc  
Current: 2 mA

Operating environment  
Temperature: 32 - 120 °F (0 - 49 °C)  
Humidity: 0 - 93% RH

Storage temperature range: -4 - 140 °F (-20 - 60 °C)

Compatible detectors: Signature Series detectors

Compatible bases: Standard bases: SB, SB4

Duct applications: Duct detector mounting plate, DH

Compatible electrical boxes: North American 1-gang box,  
standard 4 in square box 1-1/2 in (38 mm) deep with 1-  
gang cover

Construction and finish: High impact engineering polymer,  
white


Shipping weight: 3.2 oz (90 g)

Comments: Not for use with 24 Vdc circuits.

## Installation instructions

1. Refer to Technical Bulletin (P/N 270145) for installation guidelines.
2. Wire the LED to the base as described in the Installation Sheet supplied with the base. Be sure to observe the polarity of the terminals on the terminal block as shown in the diagram below.

## Wiring diagram

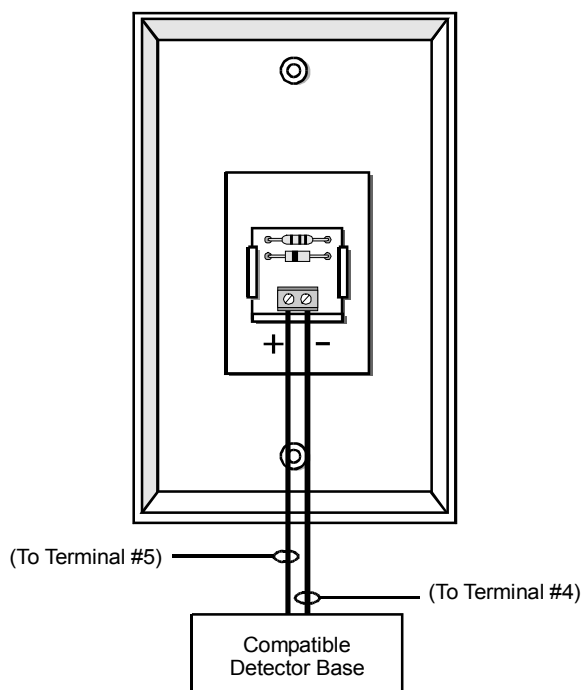

## Warnings

1. This remote annunciator is NOT intended to be used as an evacuation signal for Life Safety situations.
2. This remote annunciator will NOT operate if the device that it is connected to is not powered.
3. The LED used in this device has a 180° range of visibility, but the best visibility is achieved in direct viewing applications. This device should NOT be installed in areas of direct sunlight, or where its intensity may be reduced.