

ES 7-12

AGM - VRLA

12V - 7Ah

INTRODUCTION

The most advanced technology of ROCKET, Valve Regulated Lead Acid batteries make them highly useful in a broad range of applications. The use of high-purity calcium alloy maximizes the longevity of ROCKET batteries to ensure excellent performance in any circumstances.

ES Series are specially designed to provide better cyclic life and are ideally suited for areas prone to frequent power failures.

The unique construction coupled with the use of special sealing epoxies and long sealing paths of ROCKET series ensures that no electrolyte leakage can occur from terminals or cases of any ROCKET Batteries. This feature ensures safe & efficient operation of ROCKET batteries in any position.

TECHNICAL FEATURES

- ✍ Non-Spillable Sealed Construction
- ✍ Absorptive Glass Mat System (AGM System)
- ✍ ABS (Acrylonitrile Butadiene Styrene) container and cover
- ✍ Gas Recombination
- ✍ Maintenance-Free Operation
- ✍ Low Pressure Venting System
- ✍ Heavy - Duty Grids
- ✍ Low Self-Discharge - Long Shelf Life
- ✍ Wide Operating Temperature Range

APPLICATIONS

- ✍ UPS
- ✍ Telecom Communication Equipments
- ✍ Fire Alarm & Security Systems
- ✍ Medical Instruments
- ✍ Emergency Lighting
- ✍ Computer Backup

COMPLAINTS STANDARD

- ✍ JIS
- ✍ IEC 60896 PART 1 & 2
- ✍ BS6290-4,
- ✍ Eurobat Guide - HIGH Performance


SPECIFICATION

Nominal Voltage		12V
Capacity (20HR, 25°C)		7Ah
Dimension	Length	151mm(5.95inch)
	Width	65mm (2.56inch)
	Height	94mm (3.70inch)
	Total Height	100mm (3.90inch)
Approx Weight		2.1kg
Design Life		5 Years

CHARACTERISTICS

Capacity 25°C (77°F)	20 hour rate	7Ah
	10 hour rate	6.3Ah
	5 hour rate	5.5Ah
	1 hour rate	4.05Ah
Internal resistance (Fully charge, 25°C)		25mΩ
Self-discharge (20°C)	1 month	Remaining Capacity:97%
Operating temperature range	Discharge	-40°C~50°C
	Charge	-20°C~50°C
	Storage	-20°C~40°C
Maximum discharge current		77°F(25°C) 2.1A(5 Sec.)
Charge Methods (Constant Voltage Charge 77°F(25°C)) - Cyclic Use		Cycle Use 14.4 to 14.7V
		Max. charging Current 2.5A
Charge Methods (Constant Voltage Charge 77°F(25°C)) - Standby Use		Temp. compensation - 30mV/°C
		Standby Use 13.6-13.8V
		Temp. compensation - 20mV/°C

THE BATTERY CONTAINER AND COVER ARE AVAILABLE BOTH IN ABS plastic and Flame Retardant (FR).

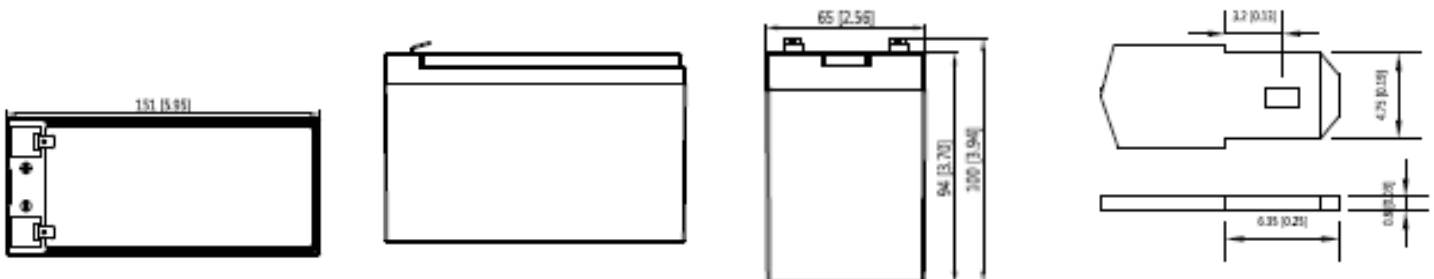

www.rocketbatteries.net

ES 7-12

AGM - VRLA

12V - 7Ah


CONSTANT CURRENT DISCHARGE (Amperes) at 25°C

End-Vpc	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	25.4	16.4	12.6	7.86	4.57	1.85	1.27	0.71	0.36
1.65V	24	16.4	12.4	7.48	4.41	1.81	1.23	0.71	0.36
1.70V	22.7	15.7	12.1	7.22	4.23	1.75	1.18	0.7	0.36
1.75V	21.3	14.7	11.5	6.86	4.05	1.69	1.14	0.69	0.35
1.80V	19.9	13.9	11	6.66	3.85	1.64	1.09	0.67	0.35

CONSTANT POWER DISCHARGE (Watts per cell) at 25°C

End-Vpc	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60V	45.4	29	21.7	14	10.6	8.99	5.07	3.61	2.35
1.65V	43.1	29	21.4	13.4	10.1	8.61	4.95	3.52	2.31
1.70V	40.9	27.5	20.9	12.9	9.67	8.25	4.81	3.42	2.27
1.75V	38.8	25.9	20	12.3	9.3	8.01	4.66	3.32	2.23
1.80V	36.3	24.4	19.2	11.9	8.98	7.64	4.51	3.21	2.17

Terminal Voltage(V) vs. Discharge Time (25°C, 77°F)

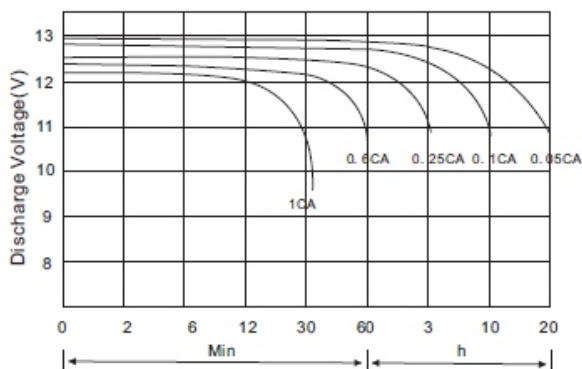

Capacity Retention Characteristic

