

AOTX.S3424 - LOCAL ALARM UNITS

Local Alarm Units

See General Information for Local Alarm Units

EDWARDS, A UNIT WITHIN UTC FIRE & SECURITY AMERICAS CORPORATION, INC.

S3424

8985 TOWN CENTER PKWY

BRADENTON, FL 34202 USA

Annunciator, door assembly, Model(s) 4-2ANND(R), 4-4ANND(R), 4-6ANND(R)

Annunciator, enclosure backbox, Model(s) 4-16ANNMT, 4-24ANNMT, 4-2ANNMT, 4-4ANNMT, 4-6ANNMT, 4-8ANNMT

Audio fiber optic motherboards, Model(s) 3FIBMB

Auxiliary power supplies, Model(s) APS10A/230, APS10CAA, APS6A, APS6A/230, APS6CAA, BPS10A, EAPS10A, EAPS10A/230, EAPS6A, EAPS6A/230, MIRAPS10A, MIRAPS6A, MIRAPS6A/230, MIRBAS10A/230, XLS-APS10A, XLS-APS10A/230, XLS-APS6A, XLS-APS6A/230

Card reader controllers, Model(s) ID-CRC, ID-CRCXM

Card reader controllers, input 24 V dc, Model(s) CRC, CRCXM

Control and display modules, input 24 V dc, Model(s) KPDISP

Control units, suitable for local alarm service, Model(s) EST3, minimum system must consist of the following 3-RCC7 Remote Closet Cabinet, ATCK Attack Kit, 3-TAMPRCC Cabinet Tamper Switch, 3-CPU1 Central Processor, 3-PPS/M Primary Power Supply, 3-LCD Main LCD Display, 3-SAC Security Access Module, 3-SSDC or 3-DSDC Signature Controller, 3-IDC8/4 Traditional Zone I/O Module, Suitable for use with the following accessories: SIGA-MD, SIGA-MDS passive infrared motion detectors with guard tour, CRC(XM) card reader controller, CRCRL crc accessory relay, CRCSND crc sounder, GFD ground fault detector, KPDISP keypad display, Listed bell and bell housing, 24DC12 Vdc voltage regulator with security bell interface, and SIGA-SEC2 security loop module.

CRC accessory relays, for use with EST-3 control panel, Model(s) CRCRL

CRC sounders, input 12 V dc, Model(s) CRCSND

Ground fault detectors, input 24 V dc, Model(s) GFD

Mounting brackets, Model(s) MN-BRKT3

Remote booster power supplies, Model(s) APS1024, APS624, BPS10A, BPS10A/230, BPS10CAA, BPS6A, BPS6A-RM, BPS10A-RM, BPS6A/230, BPS6CAA, EBPS10A, EBPS10A/230, EBPS6A, EBPS6A/230, MIRBPS10A, MIRBPS10A/230, MIRBPS6A, MIRBPS6A/230, XLS-BPS10A, XLS-BPS10A/230, XLS-BPS6A, XLS-BPS6A/230, ZBPS10A, ZBPS10A/230, ZBPS6A, ZBPS6A/230

Replacement Booster Power Supply Subassemblies, Model(s) RBPS6A, RBPS10A, RBPS6A/230, RBPS10A/230

Security bell interfaces, input 24 V dc, Model(s) 24DC12

Security loop modules, input 15.2 to 19.9 V dc, Model(s) SIGA-SEC2

Transceivers, Model(s) MMXVR, SMXHI, SMXLO

Trademark and/or Tradename: "Alarm Industry Products", "Dukane", "E in a Shield", "ESL", "Edwards Co Inc", "Edwards Company Inc.", "Edwards Signaling", "Edwards System Technology", "FAST", "Fire Alarm Systems Technology", "FireworX", "G.S. Building Systems Corp.", "GE Security", "GE Security Inc", "GS", "GSBS", "Interlogix Inc", "Mirtone", "S3424", "Sentrol", "Vigilant", "Ziton", 



The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2019 UL LLC"



UEAY.S2813 Speakers

[Page Bottom](#)

Speakers

[See General Information for Speakers](#)

EDWARDS, A UNIT WITHIN UTC FIRE & SECURITY AMERICAS CORPORATION, INC.

S2813

8985 TOWN CENTER PKWY
BRADENTON, FL 34202 USA

Genesis ECS-MNS Ceiling Speaker/Strobes, Model(s) GCHF*A-S2VMA, GCHF*A-S7VMA, GCHF*N-S2VMA, GCHF*N-S7VMA, GCHF*N-S7VMB.(#)

Genesis ECS-MNS Ceiling Speaker/Strobes, Model(s) GCHF*F-S2VMC, GCHF*F-S7VMC, GCHF*N-S2VMC, GCHF*N-S7VMC, GCHF*A-S2VMC, GCHF*A-S7VMC.(#)

Genesis ECS-MNS Ceiling Speakers, Model(s) GCHF*A-S2, GCHF*A-S7, GCHF*F-S2, GCHF*F-S7, GCHF*N-S2, GCHF*N-S7.(#)

Genesis ECS-MNS High-Candela Ceiling Speaker/Strobes, Model(s) GCHF*A-S2VMAH, GCHF*A-S7VMAH, GCHF*N-S2VMAH, GCHF*N-S7VMAH, GCHF*N-S7VMBH.(#)

Genesis ECS-MNS High-Candela Ceiling Speaker/Strobes, Model(s) GCHF*F-S2VMCH, GCHF*F-S7VMCH, GCHF*N-S2VMCH, GCHF*N-S7VMCH, GCHF*A-S2VMCH, GCHF*A-S7VMCH.(#)

Genesis ECS-MNS Wall Speaker/Strobes, Model(s) G4HF*A-S2VMA, G4HF*A-S7VMA, G4HF*N-S2VMA, G4HF*N-S7VMA, G4HF*N-S7VMB.(#)

Genesis ECS-MNS Wall Speaker/Strobes, Model(s) G4HF*F-S2VMC, G4HF*F-S7VMC, G4HF*N-S2VMC, **G4HF*N-S7VMC**, G4HF*A-S2VMC, G4HF*A-S7VMC.(#)

Genesis ECS-MNS Wall Speakers, Model(s) G4HF*F-S2, G4HF*F-S7, G4HF*N-S2, **G4HF*N-S7**, G4HF*A-S2, G4HF*A-S7.(#)

Speaker accessories, Model(s) 817B-001, 817B-003, 817B-004, 817B-005, 817B-006, 817B-007, 817B-010, 817B-011, 817B-111

Speaker accessories, back boxes, Model(s) 54003, 54010, 960A-4RF, 960A-4SF, 960A-4SS, 960A-8RF, 960A-8SF, 960A-8SS, QSB-104, QSB-108, QSB-114, QSB-124

Speakers, for indoor use, "Genesis ECS-MNS", Model(s) G4HFWA-S2VMA, G4HFWA-S7VMA, G4HFWN-S2VMA, G4HFWN-S7VMA, G4HFWN-S7VMB

Speakers, for indoor use, "Genesis ECS-MNS", Model(s) GCHFWA-S2VMA, GCHFWA-S7VMA, GCHFWN-S2VMA, GCHFWN-S7VMA, GCHFWN-S7VMB

Speakers, for indoor use, "Genesis ECS-MNS", Model(s) GCHFWA-S2VMAH, GCHFWA-S7VMAH, GCHFWN-S2VMAH, GCHFWN-S7VMAH, GCHFWN-S7VMBH

Speakers, for indoor use, Model(s) 5551B-2W, 964-1A-4RR, 964-1A-4RW, 964-1A-8RW, 964-1A-8SW, 965-1A-4RR, 965-1A-4RW, 965-1A-8RW, 965-1A-8SW, CS2-1A4R, CS2-1A4RR, CS2-1A8R, CS2-1A8B, CS7-1A4R, CS7-1A4RR, CS7-1A8R, CS7-1A8B

- * is a alfa character used to designate color

Trademark and/or Tradename: "Dukane", "E in a Shield", "ESL", "Edwards Co Inc", "Edwards Company Inc.", "Edwards Signaling", "Edwards System Technology", "FAST", "Fire Alarm Systems Technology", "FireworX", "G.S. Building Systems Corp.", "GE Security", "GE Security Inc",



Last Updated on 2018-07-30

[Questions?](#)

[Print this page](#)

[Terms of Use](#)

[Page Top](#)

© 2018 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading

manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2018 UL LLC".

UNI.U.S2318 - BOXES, NONCODED

Boxes, Noncoded

See General Information for Boxes, Noncoded

EDWARDS, A UNIT WITHIN UTC FIRE & SECURITY AMERICAS CORPORATION, INC.

S2318

8985 TOWN CENTER PKWY
BRADENTON, FL 34202 USA

Cat. Nos. 270, 270A, 270L, 270LP, 270P, M270P, M270A, followed by suffix -SPO or -DPO, optionally ending with suffix -L or -M; Cat. No. 270R, followed by suffix -SPO, -DPO, -P-SPO, -P-DPO, optionally ending with suffix -L; Cat. Nos. 270-DOC, 270A-DOC, optionally ending with suffix -L; Cat. No. 270E, followed by suffix -DPO or -SPO. Boxes may be used with 273 or V273-0002-000 housing.

Models K-270-SPO, K-270-DPO, K-270P-SPO, K-270P-DPO, K-270-DOC, K-270A-SPO, and K-270A-DPO.

Cat. Nos. 5966*, 5966*V.

Cat. Nos. 6296*-270, 6296*-K279, 6296*-T279.

Models SIGI-271, GSA-M270, GSA-M270P, SIGA-270P, SIGA-270L.

Model 27193 or 27193-11-NY mounting box.

Models 276B-RSB, 276B-BSB, and K-276B-RSB Back Box.

Noncoded manually activated fire alarm pull station Models 276*, 277*, 278*, 279* with suffix -1 or -2, followed by 1, 2, 3, 4 or 5, followed by -1 or -2, followed by *0, 1, 2, or 3, may be followed by suffix "W" or "L".

Noncoded manually activated fire alarm pull station Models K-276B-1110, K-276B-1120, K-276B-1320, K-277B-1110, K-277B-1120, K-278B-1110, K-278B-1120, K-278B-1320, K-278B-1420, K-278B-2320, K-279B-1110, and K-279B-1120.

Models SIGA-278, GSA-M278 pull station accessories, Cat. No. 276*-WF, 8254*, 897*-012, 897*-112.

Models 276A-REL, 278A-REL, K-276A-REL and K-278A-REL manual release station.

Models FX-270, E-270 addressable, single action pull station.

Models FX-278, E-278 addressable, dual action pull station.

(*) Any alpha character between A and Z except for C to classify a specific market. The fit form and function of a basic model number is the same even though the market designator may be different. The market designator identifies language(s) of the instructions and product label, i.e. B = US, C = Canada, A = US and Canada.

Trademark and/or Tradename: "Ziton", "GE Security", "Edwards System Technology", "Edwards Signaling", "Edwards Co Inc", "FAST", "Fire Alarm Systems Technology", "GSBS", "G.S. Building Systems Corp.", "Mirtone", "E in a Shield", "Edwards Company Inc.", "GS", "FireworX", "Vigilant", "Sentrol", "ESL", "Interlogix Inc", "GE Security Inc", "Dukane", "S2318", "KIDDE", "Walter Kidde Portable Equipment, Inc.",



Last Updated on 2017-05-10

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2019 UL LLC"

UOJZ7.S3000 - CONTROL UNITS, SYSTEM CERTIFIED FOR CANADA

Control Units, System Certified for Canada

See General Information for Control Units, System Certified for Canada

EDWARDS, A UNIT WITHIN UTC FIRE & SECURITY AMERICAS CORPORATION, INC.

S3000

8985 TOWN CENTER PKWY
BRADENTON, FL 34202 USA

Model	Control Unit System Type(s)	Initiating Device Type(s)	Signaling Type(s)
Control Unit, "Kidde/Vigilant Brand"			
VS2-G-2	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
Main Control Panel			
EST-4	L	A, CO, M, SS, WF	C, NC
	AUX	A, M, SS, WF	Rev Pol
	RS (PPU)	A, M, SS, WF	DAC, PB, Rev Pol
	CS (PPU)	A, M, SS, WF	DAC, PB
	P (PPU)	A, M, SS, WF	PB
	P (RU)	A, M, SS, WF	PB
Single and multi-loop analog addressable fire alarm control unit			
FX-1000-2	L	A, M, SS, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF	C, NC
FX-1000-2-PG	L	A, M, SS, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol

	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF	C, NC
FX-1000-2-SP	L	A, M, SS, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF	C, NC
FX-1000-CA	L	A, M, SS, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF	C, NC
FX-1000-PG	L	A, M, SS, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF	C, NC
FX-1000-SP	L	A, M, SS, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF	C, NC
FX-64RF	L	A, M, SS, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF	C, NC
"FireShield Plus"			
FireShield Plus FSP1004x Series - FSP1004G,FSP1004R,FSP1004GD,FSP1004RD,FSP1004G-2,FSP1004F; FireworX FX-10x Series - FX-10G, FX-10R, FX-10GD, FX-10RD, FX-10RF			
	L	A, M, SS, WF	C, NC
	AUX	A, M, WF	NC
	RS (PPU)	A, M, SS, WF	DAC, Rev Pol

	CS (PPU)	A, M, SS, WF	DAC
EST3(e), EST3R(d), EST3-230, JB-TBZL-EST3	L	A, M, SS, WF, WSS	NC
	AUX	A, M, SS, WF, WSS	NC
	RS (PPU)	A, M, SS, WF	DAC, OT, Rev Pol
	P (PPU)	A, M, SS, WF, WSS	C, OT
	P (RU)	A, M, SS, WF, WSS	MX
Fireshield Plus Model FSP502x Series - FSP502G, FSP502R, FSP502GD, FSP502RD, FSP502G-2, FSP502F; FireworX Model FX-5x Series - FX-5G, FX-5R, FX-5GD, FX-5RD, FX-5RF			
	AUX	A, M, WF	NC
	L	A, M, SS, WF	C, March, NC
	CS (PPU)	A, M, SS, WF	DAC
	RS (PPU)	A, M, SS, WF	DAC, Rev Pol
Quick Start-QSC(f), Quick Start-QS1(a)(f), Quick Start-QS4(a)(f)	L	A, M, SS, WF, WSS	C, NC
	RS (PPU)	A, M, SS, WF	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF	DAC, OT
	AUX	A, M, SS, WF	NC

For Replacement Only - Complies with ULC-S527

Replacement Parts Only (Complies with S527-99)

Model	Control Unit System Type(s)	Initiating Device Type(s)	Signaling Type(s)
Control Unit, "Edwards Signaling Brand"			
E-FSA250G	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
E-FSA250GD	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
E-FSA250R	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol

E-FSA250RD	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
Control Unit, "EST Brand"			
iO500G	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
iO500G-2	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
iO500GD	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS	A, M, SS, WF, WSS	DAC, OT
iO500R	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
iO500R-2	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
iO500RD	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
Control Unit, "Kidde/FireworX Brand"			
FX-254G	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT

	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
FX-254G-2	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
FX-254GD	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT
FX-254R	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
FX-254R-2	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
FX-254RD	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
Control Unit, "Kidde/Vigilant Brand"			
VS2-G	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
VS2-GD	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
VS2-R	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol

	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
VS2-R-2	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
VS2-RD	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
"Vigilant/Kidde"			
VM-1R, VM-1S	L	A, M, SS, WF	March, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF	DAC, PB, Rev Pol
	P (PPU)	A, M, SS, WF	PB
	CS (PPU)	A, M, SS, WF	DAC, OT

100 Mbps SFP Network Controller, Model(s) 4-FWAL-CAT, 4-NET-CAT

4,6,8 SLOT UI RAIL, Model(s) 4-UIRAIL4, 4-UIRAIL 6, 4-UIRAIL 8

Audio and Firefighter Telephone Control Display Module, Model(s) 4-LCDAUDEL

Audio IO and Telephone Riser Source Module, Model(s) 4-AUDELS

Auxiliary relay assembly, Model(s) ARA-1

Auxiliary relay module, Model(s) ARM-8

Backbox Enclosure, Model(s) 3-CAB5B

Battery booster charger monitor, Model(s) 3-BBCMON

Battery cabinet enclosures, Model(s) BC-1, BC-1R, BC-2, BC-2R

Booster Power Supplies for EST3 Series Control Units, Model(s) 3-BBC/M

Central Processor Module, Model(s) 4-CPU

Class A adapter, Model(s) SA-CLA

Common Relay Module, Model(s) 4-COMREL

Computer network card, when used for primary signaling, Model(s) FW-NIC

Computer option cards, Model(s) FW-MOD, FW-NIC, FW-SP4I, FW-ULVID3

Computer watchdog cards, Model(s) PCWD2, PCWD6

Control Unit Accessory, Proprietary Monitoring Centre Type, Model(s) CGP*-FW-NET (h), Fireworks, FW-SRV (h)

Dialers, Model(s) SA-DACT

Digital alarm communicator transmitter, Model(s) DL2

Door assembly, Model(s) 4-CAB16D, 4-CAB16DR, 4-CAB24D, 4-CAB24DL, 4-CAB24DR, 4-CAB24DRL, 4-CAB8D, 4-CAB8DR

Door lock, Model(s) 4-LOCK2KEY

Dual Audio Pre-Amp Module, Model(s) DAPM

Enclosure Boxes, Model(s) EST3X-12DS, EST3X-12DS-R, EST3X-18DS, EST3X-18DS-R, EST3X-24DW, EST3X-24DW-R, EST3X-36DW, EST3X-36DW-R

Enclosure Doors, Model(s) EST-24T, EST-24UT, EST-36UVT, EST-36VT, EST-48UVT, EST-48VT, EST-72UVT Trims, EST-72VT, EST-HT1, EST-HT2, EST-HT3, EST-UHT1, EST65-72VT, EST65-HT1, EST65-HT2, EST65-HT3

Enclosures, Model(s) BC-1, BC-1R, BC-2, BC-2R, CBA, RKU

End of Line Relay, Model(s) RELA-EOL

Field configurable LED and Switches, Model(s) 4-24L, 4-24L24S, 4-24L18S, 4-24L12S

Filler plate, Model(s) 4-FIL

Fire alarm subassemblies, Model(s) 6537-0005, 6537-A172, 6537-B007, EST-24B, EST-36B, EST-48B, EST-72B

Fire Alarm System Control Unit and Releasing Device Service for Local, Model(s) EST2, EST2-220, EST2-6, EST2-6/220, MIR2, MIR2-6

Fire Alarm, Security and Emergency Signaling Equipment, Model(s) 3-ASU, 3-ASU/FT, 3-ASU/FTMCC, 3-ASU/FTRC, 3-ASUMCC, 3-ASUMX, 3-ATPINT, 3-BPS/M, 3-CHAS4/5/7, 3-CHASS, 3-CAB panel enclosure, 3-FTCU, 3-FTRC, 3-RCC closet panel enclosures, 3-TAMP/5, 3-XMEM, 3-ZA15/20(A or B)/30/40(A or B)/90, EST200 Series, EST3, EST3-230 (i), JB-TBZL-EST3

Fire AlarmSubassemblies, "EST Brand", Model(s) 3X-ETH1, 3X-PMI, 3X-PMIMCC, 4X-CAB6DR, 4X-CAB6E, 4X-LCD(-LC), CAB6B, CAB6BEQ, CLA-PS10, PS10-4B, SFS1(i) -ELEC, SFS1-CPU

Firefighter Telephone Master Handset, Model(s) 4-FT

Frame assemblies, Model(s) 4-2ANNFA, 4-4ANNFA, 4-4X2ANNFA, 4-6ANNFA, 4-8ANNFA

Hinge assemblies, Model(s) 4-HNG21, 4-HNG714

Keyless lock, Model(s) 4-ANNSK

LED Annunciator, Model(s) D16L-Fa, D16L-iO-x, D16L-VS, D8RY-iO-x, D8RY-VS

Local System Type, "FireShield", Model(s) FS101G, FS101GC, FS101GF, FS101R

Local, auxiliary, remote station fire alarm control units, "EST3X Series Kits", Model(s) EST3X-24, EST3X-24-F, EST3X-24-F-R, EST3X-24-R, EST3X-36, EST3X-36-F, EST3X-36-F-R, EST3X-36-R, EST3X-48, EST3X-48-F, EST3X-48-F-R, EST3X-48-R, EST3X-72, EST3X-72-F, EST3X-72-F-R, EST3X-72-R

Local, Auxiliary, Remote Station, Central Station, Model(s) 3X-SFS1B(i), 3X-SFS1R(i)

Loop expander module, Model(s) 2-LCX

Main Display Module, Model(s) 4-LCD

March time module, Model(s) MTM-1, MTM-120, MTM-20

Monitor cable seismic kit, Model(s) FW-EQ

Mounting bracket, Model(s) 4-BRKT-CB, 4-BRKT-CS

Mounting plate, Model(s) 4-MPLT

Multi-port USB Hub Module, Model(s) 4-USBHUB

Network cable conduit adaptors, Model(s) FW-NCCA4, FW-UL6CC1

Network Expander Module, Model(s) 4-NET-AD

Optional modules, Model(s) AUX-8, AUX-8B

Optional Modules for EST Brand, Model(s) 3-12/S2R, 3-6/3S2RY, 3-FIB8, 3X-ETH1, 3X-ETH2, 3X-ETH3, 3X-NET, 3X-NET8, 4X-12/S1GY, 4X-12/S1RY, 4X-12SR, 4X-24R, 4X-4/3SGYWR, 4X-6/3S1G2Y, 4X-6/3S1GYR, 4X-CAB6D, CAB6B, CAB6BEQ, CLA-PS10, PS10-4B, SFS1(i)-ELEC, SFS1-CPU

Paging Microphone, Model(s) 4-MIC

Power expander transformer, Model(s) XTR3A120

Releasing Device Module, Model(s) SIGA-REL

Releasing device service, Model(s) Quick Start-QS1, Quick Start-QS4

Remote/auxiliary power supply, Model(s) 2-WB3(R) long box, 2-WB7(R) double wide box, SIGA-APS

RS232 module, Model(s) SA-232

Series Control Display Module, Model(s) 4-ANNAUDTEL

Series Fiber Optics Network Adapters, Model(s) 4-FWAL-SM, 4-FWAL-MM, 4-FWAL-SMH, 4-FWAL-SMU, 4-FWAL-SMD

Series Fiber Optics SFP Network Controllers, Model(s) 4-NET-SM, 4-NET-MM, 4-NET-SMH, 4-NET-SMU, 4-NET-SMD

Series Firewall Module, Model(s) 4-FWAL1, 4-FWAL2, 4-FWAL3, 4-FWAL4

Series Flex Cables, Model(s) 4-CABL0502, 4-CABL0504, 4-CABL0505, 4-CABL0507, 4-CABL0509, 4-CABL0541, 4-CABL0542

Single and multi-loop analog addressable fire alarm control unit, Model(s) FX-1000F, FX-64R-2-PG, FX-64R-2-SP, FX-64R-PG, FX-64R-SP

Single and multi-loop analog addressable fire alarm control units, "Kidde/Vigilant Brand", Model(s) VS1-G-2-PG, VS1-G-2-SP, VS1-G-PG, VS1-G-SP

Single and multi-loop analog addressable fire alarm control units, Model(s) iO1000G, iO1000G-2, iO1000G-2-PG, iO1000G-2-SP, iO1000G-CA, iO1000G-F, iO1000G-PG, iO1000G-SP, iO1000GD, iO1000R, iO1000R-2, iO1000RD, iO64G, iO64G-2, iO64G-2-PG, iO64G-2-SP, iO64G-PG, iO64G-SP, iO64GD, iO64GL, iO64GL-F, iO64R, iO64R-2, iO64RD, VS1-G, VS1-G-2, VS1-GD, VS1-GL, VS1-GL-F, VS1-R, VS1-R-2, VS1-RD, VS4-G, VS4-G-2, VS4-G-2-PG, VS4-G-2-SP, VS4-G-PG, VS4-G-SP, VS4-GC, VS4-GD, VS4-GF, VS4-R, VS4-R-2, VS4-RD

SLC loop driver, Model(s) V-SLC, XAL127, XAL250

Subassemblies, Isolated port cards, Model(s) IOP-3, IOP-3A

Subassemblies, Modules, Model(s) RZB-12-6/3-MFC, RZB-12-6/3-RZMPI

Subassemblies, network switch fiber optic modules, Model(s) MN-FNSFEDSM10K, MN-FNSFEMM2K, MN-FNSGBDSM10K, MN-FNSGBDSM70K, MN-FNSGBDSMDR-xx where xx=channel number (20-59), MN-FNSGBSSM10KD, MN-FNSGBSSM10KU

Subassemblies, network switch mounting hardware, Model(s) MN-BRKT1F, MN-BRKT3F, MN-BRKT4F, MN-BRKT8C18F, MN-FNS4HDK1, MN-FNS8HDK1

Subassemblies, network switch power supplies, Model(s) MN-FNS8C18FAC, MN-FNS8C18FDC

Subassemblies, network switches, Model(s) MN-FNS4C2F3, MN-FNS8C18F2, MN-FNS8C18F3, MN-FNS8C18FAC, MN-FNS8C18FDC, MN-FNS8C2F3

Subassemblies, Optional Modules for Vigilante Brand, Model(s) VM-DACT, VM-NOC, VM-NOCF, VM-SLC, VM-SLCXB

Subassemblies, signature loop cards, Model(s) 3-SDC1, 3-SDC1-HC

Subassemblies, Universal I/O Module, Model(s) UIO-12/MFC, UIO-12/RZMP

Subassembly, "EST/Edwards Brand", Model(s) 3X-PMI, 3X-PMIMCC, SFS1-CPU, 4X-LCD, 4X-LCD-LC, 3X-ETH1, 3X-ETH2, 3X-ETH3, SFS1-ELEC, SFS1i-ELEC, CLA-PS10, PS10-4B, 4X-CAB6DR, 4X-CAB6D, CAB6B, CAB6BEQ

Subassembly, Model(s) F-10ELEC-F, F-5ELEC-F, F-3ELEC-F, QS-1-VR(-R) and QS-2-VR(-R) key locked cabinet doors. 7200001-0x, 7200004-0x, 7200005-0x (where x= 1, 2, 3 or 4), QS-1-VR, QS 1-VR-R, QS 2-VR, QS 2-VR-R, QS-36B(-R), QS-48B(-R), QS-72B(-R), QSC-36-5, QS4-36-5, QSC-48-5, QS4-48-5, QSC-72-5, QS4-72-5, RQS1-CPU-1, RQS1-CPU-1-FR, RQS1-CPU-1-SP, RQS4-CPU-1, RQS4-CPU-1-FR, RQS4-CPU-1-SP, RQS4-CPU-2, RQS4-CPU-2-FR, RQS4-CPU-2-PG, RQS4-CPU-2-SP, RQSC-CPU-1, RQSC-CPU-1-FR, RQSC-CPU-2, RQSC-CPU-2-FR, RQSC-CPU-2-PG, RQSC-CPU-2-SP; PS6 Power Supply, QS-232 RS232 Card, ZB16-4 Class B Zone Card, ZA8-2 Class A Zone Card, SLIC Signature Loop Intelligent Control Card, DLD Dialer, ZR8 Relay Card, NT-A Class A RS485 Card, LED Switch Card Models SL30, SL30-1, SL30L, SL20L5S CPU Board

Subassembly, Battery Cabinet, Model(s) BC-3 (R)

Subassembly, Digital Alarm Communicators, Model(s) F-DACT, F-DACTF, F-DACT1, F-DACT1F

Subassembly, Power supply module, Model(s) APS8B

Subassembly, Power supply motherboard, Model(s) APS4B

Subassembly, signature loop card, Model(s) VM-SLC-HC

Subassembly, Transformers, Model(s) F-XTR120, F-XTR230, F-TRANS-120, F-TRANS-230

Subassembly, Universal riser supervisory module, Model(s) URSM

System Control Computer, "Fireworks", Model(s) FW-UL6S, FW-UL6W, FW4UL4

Tamper switch, Model(s) 4-TAMP, 3-TAMP, 3-TAMP5 and 3-TAMPRCC

Telephone Riser Monitor Module, Model(s) SIGA-MRM1, SIGA-RM1

Terminal panels, Model(s) 61199-0003, 8529-A036

Twisted Pair Full Duplex Network Extender, Model(s) 4-NET-XT

Twisted Pair SFP Network Controller, Model(s) 4-NET-TP, 4-NET-TP-HC

"FireworX", Model(s) FX-10(x) (j), FX-5(x) (j)

For Replacement Only - Complies with ULC-S527

Computer mounting hardware, Model(s) PCCA5

Computer option cards, Model(s) FW-VIDTVC

Computer watchdog cards, Model(s) PCWD3

Control Unit, "EST Brand", Model(s) iO500GL-F

Control Unit, "Kidde/Vigilant Brand", Model(s) VS2-GL-F

Network cable conduit adaptors, Model(s) FW-NCCA5

Subassembly, "Edwards or EST Brand", Model(s) 500elec-iO, 500elec-iO-FR, 500elec-iO-PG, 500elec-iO-SP

Subassembly, "Kidde or FireworX Brand", Model(s) 254elec-FSA, 254elec-FX

Subassembly, "Kidde/Vigilant Brand", Model(s) 500elec-VS, 500elec-VS-FR, 500elec-VS-PG, 500elec-VS-SP

Subassembly, "Vigilant/Kidde", Model(s) VM-PMI, VM-MFK, VM-MFKEQ, ACHS, AMK-RN, EAEC, D12LS-VM, VM-CPU, VM-ETH1, VM-ETH2, VM-ETH3, VM-ELEC, VMDR, VMDG, VM-LCD.

Subassembly, Hard Drive, Model(s) FW-HD5, FW-HD5W7, FW-HD5RAID, FW-HD5RAIDW7

Subassembly, Windows 7 Upgrade Kit, Model(s) FWUL5UKW7 and FWHD5RAIDUKW7

System Control Computer, "Fireworks", Model(s) FWUL5RAIDW7, FWUL5W7

L - Local System

A - Automatic Fire Alarm: thermostats, smoke detectors, etc.

M - Manual Fire Alarm: manually operated boxes

SS - Supervisory: gate valves, water-level switches, temperature switches, carbon monoxide alarm, residential fire alarm control units, etc.

WF - Waterflow Alarm: waterflow switches

WSS - Watchman's Supervisory Service

C - Coded

NC - Noncoded, Steady, Temporal 3 Pattern, etc.

AUX - Auxiliary System

RS (PPU) - Remote Station System (Protected Premises Unit)

DAC - Digital Alarm Communicator

OT - Other Transmission Technologies

Rev Pol - Reverse Polarity

CS (PPU) - Central Station System (Protected Premises Unit)

CO - Carbon Monoxide Alarm: carbon monoxide detectors

PB - Performance Based Technologies

P (PPU) - Proprietary System (Protected Premises Unit)

P (RU) - Proprietary System (Supervising Station Receiving Unit)

MX - Multiplex

March - March Time

CS - Central Station System

(a) - Suitable for releasing device service when Local System Type and is used in conjunction with the SIGA-REL.

(d) - Suitable for releasing device service when used in conjunction with the SIGA-REL.

- (e) - When Local (L) Type, System control unit with emergency voice communication, emergency telephone communication and paging.
- (f) - Other Transmission Technology, TCP/IP communication
- (h) - Where * is either 0, 1, 4, 8, 12 or 16 indicating the amount of extended memory in megabytes
- (i) - same as EST3 but uses 3-BPS/M-230 and 3-PPS/M-230 power supply modules
- (j) - Where (x) = G, R, GD, or RD

Trademark and/or Tradename: ""E" in a Shield", "Dukane", "ESL", "EST", "Edwards Co Inc.", "Edwards Company Inc", "Edwards Signaling", "Edwards System Technology", "FAST", "Fire Alarm Systems Technology", "FireworX", "G.S. Building Systems Corp", "GE Security", "GE



Last Updated on 2019-05-23

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2019 UL LLC"

UOXX.S3424 - CONTROL UNIT ACCESSORIES, SYSTEM

Control Unit Accessories, System

See General Information for Control Unit Accessories, System

EDWARDS, A UNIT WITHIN UTC FIRE & SECURITY AMERICAS CORPORATION, INC.

S3424

8985 TOWN CENTER PKWY
BRADENTON, FL 34202 USA

Remote Zone Interface "KIDDE Brand" Model(s) RZI16-2RS

Replacement Booster Power Supply Assemblies Model(s) RBPS6A, RBPS10A, RBPS6A/230, RBPS10A/230

Investigated to UL 864 (9th edition)

Addressable remote modules Model(s) RZBN12-6/3/MFC, RZBV12-6/3/MFC, UIO-12/MFC

Amplifiers "Millenium System Master" Model(s) 5580-ADA

Annunciators Model(s) 2-3ANN(f01), 2-6ANN(f01), ENVOY Remote Graphic Annunciator

Audio adjunct voice evacuation/emergency message panels "Millenium System Master" Model(s) 5541M-Y6

Auxiliary power supplies Model(s) APS10A/230, APS10CAA(f15), APS6A(f15), APS6A/230(f15), APS6CAA(f15), EAPS10A(f15), EAPS10A/230(f15), EAPS6A(f15), EAPS6A/230(f15), MIRAPS10A(f15), MIRAPS10A/230(f15), MIRAPS6A(f15), MIRAPS6A/230(f15), XLS-APS10A(f15), XLS-APS10A/230(f15), XLS-APS6A(f15), XLS-APS6A/230(f15)

Booster power supplies, input 120 V /60Hz 1.7A Model(s) BPS6A-RM

Booster power supplies, input 120V/60Hz 2.88A, for use on NAS circuit extension Model(s) BPS10A-RM

Card reader controllers Model(s) ID-CRC, ID-CRCXM

CRC accessory relays Model(s) CRCRL

CRC sounders Model(s) CRCSND

Enclosure doors Model(s) VM-RLCM-D

End of line resistors Model(s) EOL-10, EOL-100, EOL-120L, EOL-15, EOL-2.2, EOL-4K7L, EOL-6.8

Fire Alarm Subassemblies- Enclosures Model(s) RKU-36, RKU-42, RKU-61, RKU-70, RKU-77

Fire Alarm Subassembly Enclosure/Backbox "1570 EVIT Series" Model(s) 6832-1

Fire Alarm Subassembly Enclosure/Backbox Model(s) 6832-1D

In line fuses Model(s) 260006

Input/Output Module Model(s) GSA-IO, GSA-MIO, SIGA-IO, SIGA-IOC, SIGA-MIO

Isolator Module Model(s) GSA-IM (input 15.2-19.95 Vdc, 165 uA)

Mounting brackets "Edwards/Kidde/?E? SHIELD Brand" Model(s) RZI-MPL

Passive infrared motion detectors with guard tours Model(s) SIGA-MD(f08), SIGA-MDS(f08)

Portable Handset Model(s) 6700-0061, 6830-3, **MODELS 6830-3**, 6700-0061

Printers Model(s) PT-1P, PT-1P-220, PT-2

Receptacles **Model(s) 6833-4**

Relay modules "Millenium System Master" Model(s) 5580-1

Relay modules, input 15.2-19.95 VDC, 67uA Model(s) GSA-CR2

Remote annunciators Model(s) 2-LSRA, 2-LSRA-C, 2-SAN-COM, EST3 (FSCS-1), EST3 (FSCS-2), EST3 (FSCS-3), EST3 (FSCS-4)

Remote annunciators, 24 V dc, 1.28 A Model(s) SAN-8

Remote annunciators, 24 V dc, 640 mA Model(s) SAN-4

Remote annunciators, 24 V dc, 80 mA, for use with listee's EST2 and EST2-6 control units Model(s) 2-CMDN, 2-CMDN-C, 2-SMDN, 2-SMDN-C

Remote annunciators, 24 V dc, 960 mA Model(s) RSAN-6

Remote annunciators, 24 Vdc, 166 mA, for use with listee's QSC, QS1, or QS4 control units Model(s) QSA-1, followed by -S or -F, may be followed by -VR.

QSA-2, followed by -S or -F, may be followed by -VR.

Remote annunciators, input 17 to 24 VDC, 90 mA Model(s) EST-SRA1, EST-SRA4, MIR-SRA1, MIR-SRA4

Remote booster power supplies, input 120/240VAC, 6.5A models rated 390W, 10A models rated 580W Model(s) BPS10A, BPS10A/230, BPS10CAA, BPS6A/230, BPS6CAA, EBPS10A, EBPS10A/230, EBPS6A, EBPS6A/230, MIRBPS10A, MIRBPS10A/230, MIRBPS6A, MIRBPS6A/230, XLS-BPS10A, XLS-BPS10A/230, XLS-BPS6A, XLS-BPS6A/230, ZBPS10A, ZBPS10A/230, ZBPS6A, ZBPS6A/230

Remote booster power supplies, input 120/240VAC, 6.5A models rated 390W, 10A models rated 580W. Model(s) BPS6A

Remote phones Model(s) 6830-4, 6830-5A4, 6830-6A4, 6830-NY-F4, 6830-NY-S4

Remote station circuit diodes Model(s) RPD

Remote transponder Model(s) GSA-MDM, SIGA-MDM

Remote transponders "Edwards Brand" Model(s) E-1DC1A, E-1DC1B, E-1DC2B, E-1DCWS, E-2WIRE, E-ISO, E-NAC, E-RLY, E-SMK

Remote transponders "KIDDE/FireworX Brand" Model(s) FX-IDC1A, FX-IDC1B, FX-IDC2B, FX-IDCWS, FX-ISO, FX-RLY

Riser monitor modules Model(s) GSA-MRM1, GSA-RM1, SIGA-MRM1, SIGA-RM1

Single input signal modules Model(s) GSA-CT1HT

Subassembly, Enclosures, for use with the ENVOY Series graphic annunciators Model(s) EV1, EV2, EV3, EV4, EV1B, EV2B, EV3B, EV4B

Subassembly, LED Drivers, for use with the ENVOY Series graphic annunciators Model(s) 3-EVDVR(A)

Subassembly, Mounting brackets, for use with the ENVOY Series graphic annunciators Model(s) 3-EVDVRX

Subassembly, Power supplies, for use with the ENVOY Series graphic annunciators Model(s) 3-EVPWR(A)

Temporal pattern generators, input 24 V dc, 3.5A max, for use with EST3 control unit Model(s) GSA-T3T4, SIGA-TCDR

Trims, for use with the ENVOY Series graphic annunciators Model(s) EV1T, EV2T, EV3T, EV4T

VESDA modbus high level interfaces, input 24 V dc, 0.080 A max Model(s) FW-HSSX1

Visual display units Model(s) 360002(f09)

Workstation monitors Model(s) FW-RACKLCD19

Investigated to UL 864 (10th edition)

Amplifier Model(s) SIGA-AA30, SIGA-AA50

Annunciator, door assembly Model(s) 4-2ANND(R), 4-4ANND(R), 4-6ANND(R)

Annunciator, enclosure backbox Model(s) 4-16ANNMT, 4-24ANNMT, 4-2ANNMT, 4-4ANNMT, 4-6ANNMT, 4-8ANNMT

Auto-sync output modules, subassemblies Model(s) GSA-CC1S, GSA-MCC1S, SIGA-CC1S, SIGA-MCC1S

Battery backup distribution bus Model(s) 3-BTSEN

Blank Filler Plate Model(s) 4X-DR, GCI-FP

City Tie Module Model(s) 2-CTM, CTM, CTM4.7

Coder Card Model(s) CDR-3

Dual Input Module Model(s) GSA-CT2, SIGA-CT2, SIGA-CT2C

Dual Input Signal Module Model(s) GSA-CC2, SIGA-CC2

Dual input signal modules, input 15.2 to 19.95 VDC, 350uA Model(s) SIGA-CC2A, SIGA-MCC2A

Enclosure doors Model(s) 3-10ANN/D, 3-4ANN/D, 3-6ANN/D, 3-RLCM/D, VM-RLCM/D

Enclosures Model(s) 10ANN/B(-S), 4ANN/B(-S), 6ANN/B(-S), RLCM/B(-S), VM-RLCM/B (-S)

End of Line Relay Model(s) K-RELA-EOL

End of line relays Model(s) RELA-EOL

Fire Alarm Subassemblies - Control unit accessories, Amplifier Terminal Panels Model(s) ATP, ATP-220, ATPC

Fire Alarm Subassembly Model(s) SIGI-CR2

Fire Alarm Subassembly - AMP to AMP Interface Model(s) 3-ATPINT

Fire Alarm Subassembly - LCD Monitor Mounting Kit Model(s) FW-22LCDRMK1

Fire Alarm Subassembly - Power Amplifier Model(s) 1B3125, 1B3250

Graphic Annunciator Central Processor Module Model(s) 4-CPUGRPH

Isolator Module Model(s) ADT-IM, GSA-IM, SIGA-IM, XLS-IM

Keypad displays Model(s) KPDISP

Monitor Module Model(s) GSA-MM1

Motherboard "Edwards Brand" Model(s) SIGA-UIO2R-LG, SIGA-UIO6-LG, SIGA-UIO6R-LG

Motherboard "KIDDE Brand" Model(s) GSA-UIO2R, GSA-UIO6, GSA-UIO6R

Printers, , input 240V, 50/60 Hz, 1A Model(s) PT-1S-220

Printers, input 120 V, 50/60 Hz, 1 A Model(s) PT-1S, MIR-PRT/S

Relay Module Model(s) FSRRM, FSRRM24, GSA-CR, GSA-CRH, GSA-CRR, SIGA-CR, SIGA-CR2, SIGA-CRH, SIGA-CRR

Releasing Module Model(s) GSA-REL (input 24 Vdc, 4.56 A maximum, sum of all loaded outputs)

Releasing modules, input 24 V dc, 4.56 A maximum, sum of all loaded outputs Model(s) SIGA-REL

Remote Transponder "KIDDE/FireworX Brand" Model(s) FX-2WIRE

Remote Transponder Model(s) GSA -MCT2, GSA-MCC1, GSA-MCC2, GSA-MCR and GSA-MCRR

GSA-MAB

Remote Annunciator Model(s) FSRA10, FSRA10C, FSRSI, FSRZI-A, K-FSRA10, K-FSRA10C

RLCD-C-PG, RLCD-C-SP, K-RLCD-C, K-RLCD-CF, K-RLCD-CR, K-RLCD-C-PG, K-RLCD-SP, K-RLCD-C-SP (input 16-33Vdc, 99mA standby, 115mA alarm)

RLED-C-PG, RLED-C-SP, K-RLED-C, K-RLED-CF, K-RLED-CR, K-RLED-C-PG, K-RLED-SP, RLED-C-SP, K-RLED-C-SP (input 16-33Vdc, 28mA standby, 62mA alarm)

Remote Annunciator Enclosure Model(s) RA-ENC(1), RA-ENC(2)

Remote annunciator enclosures Model(s) RA-ENC(3)

Remote annunciator expander Model(s) LED24X

Remote annunciator expanders, input 16-33Vdc, 6mA standby, 144mA alarm Model(s) RLED24, K-RLED24, RLED24R, K-RLED24R

Remote annunciators Model(s) 3-ANNBF, 3-LCDANN

Remote annunciators, input 16-33Vdc, 32mA standby, 45mA alarm Model(s) RLED-C, RLED-CF, RLED-CR

Remote annunciators, input 16-33Vdc, 98mA standby, 113mA alarm Model(s) RLCD, RLCD-R

RLCDF, RLCD-PG, RLCD-SP, K-RLCD, K-RLCDF, K-RLCD-R, K-RLCD-PG, K-RLCD-SP

Remote annunciators, input 16-33Vdc, 99mA standby, 115mA alarm Model(s) RLCD-C, RLCD-CF, RLCD-CR

Remote annunciators, input 24 Vdc, 10 mA maximum current Model(s) 3-ANNM

Remote annunciators, input 24 Vdc, 94 mA standby; 144 mA alarm Model(s) 3-ANNCPU3

Remote Display Module Model(s) GCI-12RY, GCI-24G, GCI-24R, GCI-24Y

Remote display/switch modules Model(s) GCI-12S/12B, GCI-12S/12G, GCI-12S/12GY, GCI-12S/12R, GCI-12S/12RY, GCI-12S/12Y, GCI-12S/12YY, GCI-CC

Remote Graphic Annunciator Driver Model(s) GCI (16 to 33 Vdc, 36 mA Standby, 1330 mA Alarm)

GCI-NB (16 to 33 Vdc, 36 mA Standby, 1330 mA Alarm)

GCI-X (16 to 33 Vdc, 2mA Standby, 45 mA Alarm)

Remote key switches, 5Vdc, 200mA Model(s) Rkey

Remote microphones Model(s) 3-REMICP

Remote microphones, input 24 Vdc, 52 mA maximum current Model(s) 3-REMICA, VM-REMICA

Remote transponder Model(s) SIGA-MAB

Remote transponders Model(s) SIGA-MCT2, SIGA- MCT2C, SIGA -MCC1, SIGA-MCC1C, SIGA-MCC2, SIGA -MCR, SIGA-MCRR, SIGA -MCT2-LG, SIGA-MCC1-LG, SIGA-MCC2-LG, SIGA-MCRR-LG

Remote zone interfaces, input 24 Vdc, 250 mA maximum current "Edwards/Kidde/?E? SHIELD Brand" Model(s) RZI16-2

Remote Zone Supervisory and Alarm Indicator Model(s) FSRZI-SA

Reverse Polarity Module Model(s) RPM

Security bell interfaces Model(s) 24DC12

Security loop modules, input 15.2 to 19.9 V dc Model(s) SIGA-SEC2

Single Input Signal Module "KIDDE/FireworX Brand" Model(s) FX-NAC

Single Input Signal Module Model(s) GSA-CC1, SIGA-CC1, SIGA-CC1C

SIGA-CT1, SIGA-CT1C, SIGA-CT1HT, GSA-CT1, GSA-CT1HT

Smoke Module Model(s) 2-SMK (input 24.0 Vdc, 425 mA)

Subassembly Model(s) GSA-MB4 Mounting Plate, GSA-MP1 Mounting Plate, GSA-MP2 Mounting Plate, GSA-MP2L Mounting Plate, MFC (AD) Enclosure, MFC(A) Enclosure, MN-BRKT3 Mounting Bracket, RACCDR Enclosure/Backbox, RACCR Enclosure/Backbox, SIGA-AA30CPU Amplifier Controller Card, SIGA-AA50CPU Amplifier Controller Card, SIGA-MB4 Mounting Plate, SIGA-MP1 Mounting Plate, SIGA-MP2 Mounting Plate, SIGA-MP2L Mounting Plate, SIGA-CC1, SIGA-CC1S, SIGA-CC2, SIGA-CC2A, SIGA-CR, SIGA-CRR, SIGA-CT1, SIGA-CT2, SIGA-IQ, SIGA-MM1, SIGA-WTM

Subassembly, Battery Cabinet Seismic Kit Model(s) BC-1EQ

Temporal Pattern Generator "Edwards Brand" Model(s) FX-T3T4(b)

Universal Class A/B Module Model(s) GSA-UM, SIGA-UM

Universal Class A/B modules, input 15.2-19.95 VDC, 700uA Model(s) SIGA-UM

Universal input/output motherboards "Edwards Brand" Model(s) SIGA-UIO2R, SIGA-UIO6, SIGA-UIO6R

Universal Interface Module Model(s) FSUIM

Wall Plates Model(s) FSATX (c)

Water Flow Tamper Module Model(s) SIGA-WTM (input 15.2-19.95 VDC, 700uA)

Waterflow Tamper Module Model(s) GSA-WTM, SIGA-WTM

Workstation Monitor Model(s) FW-22LCDWTS, FW-42LCDWTS

(a) - ULC compatible control units, compatible to 8500, ESA, 24 V open collector and SAN control units.

(b) - T3 only in Canada

(c) - where X can be 1 to 4 to signify number of gangboxes to which the plate can mount

Note - Where * signifies R (red), Y (yellow) and G (green) LED.

Trademark and/or Tradename: ""E" in a Shield", "Dukane", "ESL", "EST", "Edwards Co Inc", "Edwards Company Inc", "Edwards Signaling", "Edwards System Technology", "FAST", "Fire Alarm Systems Technology", "FireworX", "G.S. Building Systems Corp", "GE Security", "GE

Last Updated on 2019-05-17

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2019 UL LLC"

UQGS.S1122 - HEAT-AUTOMATIC FIRE DETECTORS

Heat-automatic Fire Detectors

See General Information for Heat-automatic Fire Detectors

EDWARDS, A UNIT WITHIN UTC FIRE & SECURITY AMERICAS CORPORATION, INC.

S1122

8985 TOWN CENTER PKWY

BRADENTON, FL 34202 USA

Heat/Carbon Monoxide detector, addressable intelligent type, Model(s) SIGA-HCD, KI-HCD

Heat detectors, Model(s) Rated 135 F Model 73340, Rated 135F Model 73342, Rated 194 F Model 73341, Rated 194 F Model 73343, ZC20FTU-3, SC20FTU-3, MC20FTU-3

Model No.	Type	Compatibility Restrictions	Contact Arrangement	Temp Range (°F)	Spacing (Ft)	
					Smooth Ceiling	to Wall or Partition
GSA-HFS, SIGA-HFS	FT	D5	-	135	70	35
GSA-HRS, SIGA-HRS	FT/ROR	D5	-	135	70	35
GSA-HRSIC, SIGA-HRSIC, JTY-ZOM-SIGAHRSI						
	FT/ROR	D5	-	135	70	35
HDX-135Z-433 (*)	FT	D2	-	135	50	25
				135	50	25
JTW-ZDM-S2HFSI	FT	D5	-	135	50	25
JTW-ZDM-SIGA-HFD	FT	D5	-	135	50	25
JTW-ZOM-S2HRSI	FT/ROR	D5	-	135	50	25
JTW-ZOM-SIGA-HRD, JTW-ZDM-SIGA-DH2C, SIGA-DH2I						
	FT/ROR	D5	-	135	50	25
SIGA-DHI, JTW-ZDM-SIGA-DHC						
	FT/ROR	D5	-	135	50	25
SIGA-HFD, KI-HFD, KIR-HD						
	FT	D5	-	135	50	25
SIGA-HRD, KI-HRD	FT/ROR	D5	-	135	50	25
SIGA2-HFS	FT	D5	-	135	50	25
SIGA2-HRS	FT/ROR	D5	-	135	50	25
SIGA2-PHCOS, SIGA2-HCOS						
	FT	D5	-	135	50	25

SIGI-HCD	FT	D5	-	135	50	25
SIGI-HFD, SIGA-H2D	FT	D5	-	135	50	25
SIGI-HRD	FT/ROR	D5	-	135	50	25
ZC20RRU-3, SC20RRU-3, MC20RRU-3						
	FT/ROR	None	-	-	-	-

Base Model	Related Detector	Control Unit Compatibility Restrictions
SIGA-AB4G, KI-ABST, GSA-AB4G		
	SIGA-HFD, SIGA-HRD, KI-HFD, KI-HRD, KIR-HD, SIGA-H2D	B1
SIGA-AB4GT, KI-ABDT, GSA-SBT		
	SIGA-HFD, SIGA-HRD, KI-HFD, KI-HRD, KIR-HD, SIGA-H2D, SIGA-HCD, SIGA-HCD-CA, KI-HCD, KIR-HCD	B1
SIGA-SB, SIGA-SB4, SIGA-RB, SIGA-RB4, SIGA-IB, SIGA-IB4, KI-SB, KI-RB, KI-SB4, KI-RB4, KI-IB, KI-IB4 GSA-SB, GSA-SB4, GSA-IB, GSA-IB4, GSA-RB		
	SIGA-HFD, SIGA-HRD, KI-HFD, KI-HRD, SIGA-H2D, SIGA-HCD, SIGA-HCD-CA, KI-HCD, KIR-HCD	B1

B1 - Listing limited to specific system control unit. Information on compatible control unit indicated on installation drawing of control unit and/or detector.

D2 - For connection to Listed control units with which compatibility was determined by test or a review of circuit parameters. Interconnection and compatible models indicated on installation wiring diagram for detector (base) and/or control unit.

D5 - For use only with Listed control units with which compatibility was determined by test.

FT - Fixed temperature

FT/ROR - Fixed temperature/rate of rise combination

(*) - For use with Listed control panel model ZW-6404

Trademark and/or Tradename: ""E" in a Shield", "Dukane", "ESL", "Edwards Co Inc", "Edwards Company Inc.", "Edwards System Technology", "FAST", "Fire Alarm Systems Technology", "FireworX", "G.S. Building Systems Corp.", "GE Security", "GE Security Inc", "GS", "GSBS", "Interlogix Inc", "KIDDE", "Mirtone", "Sentrol", "Vigilant", "Walter Kidde Portable Equipment INC.", "Ziton", 



Last Updated on 2018-12-07

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2019 UL LLC"

UROX.S853 - SMOKE DETECTORS FOR FIRE ALARM SYSTEMS

Smoke Detectors for Fire Alarm Systems

See General Information for Smoke Detectors for Fire Alarm Systems

EDWARDS, A UNIT WITHIN UTC FIRE & SECURITY AMERICAS CORPORATION, INC.

S853

8985 TOWN CENTER PKWY
BRADENTON, FL 34202 USA

Investigated to ANSI/UL 268 (7th ed.)

Detector	Compatibility			Velocity Range (fpm)		Date of Manufacture	Time of Manufacture	Firmware Version
				Min	Max			
Model	Application	Type	Restrictions	Min	Max	Manufacture	Firmware Version	Update
SIGA-OSCD, SIGA-OSHCD	OAP	P	D1			-	-	-
SIGA-OSD, SIGA-OSHD	OAP, D(I)	P	D1	0	4000	-	-	-

Investigated to ANSI/UL 268 (editions prior to the 7th ed.)

Detector	Compatibility			Velocity Range (fpm)		Date of Manufacture	Time of Manufacture	Firmware Version
				Min	Max			
Model	Application	Type	Restrictions	Min	Max	Manufacture	Firmware Version	Update
109	OAP	P/I	None	0	300	-	-	-
1551F	OAP, D(I)	I	D1	0	1500	-	-	-
2251F	OAP, D(I)	P	D2	0	4000	-	-	-
2251F, 2251FB, 2251TFB	OAP, D(I)	P	D1	0	4000	-	-	-
2251FB (d)	OAP, D(I)	P	*1	0	4000	-	-	-
2251TF	OAP, D(I)	P (IHD)	D2	0	4000	-	-	-
2251TFB	OAP, D(I)	P (IHD)	*1	0	4000	-	-	-
2551F	OAP, D(I)	P	D1	0	3000	-	-	-
2551F (d)	OAP, D(I)	P	D2	0	3000	-	-	-

511CG, M2M-PD, 2M-PD, ED2M-PD	OAP	P	D1			-	-	-
521BG, M2M-PDC, 2M-PDC,ED2M-PDC	OAP	P	D1			-	-	-
521BXTG, M2M-PDHC, 2M-PDHC, ED2M-PDHC								
	OAP	P (IHD)	D1			-	-	-
521CRXTG, M2M-PDHRC, 2M-PDHRC, ED2M-PDHRC								
	OAP, RS	P (IHD)	D1			-	-	-
541CG, M2M-4PD, 2M-4PD, ED2M-4PD	OAP	P	D1			-	-	-
541CXTG, M2M-4PDH, 2M-4PDH, ED2M-4PDH								
	OAP	P (IHD)	D1			-	-	-
6181*-135	OAP	P	D1	0	3000	-	-	-
6189*, 6189*-135	OAP	P	D1	0	300	-	-	-
6192*, 6192*-135	OAP, RS	P	D1	0	300	-	-	-
6260A-CU (w/ EC30DU-3)	D(ST)	P	D1	300	4000	-	-	-
6360-1, 6360-2, 6360-4	D(ST)	I	None	300	3500	-	-	-
6381*, 6381*-135	OAP, RS	P	D1, *1	0	300	-	-	-
6391*, 6391*-135, 6392*, 6392*-135	OAP, RS	P	None	0	300	-	-	-
7349*	OAP, RS	I	None	0	300	-	-	-
EC-5000R	OAP	PB	None			-	-	-
EC-50R, EC-100R	OAP	PB	None			-	-	-
EC30U-3, ZC30U-3, MC30U-3, SC30U-3, EC30DU-3, MC30DU-3, SC30DU-3								
	OAP	P	D1	0	300	-	-	-
GSA-PHS(I)(t)	OAP, D(I)	P (IHD)	D1	0	5000	-	-	-
GSA-PS, GSA-PHS, GSA-IPHSB, GSA-IPHS								
	OAP, D(I)	P	D5	0	5000	-	-	-
JTF-GOM-S2PHSI	OAP, D(I)	P (IHD)	D5	0	4000	-	-	-
JTY-GM-S2PSI	OAP, D(I)	P	D5	0	4000	-	-	-
KI-DMP (w/KI-PD)	D(I)	P	D5	0	4000	-	-	-

KI-DMP (w/KI-PHD)	D(I)	P (IHD)	D5	0	4000	-	-	-
SD-2W, ESD-4WJ	D(ST)	P	D2	100	4000	-	-	-
SIGA-DH, GSA-DH (w/SIGA-IPHS, SIGA-IPHSB)								
	D(ST)	P/I	D1	300	1000	-	-	-
SIGA-DH, GSA-DH (w/SIGA-PHS)	D(ST)	P	D1	300	4000	-	-	-
SIGA-DH, GSA-DH (w/SIGA-PS)	D(ST)	P	D1	300	4000	-	-	-
SIGA-DMP (w/SIGA-IPHS), SIGA-DMP (w/SIGA-IPHSB)								
	D(I)	P/I	D1	0	500	-	-	-
SIGA-DMP (w/SIGA-PHS or SIGA2-PHS)	D(I)	P	D1	0	5000	-	-	-
SIGA-DMP (w/SIGA-PS or SIGA2-PS)	D(I)	P	D1	0	5000	-	-	-
SIGA-DSI, JTY- GDM-SIGA-DSC	OAP, D(I)	P	D5	0	4000	-	-	-
SIGA-IPHS(I)(t), SIGA-IPHSB(I)(t)	OAP, D(I)	P/I	D1	0	500	-	-	-
SIGA-IS(I)(t)(m)	OAP	I	D1	0	300	-	-	-
SIGA-PCD, KI-PCD, KIR-PCD	OAP	P	D5	0	300	-	-	-
SIGA-PD, KI-PD, KIR-PD, JTY-GM-SIGA-PD, JTY-GDM-SIGA-DS2C, SIGA-DS2I, JTF-GOM-SIGA-PHD								
	OAP, D(I)	P	D5	0	4000	-	-	-
SIGA-PHCD, SIGA-PHCDB, KI-PHCD, KIR-PHCD, SIGI-PHCD								
	OAP	P (IHD)	D5	0	300	-	-	-
SIGA-PHD, SIGA-PHDB, KI-PHD, KIR-PHD, JTF-GOM-SIGA-PHD, SIGI-PHD								
	OAP, D(I)	P (IHD)	D5	0	4000	-	-	-
SIGA-PHS(I)(t), GSA-PHS(I)(t)	OAP, D(I)	P (IHD)	D1	0	5000	-	-	-
SIGA-PS(I)(t)(m)	OAP, D(I)	P	D5	0	5000	-	-	-
SIGA-PSIC(I)(t)(m), JTY-GM-SIGAPS(I)(t)(m)								
	OAP, D(I)	P	D5	0	5000	-	-	-
SIGA-SD, GSA-SD	D	P	D5	100	4000	-	-	-
SIGA2-PCOS (m)(I)	OAP, D(I)	P	D5	0	300	-	-	-

SIGA2-PHCOs (I)	OAP, D(I)	P (IHD)	D5	0	300	-	-	-
SIGA2-PHS (I)	OAP, D(I)	P (IHD)	D5	0	4000	-	-	-
SIGA2-PHSB (I)	OAP, D(I)	P (IHD)	D5	0	4000	-	-	-
SIGA2-PS (m)(I)	OAP, D(I)	P	D5	0	4000	-	-	-
SIGI-PCD	OAP, D(I)	P	D1	0	4000	-	-	-
SIGI-PD	OAP, D(I)	P	D1	0	4000	-	-	-
SIGI-PHCD	OAP, D(I)	P	D1	0	4000	-	-	-
SIGI-PHD	OAP, D(I)	P	D1	0	4000	-	-	-
V-PCOS (m)	OAP, D(I)	P	D5	0	300	-	-	-

Detector	Compatibility			Velocity Range (fpm)		Pressure Differential Between Sampling Tube		Date of	Time of Manufacture	Firmware Version
						Min	Max			
Model	Application	Type	Restrictions	Min	Max	Min	Max	Manufacture	Firmware Version	Update
DH500 (with 1551F head)	D(ST)	I	D1	300	4000	0.05	1	-	-	-
DH500 (with 2551F head)	D(ST)	P	D1	300	4000	0.05	1	-	-	-
DH200F(a)	D(ST)	P	D2	500	4000	0.03	1.4	-	-	-
B501F (k), DH200RPF (k)	D(ST)	P	D2	500	4000	0.01	1.2	-	-	-
DH500F (w. 1551 head) (d)	D(ST)	I	D2	500	4000	0.01	1.2	-	-	-
DH500F(w. 2551 head) (d)	D(ST)	P	D2	500	4000	0.01	1.2	-	-	-
DH200PLF	D(ST)	P	D2	100	4000	0.0015	1.2	-	-	-
DH200RPFL	D(ST)	P	D2	100	4000	0.0015	1.2	-	-	-

Base Model

Related Detector

Control Unit
Compatibility
Restrictions

SIGA-LPS (w)	SIGI-PD, SIGI-PHD, SIGI-PHCD, SIGI-PCD, JTY-GDM-SIGA-DS2C, SIGA-DS2I	B1
SIGI-AB4G-LF-CA	SIGI-PD, SIGI-PHD, SIGI-PHCD, SIGI-PCD	B1
SIGI-AB4G-LF	SIGI-PD, SIGI-PHD, SIGI-PHCD, SIGI-PCD	B1
SIGI-AB4GT	SIGI-PD, SIGI-PHD, SIGI-PHCD, SIGI-PCD	B1
B4U, B4U-LP, RB4U, and IB4U	E-PD, FX-PD, E-PHD, FX-PHD, E-HD, FX-HD, V-HFD, GES-HFDI, V-HRD, GES-HRDI, V-PS, GES-PSI, V?PHS, and GES-PHSI	B1
B501BF, B210LPF	FCO-851 (t), FSC-851, FSP-851, FSP-851R, FSP-851T, FSP-851TC, FSI-851, FST-851, FST-851H, FST-851R, FAPT-851, FAPT-851C, FSL-751, LPX-751L, SD355, SD355T, CP355, H355, H355T, H355R, AD355, ASD-PL2F, ASD-PTL2F, ASD-IL2F, ATD-L2F, ATD-HL2F, ATD-RL2F, MCS-ACCLIMATE2F, ASD-LS, 2951ADT, 2951TADT, 1951ADT, 5951ADT, 5951HADT, 5951RADT, 2951MADT, NP-100, NP-100T, NI-100, NP-A100, NH-100, NH-100R, NH-100H, 2951J-COPTIR, 2951J, 2951TJ, 1951J, 5951J, 5951HJ, 5951RJ, 2951TMJ, 7351J, 2251FB, 2251TFB, 1251FB, 5251FB, 2251B, 2251BR, 2251TB, 2251TBC, 1251B, 5251B, 5251BC, 5251H, 5251RB, 2251TMB, 2251TMBC, 7251, IDP-PHOTO, IDP-PHOTO-T, IDP-ION, IDP-HEAT, IDP-HEAT-HT, IDP-HEAT-ROR, TC840C1000, TC806B1076, TC806DNR, TC806B1084, TC807B1059, TC808B1041, TC808B1066, TC808B1058, TC840M1021, TC846A1005, TC846A1013, 2D51 (e)(g)	B4
B501BF, B501F, B210LPF	2551F	B1
B501F	FCO-851 (t), FSC-851, FSP-851, FSP-851R, FSP-851T, FSP-851TC, FSI-851, FST-851, FST-851H, FST-851R, FAPT-851, FAPT-851C, FSL-751, LPX-751L, SD355, SD355T, CP355, H355, H355T, H355R, AD355, ASD-PL2F, ASD-PTL2F, ASD-IL2F, ATD-L2F, ATD-HL2F, ATD-RL2F, MCS-ACCLIMATE2F, ASD-LS, 2951ADT, 2951TADT, 1951ADT, 5951ADT, 5951HADT, 5951RADT, 2951MADT, NP-100, NP-100T, NI-100, NP-A100, NH-100, NH-100R, NH-100H, 2951J-COPTIR, 2951J, 2951TJ, 1951J, 5951J, 5951HJ, 5951RJ, 2951TMJ, 7351J, 2251FB, 2251TFB, 1251FB, 5251FB, 2251B, 2251BR, 2251TB, 2251TBC, 1251B, 5251B, 5251BC, 5251H, 5251RB, 2251TMB, 2251TMBC, 7251, IDP-PHOTO, IDP-PHOTO-T, IDP-ION, IDP-HEAT, IDP-HEAT-HT, IDP-HEAT-ROR, TC840C1000, TC806B1076, TC806DNR, TC806B1084, TC807B1059, TC808B1041, TC808B1066, TC808B1058, TC840M1021, TC846A1005, TC846A1013, 2D51 (e)(g)	B4
CRB4U-1	EC10U-3, EC30U-3, EC20FTU-3 and EC20RRU-3	B7
CSB4U-1	EC10U-3, EC30U-3, EC20FTU-3 and EC20RRU-3	B7
CSBU-1	EC10U-3, EC30U-3, EC20FTU-3 and EC20RRU-3	B7
CSBU-3	EC10U-3, EC30U-3, EC20FTU-3 and EC20RRU-3	B7
GSA-SB, GSA-SB4, GSA-RB, GSA-IB, GSA-IB4		
	KI-COD, KI-PD, KI-PHD, KI-PHCD, KI-PCD, KI-HFD, KI-HRD, KI-HCD, SIGA-PD, KIR-PD, SIGA-PHD, SIGA-PHDB, KIR-PHD, SIGA-PHCD, SIGA-PHCDB, SIGA-PHCD-CA, KIR-PHCD, SIGA-PCD, SIGA-PCD-CA, KIR-PCD	None
GSA-SBT	V-PCOS (m)	B1
KI-ABLT, KI-ABDT	KI-PCD, KI-PD, KI-PHCD, KI-PHD, KIR-PCD, KIR-PD, KIR-PHCD, KIR-PHD	B1

KI-ABST	KI-PD, KI-PHD, KIR-PD, KIR-PHD	B1
SB4U	FX-PD, E-PD, FX-PHD, E-PHD, FX-HD, E-HD, V-PS, V-PHS, V-HRD, V-HFD	B1
SB4U-LF	V-HFD, V-HRD, FX-HD, E-HD, V-PHS, FX-PHD, E-PHD, V-PS, FX-PD, E-PD	B1
SB4U-LF-CA	V-HFD, V-HRD, FX-HD, E-HD, V-PHS, FX-PHD, E-PHD, V-PS, FX-PD, E-PD	B1
SIGA-AB4G (w)	SIGA-OSD, SIGA-OSHD, SIGA-OSCD, SIGA-OSHCD, SIGA-IPHS, SIGA-IPHSB, SIGA-IS, SIGA-PHS, SIGA-PS, SIGA-PSIC, JTY-GM-SIGAPS, SIGA-PD, SIGA-PHD	B1
SIGA-AB4G-LF	SIGA-OSD, SIGA-OSHD, SIGA-OSCD, SIGA-OSHCD, SIGA-HRS, SIGA-HFS, SIGA2-HRS, SIGA2-HFS, SIGA-DHI, SIGA-IPHS, SIGA-IPHSB, SIGA-PHS, SIGA-PS, SIGA2-PHCOS, SIGA2-PCOS, SIGA2-HCOS, SIGA2-PHS, SIGA2-PHSB, SIGA2-PS, SIGA2-PHCOS-CA, SIGA2-PCOS-CA, SIGA2-HCOS-CA, SIGA2-COS, SIGA2-COS-CA, V-PCOS, SIGA-DSI., SIGA-PD, SIGA-PHD, SIGA-PCD, SIGA-PHCD	B1
SIGA-AB4G-LF-CA	SIGA-HRS, SIGA-HFS, SIGA2-HRS, SIGA2-HFS, SIGA-DHI, SIGA-IPHS, SIGA-IPHSB, SIGA-PHS, SIGA-PS, SIGA2-PHCOS, SIGA2-PCOS, SIGA2-HCOS, SIGA2-PHS, SIGA2-PHSB, SIGA2-PS, SIGA2-PHCOS-CA, SIGA2-PCOS-CA, SIGA2-HCOS-CA, SIGA2-COS, SIGA2-COS-CA, V-PCOS, SIGA-DSI., SIGA-PD, SIGA-PHD, SIGA-PCD, SIGA-PHCD,	B1
SIGA-AB4GT, GSA-AB4G	SIGA-OSD, SIGA-OSHD, SIGA-OSCD, SIGA-OSHCD, SIGA-IPHS, SIGA-IPHSB, SIGA-IS, SIGA-PHS, SIGA-PS, SIGA2-PCOS, SIGA2-PHCOS, SIGA2-PHS, SIGA2-PS, SIGA-PD, SIGA-PHD, SIGA-PCD, SIGA-PHCD, SIGA2-PHSB	B1
SIGA-OSD, SIGA-OSHD, SIGA-OSCD, SIGA-OSHCD, SIGA-SB(m), GSA-SB(m), SIGA-SB4(m)(v), SIGA-RB(m), SIGA-RB4(m)(v), SIGA-IB(m), SIGA-IB4(m)(v), KI-SB(m), KI-SB4(m)(v), KI-RB(m)(v), KI-RB4(m)(v), KI-IB(m), KI-IB4(m)(v)		
	SIGA-IPHS, SIGA-IPHSB, SIGA-IS, SIGA-PHS, SIGA-PS, SIGA-PSIC, JTY-GM-SIGAPS, SIGA-DSI, JTY-GDM-SIGA-DSC, SIGA-PD, SIGA-PHD, SIGA-PCD, SIGA-PHCD, KI-PCD, KI-PD, KI-PHCD, KI-PHD, KIR-PCD, KIR-PD, KIR-PHCD, KIR-PHD, JTY-GM-SIGA-PD, JTF-GOM-SIGA-PHD, JTY-GDM-SIGA-DS2C, SIGA-DS2I	B1
SIGA-SB, SIGA-SB4, SIGA-RB, SIGA-RB4, SIGA-IB, SIGA-IB4, SIGA-AB4G, KI-SB, KI-RB, KI-SB4, KI-RB4, KI-IB, KI-IB4		
	SIGA-DHI, JTW-ZDM-SIGA-DHC, SIGA-DSI, JTY-GDM-SIGA-DSC, SIGA-PD, KI-PD	B1
SIGI-SB(m), SIGI-SB4(m)(v)	SIGI-PD, SIGI-PHD, SIGI-PHCD, SIGI-PCD	B1
Z6U-BS1	Z610AU-2, Z610U-2	B1

B1 - Listing limited to specific system control unit. Information on compatible control unit indicated on installation drawing of control unit and/or detector.

B4 - For connection to any manufacturer's Listed compatible control unit.

B7 - Determined by head.

D1 - Listing limited to specific system control unit. Information on compatible control unit indicated on installation drawing of control unit and/or detector.

D2 - For connection to Listed control units with which compatibility was determined by test or a review of circuit parameters. Interconnection and compatible models indicated on installation wiring diagram for detector (base) and/or control unit.

D5 - For use only with Listed control units with which compatibility was determined by test.

#1 - Analog detectors. For use with ESA 2000 control panel.

*1 - Analog detectors. For use with ESA 2000 control panel.

OAP - Open Area Protection

P - Photoelectric

D(I) - Duct Detector - Installation Inside Duct

P/I - Combination Photoelectric and Ionization

I - Ionization

IHD - Includes Integral Heat Detector

RS - Releasing Service

D(ST) - Duct Detector - Sampling Tubes

PB - Projected Beam

D - Duct Detector

Date of Manufacture identifies the manufacturing start date of all product models that will use the specific Time of Manufacture Firmware Version. The date of manufacture is noncoded and in the format YEAR (in 4 digits), MONTH (in letters), DAY (in 2 digits).

Time of Manufacture Firmware Version identifies a numerical and/or alphabetic series designation that is product and date-code specific and will only identify the Firmware Version at the time the product was manufactured. The numeric and/or alphabetic sequence is defined by the manufacturer.

Firmware Version Update is a numerical and/or alphabetic sequential identification that is product and date-code specific and sequentially identifies the Firmware Version Update from the previous version of firmware. The numerical and/or alphabetic sequence is defined by the manufacturer.

(a) - Suitable for use in ambient temperatures of 0-55 C (23-131F).

(d) - Suitable for use in ambient temperatures of 0-49 C (32-120 F).

(k) - Suitable for use in ambient temperatures of 0-55 C (23-131 F).

(l) - This detector, when used with the SIGA-RB(4) base, is also suitable for releasing service.

(m) - Listed for extended ambients of 0 thru 49 degrees C.

(t) - Employs field adjustable sensitivities.

(v) - May employ GSA-TS or GSA-TSB trim skirts.

(w) - Includes integral audible signal.

* - Represents A-Z incl. except for C. May be used as a marketing technique.

t - For use with base B501, B224BI and B224RB

Trademark and/or Tradename: ""E" in a Shield", "Dukane", "ESL", "EST", "Edwards Co Inc", "Edwards Company Inc", "Edwards Signaling", "Edwards System Technology", "FAST", "Fire Alarm Systems Technology", "FireworX", "G.S. Building Systems Corp.", "GE Security", "GE Security Inc", "GS", "GSBS", "Interlogix Inc", "Kidde, Walter Kidde Portable Equipment Inc.", "Mirtone", "S853", "Sentrol", "Vigilant", "Ziton",      **GE Security**,  

Last Updated on 2019-04-02

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2019 UL LLC"



URRQ.S2490 Smoke-automatic Fire Detector Accessories

[Page Bottom](#)

Smoke-automatic Fire Detector Accessories

[See General Information for Smoke-automatic Fire Detector Accessories](#)

EDWARDS, A UNIT WITHIN UTC FIRE & SECURITY AMERICAS CORPORATION, INC.

S2490

8985 TOWN CENTER PKWY
BRADENTON, FL 34202 USA

Remote LED alarm indicators, Model(s) EC-LED, input: 3 V dc, 2 mA, compatible only with CSBU-1 detector base.

Remote LED alarm indicators, Model(s) R-LED input: 3 V dc, 2 mA, compatible only with detector base models B4U or B4U-LP, also with duct detector models FX-PDD or E-PDD.

Remote LED alarm indicators, Model(s) SIGA-LED, GSA-LED, input: 3 V dc, 2 mA, compatible only with SIGA-SB and SIGA-SB4 detector bases.

Remote test stations, Model(s) GSA-DTS, SIGA-DTS, SIGI-DTS

Smoke detector guard accessories, audible base surface mount boxes, for use with audible detector base model KI-ABST, Model(s) K-AB4G-SB

Smoke detector guard accessories, audible base surface mount boxes, for use with audible detector base models SIGA-AB4G and GSA-AB4G, Model(s) AB4G-SB

Smoke detector guard flanges, Model(s) SIGA-DGMF, KI-DGMF

Smoke detector guard surface mount boxes, Model(s) SIGA-DGSB, KI-DGSB

Smoke detector guard, surface mount boxes, Model(s) SIGA-DGSA

Smoke detector guards, Model(s) SIGA-DG, SIGA-GRD, KI-GRD

Trademark and/or Tradename: "Dukane", "E in a Shield", "ESL", "Edwards Co Inc", "Edwards Company Inc.", "Edwards Signaling", "Edwards System Technology", "FAST", "Fire Alarm Systems Technology", "FireworX", "G.S. Building Systems Corp.", "GE Security", "GE Security Inc", "GS", "GSBS", "Interlogix Inc", "Kidde", "Mirtone", "S2490", "Sentrol", "Vigilant", "Walter Kidde Portable Equipment Inc.", "Ziton", 



[Last Updated](#) on 2017-12-15

[Questions?](#)

[Print this page](#)

[Terms of Use](#)

[Page Top](#)

© 2018 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2018 UL LLC".



UUMW.S6606

Speakers and Amplifiers for Fire-protective Signaling Systems

[Page Bottom](#)

Speakers and Amplifiers for Fire-protective Signaling Systems

[See General Information for Speakers and Amplifiers for Fire-protective Signaling Systems](#)

EDWARDS, A UNIT WITHIN UTC FIRE & SECURITY AMERICAS CORPORATION, INC.

S6606

8985 TOWN CENTER PKWY
BRADENTON, FL 34202 USA

Back boxes Model(s) 54003 (a), 54010 (a), 960A-4RF (a), 960A-4SF (a), 960A-4SS (a), 960A-8RF (a), 960A-8SF (a), 960A-8SS (a), QSB-104 (a), QSB-108 (a), QSB-114 (a), QSB-124 (a)

Enclosure backboxes, for indoor use Model(s) G4B, G4BDF, G4RB, G4RBDF

Speaker accessories Model(s) 74458U, 74459U, 74461U, 74462U, 74463U, 74465U, 74468U, 897B-001, 897B-003, 897B-004, 897B-005, 897B-006, 897B-007, 897B-010, 897B-011, 897B-012, 897B-111, 897B-112

Speakers, cone type, for indoor use Model(s) 757-1A-S25*, 757-1A-S70*, XL757-1A-S25*, XL757-1A-S70*

Speakers, cone type, with signaling appliances for the hearing impaired, for indoor use Model(s) 757, followed by -3A, -4A, -5A, -7A or -8A, followed by -SS, followed by 25 or 70.*

INT-5A-S*

XLS757, followed by -3A, -4A, -7A or -8A, followed by -RS, followed by 25 or 70.*

Speakers, for indoor and outdoor use Model(s) 5552-15W-G, 5552-15W-R, HPSA15G2570, HPSA15R2570

Speakers, for indoor or outdoor use Model(s) 5551B-2W

Speakers, for indoor use Model(s) 54004 (b), ADTGC-S2, ADTGC-S7, ADTGCF-S2, ADTGCF-S7, EGC-S2, EGC-S7, EGCF-S2, EGCF-S7, EGCFR-S7, G4-S2, G4-S7, G4F-S2, G4F-S7, G4R-S2, G4R-S7, G4RF-S2, G4RF-S7, GC-S2, GC-S2-LG, GC-S7, GC-S7-LG, GCF-S2, GCF-S2-LG, GCF-S7, GCF-S7-LG, GCFR-S7, MGC-S2, MGC-S7, MGCF-S2, MGCF-S7, MGCFR-S7, QSB-4ST (b), QSB-4ST-A (b), QSB-4ST-B (b), QSB-4STF (b), QSB-8ST (b), QSB-8STF (b), XLSGC-S2, XLSGC-S7, XLSGCF-S2, XLSGCF-S7, ZGC-S2, ZGC-S7, ZGCF-S2, ZGCF-S7

Speakers, one type, for indoor use Model(s) INT-S*

Speakers, re-entrant type, for indoor and outdoor use Model(s) 2461-25-R*, 2461-70-R*, 757-1A-R25*, 757-1A-R70*, INT-R*, XL757-1A-R25*, XL757-1A-R70*

Speakers, re-entrant type, with signaling appliances for the hearing impaired, for indoor and outdoor use Model(s) 2471-25-15/75-R*

757, followed by -3A, -4A, -7A or -8A, followed by -RS, followed by 25 or 70*

INT-7A-R*, INT-R*

XLS757, followed by -3A, -4A, -7A or -8A, followed by -RS, followed by 25 or 70*

Speakers, with signaling appliances for the hearing impaired Model(s) G4-S2VM, G4-S7VM, G4F-S2V1575, G4F-S2VM, G4F-S7V1575, G4F-S7VM, G4R-S2VM, G4R-S7VM, G4RF-S2V1575, G4RF-S2VM, G4RF-S7V1575, G4RF-S7VM

XLS964 or XLS965, followed by -3A, -4A, -5A, -7A or -8A, followed by -4RR, -4RW, -8RS or -8RW.

Speakers, with signaling appliances for the hearing impaired, for indoor use Model(s) ADTGC-S2VM, ADTGC-S2VMH, ADTGC-S7VM, ADTGC-S7VMH, ADTGCF-S2VM, ADTGCF-S2VMH, ADTGCF-S7VM, ADTGCF-S7VMH, EGC-S2VM, EGC-S2VMH, EGC-S7VM, EGC-S7VMH, EGCF-S2VM, EGCF-S2VMH, EGCF-S7VM, EGCF-S7VMH, EGCFR-S7VM, GC-S2VM, GC-S2VM-LG, GC-S2VMH, GC-S2VMH-LG, GC-S7VM, GC-S7VM-LG, GC-S7VMH, GC-S7VMH-LG, GCF-S2VM, GCF-S2VM-LG, GCF-S2VMH, GCF-S2VMH-LG, GCF-S7VM, GCF-S7VM-LG, GCF-S7VMH, GCF-S7VMH-LG, GCFR-S7VM, MGC-S2VM, MGC-S2VMH, MGC-S7VM, MGC-S7VMH, MGCF-S2VM, MGCF-S2VMH, MGCF-S7VM, MGCF-S7VMH, MGCFR-S7VM, XLSGC-S2VM, XLSGC-S2VMH, XLSGC-S7VM, XLSGC-S7VMH, XLSGCF-S2VM, XLSGCF-S2VMH, XLSGCF-S7VM, XLSGCF-S7VMH, ZGC-S2VM, ZGC-S2VMH, ZGC-S7VM, ZGC-S7VMH, ZGCF-S2VM, ZGCF-S2VMH, ZGCF-S7VM, ZGCF-S7VMH


(a) - For use with speakers 9678-342, 9678-352, 9678-382 or 9678-392.

(b) - For indoor use with back box QSB-104, QSB-108, 54003 or 54010. May be used outdoors when employing back box WBB.

* - May be followed by A thru Z.

Note - The UA, UH and UK speakers are intended for use with the manufacturers U Series baffles and enclosures. The UATM speakers are intended for use with the manufacturer's US Series baffles and enclosures.

Trademark and/or Tradename: "AIP" , "Alarm Industry Products" , "Edwards Co Inc." , "Fire Alarm Systems Technology" , "GE Security" , "Mirtone"



Last Updated on 2018-03-21

[Questions?](#)

[Print this page](#)

[Terms of Use](#)

[Page Top](#)

© 2018 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2018 UL LLC".



IMPROVED CERTIFICATIONS
SEARCH TOOL. REGISTER NOW!

 LEARN MORE

UOXX.S3424 Control Unit Accessories, System

[Page Bottom](#)

Control Unit Accessories, System

[See General Information for Control Unit Accessories, System](#)

EDWARDS, A UNIT WITHIN UTC FIRE & SECURITY AMERICAS CORPORATION, INC.

S3424

8985 TOWN CENTER PKWY
BRADENTON, FL 34202 USA

Remote Zone Interface "KIDDE Brand" Model(s) RZI16-2RS

Replacement Booster Power Supply Assemblies Model(s) RBPS6A, RBPS10A, RBPS6A/230, RBPS10A/230

Investigated to UL 864 (9th edition)

Addressable remote modules Model(s) RZBN12-6/3/MFC, RZBV12-6/3/MFC, UIO-12/MFC

Amplifiers "Millenium System Master" Model(s) 5580-ADA

Annunciators Model(s) 2-3ANN(f01), 2-6ANN(f01), ENVOY Remote Graphic Annunciator

Audio adjunct voice evacuation/emergency message panels "Millenium System Master" Model(s) 5541M-Y6

Auto-sync output modules, subassemblies Model(s) GSA-CC1S, GSA-MCC1S, SIGA-CC1S, SIGA-MCC1S

Auxiliary power supplies Model(s) APS10A/230, APS10CAA(f15), APS6A(f15), APS6A/230(f15), APS6CAA(f15), EAPS10A(f15), EAPS10A/230(f15), EAPS6A(f15), EAPS6A/230(f15), MIRAPS10A(f15), MIRAPS10A/230(f15), MIRAPS6A(f15), MIRAPS6A/230(f15), XLS-APS10A(f15), XLS-APS10A/230(f15), XLS-APS6A(f15), XLS-APS6A/230(f15)

Battery backup distribution bus Model(s) 3-BTSEN

Blank Filler Plate Model(s) GCI-FP

Booster power supplies, input 120 V / 60Hz 1.7A Model(s) BPS6A-RM

Booster power supplies, input 120V/60Hz 2.88A, for use on NAS circuit extension Model(s) BPS10A-RM

Card reader controllers Model(s) ID-CRC, ID-CRCXM

CRC accessory relays Model(s) CRCRL

CRC sounders Model(s) CRCSND

Dual input signal modules, input 15.2 to 19.95 VDC, 350uA Model(s) SIGA-CC2A, SIGA-MCC2A

Enclosure doors Model(s) 3-10ANN/D, 3-4ANN/D, 3-6ANN/D, 3-RLCM/D, VM-RLCM-D, VM-RLCM/D

Enclosures Model(s) 10ANN/B(-S), 4ANN/B(-S), 6ANN/B(-S), VM-RLCM/B(-S), VM-RLCM/B-S

End of line relays Model(s) RELA-EOL

End of line resistors Model(s) EOL-10, EOL-100, EOL-120L, EOL-15, EOL-2.2, EOL-4K7L, EOL-6.8

Fire Alarm Subassemblies - Control unit accessories, Amplifier Terminal Panels Model(s) ATP, ATP-220, ATPC

Fire Alarm Subassemblies- Enclosures Model(s) RKU-36, RKU-42, RKU-61, RKU-70, RKU-77

Fire Alarm Subassembly - AMP to AMP Interface Model(s) 3-ATPINT

Fire Alarm Subassembly Enclosure/Backbox "1570 EVIT Series" Model(s) 6832-1

Fire Alarm Subassembly Enclosure/Backbox Model(s) 6832-1D

In line fuses Model(s) 260006

Input/Output Module Model(s) GSA-IO, GSA-MIO, SIGA-IO, SIGA-IOC, SIGA-MIO

Isolator Module Model(s) GSA-IM (input 15.2-19.95 Vdc, 165 uA), SIGA-IM

Keypad displays Model(s) KPDISP

Monitor Module Model(s) GSA-MM1 (input 15.2-19.95 Vdc, 700 uA)

Mounting brackets "Edwards/Kidde/?E? SHIELD Brand" Model(s) RZI-MPL

Passive infrared motion detectors with guard tours Model(s) SIGA-MD(f08), SIGA-MDS(f08)

Portable Handset Model(s) 6700-0061, 6830-3, MODELS 6830-3, 6700-0061

Printers Model(s) PT-1P, PT-1P-220, PT-2

Receptacles Model(s) 6833-4

Relay modules "Millenium System Master" Model(s) 5580-1

Relay modules, input 15.2-19.95 VDC, 67uA Model(s) GSA-CR2

Remote Transponder Model(s) GSA-MDM, -MCT2, -MCC1, -MCC2, -MCR and -MCRR

Remote annunciators Model(s) 2-LSRA, 2-LSRA-C, 2-SAN-COM, 3-ANNBF, 3-LCDANN, 4X-DR, EST3 (FSCS-1), EST3 (FSCS-2), EST3 (FSCS-3), EST3 (FSCS-4)

Remote annunciators, 24 V dc, 1.28 A Model(s) SAN-8

Remote annunciators, 24 V dc, 640 mA Model(s) SAN-4

Remote annunciators, 24 V dc, 80 mA, for use with listee's EST2 and EST2-6 control units Model(s) 2-CMDN, 2-CMDN-C, 2-SMDN, 2-SMDN-C

Remote annunciators, 24 V dc, 960 mA Model(s) RSAN-6

Remote annunciators, 24 Vdc, 166 mA, for use with listee's QSC, QS1, or QS4 control units Model(s) QSA-1, followed by-S or -F, may be followed by -VR.

QSA-2, followed by-S or -F, may be followed by -VR.

Remote annunciators, input 17 to 24 VDC, 90 mA Model(s) EST-SRA1, EST-SRA4, MIR-SRA1, MIR-SRA4

Remote annunciators, input 24 Vdc, 10 mA maximum current Model(s) 3-ANNSM

Remote annunciators, input 24 Vdc, 94 mA standby; 144 mA alarm Model(s) 3-ANNCPU3

Remote booster power supplies, input 120/240VAC, 6.5A models rated 390W, 10A models rated 580W Model(s) BPS10A, BPS10A/230, BPS10CAA, BPS6A/230, BPS6CAA, EBPS10A, EBPS10A/230, EBPS6A, EBPS6A/230, MIRBPS10A, MIRBPS10A/230, MIRBPS6A, MIRBPS6A/230, XLS-BPS10A, XLS-BPS10A/230, XLS-BPS6A, XLS-BPS6A/230, ZBPS10A, ZBPS10A/230, ZBPS6A, ZBPS6A/230

Remote booster power supplies, input 120/240VAC, 6.5A models rated 390W, 10A models rated 580W. Model(s) BPS6A

Remote display/switch modules Model(s) GCI-12S/12B, GCI-12S/12G, GCI-12S/12GY, GCI-12S/12R, GCI-12S/12RY, GCI-12S/12Y, GCI-12S/12YY, GCI-CC

Remote key switches, 5Vdc, 200mA Model(s) Rkey

Remote microphones, input 24 Vdc, 52 mA maximum current Model(s) 3-REMICA, VM-REMICA

Remote microphones, input 24 Vdc, 64 mA maximum current Model(s) 3-REMICP

Remote phones Model(s) 6830-4, 6830-5A4, 6830-6A4, 6830-NY-F4, 6830-NY-S4

Remote station circuit diodes Model(s) RPD

Remote transponders "Edwards Brand" Model(s) E-1DC1A, E-1DC1B, E-1DC2B, E-1DCWS, E-2WIRE, E-ISO, E-NAC, E-RLY, E-SMK

Remote transponders "KIDDE/FireworX Brand" Model(s) FX-IDC1A, FX-IDC1B, FX-IDC2B, FX-IDCWS, FX-ISO, FX-RLY

Remote transponders Model(s) SIGA-MDM, -MCT2, - MCT2C, -MCC1, -MCC1C, -MCC2, -MCR, -MCRR, -MCT2-LG, -MCC1-LG, -MCC2-LG, -MCRR-LG

Riser monitor modules Model(s) GSA-MRM1, GSA-RM1, SIGA-MRM1, SIGA-RM1

Security bell interfaces Model(s) 24DC12

Security loop modules, input 15.2 to 19.9 V dc Model(s) SIGA-SEC2

Single input signal modules Model(s) GSA-CT1HT

Smoke Module Model(s) 2-SMK (input 24.0 Vdc, 425 mA)

Subassembly Model(s) GSA-MB4 Mounting Plate

Subassembly, Enclosures, for use with the ENVOY Series graphic annunciators Model(s) EV1, EV2, EV3, EV4, EV1B, EV2B, EV3B, EV4B

Subassembly, LED Drivers, for use with the ENVOY Series graphic annunciators Model(s) 3-EVDVR(A)

Subassembly, Mounting brackets, for use with the ENVOY Series graphic annunciators Model(s) 3-EVDVRX

Subassembly, Power supplies, for use with the ENVOY Series graphic annunciators Model(s) 3-EVPWR(A)

Temporal pattern generators, input 24 V dc, 3.5A max, for use with EST3 control unit Model(s) GSA-T3T4, SIGA-TCDR

Trims, for use with the ENVOY Series graphic annunciators Model(s) EV1T, EV2T, EV3T, EV4T

Universal input/output motherboards Model(s) SIGA-UIO2R, SIGA-UIO6, SIGA-UIO6R

VESDA modbus high level interfaces, input 24 V dc, 0.080 A max Model(s) FW-HSSX1

Visual display units Model(s) 360002(f09)

Workstation monitors Model(s) FW-RACKLCD19

Investigated to UL 864 (10th edition)

Amplifier Model(s) SIGA-AA30, SIGA-AA50

Annunciator, door assembly Model(s) 4-2ANNND(R), 4-4ANNND(R), 4-6ANNND(R)

Annunciator, enclosure backbox Model(s) 4-16ANNMT, 4-24ANNMT, 4-2ANNMT, 4-4ANNMT, 4-6ANNMT, 4-8ANNMT

City Tie Module Model(s) 2-CTM, CTM, CTM4.7

Coder Card Model(s) CDR-3

Dual Input Module Model(s) GSA-CT2, SIGA-CT2, SIGA-CT2C

Dual Input Signal Module Model(s) GSA-CC2, SIGA-CC2

Enclosures Model(s) RLCM/B(-S)

End of Line Relay Model(s) K-RELA-EOL

Fire Alarm Subassembly Model(s) SIGI-CR2

Isolator Module Model(s) ADT-IM, GSA-IM, XLS-IM

Monitor Module Model(s) GSA-MM1

Printers, , input 240V, 50/60 Hz, 1A Model(s) PT-1S-220

Printers, input 120 V, 50/60 Hz, 1 A Model(s) PT-1S, MIR-PRT/S

Relay Module Model(s) FSRRM, FSRRM24, GSA-CR, GSA-CRH, GSA-CRR, SIGA-CR, SIGA-CR2, SIGA-CRH, SIGA-CRR

Releasing Module Model(s) GSA-REL (input 24 Vdc, 4.56 A maximum, sum of all loaded outputs)

Releasing modules, input 24 V dc, 4.56 A maximum, sum of all loaded outputs Model(s) SIGA-REL

Remote Transponder "KIDDE/FireworX Brand" Model(s) FX-2WIRE

Remote Transponder Model(s) GSA-MAB

Remote Annunciator Model(s) FSRA10, FSRA10C, FSRSI, FSRZ1-A, K-FSRA10, K-FSRA10C

RLCD-C-PG, RLCD-C-SP, K-RLCD-C, K-RLCD-CF, K-RLCD-CR, K-RLCD-C-PG, K-RLCD-SP, K-RLCD-C-SP (input 16-33Vdc, 99mA standby, 115mA alarm)

RLED-C-PG, RLED-C-SP, K-RLED-C, K-RLED-CF, K-RLED-CR, K-RLED-C-PG, K-RLED-SP, RLED-C-SP, K-RLED-C-SP (input 16-33Vdc, 28mA standby, 62mA alarm)

Remote Annunciator Enclosure Model(s) RA-ENC(1), RA-ENC(2)

Remote annunciator enclosures Model(s) RA-ENC(3)

Remote annunciator expanders, input 16-33Vdc, 6mA standby, 144mA alarm Model(s) RLED24, K-RLED24, RLED24R, K-RLED24R

Remote annunciators, input 16-33Vdc, 32mA standby, 45mA alarm Model(s) RLED-C, RLED-CF, RLED-CR

Remote annunciators, input 16-33Vdc, 98mA standby, 113mA alarm Model(s) RLCD, RLCD-R

RLCDF, RLCD-PG, RLCD-SP, K-RLCD, K-RLCDF, K-RLCD-R, K-RLCD-PG, K-RLCD-SP

Remote annunciators, input 16-33Vdc, 99mA standby, 115mA alarm Model(s) RLCD-C, RLCD-CF, RLCD-CR

Remote Display Module Model(s) GCI-12RY, GCI-24G, GCI-24R, GCI-24Y

Remote Graphic Annunciator Driver Model(s) GCI (16 to 33 Vdc, 36 mA Standby, 1330 mA Alarm)

GCI-NB (16 to 33 Vdc, 36 mA Standby, 1330 mA Alarm)

GCIX (16 to 33 Vdc, 2mA Standby, 45 mA Alarm)

Remote transponder Model(s) SIGA-MAB

Remote zone interfaces, input 24 Vdc, 250 mA maximum current "Edwards/Kidde/?E? SHIELD Brand" Model(s) RZI16-2

Remote Zone Supervisory and Alarm Indicator Model(s) FSRZI-SA

Reverse Polarity Module Model(s) RPM

Single Input Signal Module "KIDDE/FireworX Brand" Model(s) FX-NAC

Single Input Signal Module Model(s) GSA-CC1, SIGA-CC1, SIGA-CC1C

SIGA-CT1, -CT1C, SIGA-CT1HT, GSA-CT1, GSA-CT1HT

Smoke Module Model(s) 2-SMK

Subassembly Model(s) GSA-MP1 Mounting Plate, GSA-MP2 Mounting Plate, GSA-MP2L Mounting Plate, MFC (AD) Enclosure, MFC(A) Enclosure, MN-BRKT3 Mounting Bracket, RACCDR Enclosure/Backbox, RACCR Enclosure/Backbox, SIGA-AA30CPU Amplifier Controller Card, SIGA-AA50CPU Amplifier Controller Card, SIGA-MB4 Mounting Plate, SIGA-MP1 Mounting Plate, SIGA-MP2 Mounting Plate, SIGA-MP2L Mounting Plate, SIGI-CC1, SIGI-CC1S, SIGI-CC2, SIGI-CC2A, SIGI-CR, SIGI-CRR, SIGI-CT1, SIGI-CT2, SIGI-IO, SIGI-MM1, SIGI-WTM

Temporal Pattern Generator "Edwards Brand" Model(s) FX-T3T4(b)

Universal Class A/B Module Model(s) GSA-UM, SIGA-UM

Universal Class A/B modules, input 15.2-19.95 VDC, 700uA Model(s) SIGA-UM

Universal Interface Module Model(s) FSUIM

Water Flow Tamper Module Model(s) SIGA-WTM (input 15.2-19.95 VDC, 700uA)

Waterflow Tamper Module Model(s) GSA-WTM, SIGA-WTM

Workstation Monitor Model(s) FW-22LCDWTS, FW-42LCDWTS

(a) - ULC compatible control units, compatible to 8500, ESA, 24 V open collector and SAN control units.

(b) - T3 only in Canada

Note - Where * signifies R (red), Y (yellow) and G (green) LED.

Trademark and/or Tradename: ""E" in a Shield", "Dukane", "ESL", "EST", "Edwards Co Inc", "Edwards Company Inc", "Edwards Signaling", "Edwards System Technology", "FAST", "Fire Alarm Systems Technology", "FireworX", "G.S. Building Systems Corp", "GE Security", "GE Security Inc", "GS", "GSBS", "Interlogix Inc", "KIDDE", "Mirtone", "S3424", "Sentrol", "Vigilant", "Walter Kidde Portable Equipment Inc",



Last Updated on 2018-07-27

[Questions?](#)

[Print this page](#)

[Terms of Use](#)

[Page Top](#)

© 2018 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2018 UL LLC".



UOJZ.S3000 Control Units, System

[Page Bottom](#)

Control Units, System

[See General Information for Control Units, System](#)
EDWARDS, A UNIT WITHIN UTC FIRE & SECURITY AMERICAS CORPORATION, INC.

S3000

 8985 TOWN CENTER PKWY
 BRADENTON, FL 34202 USA

UL 864 10th Edition Listed

Model	Control Unit System Type(s)	Initiating Device Type(s)	Signaling Type(s)
"EST/Edwards Brand"			
3X-SFS1B, 3X-SFS1R, 3X-SFS1Bi and 3X-SFS1Ri	L	A, M, SS, WF	March, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF	DAC, PB, Rev Pol
	P (PPU)	A, M, SS, WF	PB
	CS (PPU)	A, M, SS, WF	DAC, PB
"FireShield Plus"			
FireShield Plus FSP1004x Series - FSP1004G, FSP1004R, FSP1004GD, FSP1004RD, FSP1004R-2, FSP1004F; FireworX FX-10x Series - FX-10G, FX-10R, FX-10GD, FX-10RD, FX-10RF			
	L	A, M, SS, WF	C, NC
	AUX	A, M, WF	NC
	RS (PPU)	A, M, SS, WF	DAC, Rev Pol
	CS (PPU)	A, M, SS, WF	DAC
"FireWorks"			
FW-UL6S (b) System Control Server	CS (RU)	A, M, SS, WF	DAC, OT
	P (RU)	A, M, SS, WF	DAC, MX, OT
FW-UL6W (b) System Control Workstation	CS (RU)	A, M, SS, WF	DAC, OT
	P (RU)	A, M, SS, WF	DAC, MX, OT
FWUL5RAIDW7 (b) System Control Computer	CS (RU)	A, M, SS, WF	DAC
	P (RU)	A, M, SS, WF	DAC, MX
FWUL5W7 (b) System Control Computer	P (RU)	A, M, SS, WF	DAC, MX
	CS (RU)	A, M, SS, WF	DAC
"Vigilant/Kidde"			
VM-1R, VM-1S	L	A, M, SS, WF	March, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF	DAC, PB, Rev Pol
	P (PPU)	A, M, SS, WF	PB

	CS (PPU)	A, M, SS, WF	DAC, OT
Fireshield Plus Model FSP502x Series - FSP502G,FSP502R,FSP502GD,FSP502RD,FSP502G-2,FSP502F; FireworX Model FX-5x Series - FX-5G, FX-5R, FX-5GD, FX-5RD, FX-5RF			
	AUX	A, M, WF	NC
	L	A, M, SS, WF	C, March, NC
	CS (PPU)	A, M, SS, WF	DAC
	RS (PPU)	A, M, SS, WF	DAC, Rev Pol
iO64G(d, f), iO64GD(d, f), iO64R(d, f), iO64RD(d, f), iO64G-2(d, f), iO64R-2(d, f), iO64G-PG(d, f), iO64G-SP(d, f), iO64G-2-PG(d, f), iO64G-2-SP(d, f), iO1000G(d, f), iO1000GD(d, f), iO1000R(d, f), iO1000RD(d, f), iO1000G-2(d, f), iO1000R-2(d, f), iO1000G-PG(d, f), iO1000G-SP(d, f), iO1000G-2-PG(d, f), iO1000G-2-SP(d, f), iO1000G-CA(d, f), VS1-G(f), VS1-GD(d, f), VS1-R(d, f), VS1-RD(d, f), VS1-G-2(d, f), VS1-R-2(d, f), VS4-G(d, f), VS4-GD(d, f), VS4-R(d, f), VS4-RD(d, f), VS4-G-2(d, f), VS4-R-2(d, f), VS4-G-PG(d, f), VS4-G-SP(d, f), VS4-G-2-PG(d, f), VS4-G-2-SP(d, f), VS4-GF(d, f), VS4-GC(d, f), FX-64G(f), FX-64GD(f), FX-64R(f), FX-64RD(f), FX-64RF(f), FX-64R-PG(f), FX-64R-SP(f), FX-64G-2(f), FX-64R-2(f), FX-64R-2-PG(f), FX-64R-2-SP(f), FX-1000, FX-1000D, FX-1000F, FX-1000-CA, FX-1000-PG, FX-1000-SP, FX-1000-2, FX-1000-2-PG, FX-1000-2-SP, E-FSA64G(f), E-FSA64GD(f), E-FSA64R(f), E-FSA64RD(f),			
	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
iO64GL (f), iO64GL-F (f)	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT

UL 864 9th Edition Listed

Model	Control Unit System Type(s)	Initiating Device Type(s)	Signaling Type(s)
EST-2(b), EST-2/220(b), EST2-6(b), EST2-6/220(b), MIR2(b), MIR2/220(b), MIR2-6(b), MIR2-6/220(b)			
	L	A, M, SS, WF	C, NC
	AUX	A, M, SS, WF	-
	RS (PPU)	A, M, SS, WF	DAC, Rev Pol
	P	A, M, SS, WF	C
	CS (PPU)	A, M, SS, WF	DAC
	CS	A, M, SS, WF	DAC, OT
	CS	A, M, SS, WF	DAC, OT
EST200, EST200R(d), EST200-2, EST200R-2(d)	L	A, M, SS, WF, WSS	NC
	AUX	A, M, SS, WF, WSS	NC
	RS (PPU)	A, M, SS, WF	DAC, Rev Pol
	P (PPU)	A, M, SS, WF, WSS	C
EST3(e), EST3R(d), EST3-230, JB-TBZL-EST3	L	A, M, SS, WF, WSS	NC
	AUX	A, M, SS, WF, WSS	NC
	RS (PPU)	A, M, SS, WF	DAC, OT, Rev Pol

	P (PPU)	A, M, SS, WF, WSS	C, OT
	P (RU)	A, M, SS, WF, WSS	MX
Quick Start-QSC(f), Quick Start-QS1(a)(f), Quick Start-QS4(a)(f)	L	A, M, SS, WF, WSS	C, NC
	RS (PPU)	A, M, SS, WF	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF	DAC, OT
	AUX	A, M, SS, WF	NC
VS1-GL (f), VS1-GL-F (f)	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT

UL 864 10th Edition Listed

Subassembly, Model(s) 3-SDC1, 3-SDC1-HC Signature Loop Card, FCOM-FIB Printed Circuit Board, FE-EQ Monitor Cable Seismic Kit, FW-HD5, FW-HD5RAID, FW-HD5RAIDW7, FW-UL6SSSD500GB Hard Drive, FW-MOD Computer Option Card, FW-NCCA5, FW-UL6CC1 Network Cable Conduit Adaptor, FW-NIC Computer Option Card, FW-SP4I Computer Option Card, FW-ULVID3 Computer Options Card, FW-VIDTVC Computer Option Card, FWUL5RAM2G Memory Upgrade Kit, FWUL5UKW7, FWHD5RAIDUKW7 Windows 7 Upgrade Kit, iO-SDC1, iO-SDC2, V-SLC2-1, V-SLC2-2, FX-SLC1, FX-SLC2 SLC Loop Driver, Mini-Mux Printed Circuit Board, PCCA5 Computer Mounting Hardware, PCWD2 Computer Watchdog Card, PCWD3 Computer Watchdog Card, PCWD6 Computer Watchdog Card, SA-232 RS232 Module, SA-CLA Class A Adapter, SA-DACT Dialer, SA-ETH Ethernet Adapter

UL 864 9th Edition Listed

Door assembly, Model(s) 4-CAB16D, 4-CAB16DR, 4-CAB24D, 4-CAB24DL, 4-CAB24DR, 4-CAB24DRL, 4-CAB8D, 4-CAB8DR

Door lock, Model(s) 4-LOCK2KEY

Enclosures for use in type Envoy graphics control panels, Model(s) BC-1, BC-1R, BC-2; BC-2(R), CBA48, CBA48-B, CBA48-D, CBA48-HT1, CBA48-HT2, CBA48-RMD, CBA48-VT, CBA48R, CBA48R-B, CBA48R-D, CBA48R-HT1, CBA48R-HT2, CBA72, CBA72-B, CBA72-D, CBA72-HT1, CBA72-HT2, CBA72-RMD, CBA72-VT, CBA72R, CBA72R-B, CBA72R-D, CBA72R-HT1, CBA72R-HT2, CBAR48-VT, CBAR72-VT

Filler plate, Model(s) 4-FIL

Fire Alarm and Emergency Signaling Subassembly: Zoned Audio Amplifier Daughterboard, Model(s) 3-ZADC-E

Fire AlarmSubassemblies, "EST Brand", Model(s) 3X-PMI, 3X-PMIMCC

Frame assemblies, Model(s) 4-2ANNFA, 4-4ANNFA, 4-4X2ANNFA, 4-6ANNFA, 4-8ANNFA

Hinge assemblies, Model(s) 4-HNG21, 4-HNG714

Keyless lock, Model(s) 4-ANNSK

LED Annunciator, Model(s) D16L-Fa, D16L-iO-x, D16L-VS, D8RY-iO-x, D8RY-VS

Mounting bracket, Model(s) 4-BRKT-CB, 4-BRKT-CS

Mounting plate, Model(s) 4-MPLT

Optional Modules for EST Brand, Model(s) 3X-PMI, 3X-PMIMCC

Single and multi-loop analog addressable fire alarm control unit, Model(s) FX-1000F

Subassembly, "EST/Edwards Brand", Model(s) 3X-PMI, 3X-PMIMCC, 4X-12/S1GY, 4X-12/S1RY, 4X-12SR, 4X-24R, 4X-6/3S1G2Y, 4X-6/3S1GYR, 4X-4/3SGYWR, 4X-DR, SFS1-CPU, 4X-LCD, 4X-LCD-LC, 3X-ETH1, 3X-ETH2, 3X-ETH3, SFS1-ELEC, SFS1i-ELEC, CLA-PS10, PS10-4B, 4X-CAB6DR, 4X-CAB6D, CAB6B, CAB6BEQ

Subassembly, "Vigilant/Kidde", Model(s) VM-PMI, VM-MFK, VM-MFKEQ, ACHS, AMK-RN, EAEC, D12LS-VM, VM-CPU, VM-ETH1, VM-ETH2, VM-ETH3, VM-ELEC, VMDR, VMDG, VM-LCD, VM-BF

Subassembly, Model(s) 3-ASUMCC, 3-ASU/FTMCC Audio Source Unit, 3-CCI City of Chicago Interface, ARM-8 Auxiliary Relay Module, MN-BRKT1F, MN-BRKT3F, MN-BRKT8C18F, MN-FNS4HDK1, MN-FNS8HDK1 Network Switch Mounting Bracket, MN-BRKT4F Mounting Bracket, MN-FNS8C18FAC, MN-FNS8C18FDC Network Switch Power Supply, MN-FNS8C2F3, MN-FNS4C2F3, MN-FNS8C18F2, MN-FNS8C18F3 Network Switch, MN-FNSGBDSM70K, MN-FNSFEDSM10K, MN-FNSFEMM2K, MN-FNSGBDSMDR-xx where xx=channel number (20-59), MN-FNSGBDSM10K, MN-FNSGBSSM10KD, MN-FNSGBSSM10KU Network Switch Fiber Optic Module, MN-NRBK1 Mounting Bracket, RQS1-CPU-1, RQS1-CPU-1-FR, RQS1-CPU-1-SP, RQS4-CPU-1, RQS4-CPU-1-FR, RQS4-CPU-1-SP, RQS4-CPU-2, RQS4-CPU-2-FR, RQS4-CPU-2-PG, RQS4-CPU-2-SP, RQSC-CPU-1, RQSC-CPU-1-FR, RQSC-CPU-2, RQSC-CPU-2-FR, RQSC-CPU-2-PG, RQSC-CPU-2-SP; PS6 Power Supply, QS-232 RS232 Card, ZB16-4 Class B Zone Card, ZA8-2 Class A Zone Card, SLIC Signature Loop Intelligent Card, DLD Dialer, ZR8 Relay Card, NT-A Class A RS485 Card, LED

Switch Card Models SL30, SL30-1, SL30L, SL20L5S CPU Board, V-SLC SLC Loop Driver, VM-ETH2, VM-ETH3, 3X-ETH2, 3X-ETH3 Ethernet Adapter Card, VM-SLC-HC Signature Loop Card, XAL127 SLC Loop Driver, XAL250 SLC Loop Driver

Tamper switch, Model(s) 4-TAMP, 3-TAMP, 3-TAMP5 and 3-TAMPRCC

L - Local System

A - Automatic Fire Alarm: thermostats, smoke detectors, etc.

M - Manual Fire Alarm: manually operated boxes

SS - Supervisory: gate valves, water-level switches, temperature switches, carbon monoxide alarm, residential fire alarm control units, etc.

WF - Waterflow Alarm: waterflow switches

March - March Time

NC - Noncoded, Steady, Temporal 3 Pattern, etc.

AUX - Auxiliary System

RS (PPU) - Remote Station System (Protected Premises Unit)

DAC - Digital Alarm Communicator

PB - Performance Based Technologies

Rev Pol - Reverse Polarity

P (PPU) - Proprietary System (Protected Premises Unit)

CS (PPU) - Central Station System (Protected Premises Unit)

C - Coded

CS (RU) - Central Station System (Supervising Station Receiving Unit)

OT - Other Transmission Technologies

P (RU) - Proprietary System (Supervising Station Receiving Unit)

MX - Multiplex

WSS - Watchman's Supervisory Service

P - Proprietary System

CS - Central Station System

(a) - Suitable for releasing device service when Local System Type and is used in conjunction with the SIGA-REL.

(b) - Requires separately Listed equipment when Type signaling is Digital Alarm Communicator (DAC).

(d) - Suitable for releasing device service when used in conjunction with the SIGA-REL.

(e) - When Local (L) Type, System control unit with emergency voice communication, emergency telephone communication and paging.

(f) - Other Transmission Technology, TCP/IP communication


Trademark and/or Tradename: ""E" in a Shield", "Dukane", "ESL", "EST", "Edwards Co Inc.", "Edwards Company Inc", "Edwards Signaling", "Edwards System Technology", "FAST", "Fire Alarm Systems Technology", "FireworX", "G.S. Building Systems Corp", "GE Security", "GE

Security Inc", "GS", "GSBS", "Interlogix Inc", "Mirtone", "S3000", "Sentrol", "Vigilant", "Ziton",

DUKANE
COMMUNICATION SYSTEMS



GE Security



Last Updated on 2017-11-13

[Questions?](#)

[Print this page](#)

[Terms of Use](#)

[Page Top](#)

© 2018 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory

with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2018 UL LLC".



ULSZ.S218 Audible-signal Appliances

[Page Bottom](#)

Audible-signal Appliances

[See General Information for Audible-signal Appliances](#)

EDWARDS, A UNIT WITHIN UTC FIRE & SECURITY AMERICAS CORPORATION, INC.

S218

8985 TOWN CENTER PKWY
BRADENTON, FL 34202 USA

Accessories, Models GL1xx-BB1g, GL1xxTP.

Horn or Horn/LED Strobe accessories, trim skirts, Models G1TR, G1TW, EG1TR, and EG1TW.

Adaptatone, Series 5530BD-AW, -GR, 5530BDHV-AW, -GR, CS2309B. For indoor and outdoor use.

Audible signal appliances, bells, Cat. Nos. 434-4E5, -4G5, -4N5, -4R5, -6E5, -4R5-230A, -6R5-230A, -8N5-110A(-R), -8R5-230A, -8R5-230A(-R), -6G5, -6N5, -8G5, -8N5, -8R5, -10G5, -10N5, 434EM-4G5, -4N5, -6G5, -6N5, -8G5, -8N5, -10G5, -10N5, 435-4C1, -4E1, -4G1, -4J1, -4K1, -4P1, -4S1, -6C1, -6E1, -6G1, -6J1, -6K1, -6P1, -6S1, -8C1, -8E1, -8G1, -8J1, -8K1, -8P1, -8S1, -10C1, -10E1, -10G1, -10J1, -10K1, -10P1, -10S1.

Audible signal appliance for fire alarm service, Model GL1xx-HD. Intended for indoor use only, mounted on a wall or ceiling.

Audible signal appliances for fire alarm service private mode with signaling appliance for the hearing impaired, Model 757 followed by 3A, 4A, 5A, 6A, 7A, or 8A, followed by T or TW.

Model XLS757 followed by 3A, 4A, 5A, 6A, 7A, or 8A, followed by T or TW.

Model INT followed by 3A, 4A, 5A, 6A, 7A, or 8A, followed by T or TW.

Audible signal appliances for fire alarm service private mode with signaling appliance for the hearing impaired, Model 757 followed by 3A, 5A, 6A, 7A, or 8A, followed by CS, followed by A through Z.

Model 2452THS followed by -30, -15, -15/75, -110 or -75, followed by -R or -W.

Audible signal appliance for fire alarm service with signaling appliance for the hearing impaired, Model GL1xx-HDVMC. Intended for indoor use only, mounted on a wall.

Bells, vibrating, Models 325-4FC, 325G-4FC, 325-6C5, 325G-6C5, 325-10C5, 325G-10C5.

Buzzers, Models 1064-G5, -N5, -R5, -R5C, 1065-G5, -N5, -R5, 1066-G5, -N5, -R5.

Chimes, Models ADTG1-C, ADTG1F-C, ADTG1R-C, ADTG1RF-C, G1-C, G1F-C, G1R-C, G1RF-C, MG1-C, MG1F-C, MG1R-C, MG1RF-C, EG1-C, EG1F-C, EG1R-C, EG1RF-C, XLSG1-C, XLSG1F-C, XLSG1R-C, XLSG1RF-C, G1-C-LG, G1F-C-LG, G1R-C-LG, G1RF-C-LG, ZG1-C, ZG1F-C, ZG1R-C, ZG1RF-C.

Chimes, indoor use, private mode, Cat. Nos. 721, 722, 921, 922 with suffix -1 and any letter A through Z; Cat. Nos. 757 1A C, 2455C, INT C, XLS757 1A C followed by any letter A through Z.

Chimes/strobes, Models ADTG1-CVM, ADTG1F-CVM, ADTG1R-CVM, ADTG1RF-CVM, G1-CVM, G1F-CVM, G1R-CVM, G1RF-CVM, G1-CV1575, G1F-CV1575, G1R-CV1575, G1RF-CV1575, MG1-CVM, MG1F-CVM, MG1R-CVM, MG1RF-CVM, MG1-CV1575, MG1F-CV1575, MG1R-CV1575, MG1RF-CV1575, EG1-CVM, EG1F-CVM, EG1R-CVM, EG1RF-CVM, EG1-CV1575, EG1F-CV1575, EG1R-CV1575, EG1RF-CV1575, XLSG1-CVM, XLSG1F-CVM, XLSG1R-CVM, XLSG1RF-CVM, G1-CVM-LG, G1F-CVM-LG, G1R-CVM-LG, G1RF-CVM-LG, ZG1-CVM, ZG1F-CVM, ZG1R-CVM, ZG1RF-CVM.

Electronic horns, Models 757 1A H, XLS757 1A H, INT H, 2447H followed by suffix A through Z.

Master Unit Models 757 1A MT, 757 1A, MTW, INT MT, INT MTW, XLS757 1A MT, XLS757 1A MTW.

Models 757 1A T, 757 1A TW, INT T, INT W, XLS757 1A T, XLS757 1A TW.

Cat. Nos. 881, 882 with suffix -1B or -2B; Cat. Nos. 781, 782 with suffix -1 and any letter A through Z. Suitable for outdoor use.

Cat. Nos. 981, 982 with suffix -3 and any letter A through Z. Indoor use only.

Cat. No. 821 or 822 followed by suffix -1, may be followed by suffix A through Z; Cat. No. 2455.

Electronic horns/strobes for private mode signaling, Models G1-HDVM-RCW, G1-HDVM-RCC.

Low Frequency Sounders, Models G4LFWN-H, G4LFWF-H, G4LFRN-H and G4LFRF-H are intended for indoor use only.

Low Frequency Sounder/Strobe, Two-wire type, Models G4LFWN-HVM, G4LFWF-HVM, G4LFRN-HVM and G4LFRF-HVM are intended for indoor use only.

General signaling equipment, Models CS2310B, 5530B-AQ, 5530BHV-AQ, 5530B-Y6, 5530BHV-Y6, 5530B-N5, 5530BVM-N5, 5531B-AQ, 5531BHV-AQ, 5531B-Y6, 5531BHV-Y6, 5531B-N5, 5540B-AQ, 5540B-N5, 5540B-Y6, 5532B-AQ, 5532BHV-AQ, 5532B-N5, 5532B-Y6, 5532BHV-Y6, 5535-N5, 5535-R5, 5536B-Y6.

Horns, Cat. Nos. 860-E5, -FA, 862-E5, -FA, 864-E5, -FA, 866-E5, -FA, 880D-N5, 882D-N5, 884D-N5, 886D-N5, 894B-007. May be suitable for outdoor use.

Cat. Nos. 870-G5, -N5, -R5, 870P-E5, -G5, -N5, -R5, 872DPO-G5, -N5, -R5, 872-E5, -G5, -N5, -R5, 874-E5, -G5, -N5, -R5, 876-E5, -G5, -N5, -R5. May be suitable for outdoor use.

Models 681-1-002, 681-1-102, 681-1-012, 681-1-112, 682-1-002, 682-1-102, 682-1-012, 682-1-112, 682-1-HR, MH-1AR, 682-1-HW, MH-1AW, 2445.

Models WG4WF-H, WG4RF-H, WG4WN-H, WG4RN-H for indoor or outdoor use when installed with a Model 449 backbox. Suitable for wall/ceiling mount.

Models ZG1-P, ZG1R-P, ZG1F-P, ZG1RF-P, ZG1-HD, ZG1F-HD, ZG1R-HD, ZG1RF-HD, G1-P, G1R-P, G1F-P, G1RF-P, G1-HD, G1F-HD, G1R-HD, G1RF-HD, MG1-P, MG1R-P, MG1F-P, MG1RF-P, MG1-H, MG1R-H, MG1-HD, MG1F-HD, MG1R-HD, MG1RF-HD, EG1-P, EG1R-P, EG1F-P, EG1RF-P, EG1-H, EG1R-H, EG1-HD, EG1F-HD, EG1R-HD, EG1RF-HD, XLSG1-P, XLSG1R-P, XLSG1F-P, XLSG1RF-P, XLSG1-HD, XLSG1F-HD, XLSG1R-HD, XLSG1RF-HD, ADTG1-P, ADTG1R-P, ADTG1F-P, ADTG1RF-P, ADTG1-HD, ADTG1F-HD, ADTG1R-HD, ADTG1RF-HD.

Models G1ARF, G1ARF-FR, G1ARF-SP, G1ARN, G1AWF, G1AWF-FR, G1AWF-SP, G1AWN, EG1ARF, EG1ARN, EG1AWF, and EG1AWN for Indoor dry use and wall or ceiling mount.

Horn accessories, Cat. Nos. 897-001, -002, -004, -005, -006, -007, -010, -011, -012, -112, 899-001, -002, -003.

Cat. Nos. "780", "790" series units. Suitable for outdoor use when used with Cat. No. 897-007 back box.

Horn-siren combinations, for indoor use, Models 5520D-AW, 5520D-N5, for outdoor use when employed with No. 349 back box.

Horn/strobes, Models ZG1-HDVM, ZG1F-HDVM, ZG1R-HDVM, ZG1RF-HDVM, ZGC-HDVM, ZGCF-HDVM, ZGC-HDVMH, ZGCF-HDVMH, G1-HDVM, G1WA-HDVMa, G1F-HDVM, G1R-HDVM, G1RF-HDVM, G1-HDV1575, G1R-HDV1575, G1F-HDV1575, G1RF-HDV1575, GC-HDVM, GCF-HDVM, GC-HDVMH, GCF-HDVMH, GCFR-HDVM, MG1-HDVM, MG1F-HDVM, MG1R-HDVM, MG1RF-HDVM, MG1-HDV1575, MG1F-HDV1575, MG1R-HDV1575, MG1RF-HDV1575, MGC-HDVM, MGCf-HDVM, MGC-HDVMH, MGCf-HDVMH, MGCfR-HDVM, EG1-HDVM, EG1F-HDVM, EG1R-HDVM, EG1RF-HDVM, EG1-HDV1575, EG1F-HDV1575, EG1R-HDV1575, EG1RF-HDV1575, EGC-HDVM, EGCf-HDVM, EGC-HDVMH, EGCf-HDVMH, EGCfR-HDVM, XLSG1-HDVM, XLSG1F-HDVM, XLSG1R-HDVM, XLSG1RF-HDVM, XLSGC-HDVM, XLSGCF-HDVM, XLSGCf-HDVMH, XLSGCF-HDVMH, ADTG1-HDVM, ADTG1F-HDVM, ADTG1R-HDVM, ADTG1RF-HDVM, ADTGC-HDVM, ADTGCF-HDVM, ADTGC-HDVMH, ADTGCF-HDVMH.

Models WG4RF-HVMC, WG4RN-HVMC, WG4WF-HVMC, WG4WN-HVMC, WG4RF-HVMHC, WG4RN-HVMHC, WG4WF-HVMHC, WG4WN-HVMHC for indoor or outdoor use when installed with a Model 449 backbox. Suitable for wall/ceiling mount.

Horn/LED Strobe, Models G1AVRF, G1AVRF-FR, G1AVRF-SP, G1AVRN, G1AVWF, G1AVWF-FR, G1AVWF-SP, G1AVWN, EG1AVRF, EG1AVRN, EG1AVWF, and EG1AVWN for Indoor dry use and wall mount.

Signaling appliance accessories, indoor and outdoor back boxes and indoor trim plates, Models 897B-002, 897B-003, 897A-007, 897B-007, 897A-008, 897B-008, 897B-009, 897A-010, 897B-010, 897A-011, 897B-011, 897A-012, 897B-012, 897B-102, 897B-103, 897A-107, 897B-107, 897A-108, 897B-108, 897B-109, 897A-110, 897B-110, 897A-111, 897B-111, 897A-112, 897B-112, 960A-8RF, -4RF, -4SS, -4SF, -8SS, -8SF, 2459-SMB-R, 2459-SMB-W, 2459-WPB-R, **2459-WPB-W**, 2459-BDF-R, 2459-BDF-W, 2459T-RR-R, 2459T-RR-W, 2459-RR-R, 2459-RR-W, QSB-108, -104, -124, -114, 54010, 54003, 74466, 74467, G1T, MG1T, EG1T, G1RT, MG1RT, EG1RT, XLSG1T, XLSG1RT, MG1T-FIRE, EG1T-FIRE, XLSG1T-FIRE, MG1RT-FIRE, EG1RT-FIRE, XLSG1RT-FIRE, ADTG1T, ADTG1RT, ADTG1T-FIRE, ADTG1RT-FIRE.

Signaling appliance accessories, indoor back boxes, Models 27193, 27193-11-NY


Single stroke bells, Cat. Nos. 332D-4N5, -6N5, -10N5, 323D-10AW, 323-10FR, 323D-4AW, 323D-6AW.

Cat. Nos. 332-4E5, -4G5, -4N5, -4R5, -6E5, -6G5, -6N5, -6R5, -10G5, -10N5, -10R5, 332D-4N5, -6NF, -10N5, 333-4E1, -4G1, -4P1, -6E1, -6G1, -6K1, -6P1, -10C1, -10G1, -10P1, -10S1, CS2685.

Horn/Strobe accessories, Models WG4RTS, WG4WTS trim skirts; Model WG4GSKT replacement gasket kit.

xx = Alphanumeric character which indicate product color and/or lettering.

Trademark and/or Tradename: "Ziton", "GE Security", "Edwards System Technology", "Edwards Signaling", "Edwards Co Inc", "FAST", "Fire Alarm Systems Technology", "GSBS", "G.S. Building Systems Corp.", "Mirtone", "'E' in a Shield", "Edwards Company Inc.", "GS", "FireworX",



Last Updated on 2017-12-20

Questions?

[Print this page](#)

Terms of Use

[Page Top](#)

© 2018 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-

misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2018 UL LLC".



QCIT.E23156 Metallic Outlet Boxes

[Page Bottom](#)

Metallic Outlet Boxes

[See General Information for Metallic Outlet Boxes](#)

COOPER CROUSE-HINDS

E23156

WOLF & 7TH NORTH ST
PO BOX 4999
SYRACUSE, NY 13221 USA

Trademark and/or Tradename: "Eaton"

Covers, single device tile wall covers, Model(s) TP106 (a), TP520, TP522, TP531

Covers, two device tile wall covers, Model(s) TP529, TP532, TP534, TP536, TP538, TP541, TP543

Extension boxes, Model(s) TP422

Extension rings, Model(s) TP258, TP424, TP426, TP428, TP443, TP465, TP550, TP551, TP564, TP564RED, TP565, TP566, TP623, TP624, TP635, TP643

Flush device boxes, Model(s) TBR-D-ECP (b), TP112 (a), TP114 (a), TP158 (a), TP175 (a), TP178 (b), TP179 (b), TP180 (b), TP183 (b), TP184 (b), TP185 (b), TP197 (b), TP214 (a), TP216 (a), TP218 (a), TP218SW (a), TP220 (a), TP222 (a), TP224 (a), TP588 (b), TP591 (b), TP594 (b), TP596 (b), TP598 (a), TP604 (b), TP604 UST (b), TP605 (a), TP606 (b), TP672 (a), TP674 (a), TP676 (a), TP678 (a), TP680 (a)

Flush device boxes, with clamps for armored and metal clad interlocking steel cable, Model(s) TP120 (a), TP121 (a), TP123 (a), TP124 (a), TP213 (a), TP244 (a), TP246 (a), TP249 (a), TP666 (a), TP668 (a), TP670 (a)

Flush device boxes, with clamps for nonmetallic sheathed cable, Model(s) TP161 (b), TP162 (b), TP162SW (b), TP163 (b), TP164 (b), TP170 (b), TP171 (b), TP172 (b), TP177 (b)

Flush device boxes, with clamps for nonmetallic sheathed cable and flexible nonmetallic sheathed tubing, Model(s) TP100 (a), TP104 (a), TP110 (a), TP116 (a), TP188 (b), TP190 (b), TP196 (b), TP198 (b), TP660 (a), TP662 (a), TP664 (a)

Flush device boxes, with clamps for nonmetallic sheathed cable and nonmetallic flexible tubing, Model(s) TP165 (a), TP174 (a), TP206 (a), TP210 (a)

Flush device boxes, with rigid or intermediate conduit, Model(s) TP13160 thru TP13166 (a), TP13680 thru TP13699 (a), TP13715 thru TP13720 (a), TP13725 thru TP13730 (a), TP13735 thru TP13740 (a), TP13745 thru TP13750 (a), TP13755 thru TP13804 (a), TP13810 thru TP13829 (a), TP13840 thru TP13849 (a), TP13860 thru TP13869 (a)

Flush device boxes, with Type N-T clamps for nonmetallic sheathed cable and flexible tubing, Model(s) TP236, TP238, TP239, TP240, TP242, TP243

Flush device boxes, without clamps, Model(s) TP248, TP250, TP252, TP254

Flush device cover plates, Model(s) 7297, TP608, TP610, TP612, TP613, TP614, TP616, TP618, TP7199, TP7202, TP7206, TP7214, TP7218, TP7220, TP7224, TP7228, TP7236, TP7237, TP7238, TP7240, TP7241, TP7242, TP7244, TP7248, TP7252, TP7256, TP7268, TP7280, TP7292, TP7293, TP7294, TP7296, TP7298

Gang box covers, Model(s) TP632 (a), TP802, TP803, TP804, TP805, TP806

Masonry boxes, Model(s) TP633 (a), TP637 (a), TP638 (a), TP675, TP679 (a), TP681 (a), TP682 (a), TP683 (a), TP684 (a), TP685 (a), TP686 (a), TP687 (a), TP688 (a), TP689 (a), TP690 (a), TP691 (a), TP692 (a), TP693 (a), TP694 (a), TP695 (a), TP696 (a), TP697 (a), TP698 (a), TP699 (a)

Masonry boxes, Model(s) TP671

Outlet box covers, Model(s) TP270, TP272, TP322, TP323, TP326, TP328, TP329, TP330, TP331, TP332, TP333, TP335, TP337, TP472, TP472RED, TP473, TP474, TP475, TP476, TP477, TP478, TP479, TP480, TP482, TP483, TP484, TP486, TP487, TP488, TP489, TP490, TP494, TP496, TP498, TP499, TP500, TP501, TP502, TP503, TP504, TP506, TP507, TP508, TP509, TP510, TP511, TP512, TP513, TP514, TP515, TP516, TP517, TP518, TP519, TP526, TP528, TP530, TP540, TP568, TP570, TP572, TP576, TP580, TP582, TP584, TP586, TP587, TP589, TP593, TP648, TP649, TP652

Outlet box extension rings, Model(s) TP636, TP644

Outlet box extensions, Model(s) TP284, TP286, TP428RED, TP433, TP602-W

Outlet box extensions , Model(s) TP600

Outlet box raised covers, Model(s) TP266 (c), TP267 (c), TP269 (c), TP653, TP655, TP657, TP661, TP667

Outlet box support covers, Model(s) TP30000, TP31000, TP32000, TP35000, TP36000, TP37000

Outlet box support covers-outlet box combinations, Model(s) TP30XXX, TP31XXX, TP32XXX, TP35XXX, TP36XXX or TP37XXX, where XXX may be numbers 403PF, 404, 404PF, 405, 408, 410, 411, 412, 414, 415, 422, 424, 426, 428, 430, 431, 431PF, 432, 433, 434, 436, 438, 444, 450, 454, 454PF (these numbers represent outlet boxes supplied with the covers).

Outlet boxes, Model(s) TP126 (a), TP128 (a), TP130 (a), TP131 (a), TP132 (a), TP134 (a), TP135 (a), TP137 (a), TP138 (a), TP140 (a), TP144 (a), TP146 (a), TP148 (a), TP149 (a), TP256 (b), TP257 (b), TP273 (b), TP274 (b), TP276 (b), TP278 (b), TP280 (b), TP282 (b), TP288 (b), TP290 (b), TP292 (b), TP293, TP294 (b), TP295, TP298 (b), TP300 (b), TP302 (b), TP304 (b), TP306 (b), TP308 (b), TP312 (b), TP314 (b), TP317 (b), TP318 (b), TP320 (b), TP338 (b), TP338PF (a), TP338PF (b), TP339 (b), TP396 (c), TP403 (a), TP403 (c), TP403PF (a), TP403RED (c), TP404 (a), TP404 (c), TP404PF (c), TP404RED (c), TP408 (c), TP40D (a), TP40DPF (a), TP40S (a), TP40SPF (a), TP410 (c), TP412 (c), TP414 (c), TP414G (c), TP414PF (c), TP414RED (c), TP423 (a), TP423RED (b), TP425 (a), TP430, TP431 (c), TP431PF (a), TP431PF (c), TP431SSB12-6 (a), TP432, TP432 (a), TP432 (c), TP434 (c), TP434G (c), TP434PF (c), TP434RED (c), TP436, TP436 (c), TP437 (a), TP438 (c), TP438G (c), TP438PF (c), TP440 (a), TP444 (a), TP446 (a), TP449 (a), TP450 (c), TP451 (a), TP451PF, TP451RED (a), TP454 (c), TP454PF (a), TP454PF (c), TP454SSB12-6 (a), TP456 (a), TP456PF (a), TP459 (a), TP461 (a), TP467 (c), TP469 (a), TP40BDPF (a), TP40BPF (a), TP528454PF (a), TP548 (e), TP549 (e), TP552 (e), TP553, TP554 (e), TP555, TP556 (e), TP556PF (e), TP556RED (e), TP557, TP558 (e), TP559, TP560 (e), TP561, TP563 (e), TP568, TP568RED, TP629 (a), TP630 (a), TP631 (a), TP640 (a), TP641 (a), TP647 (a), TP704 (a), TP7154 (a), TP870 (a), TP871 (a), TP872 (a), TP873 (a), TP874 (a)

Outlet boxes with bar hanger, Model(s) TP256BH, TP260BH, TP262BH, TP264BH, TP266BH, TP267BH, TP269BH, TP274BH, TP275BH, TP276BH, TP278BH, TP288BH, TP290BH, TP292BH, TP294BH, TP298BH, TP300BH, TP310BH, TP317BH, TP403BH, TP403REDBH, TP404BH, TP404PFBH, TP404REDBH, TP408BH, TP410BH, TP412BH, TP414BH, TP414GBH, TP414PFBH, TP414REDBH, TP431BH, TP431PFBH, TP432BH, TP434BH, TP434GBH, TP434PFBH, TP434REDBH, TP436BH, TP438BH, TP438GBH, TP438PFBH, TP450BH, TP454BH, TP454PFBH, TP467BH, TP548BH, TP549BH, TP552BH, TP554BH, TP556BH, TP556PFBH, TP556REDBH, TP558BH, TP560BH, TP563BH

Outlet boxes, concrete tight, Model(s) TP620 (a), TP622 (a), TP628 (a)

Outlet boxes, for ceiling suspended fans, Model(s) TP275 (c)

Outlet boxes, for ceiling-suspended fan and fixture supports, Model(s) TP301 (a)

Outlet boxes, provided with mounting bracket and box stabilizer, Model(s) TP403MSB (d), TP403REDMSB (d), TP404MSB (d), TP404REDMSB (d), TP405MSB (d), TP408MSB (d), TP40DMSB (d), TP40SMSB (d), TP410MSB (d), TP412MSB (d), TP414MSB (d), TP414REDMSB (d), TP431MSB (d), TP432MSB (d), TP434MSB (d), TP434REDMSB (d), TP436MSB (d), TP438MSB (d), TP444MSB (d), TP450MSB (d), TP454MSB (d), TP459MSB (d), TP467MSB (d), TP548MSB (d), TP549MSB (d), TP552MSB (d), TP554MSB (d), TP556MSB (d), TP556REDMSB (d), TP558MSB (d), TP560MSB (d), TP563MSB (d)

Outlet boxes, with bar hanger and clamps for armored cable and metal clad interlocking steel cable, Model(s) TP367 (a), TP367PF (a), TP369 (a)

Outlet boxes, with bar hanger and clamps for nonmetallic sheathed cable and nonmetallic flexible tubing, Model(s) TP377 (a), TP378 (a), TP386 (a)

Outlet boxes, with clamps for armored cable and metal clad interlocking steel cable, Model(s) TP310 (b)

Outlet boxes, with clamps for nonmetallic sheathed cable and flexible nonmetallic tubing, Model(s) TP118 (a), TP259 (a), TP260 (a), TP262 (a), TP264 (a)

Outlet boxes, with covers, Model(s) TP431SSB12-6 (a), TP454SSB12-6 (a)

Outlet boxes, with covers, grounding leads and support brackets, Model(s) BB423-1104 (a), BB423-1104D (a), BB423-2104 (a), BB423-2104D (a), TP489403PF (a), TP499403PF (a)

Outlet boxes, with mounting bracket and box stabilizer, Model(s) TP434

Outlet boxes, with removable back, Model(s) TP50BPF

Outlet boxes, with support brackets, Model(s) TP403SSB, TP404SSB, TP404SSBPF, TP431SSB, TP444SSB, TP450SSB, TP454SSB, TP563SSB (a)

Welded Steel Box, Model(s) Cat. Nos. TP521, TP521RED, TP525, and TP525RED

Welded Steel Box, Model(s) Cat. Nos. TP521, TP521RED, TP525, and TP525RED, followed by PF, PF11, or G.(f)

(a) - May be followed by -PF to designate that a ground lead is provided.

(b) - May be followed by -PF to designate that a ground lead is provided. May be followed by -G to designate that a ground screw is provided. The numeric part number may be preceded by "50" to designate a bar code label is applied (i.e. TP50161).

(c) - May be followed by BH (bar hanger) or -PF to designate that a ground lead is provided.

(d) - May be provided with suffix -6, -PF, or -G.

(e) - May have suffix BH if provided with bar hanger.

(f) - PF ? Designates the box is provided with a ground lead. G ? Designates the box is provided with a ground screw.. PF11 ? Designates the box is provided with an 11 Inch ground lead.

[Click here to view the Colombia Market Access Certification](#)

[Last Updated](#) on 2017-09-04

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2017 UL LLC".



UVAV.S5389

Visual-signal Appliances for Fire-protective Signaling Systems

[Page Bottom](#)

Visual-signal Appliances for Fire-protective Signaling Systems

[See General Information for Visual-signal Appliances for Fire-protective Signaling Systems](#)

EDWARDS, A DIV OF UTC FIRE & SECURITY AMERICAS CORPORATION, INC.

S5389

8985 TOWN CENTER PKWY
BRADENTON, FL 34202 USA

Accessories, Models GL1xx-BB1G, GL1xx-TP.

Adapter plate strobe lights, Models 403, 404, followed by -3, -4, -5, -6, -7 or -8, followed by A through Z, followed by B, R, W or no suffix; Model 2453BSA, followed by -15, -15/75, -30, -60 or -110, followed by B, R, W or no suffix; Model BS, followed by -3, -5, -6, -7 or -8, followed by A through Z, followed by B, R, W or no suffix; Model XLS403, followed by -3, -5, -6, -7 or -8, followed by A through Z, followed by B, R, W or no suffix. All models are intended for wall mount only at a point which is 24 in. down from the ceiling.

Singal gang strobe lights, Model 203-8 followed by A through Z, followed by no suffix, followed by B, R or W; Model 2440 followed by A through Z or 110, followed by B, R or W, followed by -N5; Model MS-120 followed by B, R or W; Model XLS203-8 followed by A through Z, followed by T, followed by B, R or W. Any of the above models may or may not be followed by suffix -001 through -999 to indicate product color or market variations.

All of the above models are intended for wall mount only at a point which is 24 in. down from the ceiling. Models employing -8, -110, -H, -6, -60, -M, -3 and -30 are derated to 60 cd, 60 cd, 60 cd, 30 cd, 30 cd, 30 cd, 15 cd and 15 cd, respectively, for ceiling mount.

Double gang strobe lights, Model 405, followed by -3, -5, -6, -7 or -8, followed by A through Z, followed by -T, followed by no suffix, B, R or W; Model 2441S, followed by -15, -30, -60, -15/75, -110, followed by B, R or W; Model 4MS, followed by -3, -5, -6, -7 or -8, followed by A, followed by B, R or W; Model XLS405, followed by -3, -5, -6, -7 or -8, followed by A through T, followed by B, R or W; Model 757, followed by -3, -5, -6, -7 or -8, followed by A, followed by B, R or W.

Model CS405, followed by -7 or -8, followed by a letter, followed by -T, followed by no suffix, B, R or W.

Fire alarm equipment: Single gang strobe lights, Model 202, followed by -3, -4, -5, -6, -7 or -8, followed by A through Z, followed by -T, followed by no suffix, B, R or W; Model 2440, followed by S, followed by -15, -30, -60, -15/75 or -110, followed by B, R or W; Model MS, followed by -3, -4, -5, -6, -7 or -8, followed by A, followed by B, R or W; Model XLS202, followed by -3, -4, -5, -6, -7, -8, followed by A through T, followed by B, R or W.


Strobes, Model GL1xx-VMC, GL1xx-VMA synchronous or non synchronous strobe with amber lens, intended for indoor use only, mounted on a wall. Intended for Private Mode Emergency Use. Amber lens strobe selections meet polar light output plot per UL 1971 Public Mode and Mass Notification/Emergency Evacuation per NFPA 72.

Strobe lights, Models EGC-VM, MGC-VM, ZGC-VM, EGCF-VM, MGCF-VM, ZGCF-VM, EGCRF-VM, MGCRF-VM, ZGCRF-VM, GC-VM, GCF-VM, GCFR-VM, EGC-VHM, MGC-VHM, ZGC-VHM, EGCF-VHM, MGCF-VHM, ZGCF-VHM, GC-VMH, GCF-VMH, GCWA-VMHC, GCWN-VMHC. Intended for indoor use only, mounted on a wall or a ceiling.

Visual signaling appliance accessories, Models G4SWN, G4SVWN, G4ERA-A, G4ERN-A. Intended for indoor use only, mounted on a wall only, used with surface mount box models G4EWB, G4ERB. For use with this manufacturers Listed compatible audible signal or speaker.

xx - Alphanumeric character which indicate product color and/or lettering.

Trademark and/or Tradename: "Ziton", "GE Security", "Edwards System Technology", "Edwards Signaling", "Edwards Co Inc", "FAST", "Fire Alarm Systems Technology", "GSBS", "G.S. Building Systems Corp.", "Mirtone", "E" in a Shield, "Edwards Company Inc.", "GS", "FireworX",

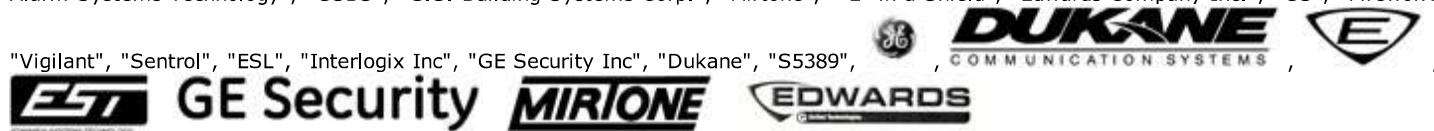

[Last Updated](#) on 2014-05-07

[Questions?](#)

[Print this page](#)

[Terms of Use](#)

[Page Top](#)

© 2015 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2015 UL LLC".



UUMW.S218 Speakers and Amplifiers for Fire-protective Signaling Systems

[Page Bottom](#)

Speakers and Amplifiers for Fire-protective Signaling Systems

[See General Information for Speakers and Amplifiers for Fire-protective Signaling Systems](#)

EDWARDS, A DIV OF UTC FIRE & SECURITY AMERICAS CORPORATION, INC.

S218

8985 TOWN CENTER PKWY
BRADENTON, FL 34202 USA

Signaling appliance accessory, indoor and outdoor back boxes, and indoor trim plates, Models 897B-002, 897B-003, 897A-007, 897B-007, 897A-008, 897B-008, 897B-009, 897A-010, 897B-010, 897A-011, 897B-011, 897A-012, 897B-012, 897B-103, 897A-107, 897B-107, 897A-108, 897B-108, 897B-109, 897A-110, 897B-110, 897A-111, 897B-111, 897A-112, 897B-112, 960A-8RF, -4RF, -4SS, -4SF, -8SS, -8SF, 757A-SB, 757A-SBW, 757A-BDFW, 757A-BDF, 757A-WB, 757A-WBW, QSB-108, -104, -124, -114, 54010, 54003, 757A-RR2, 757A-RR2W, 757A-RR, 757A-RRW, 757A-RR2W, 74466, 74467, G1T, MG1T, EG1T, ZG1T, ZG1RT, G1RT, MG1RT, EG1RT, XLSG1T, G1T-LG, XLSG1RT, G1RT-LG, G1T-FIRE, MG1T-FIRE, ZG1T-FIRE, ZGOT-FIRE, EG1T-FIRE, XLSG1T-FIRE, G1T-FIRE-LG, G1RT-FIRE, MG1RT-FIRE, EG1RT-FIRE, ZG1RT-FIRE, XLSG1RT-FIRE, G1RT-FIRE-LG, ADTG1T, ADTG1RT, ADTG1T-FIRE, ADTG1RT-FIRE.

Signaling appliance accessories, indoor back boxes, Models 27193, 27193-11-NY.

Trademark and/or Tradename: "Ziton", "GE Security", "Edwards System Technology", "Edwards Signaling", "Edwards Co Inc", "FAST", "Fire Alarm Systems Technology", "GSBS", "G.S. Building Systems Corp.", "Mirtone", "'E' in a Shield", "Edwards Company Inc.", "GS", "FireworX",

"Vigilant", "Sentrol", "ESL", "Interlogix Inc", "GE Security Inc", "Dukane", "S218",

[Last Updated](#) on 2014-05-08

[Questions?](#)

[Print this page](#)

[Terms of Use](#)

[Page Top](#)

© 2015 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2015 UL LLC".



UUMW.S922

Speakers and Amplifiers for Fire-protective Signaling Systems

[Page Bottom](#)

Speakers and Amplifiers for Fire-protective Signaling Systems

[See General Information for Speakers and Amplifiers for Fire-protective Signaling Systems](#)

EDWARDS, A DIV OF UTC FIRE & SECURITY AMERICAS CORPORATION, INC.

S922


8985 TOWN CENTER PKWY
BRADENTON, FL 34202 USA

Power amplifiers, Models 1B3125, 1B3127, 1B3250, 1B3252.

Preamplifier, Model 2A68A.

Trademark and/or Tradename: "Ziton", "GE Security", "Edwards System Technology", "Edwards Signaling", "Edwards Co Inc", "FAST", "Fire Alarm Systems Technology", "GSBS", "G.S. Building Systems Corp.", "Mirtone", "'E' in a Shield", "Edwards Company Inc.", "GS", "FireworX",

"Vigilant", "Sentrol", "ESL", "Interlogix Inc", "GE Security Inc", "Dukane", "S922",

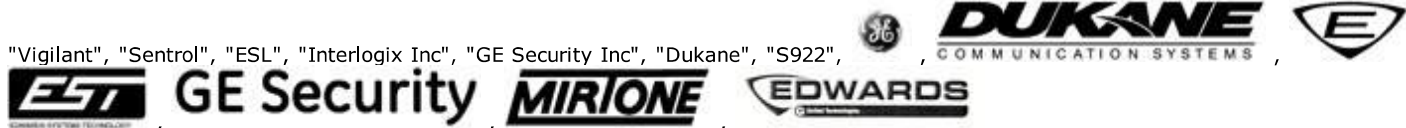

[Last Updated](#) on 2014-05-07

[Questions?](#)

[Print this page](#)

[Terms of Use](#)

[Page Top](#)

© 2015 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2015 UL LLC".



APOU.S3424

Proprietary Alarm Units

[Page Bottom](#)

Proprietary Alarm Units

[See General Information for Proprietary Alarm Units](#)

EDWARDS, A DIV OF UTC FIRE & SECURITY AMERICAS CORPORATION, INC.

8985 TOWN CENTER PKWY
BRADENTON, FL 34202 USA

S3424

CRC accessory relay, Model CRCRL, for use with this manufacturer's Listed EST-3 control panel.

CRC sounder, Model CRCSND.

Ground fault detector, Model GFD.

Keypad display, Model KPDISP.

Security bell interface, Model 24DC12.

Security loop module, Model SIGA-SEC2.

Model 130046 date line terminator.

Models 260001, 260003, 260044, 260045, 260046, 260072, 260080, EOL1.1KL, EOL3.6KL , end of line resistors.

Models 260002, 260004, 260047, 260055, 7140025-01, 7140025-02.

Model 260005 remote station circuit diode.

Model 260006 in line fuse.

Model 260032 master box circuit resistor.

Model 260035 remote station circuit resistor.

Model 240023 tamper switch.

ZBO-8 (130087) relay card, ZR8-2 (130108) relay card; ZAS-1 (130100), ZAS-1S (130312), ZAS-2 (240423), analog addressable card, PZB12-6/MFC (240204) remote zone board with field cabinet, RZB12-6/RZMP (240205) remote zone board, ZFIT (130132) fiber optic transmitter ZFIR (130131) fiber optic receiver, 2400-BATBOX (46035-2180) enclosure, 2400-BATBOXR (46035-2181) enclosure, BC-2 (46035-2178) enclosure, BC-2R (46035-2179) enclosure, CBA48 enclosure, CAB2 (240110) enclosure, CAB3 (240075) enclosure, CAB6 (240112) enclosure, CAB3F (240111) enclosure, CB24 (240048) enclosure, CB48 (240042) enclosure, CBA72 enclosure, ARM8 (240122) relay module plate, ARA-1 (250055) relay module, RAMM (240107) message module, DAPM (130101) dual audio preamp module, RPM (130090) reverse polarity module, URSM (130102) universal riser supervisory module.

Model 240070 External relay module.

Models PTI-P, PTI-S Printers.

Models CMDN, CMDN-C, RSA-4, RSAN-6 (240176), SAN-4 (240171), SAN-8 (240172), SMDN, SMDN-C Remote annunciators.

Models SIGA-CT1, -CT2, -VM Intelligent input modules.

Audio fiber optic motherboard, Model 3FIBMB.

Auxiliary power supplies, Models APS6A, APS6A/230, APS6CAA, APS10A, APS10A/230, APS10CAA, MIRAPS6A, MIRAPS6A/230, MIRAPS10A, MIRAPS10A/230, XLS-APS6A, XLS-APS6A/230, XLS-APS10A, XLS-APS10A/230, EAPS6A, EAPS6A/230, EAPS10A, EAPS10A/230.

Remote booster power supplies, Models BPS6A, BPS10A, BPS6A/230, BPS10A/230, BPS6CAA, BPS10CAA, MIRBPS6A, MIRBPS6A/230, MIRBPS10A, MIRBPS10A/230, XLS-BPS6A, XLS-BPS6A/230, XLS-BPS10A, XLS-BPS10A/230, EBPS6A, EBPS6A/230, EBPS10A, EBPS10A/230, ZBPS6A, ZBPS6A/230, ZBPS10A, ZBPS10A/230, APS624, APS1024.

Ethernet network card, Model FW-NIC.

Mounting bracket, Model MN-BRKT3.

Line Security Specifications

Model	Standard Line Security	Encrypted Line Security	No Line Security	Conditions and Notes
53				

Card reader controllers, Models CRC, CRCXM, ID-CRC, ID-CRCXM				X
Model IRC-3 suitable for proprietary fire and security service	X			IRC-3 can consist of the following: CM1N (240100) main control module, CM2N (240101) slave control unit, CM1 (240102) main control module, CM2 (240121) slave control unit, RMDP-1N main control module, RMDP-1 main control unit, PS8A (240098), PS8B (240555) power supply, PS4A (240099), PS4B (240551) power supply, APS8A (240157), APS8B (240561) auxiliary power supply, ZB8-2 (130074) initiating zone card, ZB8-5 (240119) initiating zone card, ZB8-8 (240113) initiating zone card, ZA4-2 (130082) initiating zone card. Used with Fireworks burglary receiving equipment.
Model FCC system suitable for proprietary fire and security service	X			Model SO-F1B and/or FCOM-F1B fiber optic communication modules are utilized. The system can consist of all of the modules utilized in the above IRC-3 system plus the following modules: PCPU polling CPU module, DCPU display CPU module, FCCD display module, FCCS switch module, FCOM-F1B fiber optic communication module, FCOM-2020 mu communication module, FCOM-485, RS-485 communication module, FCOM-4850, RS485DRS-485 communication module with TD & RE, FCOM-

				232, RS-232 communication module, MUX-8 eight channel communication multiplexed module, CDR-3 coder card. For use with Fireworks burglary equipment.
Model EST3 system suitable for proprietary fire and burglar alarm service, Standard Line Security.	X			Minimum system must consist of the following: 3-CAB5(5) or 3-CAB7(7), 3-CAB14(14) or 3CAB21(21) with 3-CHAS7, 3-TAMP or 3-TAMP5, 3-CPU, 3-CPU1, 3-CPU2, 3-LCD, 3-PPS/M, 3-SSDC or 240629 with SIGA-CT1, -CT2 or -UM or 3-IDC8/4.
Control unit, Model EST3, control unit suitable for proprietary fire and burglar alarm service			X	Minimum system must consist of the following: 3-RCC7 Remote Closet Cabinet, ATCK Attack Kit, 3-TAMPRCC Cabinet Tamper Switch, 3-CPU1 Central Processor, 3-PPS/M Primary Power Supply, 3-LCD Main LCD Display, 3-SAC Security Access Module, 3-SSDC or 3-DSDC Signature Controller. Suitable for service when used with Fireworks burglary equipment, and the following accessories: SIGA-MD, SIGA-MDS passive infrared motion detectors with guard tour, CRC(XM) card reader controller, CRCRL crc accessory relay, CRCSND crc sounder, GFD ground fault detector, KPDISP keypad display, SIGA-SEC2 security loop module, 3-MODCOM communication module or Fireworks, Listed bell and bell housing,

				24DC12 Vdc voltage regulator with security bell interface.
Fireworks proprietary Fire and Burglary receiving equipment consisting of: Model FW4UL4 central processor unit.			X	
CRT's - Models FW-19MN, -19MNTS, -21MN, -21MNTS, -18LCD, -18LCDTS, -19LCDTS, -RACKLCD19, -19LCDTS2, -19LCDTS3W			X	
Audio fiber optic motherboard, Model 3FIBMB			X	
Transceivers, Models SMXHI, SMXLO, and MMXVR			X	

Trademark and/or Tradename: "Alarm Industry Products", "Fire Alarm Systems Technology", "Ziton", "GE Security", "Edwards System Technology", "Edwards Signaling", "Edwards Co Inc", "FAST", "Fire Alarm Systems Technology", "GSBS", "G.S. Building Systems Corp.", "Mirtone", "'E" in a Shield", "Edwards Company Inc.", "GS", "FireworX", "Vigilant", "Sentrol", "ESL", "Interlogix Inc", "GE Security Inc",



Last Updated on 2015-11-03

[Questions?](#)

[Print this page](#)

[Terms of Use](#)

[Page Top](#)

© 2015 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2015 UL LLC".



UOJZ.S3000 - CONTROL UNITS, SYSTEM

Control Units, System

See General Information for Control Units, System

EDWARDS, A UNIT WITHIN UTC FIRE & SECURITY AMERICAS CORPORATION, INC.

S3000

8985 TOWN CENTER PKWY
BRADENTON, FL 34202 USA**UL 864 10th Edition Listed**

Model	Control Unit System Type(s)	Initiating Device Type(s)	Signaling Type(s)
Main Control Panel			
EST-4	L	A, CO, M, SS, WF	C, NC
	AUX	A, M, SS, WF	Rev Pol
	RS (PPU)	A, M, SS, WF	DAC, PB, Rev Pol
	CS (PPU)	A, M, SS, WF	DAC, PB
	P (PPU)	A, M, SS, WF	PB
	P (RU)	A, M, SS, WF	PB
"EST/Edwards Brand"			
3X-SFS1B, 3X-SFS1R, 3X-SFS1Bi and 3X-SFS1Ri	L	A, M, SS, WF	March, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF	DAC, PB, Rev Pol
	P (PPU)	A, M, SS, WF	PB
	CS (PPU)	A, M, SS, WF	DAC, PB
"FireShield Plus"			
FireShield Plus FSP1004x Series - FSP1004G,FSP1004R,FSP1004GD,FSP1004RD,FSP1004G-2,FSP1004F; FireworX FX-10x Series - FX-10G, FX-10R, FX-10GD, FX-10RD, FX-10RF			
	L	A, M, SS, WF	C, NC
	AUX	A, M, WF	NC
	RS (PPU)	A, M, SS, WF	DAC, Rev Pol

	CS (PPU)	A, M, SS, WF	DAC
"FireWorks"			
FW-UL6S (b) System Control Server	CS (RU)	A, M, SS, WF	DAC, OT
	P (RU)	A, M, SS, WF	DAC, MX, OT
FW-UL6W (b) System Control Workstation	CS (RU)	A, M, SS, WF	DAC, OT
	P (RU)	A, M, SS, WF	DAC, MX, OT
FWUL5RAIDW7 (b) System Control Computer	CS (RU)	A, M, SS, WF	DAC
	P (RU)	A, M, SS, WF	DAC, MX
FWUL5W7 (b) System Control Computer	P (RU)	A, M, SS, WF	DAC, MX
	CS (RU)	A, M, SS, WF	DAC
"Vigilant/Kidde"			
VM-1R, VM-1S	L	A, M, SS, WF	March, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF	DAC, PB, Rev Pol
	P (PPU)	A, M, SS, WF	PB
	CS (PPU)	A, M, SS, WF	DAC, OT
EST3(e), EST3R(d), EST3-230, JB-TBZL-EST3	L	A, M, SS, WF, WSS	NC
	AUX	A, M, SS, WF, WSS	NC
	RS (PPU)	A, M, SS, WF	DAC, OT, Rev Pol
	P (PPU)	A, M, SS, WF, WSS	C, OT
	P (RU)	A, M, SS, WF, WSS	MX
Fireshield Plus Model FSP502x Series - FSP502G,FSP502R,FSP502GD,FSP502RD,FSP502G-2,FSP502F; FireworX Model FX-5x Series - FX-5G, FX-5R, FX-5GD, FX-5RD, FX-5RF			
	AUX	A, M, WF	NC
	L	A, M, SS, WF	C, March, NC
	CS (PPU)	A, M, SS, WF	DAC
	RS (PPU)	A, M, SS, WF	DAC, Rev Pol

iO64G(d, f), iO64GD(d, f), iO64R(d, f), iO64RD(d, f), iO64G-2(d, f), iO64R-2(d, f), iO64G-PG(d, f), iO64G-SP(d, f), iO64G-2-PG(d, f), iO64G-2-SP(d, f), iO1000G(d, f), iO1000GD(d, f), iO1000R(d, f), iO1000RD(d, f), iO1000G-2(d, f), iO1000R-2(d, f), iO1000G-PG(d, f), iO1000G-SP(d, f), iO1000G-2-PG(d, f), iO1000G-2-SP(d, f), VS1-G(f), VS1-GD(d, f), VS1-R(d, f), VS1-RD(d, f), VS1-G-2(d, f), VS1-R-2(d, f), VS4-G(d, f), VS4-GD(d, f), VS4-R(d, f), VS4-RD(d, f), VS4-G-2(d, f), VS4-R-2(d, f), VS4-G-PG(d, f), VS4-G-SP(d, f), VS4-G-2-PG(d, f), VS4-G-2-SP(d, f), FX-64G(f), FX-64GD(f), FX-64R(f), FX-64RD(f), FX-64RF(f), FX-64R-PG(f), FX-64R-SP(f), FX-64G-2(f), FX-64R-2(f), FX-64R-2-PG(f), FX-64R-2-SP(f), FX-1000, FX-1000D, FX-1000F, FX-1000-CA, FX-1000-PG, FX-1000-SP, FX-1000-2, FX-1000-2-PG, FX-1000-2-SP, E-FSA64G(f), E-FSA64GD(f), E-FSA64R(f), E-FSA64RD(f),

	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT

UL 864 9th Edition Listed

Model	Control Unit System Type(s)	Initiating Device Type(s)	Signaling Type(s)
Control Unit, "Edwards Signaling Brand"			
E-FSA250G	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
E-FSA250GD	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
E-FSA250R	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol

E-FSA250RD	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
Control Unit, "EST Brand"			
iO500G	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
iO500G-2	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
iO500GD	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS	A, M, SS, WF, WSS	DAC, OT
iO500R	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
iO500R-2	L	A, M, SS, WF, WSS	C, NC

	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
iO500RD	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
Control Unit, "Kidde/FireworX Brand"			
FX-254G	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
FX-254G-2	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
FX-254GD	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT
FX-254R	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-

	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
FX-254R-2	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
FX-254RD	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
Control Unit, "Kidde/Vigilant Brand"			
VS2-G	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
VS2-G-2	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
VS2-GD	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol

	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
VS2-R	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
VS2-R-2	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
VS2-RD	L	A, M, SS, WF, WSS	C, NC
	AUX	A, M, WF	-
	RS (PPU)	A, M, SS, WF, WSS	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF, WSS	DAC, OT
EST-2(b), EST-2/220(b), EST2-6(b), EST2-6/220(b), MIR2(b), MIR2/220(b), MIR2-6(b), MIR2-6/220(b)			
	L	A, M, SS, WF	C, NC
	AUX	A, M, SS, WF	-
	RS (PPU)	A, M, SS, WF	DAC, Rev Pol
	P	A, M, SS, WF	C
	CS (PPU)	A, M, SS, WF	DAC
	CS	A, M, SS, WF	DAC, OT
	CS	A, M, SS, WF	DAC, OT
EST200, EST200R(d), EST200-2, EST200R-2(d)	L	A, M, SS, WF, WSS	NC
	AUX	A, M, SS, WF, WSS	NC
	RS (PPU)	A, M, SS, WF	DAC, Rev Pol

	P (PPU)	A, M, SS, WF, WSS	C
Quick Start-QSC(f), Quick Start-QS1(a)(f), Quick Start-QS4(a)(f)	L	A, M, SS, WF, WSS	C, NC
	RS (PPU)	A, M, SS, WF	DAC, OT, Rev Pol
	CS (PPU)	A, M, SS, WF	DAC, OT
	AUX	A, M, SS, WF	NC

UL 864 10th Edition Listed

100 Mbps SFP Network Controller, Model(s) 4-FWAL-CAT, 4-NET-CAT

4,6,8 SLOT UI RAIL, Model(s) 4-UIRAIL4, 4-UIRAIL 6, 4-UIRAIL 8

Annunciator central processor module, Model(s) 4-ANNCPU

Audio and Firefighter Telephone Control Display Module, Model(s) 4-LCDAUDEL

Audio IO and Telephone Riser Source Module, Model(s) 4-AUDELS

Central Processor Module, Model(s) 4-CPU

Common Relay Module, Model(s) 4-COMREL

Door assembly, Model(s) 4-CAB16D, 4-CAB16DR, 4-CAB24D, 4-CAB24DL, 4-CAB24DR, 4-CAB24DRL, 4-CAB8D, 4-CAB8DR

Door lock, Model(s) 4-LOCK2KEY

Field configurable LED and Switches, Model(s) 4-24L, 4-24L24S, 4-24L18S, 4-24L12S

Filler plate, Model(s) 4-FIL

Fire AlarmSubassemblies, "EST Brand", Model(s) 3X-PMI, 3X-PMIMCC, 4X-CAB6DR, 4X-CAB6E, 4X-LCD(-LC)

Firefighter Telephone Master Handset, Model(s) 4-FT

Frame assemblies, Model(s) 4-2ANNFA, 4-4ANNFA, 4-4X2ANNFA, 4-6ANNFA, 4-8ANNFA

Hinge assemblies, Model(s) 4-HNG21, 4-HNG714

Keyless lock, Model(s) 4-ANNSK

Main Display Module, Model(s) 4-LCD

Main LCD Display Module, Model(s) 4-3LCD

Mounting bracket, Model(s) 4-BRKT-CB, 4-BRKT-CS

Mounting plate, Model(s) 4-MPLT

Multi-port USB Hub Module, Model(s) 4-USBHUB

Network Expander Module, Model(s) 4-NET-AD

Optional Modules for EST Brand, Model(s) 3-12/S2R, 3-6/3S2RY, 4X-12/S1GY, 4X-12/S1RY, 4X-12SR, 4X-24R, 4X-4/3SGYWR, 4X-6/3S1G2Y, 4X-CAB6D

Paging Microphone, Model(s) 4-MIC

Series Control Display Module, Model(s) 4-ANNAUDEL

Series Fiber Optics Network Adapters, Model(s) 4-FWAL-SM, 4-FWAL-MM, 4-FWAL-SMH, 4-FWAL-SMU, 4-FWAL-SMD

Series Fiber Optics SFP Network Controllers, Model(s) 4-NET-SM, 4-NET-MM, 4-NET-SMH, 4-NET-SMU, 4-NET-SMD

Series Firewall Module, Model(s) 4-FWAL1, 4-FWAL2, 4-FWAL3,4-FWAL4

Series Flex Cables, Model(s) 4-CABL0502,4-CABL0504,4-CABL0505,4-CABL0507,4-CABL0509,4-CABL0541,4-CABL0542

Single and multi-loop analog addressable fire alarm control unit, Model(s) FX-1000F

Single and multi-loop analog addressable fire alarm control units, "Kidde/Vigilant Brand", Model(s) VS1-G-2-PG, VS1-G-2-SP, VS1-G-PG, VS1-G-SP

Subassemblies, Dual Signature Control for Vigilant Brand, Model(s) VM-SLCXB

Subassemblies, Fiber Module for Vigilant Brand, Model(s) VM-NOCF

Subassemblies, Network data communications card for Vigilant Brand, Model(s) VM-NOC

Subassemblies, Switching Hub, Model(s) MN-FNS8C2F3

Subassemblies, Signature Data Card for Vigilant Brand, Model(s) VM-SLC

Subassembly, "EST/Edwards Brand", Model(s) 3X-PMI, 3X-PMIMCC, SFS1-CPU, 4X-LCD, 4X-LCD-LC, 3X-ETH1, 3X-ETH2, 3X-ETH3, SFS1-ELEC, SFS1i-ELEC, CLA-PS10, PS10-4B, 4X-CAB6DR, 4X-CAB6D, CAB6B, CAB6BEQ

Subassembly, "Vigilant/Kidde", Model(s) VM-PMI, VM-MFK, VM-MFKEQ, ACHS, AMK-RN, EAEC, D12LS-VM, VM-CPU, VM-ETH1, VM-ETH2, VM-ETH3, VM-ELEC, VMDR, VMDG, VM-LCD, VM-BF

Subassembly, Model(s) 3-ASU/FT-CC, 3-ASU/FT-CC-CS, 3-ASU/FTMCC, 3-CAB14D (R), F-10ELEC-F, F-5ELEC-F, F-3ELEC-F, FCOM-FIB Printed Circuit Board, FW-EQ Monitor Cable Seismic Kit, FW-HD5, FW-HD5RAID, FW-HD5RAIDW7, FW-UL6SSSD500GB Hard Drive, FW-MOD Computer Option Card, FW-NCCA5, FW-UL6CC1 Network Cable Conduit Adaptor, FW-NIC Computer Option Card, FW-SP4I Computer Option Card, FW-ULVID3 Computer Options Card, FW-VIDTVC Computer Option Card, FWUL5RAM2G Memory Upgrade Kit, FWUL5UKW7, FWHD5RAIDUKW7 Windows 7 Upgrade Kit, iO-SDC1, iO-SDC2, V-SLC2-1, V-SLC2-2, FX-SLC1, FX-SLC2 SLC Loop Driver, Mini-Mux Printed Circuit Board, PCCA5 Computer Mounting Hardware, PCWD2 Computer Watchdog Card, PCWD3 Computer Watchdog Card, PCWD6 Computer Watchdog Card, SA-232 RS232 Module, SA-CLA Class A Adapter, SA-DACT Dialer, SA-ETH Ethernet Adapter, VM-ETH1, VM-ETH2, VM-ETH3, 3X-ETH1, 3X-ETH2, 3X-ETH3 Ethernet Adapter Card

Subassembly, Encoding/decoding Unit, Model(s) MN-FVPN

Subassembly, Chinese Dual Signature Card, Model(s) 3-DSDC1C

Subassembly, CPU door, Model(s) 3-CPUDR

Subassembly, DC Power Supply, Model(s) MN-FNS8C18FDC

Subassembly, Dual Audio Preamp module, Model(s) MN-PASM, MN-PASM2

Subassembly, Enclosure, Model(s) 3-CAB14B(R), 3-CAB21B(R), 3-CAB51(R), 3-CAB7B(R)

Subassembly, Interface Module, Model(s) MN-ABPM

Subassembly, LED annunciator, Model(s) 3-24Y

Subassembly, Signature Data Card, Model(s) 3-SDC1, 3-SDC1-HC, 3-SDC1C, 3-SSDC1C

Subassembly, Switching Hub, Model(s) MN-FNS4C2F3, MN-FNS8C18F2, MN-FNS8C18F3

Subassembly, 16 Zone Front Panel LED Annunciator, "Edwards or EST Brand", Model(s) D16L-iO-x, D8RY-iO-x

Subassembly, 16 Zone Front Panel LED Annunciator, "Kidde or FireworX or Edwards Signaling Brand", Model(s) D16L-Fa

Subassembly, 16 Zone Front Panel LED Annunciator, "Kidde or Vigilant Brand", Model(s) D16L-VS, D8RY-VS

Subassembly, 4 module chassis, Model(s) 3-CHASS, 3-CHASS4

Subassembly, 5 module chassis, Model(s) 3-CHAS5

Subassembly, 7 module chassis, Model(s) 3-CHAS7

Subassembly, Analog Addressable Module, Model(s) 3-AADC1

Subassembly, annunciator, Model(s) 4X-24Y, 4X-6/3S1G2Y, 4X-6/3S1GYR

Subassembly, Attack Kit, Model(s) ATCK

Subassembly, Audio Source Module, Model(s) 3-ASU-CC, 3-ASU-CC-CS, 3-ASU-CS, 3-ASU/4, 3-ASU/4-CC, 3-ASU/4-CC-CS, 3-ASU/4-CS

Subassembly, Audio Source Module/Firefighter Phone Module, Model(s) 3-ASU/FT, 3-ASU/FT-CS, 3-ASU/FTRC, 3-ASU/FTRC-CS

Subassembly, Audio Source Unit, Model(s) 3-ASU, 3-ASUMCC

Subassembly, Audio Source Unit Memory Expansion, Model(s) 3-ASUMX

Subassembly, Auxiliary Communications Card, Model(s) 3-RS232

Subassembly, Backbox Enclosure, Model(s) 3-CAB5B

Subassembly, Battery Cabinet, Model(s) BC-3 (R)

Subassembly, Blank LRM filler, Model(s) 3-LRMF

Subassembly, Blank Plate, Model(s) 4X-LRMF

Subassembly, Booster Charger Monitor, Model(s) 3-BBCMON

Subassembly, Booster P/S 120 V with monitor, Model(s) 3-BPS/M

Subassembly, Booster P/S 120V with monitor, Model(s) 3-BBC/M

Subassembly, Booster P/S 230V with monitor, Model(s) 3-BBC/M-230, 3-BPS/M-230

Subassembly, Booster Power Monitor, Model(s) 3-BPOMON

Subassembly, Cabinet, Model(s) 3-RCC14R, 3-RCC21R, 3-RCC7R

Subassembly, City of Chicago Interface, Model(s) 3-CCI

Subassembly, Communication Interface Card, Model(s) 3-SAC

Subassembly, CPU LCD Display, XL, Model(s) 3-LCDXL1

Subassembly, CPU Module, Model(s) 3-CPU3

Subassembly, DACT/Modem, Model(s) 3-MODCOM, 3-MODCOMP

Subassembly, Digital Alarm Communicators, Model(s) F-DACT, F-DACTF, F-DACT1, F-DACT1F

Subassembly, Dual Signature Card, Model(s) 3-DSDC1, 3-SDDC1, 3-SDDC1C, 3-SDDC1(-MB)

Subassembly, Enclosure, Model(s) 3-CAB21D (R), 3-CAB7D (R)

Subassembly, Fiber Optic Interface Module, Model(s) 3-FIBMB2

Subassembly, Fiber Optic Module, Model(s) MN-FNSFEDSM10K, MN-FNSFEMM2K, MN-FNSGBDSM10K, MN-FNSGBDSM70K, MN-FNSGBDSMDR-xx where xx=channel number (20-59), MN-FNSGBSSM10KD, MN-FNSGBSSM10KU

Subassembly, Fiber Transceiver, Model(s) MMXVR, SMXHI, SMXHI2, SMXLO, SMXLO2

Subassembly, Firefighter Phone Module, Model(s) 3-FTCU, 3-FTCU-CC, 3-FTRC

Subassembly, Interface module, Model(s) MN-COM1S

Subassembly, LCD Display Module, Model(s) 3-LCD

Subassembly, LED Annunciator, Model(s) 3-12/S1GY, 3-12/S1RY, 3-12/S2Y

Subassembly, LED annunciator, Model(s) 3-12RY

Subassembly, LED Annunciator, Model(s) 3-12SG, 3-12SR, 3-12SY

Subassembly, LED annunciator, Model(s) 3-24G, 3-24R

Subassembly, LED Annunciator, Model(s) 3-4/3SGYWR, 3-6/3S1G2Y, 3-6/3S1GYR

Subassembly, LED annunciator, Model(s) 4X-12RY

Subassembly, LED display support module, Model(s) 3-LDSM

Subassembly, Modem Communication Card, Model(s) 3-NSHM1(2)

Subassembly, Mounting Bracket, Model(s) MN-BRKT1, MN-BRKT1F, MN-BRKT3F, MN-BRKT4F, MN-BRKT8C18F, MN-FNS4HDK1, MN-FNS8HDK1, MN-NRBK1, RC-BRKT

Subassembly, Mounting Plate Bracket, Model(s) MN-BRKT2

Subassembly, Network data communications card, Model(s) 3-RS485(A/B/R), 3X-NET, 3X-NET8

Subassembly, Network Relay Module, Model(s) MN-NETRLY4

Subassembly, Off Premise Module, Model(s) 3-OPS

Subassembly, Primary P/S 120 V with monitor, Model(s) 3-PPS/M

Subassembly, Primary P/S 230 V with monitor, Model(s) 3-PPS/M-230

Subassembly, Primary Power Monitor, Model(s) 3-PSMON

Subassembly, Replacement Doors, Model(s) FS-5DG, FS-5DR, FS-10DG, FS-10DR, FX-5DG, FX-5DR, FX-10DG, FX-10DR

Subassembly, Replacement Dorrs, Model(s) FSP-5DG, FSP-5DR, FSP-10DG, FSP-10DR

Subassembly, Seismic Kit, Model(s) 3-CABEQ, 3-FTEQ, 3-RCCEQ50, 3-RCCEQ65

Subassembly, signature loop card, Model(s) VM-SLC-HC

Subassembly, Switching Hub, Model(s) MN-NETSW1, MN-NETSW2

Subassembly, Terminal Block Kit, Model(s) MN-TK10

Subassembly, Traditional Zone I/O Module, Model(s) 3-IDC8/4

Subassembly, Transformers, Model(s) F-XTR120, F-XTR230, F-TRANS-120, F-TRANS-230

Subassembly, Zone amplifier, Model(s) 3-ZA20A, 3-ZA20B, 3-ZA40A, 3-ZA40B, 3-ZA95

Subassembly, Zoned Audio Amplifier Daughterboard, Model(s) 3-ZADC-E

Tamper switch, Model(s) 4-TAMP, 3-TAMP, 3-TAMP5 and 3-TAMPGCC

Twisted Pair Full Duplex Network Extender, Model(s) 4-NET-XT

Twisted Pair SFP Network Controller, Model(s) 4-NET-TP, 4-NET-TP-HC

UL 864 9th Edition Listed

Enclosures for use in type Envoy graphics control panels, Model(s) BC-1, BC-1R, BC-2; BC-2(R), CBA48, CBA48-B, CBA48-D, CBA48-HT1, CBA48-HT2, CBA48-RMD, CBA48-VT, CBA48R, CBA48R-B, CBA48R-D, CBA48R-HT1, CBA48R-HT2, CBA72, CBA72-B, CBA72-D, CBA72-HT1, CBA72-HT2, CBA72-RMD, CBA72-VT, CBA72R, CBA72R-B, CBA72R-D, CBA72R-HT1, CBA72R-HT2, CBA72R-VT, CBA72R-VT

Subassembly, "Edwards or EST Brand", Model(s) 500elec-iO, 500elec-iO-FR, 500elec-iO-PG, 500elec-iO-SP

Subassembly, "Kidde or FireworX Brand", Model(s) 254elec-FSA, 254elec-FX

Subassembly, "Kidde/Vigilant Brand", Model(s) 500elec-VS, 500elec-VS-FR, 500elec-VS-PG, 500elec-VS-SP

Subassembly, Model(s) ARM-8 Auxiliary Relay Module, RQS1-CPU-1, RQS1-CPU-1-FR, RQS1-CPU-1-SP, RQS4-CPU-1, RQS4-CPU-1-FR, RQS4-CPU-1-SP, RQS4-CPU-2, RQS4-CPU-2-FR, RQS4-CPU-2-PG, RQS4-CPU-2-SP, RQSC-CPU-1, RQSC-CPU-1-FR, RQSC-CPU-2, RQSC-CPU-2-FR, RQSC-CPU-2-PG, RQSC-CPU-2-SP; PS6 Power Supply, QS-232 RS232 Card, ZB16-4 Class B Zone Card, ZA8-2 Class A Zone Card, SLIC Signature Loop Intelligent Control Card, DLD Dialer, ZR8 Relay Card, NT-A Class A RS485 Card, LED Switch Card Models SL30, SL30-1, SL30L, SL20L5S CPU Board, V-SLC SLC Loop Driver, XAL127 SLC Loop Driver, XAL250 SLC Loop Driver

L - Local System

A - Automatic Fire Alarm: thermostats, smoke detectors, etc.

CO - Carbon Monoxide Alarm: carbon monoxide detectors

M - Manual Fire Alarm: manually operated boxes

SS - Supervisory: gate valves, water-level switches, temperature switches, carbon monoxide alarm, residential fire alarm control units, etc.

WF - Waterflow Alarm: waterflow switches

C - Coded

NC - Noncoded, Steady, Temporal 3 Pattern, etc.

AUX - Auxiliary System

Rev Pol - Reverse Polarity

RS (PPU) - Remote Station System (Protected Premises Unit)

DAC - Digital Alarm Communicator

PB - Performance Based Technologies

CS (PPU) - Central Station System (Protected Premises Unit)

P (PPU) - Proprietary System (Protected Premises Unit)

P (RU) - Proprietary System (Supervising Station Receiving Unit)

March - March Time

CS (RU) - Central Station System (Supervising Station Receiving Unit)

OT - Other Transmission Technologies

MX - Multiplex

WSS - Watchman's Supervisory Service

CS - Central Station System

P - Proprietary System

(a) - Suitable for releasing device service when Local System Type and is used in conjunction with the SIGA-REL.

(b) - Requires separately Listed equipment when Type signaling is Digital Alarm Communicator (DAC).

(d) - Suitable for releasing device service when used in conjunction with the SIGA-REL.

(e) - When Local (L) Type, System control unit with emergency voice communication, emergency telephone communication and paging.

(f) - Other Transmission Technology, TCP/IP communication

Trademark and/or Tradename: "E" in a Shield, "Dukane", "ESL", "EST", "Edwards Co Inc.", "Edwards Company Inc", "Edwards Signaling", "Edwards System Technology", "FAST", "Fire Alarm Systems Technology", "FireworX", "G.S. Building Systems Corp", "GE Security", "GE Security Inc", "GS", "GSBS", "Interlogix Inc", "Mirtone", "S3000", "Sentrol", "Vigilant", "Ziton",  Kidde,



Last Updated on 2019-11-11

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2020 UL LLC"

BAZR2.MH46330 - Batteries, Standby - Component

Batteries, Standby - Component

GLOBAL POWER SOURCE (INDIA) PVT LTD

MH46330

701-702, C Wing

Neelkanth Business Park

Near Vidyavihar Bus depot

Mumbai, Maharashtra 400086 India

Model	Capacity, Voltage,		Max Discharge		Max Charge		Oper. Range/	Battery Case	Enclosure	High-rate Discharge
	Ah	Vdc	Rate		Rate		Max Ambient	Flame	Test	Test Current
			Amps	Hr	Amps	Hr	°C	Rating	Schedule	Amps
Sealed cell, lead acid batteries with pressure release vents										
ES 100-12	-	-	-	-	-	-	-	V-2	-	-
ES 12-12	12	12	-	-	-	-	-	HB	-	-
ES 120-12	-	-	-	-	-	-	-	V-2	-	-
ES 150-12	-	-	-	-	-	-	-	V-2	-	-
ES 18-12	17	12	-	-	-	-	-	HB	-	-
ES 200-12	-	-	-	-	-	-	-	V-2	-	-
ES 26-12	24	12	-	-	-	-	-	HB	-	-
ES 33-12	33	12	-	-	-	-	-	V-0	-	-
ES 4-6	-	-	-	-	-	-	-	HB	-	-
ES 4.5-6	-	-	-	-	-	-	-	V-2	-	-
ES 40-12	-	-	-	-	-	-	-	V-2	-	-
ES 42-12	40	12	-	-	-	-	-	HB	-	-
ES 5-12	5	12	-	-	-	-	-	HB	-	-
ES 55-12, ESD 55-12	55	12	-	-	-	-	-	HB	-	-
ES 65-12	-	-	-	-	-	-	-	V-2	-	-
ES 65-12, ESH 65-12 FR [AGM+GEL]	65	12	-	-	-	-	-	HB	-	-
ES 7-12	7	12	-	-	-	-	-	HB	-	-
ES 7-12FR	7	12	-	-	-	-	-	HB	-	-


ES 75-12	75	12	-	-	-	-	-	HB	-	-
ES 80-12	-	-	-	-	-	-	-	HB	-	-
ES 9-12	9	12	-	-	-	-	-	HB	-	-
ES 9-12FR	9	12	-	-	-	-	-	HB	-	-
ES 90-12	90	12	-	-	-	-	-	V-0	-	-
ES7-12 (12V,7.0AH)	7.0	12	-	-	-	-	-	HB	-	-
ESC 100-12	-	-	-	-	-	-	-	V-2	-	-
ESC 100-12 FR, ESH 100-12 FR [AGM+GEL]	100	12	-	-	-	-	-	V-0	-	-
ESC 120-12	-	-	-	-	-	-	-	V-2	-	-
ESC 120-12 FR, ESC 120-12 FR [AGM+GEL]	120	12	-	-	-	-	-	V-0	-	-
ESC 150-12	-	-	-	-	-	-	-	V-2	-	-
ESC 150-12 FR, ESH 150-12 FR [AGM+GEL]	150	12	-	-	-	-	-	V-0	-	-
ESC 200-12	-	-	-	-	-	-	-	V-2	-	-
ESC 200-12 FR, ESH 200-12 FR [AGM+GEL]	200	12	-	-	-	-	-	HB	-	-
ESC 200-12L	-	-	-	-	-	-	-	V-2	-	-
ESC 230-12 FR	215	12	-	-	-	-	-	V-0	-	-
ESC 250-12	215	12	-	-	-	-	-	V-0	-	-
ESC 250-12 FR	200	12	-	-	-	-	-	HB	-	-
ESFT 100-12	100	12	-	-	-	-	-	HB	-	-
ESFT 105-12	105	12	-	-	-	-	-	HB	-	-
ESFT 125-12	125	12	-	-	-	-	-	HB	-	-
ESFT 150-12	150	12	-	-	-	-	-	HB	-	-
ESFT 180-12	180	12	-	-	-	-	-	HB	-	-
ESFT 200-12	200	12	-	-	-	-	-	V-0	-	-
ESFT 50-12	50	12	-	-	-	-	-	HB	-	-
ESFT 80-12	80	12	-	-	-	-	-	HB	-	-
ESG 1000	-	-	-	-	-	-	-	HB	-	-
ESG 120	-	-	-	-	-	-	-	HB	-	-

ESG 150	-	-	-	-	-	-	-	HB	-	-
ESG 200	-	-	-	-	-	-	-	V-2	-	-
ESG 2000	-	-	-	-	-	-	-	HB	-	-
ESG 250	-	-	-	-	-	-	-	V-2	-	-
ESG 300	-	-	-	-	-	-	-	V-2	-	-
ESG 400	-	-	-	-	-	-	-	V-2	-	-
ESG 500	-	-	-	-	-	-	-	V-2	-	-
ESG 600	-	-	-	-	-	-	-	HB	-	-
ESG 800	-	-	-	-	-	-	-	HB	-	-
ESH 12-1050W	200	12	-	-	-	-	-	HB	-	-
ESH 12-290W	100	12	-	-	-	-	-	V-0	-	-
ESH 12-320W FR	75	12	-	-	-	-	-	HB	-	-
ESH 12-400W FR	100	12	-	-	-	-	-	HB	-	-
ESH 12-420W FR	90	12	-	-	-	-	-	HB	-	-
ESH 12-450W FR, ESH 12-450W FR [AGM+GEL]	120	12	-	-	-	-	-	HB	-	-
ESH 12-500W FR	134	12	-	-	-	-	-	V-0	-	-
ESH 12-540W FR	140	12	-	-	-	-	-	V-0	-	-
ESH 12-560W FR, ESH 12-560W FR [AGM+GEL]	120	12	-	-	-	-	-	HB	-	-
ESH 12-570W	200	12	-	-	-	-	-	V-0	-	-
ESH 12-710W FR, ESH 12-710W FR [AGM+GEL]	192	12	-	-	-	-	-	V-0	-	-
ESH 12-800W	150	12	-	-	-	-	-	HB	-	-
ESH 12-820W FR, ESH 12-820W FR [AGM+GEL]	200	12	-	-	-	-	-	HB	-	-
ESH 130-12 FR [AGM+GEL]	120	12	-	-	-	-	-	HB	-	-
ESH 42-12 FR [AGM+GEL]	40	12	-	-	-	-	-	HB	-	-
ESH12-620W	80	12	-	-	-	-	-	V-0	-	-
ESH12-810W	260	12	-	-	-	-	-	V-0	-	-
ESU 12-100W FR	28	12	-	-	-	-	-	HB	-	-
ESU 12-150W FR	33	12	-	-	-	-	-	HB	-	-

ESU 12-210W FR	55	12	-	-	-	-	-	HB	-	-
ESU 12-300W FR	80	12	-	-	-	-	-	HB	-	-
ESU 12-350W FR	90	12	-	-	-	-	-	HB	-	-
ESU 12-400W FR	100	12	-	-	-	-	-	HB	-	-
ESU 12-490W FR	140	12	-	-	-	-	-	HB	-	-
ESU 12-540W FR	140	12	-	-	-	-	-	HB	-	-
Sealed cell, lead-acid rechargeable batteries with pressure release vents										
ESHL390W	95	12	-	-	-	-	-	V-0	-	-
ESHL550W	140	12	-	-	-	-	-	V-0	-	-
ESHL600W	150	12	-	-	-	-	-	V-0	-	-
ESHL850W	230	12	-	-	-	-	-	V-0	-	-
Sealed, Valve-regulated Lead-acid Battery										
ESHL400W	100	12	300	30	25	2.5	-15-45	V-0	Counter/floor supported	40
ESHL700W	180	12	540	54	45	4.5	-15-45	V-0	Counter/floor supported	70

Note - CB battery models series may be followed by "FR" when a V-0 or V-1 rated material is used for the case and cover.

Marking: Company name or tradename "EnerRocket", "ROCKET" or trademark

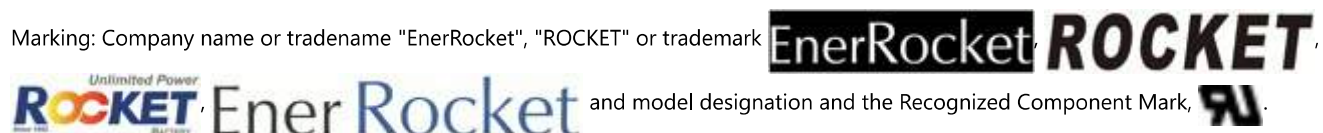

Last Updated on 2021-06-15

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2021 UL LLC"



URXG.S25287 Smoke Detectors for Special Applications

[Page Bottom](#)

Smoke Detectors for Special Applications

[See General Information for Smoke Detectors for Special Applications](#)
EDWARDS, A DIV OF UTC FIRE & SECURITY AMERICAS CORPORATION, INC.

S25287

8985 TOWN CENTER PKWY
BRADENTON, FL 34202 USA

			Compatibility	Velocity Range (fpm)	
Model	Type	Sensitivity	Restrictions	Min	Max
FHSD8010-xx (LaserSense Nano) [#]*(a); ReadySET*(a)					
	AS	-	None	0	4000
FHSD8025-xx (LaserSense 25) [#]*(a)	AS	N/A	None	0	4000
FHSD8100-xx (LaserSense 100) [#]*(a)					
	AS	N/A	None	0	4000
FHSD8200-xx (LaserSense HSSD2) [#] (a), FHSD8210-xx (LaserSense HSSD2 Minimum Display) [#] (a)*; FHSD8220-xx (LaserSense HSSD2 with Command Module) [#](a) *					
	AS	N/A	None	0	4000

AS - Air Sampling

- xx = Language Code

(a) - 3/4" internal diameter CPVC piping, Listed for Fire Protection Service under the category of Chlorinated Polyvinyl Chloride Sprinkler Pipe and Fittings (VIWT). Listed for use in air plenums, complying with the requirements of the Standard for Fire Test of Plastic Sprinkler Pipe for Visible Flame and Smoke Characteristics, UL 1887, for use with all FHSD (Laser Sense) series air sampling smoke detectors.

* - Also suitable for open area protection with limits as described in the installation manual. Air transport time must be calculated with AirSense PipeCAD software (Rev. 2.9) specifically indicating maximum transport time.

[Last Updated](#) on 2013-01-14

[Questions?](#)
[Print this page](#)
[Terms of Use](#)
[Page Top](#)

© 2015 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2015 UL LLC".



UUMW.S2813 Speakers and Amplifiers for Fire-protective Signaling Systems

[Page Bottom](#)

Speakers and Amplifiers for Fire-protective Signaling Systems

[See General Information for Speakers and Amplifiers for Fire-protective Signaling Systems](#)

EDWARDS, A DIV OF UTC FIRE & SECURITY AMERICAS CORPORATION, INC.

S2813

8985 TOWN CENTER PKWY
BRADENTON, FL 34202 USA

Bi-directional frame/ speaker enclosures, Models G4BDF, G4RBDF, for indoor use only.

Speakers, Cat. Nos. 965-1A-4RR, -4RW, -8RW, -8SW, CS7-1A4RR, CS7-1A4R, CS7-1A8R, CS7-1AB8, 964-1A, -4RR, -4RW, -8RW, -8SW 5551B-2W, CS2-1A4RR, CS2-1A4R, CS2-1A8R, CS2-1AB8 for indoor use only.

Models G4WA-S2, G4WN-S2, G4WA-S7, G4WN-S7, GCWA-S2, GCWN-S2, GCWA-S7, GCWN-S7.

Speakers, cone type, Cat. Nos. 757-1A, XLS757-1A followed by -S, followed by 25 or 70, may be followed by A through Z; Cat. No. 2460 followed by 25 or 70, may be followed by A through Z; Cat. No. INT followed by -S, followed by 2, may be followed by A through Z. Suitable for indoor use only.

Speakers, re-entrant type, Cat. Nos. 757-1A, XLS757-1A followed by -R, followed by 25 or 70, may be followed by A through Z; Cat. No. 2461- followed by 25 or 70, followed by -R, may be followed by A through Z; Cat. No. INT followed by -R, followed by 2, may be followed by A through Z. Suitable for indoor and outdoor use.

Speakers for fire alarm service, Models G4-S2, G4-S7, G4F-S2, G4F-S7, G4R-S2, G4R-S7, G4RF-S2, G4RF-S7, for indoor use. Prefix of E (Edwards Signaling), M (Mirtone) or Z (Ziton) to all above models.

Models GC-S2, ADTGC-S2, EGC-S2, GC-S2-LG, MGC-S2, XLSGC-S2, ZGC-S2, GCF-S2, ADTGCF-S2, EGCF-S2, GCF-S2-LG, MGCF-S2, XLSGCF-S2, ZGCF-S2, GC-S7, ADTGC-S7, EGC-S7, GC-S7-LG, MGC-S7, XLSGC-S7, ZGC-S7, GCF-S7, GCFR-S7, ADTGCF-S7, EGCF-S7, EGCFR-S7, GCF-S7-LG, MGCF-S7, MGCFR-S7, XLSGCF-S7, ZGCF-S7. Suitable for indoor use only.

Models WG4RF-S, WG4RN-S, WG4WA-S, WG4WF-S, WG4WN-S, for indoor or outdoor/wet use when installed with a Model 449 backbox.

Models G4HFRF-S2, G4HFRF-S7, G4HFRN-S2, G4HFRN-S7, G4HFWA-S2, G4HFWA-S7, G4HFWF-S2, G4HFWF-S7, G4HFWN-S2, G4HFWN-S7, Suitable for indoor use only.

Models GCHFWA-S2, GCHFWA-S7, GCHFRF-S2, GCHFRF-S7, GCHFWF-S2, GCHFWF-S7, GCHFRN-S2, GCHFRN-S7, GCHFWN-S2, GCHFWN-S7. Suitable for indoor use only.

Speakers for fire alarm service with signaling appliance for the hearing impaired, Models G4-S2VM, G4-S7VM, G4F-S2VM, G4F-S7VM, G4R-S2VM, G4R-S7VM, G4RF-S2VM, G4RF-S7VM, G4F-S2V1575, G4RF-S2V1575, G4F-S7V1575, G4RF-S7V1575. Prefix of E (Edwards Signaling), M (Mirtone) or Z (Ziton) to all above models.

Model 964 followed by -3A, -4A, -5A, -7A or -8A, followed by -4R, -8R or -8S, followed by any alphanumeric character.

Model CSS2 followed by -3A, -4A, -5A, -7A or -8A, followed by -4R, -8R or -8S, followed by any alphanumeric character.

Model 965 followed by -3A, -4A, -5A, -7A or -8A, followed by -4R, -8R or -8S, followed by any alphanumeric character.

Model CSS7 followed by -3A, -4A, -5A, -7A or -8A, followed by -4R, -8R or -8S, followed by any alphanumeric character.

Models G4WA-SVM*, G4WN-SVM*, where * can be B = Blue, G = Green and R = Red.

Models WG4RF-SVMC, WG4RN-SVMC, WG4WA-SVMC, **WG4WF-SVMC**, WG4WN-SVMC, WG4RF-SVMHC, WG4RN-SVMHC, WG4WA-SVMHC, WG4WF-SVMHC, WG4WN-SVMHC, **for indoor or outdoor/wet use.**

Models G4HFRF-S2VMC, G4HFRF-S7VMC, G4HFRN-S2VMC, G4HFRN-S7VMC, G4HFWA-S2VMC, G4HFWA-S7VMC, G4HFWF-S2VMC, G4HFWF-S7VMC, G4HFWN-S2VMC, G4HFWN-S7VMC. Suitable for indoor use only.

Models GCHFRF-S2VMC, GCHFRF-S7VMC, GCHFRN-S2VMC, GCHFRN-S7VMC, GCHFWA-S2VMC, GCHFWA-S7VMC, GCHFWF-S2VMC, GCHFWF-S7VMC, GCHFWN-S2VMC, GCHFWN-S7VMC. Suitable for indoor use only.

Models GCHFRF-S2VMCH, GCHFRF-S7VMCH, GCHFRN-S2VMCH, GCHFRN-S7VMCH, GCHFWA-S2VMCH, GCHFWA-S7VMCH, GCHFWF-S2VMCH, GCHFWF-S7VMCH, GCHFWN-S2VMCH, GCHFWN-S7VMCH. Suitable for indoor use only.

Speaker for fire alarm service with visual signaling appliances, Models WG4WA-SVMA, WG4WN-SVMA, WG4WA-SVMHA, WG4WN-SVMHA.

Models G4HFWA-S2VMA, G4HFWA-S7VMA, G4HFWN-S2VMA, G4HFWN-S7VMA.

Models GCHFWA-S2VMA, GCHFWA-S7VMA, GCHFWN-S2VMA, GCHFWN-S7VMA.

Models GCHFWA-S2VMAH, GCHFWA-S7VMAH, GCHFVN-S2VMAH, GCHFVN-S7VMAH.

Speakers with signaling appliance for the hearing impaired, cone type speakers, Cat. Nos. 757, XLS757 followed by -3A, -4A, -5A, -7A or 8A, followed by -SS, followed by 25 or 70, may be followed by A through Z; Cat. No. INT followed by -5A, followed by -S, may be followed by A through Z; Suitable for indoor use only.

Speakers with signaling appliance for the hearing impaired, Models GCWA-S2VMA, GCWA-S2VMHA, GCWA-S7VMA, GCWA-S7VMHA, GCWN-S2VMA, GCWN-S2VMHA, GCWN-S7VMA, GCWN-S7VMHA, G4WA-S2VMA, G4WN-S2VMA, G4WA-S7VMA, G4WN-S7VMA, GCWA-S2VMC, GCWA-S2VMHC, GCWA-S7VMC, GCWA-S7VMHC, GCWN-S2VMC, GCWN-S2VMHC, GCWN-S7VMC, GCWN-S7VMHC.

Speakers with signaling appliance for the hearing impaired, re-entrant type speakers, Cat. Nos. 757, XLS757 followed by -3A, -4A, -7A or -8A, followed by -RS, followed by 25 or 70, may be followed by A through Z; Cat. No. INT followed by -7A, followed by -R, may be followed by A through Z; Cat. No. 2471 followed by 25 or 70, 15/75, 30, -110 followed by -R or -W, may be followed by A through Z; Cat. No. INT followed by -R, may be followed by A through Z. Suitable for indoor and outdoor use.

Model 757 followed by -7A or -8A, followed by -RS70WA or -RS25WA. For private mode use and suitable for indoor and outdoor use.

Speaker accessories, Cat. Nos. 817B-001, -003, -004, -005, -006, -007, -010, -011, -111.

Models WG4RTS, WG4WTS trim skirts, for indoor or outdoor/wet use.

Model WG4GSKT replacement gasket kit, for indoor or outdoor/wet use.


Speaker accessories, back boxes, Cat. Nos. 960A-8RF, -4RF, -4SS, -4SF, -8SS, -8SF, QSB-108, -104, -124, -114, 54010, 54003.

Speakers/strobes for fire alarm service with signaling appliance for the hearing impaired, Models GC-S2VM, ADTGC-S2VM, EGC-S2VM, GC-S2VM-LG, MGC-S2VM, , XLSGC-S2VM, ZGC-S2VM, GCF-S2VM, ADTGCF-S2VM, EGCF-S2VM, GCF-S2VM-LG, MGCF-S2VM, XLSGCF-S2VMZGCF-S2VM, GC-S7VM, ADTGC-S7VM, EGC-S7VM, GC-S7VM-LG, MGC-S7VM, XLSGC-S7VM, ZGC-S7VM, GCF-S7VM, GCFR-S7VM, ADTGCF-S7VM, EGCF-S7VM, EGCFR-S7VM, GCF-S7VM-LG, MGCF-S7VM, MGCFR-S7VM, XLSGCF-S7VM, ZGCF-S7VM. Suitable for indoor use only.

Models GC-S2VMH, ADTGC-S2VMH, EGC-S2VMH, GC-S2VMH-LG, MGC-S2VMH, XLSGC-S2VMH, ZGC-S2VMH, GCF-S2VMH, ADTGCF-S2VMH, EGCF-S2VMH, GCF-S2VMH-LG, MGCF-S2VMH, XLSGCF-S2VMH, ZGCF-S2VMH, GC-S7VMH, ADTGC-S7VMH, EGC-S7VMH, GC-S7VMH-LG, MGC-S7VMH, XLSGC-S7VMH, ZGC-S7VMH, GCF-S7VMH, ADTGCF-S7VMH, EGCF-S7VMH, GCF-S7VMH-LG, MGCF-S7VMH, XLSGCF-S7VMH, ZGCF-S7VMH. Suitable for indoor use only.

Surface mount speaker enclosures, Models G4B, G4RB, for indoor use only.

Trademark and/or Tradename: "Ziton", "GE Security", "Edwards System Technology", "Edwards Signaling", "Edwards Co Inc", "FAST", "Fire Alarm Systems Technology", "GSBS", "G.S. Building Systems Corp.", "Mirtone", ""E" in a Shield", "Edwards Company Inc.", "GS", "FireworX",



Last Updated on 2015-04-20

[Questions?](#)

[Print this page](#)

[Terms of Use](#)

[Page Top](#)

© 2015 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2015 UL LLC".





UL Product iQ

UL'S NEXT GENERATION CERTIFICATIONS SEARCH

The same trusted data in a modern search engine.

NOW AVAILABLE

➤ LEARN MORE

UUMW.S2652

Speakers and Amplifiers for Fire-protective Signaling Systems

Page Bottom

Speakers and Amplifiers for Fire-protective Signaling Systems

See General Information for Speakers and Amplifiers for Fire-protective Signaling Systems

COOPER WHELOCK INC

273 BRANCHPORT AVE

LONG BRANCH, NJ 07740-6830 USA

S2652

Accessories Model(s) AP, BB, DBB, DFB, FBB, FP, FSB1, IOB, RP, SB, SBB, SBB-4, SBB-8, SBL, SBL-1, SBL-2, SFB, SHMP, UFP, WBB

Ceiling mounted speakers, for indoor dry use Model(s) LSPKxC (a), S8-70/25

Ceiling speaker surface back box accessories Model(s) LSPKBB-C

Enclosures, for use with speaker E50 Model(s) SB

Enclosures, for use with speaker/strobe E50-24MCW, E50-24MCWH or E50-241575W Model(s) SSB

Speakers Model(s) E50H-R+, E50H-W+, E60H-R+, E60H-W+, E70H-R+, E70H-W+, E90H-R+, E90H-W+, SA-70SR, SA-70SW, SA-90SW, SA-S70, SA-S90

Speakers (25 or 70.7 VRMS) with plastic housing Model(s) ET-1080P(X)

Speakers, for indoor and outdoor use Model(s) STH-15S, STH-15SR

Speakers, for indoor dry use on wall Model(s) E50-(Y), LSPKx (a)

Speakers, for indoor use Model(s) E60(X), E70(X), E90(X)

Speakers, indoor use with back box SB or SBL Model(s) 806T(X), 807T(X)

Speakers, outdoor use with back box WBB Model(s) 806T(X), 807T(X)

Speakers/strobes Model(s) E50H(X)-24MCW-FR+, E50H(X)-24MCW-FW+, E50H(X)-24MCWH-FR+, E50H(X)-24MCWH-FW+, E60H(X)-24MCC-FR+, E60H(X)-24MCC-FW+, E60H(X)-24MCCH(X)-FW+, E60H(X)-24MCCH-FR+, E70H(X)-24MCC-FR+, E70H(X)-24MCC-FW+, E70H(X)-24MCW-FR+, E70H(X)-24MCW-FW+, E70H(X)-24MCWH-FR+, E70H(X)-24MCWH-FW+, E70H(X)-241575W-FR+, E70H-241575W-FW+, E90H(X)-24MCC-FR+, E90H(X)-24MCC-FW+, E90H(X)-24MCCH-FR+, E90H(X)-24MCCH-FW+

ET-1080 (25 and 70.7 VRMS), followed by A (Amber), B (Blue), G (Green), R (Red) or W (White), followed by -S (12,000cd/1.5cd) or -H (70,000cp/15cd) for strobe intensity, followed by -12 (12VDC) or -24 (18-31VDC) for strobe voltage, may be followed by (Y), Prefixed with P in front of the product color indicates plastic housing.

- ET-1080 (25 and 70.7VRMS), followed by W (White/clear window) indicating lens color, followed by -M (117cd) for strobe intensity, followed by -24 (18-31VDC)for strobe voltage, may be followed by (Y), prefixed with P placed in front of the product color indicates plastic housing.
- ET-1080, followed by HSW-24 (110 cd), HSPW-24 (110 cd), IS-24 (75 cd), LS-24 (15 cd), LSM-24 (15 cd), MS-24 (30 cd), MSP-24 (30 cd), SHPW-24 (110 cd), SL-24 (15 cd), SLM-24 (15 cd) indicating strobe intensity and voltage range (20-31 VDC/VFWR), may be followed by (Y).
- ET-1080, followed by LS-12 (15 cd), LSM-12 (15 cd), MS-12 (30 cd) indicating strobe light intensity and voltage range (10.5-15.6 VDC/VFWR), may be followed by (Y).
- ET-1080, may be followed by -IS-24, -LS-24, -LSM-24, -MS-24, -SL-24 or -SLM-24, followed by (Y).
- LSPK+, LSPST+, LSPST-Amber+
- SA-70S, followed by IS-24, LS-24, LSM-24, MS-24, SL-24 or SLM-24, may be followed by R or W indicating color.
- SA-90S, followed by IS-24, LS-24, MS-24 or SL-24, may be followed by R or W indicating color.
- SA-S70-(Z), SA-S70-24MCC(X), SA-S70-24MCW(X), SA-S90-(Z)
- Speakers/strobes (with incandescent strobe), 1/4, 1/2, 1 or 2 Watt taps** Model(s) E-7025, E-7070, E-9025 or E-9070, followed by VL (.84cd) to indicate strobe intensity. Suffix after the strobe designation indicates strobe voltage (-24VDC), followed by A (Amber), B (Blue), G (Green), R (Red) or W (White) indicate lens color, may be followed by (Y).
- Speakers/strobes, 1/4, 1/2, 1 or 2 Watt taps** Model(s) E-7025, E-7070, E-9025 or E-9070, followed by A (amber), B (blue), G (green), R (red) or W (white) indicating lens color, followed by -S (12,000cd/1.5cd) or H (70,000cp/15cd) for strobe intensity, followed by -12 (12VDC) or -24 (18-31VDC)for strobe voltage, may be followed by (Y).
- Speakers/strobes, for indoor dry use** Model(s) E60(X)-24MCC or E60(X)-24MCCCH, may be followed by (Y).
- Speakers/strobes, for indoor dry use mounted on ceiling** Model(s) LSPSTxC3 (a), LSPSTxC3-A (a), S8(X)-24MCC, S8(X)-24MCCCH
- Speakers/strobes, for indoor dry use on wall** Model(s) E50-241575W-(Y), E50-MCC-(Y), E50-MCW-(Y), E50-MCWH-(Y), LSPSTx3 (a), LSPSTx3-A (a)
- Speakers/strobes, for indoor use** Model(s) E60(X)-24MCC-(Y), E60(X)-24MCCH-(Y), E60(X)-24MCW-(Y), E60(X)-24MCWH-(Y), E70(X)-241575W-(Y), E70(X)-24MCC-(Y), E70(X)-24MCCH-(Y), E70(X)-24MCW-(Y), E70(X)-24MCWH-(Y), E90(X)-241575W-(Y), E90(X)-24MCC-(Y), E90(X)-24MCCH-(Y), E90(X)-24MCW-(Y), E90(X)-24MCWH-(Y)
- ET70 or ET90, followed by -24, followed by 150W, 177W, 185W, 150C or 177C, may be followed by (Y).
- ET70(X)-24MCC-(Y), ET70(X)-24MCCH-(Y), ET70(X)-24MCW-(Y), ET70(X)-24MCWH-(Y), ET80(X)-24MCW-(Y), ET80(X)-24MCCH-(Y), ET90(X)-24MCC-(Y), ET90(X)-24MCW-(Y), ET90(X)-24MCWH-(Y)
- Speakers/strobes, for indoor use mounted on ceiling** Model(s) LSPSTxC+
- Speakers/strobes, for indoor use on wall** Model(s) E70 or E90, followed by -24, followed by 15W, 30W, 75W, 110W or 185W, 150W, or 177W, may be followed by (Y).
- ET70(X) or E90(X), followed by -24, followed by 1575W, may be followed by (Y).
- ET70, ET80 or ET90, followed by -24, followed by 1575W.
- Speakers/strobes, for indoor use on wall or ceiling** Model(s) E70 or E90, followed by -24, followed by 15C, 30C, 75C, 100C, 150C or 177C, may be followed by (Y).
- Speakers/strobes, for outdoor use with IOB back box** Model(s) ET70WP-24115C-(Y), ET70WP-24135W-(Y), ET70WP-24177C-(Y), ET70WP-24185W-(Y), ET70WP-2475C-(Y), **ET70WP-2475W-(Y)**
- Surface mounted speakers (25 or 70.7 VRMS) with plastic housing** Model(s) ET-1010P(X)
- Surface mounted speakers, for indoor use with SBL back box** Model(s) ET-1010
- Surface mounting speakers, for outdoor use with WBB back box** Model(s) ET-1010
- Synchronized strobe lights, use with sync module SCM-24, SM-12/24 or DSM-12/24** Model(s) SHPW-24, SL-24, SLM-24
- Wall speaker surface back box accessories** Model(s) LSPKBB

Investigated to UL 1480

extension ring Model(s) E60EXT

- (a) - "X" represents product color. All models may be followed by any alphanumeric characters which indicate product lettering, followed by `A? for amber lens color, if applicable.
- (X) - Where X represents one or two alphanumeric character(s) represents lens color and/or surface mouting , for color may be either R (Red), B (Blue), G (Green) or A (Amber). No (X) designator indicates clear lens.
- (Y) - Where Y represents two or three alphanumeric characters indicating lens orientation, lettering and product color.
- (Z) - Where Z can be a one or two digit code indicating color of enclosure and/or verbiage marked on the front of the unit.

Trademark and/or Tradename: "Cooper Notification" , "Wheelock"

Last Updated on 2018-02-15

<u>Questions?</u>	<u>Print this page</u>	<u>Terms of Use</u>	<u>Page Top</u>
-------------------	------------------------	---------------------	-----------------

© 2018 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2018 UL LLC".