



COMPANY PROFILE

2024



WELCOME

Emirates Paints positioned itself in the market with premium formulas, a wide range of products, and a team of professionals. The company continues to serve every customer while keeping up with numerous modern developments and transformations of the glorious United Arab Emirates.

In accordance with the UAE's rapid growth and significant developments in architecture and landmarks since the beginning of the twenty-first century, the paint industry has seen an upturn in demand from owners of commercial and residential buildings seeking high-end products that improve the aesthetic appeal of their homes and buildings. Explore our projects, offerings, and achievements in this manual.



TABLE OF CONTENT

Our Story	01
Product Categories	02
Manufacturing Factory Premises	03
Certifications	04
Completed and Ongoing projects	05
Contact	06

غ الإمارات

EMIRAT

PAINTS

الملا
IUM

A black and white photograph of the Emirates Paints building facade. The building has a modern, grid-like structure. The word 'Emirates' is partially visible in Arabic script and English. The English part 'TES' is in large, bold, red letters. Below it, the word 'PAINTS' is partially visible in smaller letters. The background is a solid red color with abstract, wavy white lines.

أُمّ
TES

01 OUR STORY

Emirates Paints was established in 2021. Proudly made in the UAE. A Fast-growing company successfully expanding in the UAE and throughout the MENA region.

We are dedicated to providing high-quality products to the highest standards following international guidelines. We take pride in using the latest technologies, techniques, and formulas available in the market to develop our products.



5000+
COLORS



INTERIOR



EXTERIOR



INDUSTRIAL

01 Commitment

Our team of employees has taken great interest in remaining ecologically aware whilst developing and perfecting our premium paints and continues to work hard to develop new products and improve on existing products to ensure the greatest safety for you and your loved ones.

We are determined to provide our customers with the most durable and long-lasting products, as we believe it is our ethical duty to do so.

"We set the standards for excellence with hard work and commitment." ————— *Saif Al Ghurair*



02 Mission and Vision

To be the fastest-growing paint company in UAE and MENA region, we will provide the best quality products and services to our customers.

We will always be

Innovating and improving our products and services to meet the ever-changing needs of our customers.

Responsive to our customer's feedback to ensure that we are always meeting their needs.

Looking for new ways to grow our business and expand our market share.

03 Chairman's Message

"As a businessman, I aim to create a legacy of pride and glory for the United Arab Emirates."

With unity, passion, and creative thinking – We work with the vision to innovate. The core value of Emirates Paints' team lies in their dedication to crafting high-quality products that surpass customers' expectations and enhance their lives.

————— *Mohamed Saif Al Ghurair*





أصباغ الإمارات
EMIRATES
PAINTS

**EPOXY
THINNER**

Premium Quality

أصباغ الإمارات
EMIRATES
PAINTS

**STUCCO
FILLER**

Premium Quality

أصباغ الإمارات
EMIRATES
PAINTS

**DURABLE
EMULSION**

Premium Quality

أصباغ الإمارات
EMIRATES
PAINTS

**AQUA
EMULSION**

Premium Quality

أصباغ الإمارات
EMIRATES
PAINTS

EMULSION

Premium Quality

02 PRODUCT CATEGORIES



Easy Application



Weather Resistant



Easy to Clean



Water Based



Long Lasting



Eco Friendly



Antibacterial



Antifungal



Low VOC

Product Categories

Emirates Paints rapidly expanding product line is conveniently available in six sizes: 250ML, 500ML, 0.9L, 1L, 3.6L, and 18L.

1. EMULSION PRIMER / UNDERCOAT
2. EMASHIELD TOP COAT
3. EMULSION FILLER
4. TEXTURE COATINGS
5. EMULSION TOP COAT
6. ALKYD TOP COATS

7. SPRAY PLASTER
8. ALKYD PRIMERS
9. FLOOR COATING
10. WATER PROOFING
11. EMACRYLIC
12. INDUSTRIAL & ANTICORROSIVE

13. POLYURETHANE
14. WOOD COATING
15. SPECIALTY PRODUCTS
16. CHROMA AUTOMOTIVE PAINTS
17. THINNERS

- ✓ LONG LASTING
- ✓ COLOR VARIETY
- ✓ PREMIUM QUALITY





EMULSION PRIMER / UNDERCOAT

PVA PRIMER · WHITE, COLORS
 PVA PRIMER SEALER · CLEAR
 ACRYLIC PRIMER · WHITE, COLORS
 SILOXANE PRIMER
 SILICONE PRIMER

TEX PRIMER
 EMASHEILD TEX PRIMER
 PENETRATING SEALER
 TEXO COMPOUND
 NUTEX



EMASHIELD TOP COAT

EMASHEILD LONG LIFE CLASSIC TEX
 EMASHEILD LONG LIFE ANTIQUE TEX
 EMASHEILD LONG LIFE TRADITIONAL TEX
 EMASHEILD TOP COAT · GLOSS, SEMI-GLOSS, MATT

EMASHIELD TEX SILK
 EMASHIELD ULTRA SILK
 EMASHIELD FINE SILK



EMULSION FILLER

STUCCO FILLER
 EMASHIELD EXTERIOR PUTTY



TEXTURE COATINGS (WATER BASED)

EMATEX

EMASYNPLAST

EMASANDTEX

EMAMINITEX

EMASYNTEX

EMAFINETEX

GROOVED DÉCOR

MINI DECO · FINE, MEDIUM

EMASHIELD TEX MEDIUM

ACRYLIC GLAZE COAT CLEAR



EMULSION TOP COAT

AQUA EMULSION

EXCEL EMULSION

PREMIUM EMULSION · SILKY, MATT

DURABLE EMULSION

MAJESTIC · SILKY, MATT

MAJESTIC · SILKY, MATT

MAJESTIC ANTIFUNGAL · SILKY, MATT

GLOSS EMULSION

PROTECT SEAL · SILK, MATT

ANTICARBONATION · SILKY, MATT



ALKYD TOP COATS

ALKYD ENAMEL · GLOSS, SEMI-GLOSS, MATT

ALKYD ENAMEL VARNISH · GLOSS, MATT

ALKYD ENAMEL ECO MASTER

ALKYD ENAMEL QD

ALKYD STAIN



SPRAY PLASTER

SPRAY PLASTER FINE
 SPRAY PLASTER MEDIUM
 SPRAY PLASTER COARSE
 EXTERIOR SPRAY PLASTER COARSE



ALKYD PRIMERS

ALKYD ENAMEL UNDER COAT
 GREY OXIDE PRIMER
 QD RED OXIDE PRIMER
 RED OXIDE PRIMER
 WOOD PRIMER



FLOOR COATING (A+B)

EMAPOXY PRIMER FOR CEMENT CLEAR
 EMAPOXY FLOORING PRIMER CLEAR SF
 EMAPOXY FILLER SF
 EMAPOXY FLOORING TOP COAT
 EMAPOXY FLOORING TOP COAT SF

EMAPOXY SELF LEVELING
 EMA PU FLOORING H.B
 EMA HEAVY DUTY FLOOR SCREED
 (A+B+C) · CLEAR, PIGMENTED



WATER PROOFING

POLYDEX



EMACRYLIC (SOLVENT BASED)

EMACRYLIC PRIMER

EMACRYLIC TOP COAT



INDUSTRIAL & ANTICORROSIVE (A+B)

EMAPOXY UNIVERSAL PRIMER

EMAPOXY MASTERBOND PRIMER

EMAPOXY PHENOLIC PRIMER

EMAPOXY ZINC RICH PRIMER

EMAPOXY ZINC PHOSPHATE PRIMER

EMAPOXY ZINC CHROMATE PRIMER

EMAPOXY M.I.O PRIMER

EMAPOXY RED OXIDE PRIMER

EMAPOXY COAL TAR

EMAPOXY PRIMER

EMAPOXY UNDERCOAT

EMAPOXY TOP COAT

EMAPOXY TOP COAT PIGMENTED SF

EMAPOXY CLEAR SF

EMA PU PRIMER

EMA PU TOP COAT

EMA ALIPHATIC PU



POLYURETHANE (A+B)

EMA PU TOP COAT



WOOD COATING NC, PU, ALKYD

NC PUTTY

NC PRIMER

NC SANDING SEALER

NC TOP COAT · GLOSS, SEMI-GLOSS, MATT

NC CLEAR · GLOSS, SEMI-GLOSS, MATT

NC WOOD FILLER

NC WOOD STAIN

PU WOOD PRIMER

PU WOOD SANDING SEALER

PU WOOD TOP COAT · GLOSS, SEMI-GLOSS, MATT

PU WOOD CLEAR · GLOSS, SEMI-GLOSS, MATT

CRACKLE LACQUER · CLEAR, WHITE

ALKYD WOOD STAIN

WOOD GLUE



SPECIALTY PRODUCTS

RUST REMOVER

PAINT REMOVER

ROAD MARKER · WHITE, YELLOW, BLACK

EMACRYLIC ROAD MARKER

EMAPOXY INTERGUARD (A+B)

JOINT FILLER

BLOCK FILLER

CRACK FILLER

HAMMER FINISH

ALUMINUM PAINTS



CHROMA AUTOMOTIVE PAINTS NC, 2K, EMALUX

CHROMA NC PUTTY
CHROMA NC PRIMER
CHROMA NC TOP COAT · GLOSS, MATT
CHROMA NC CLEAR · GLOSS, SEMI-GLOSS, MATT
CHROMA NC THINNER
CHROMA 2K TOP COAT · GLOSS, MATT
CHROMA 2K CLEAR · GLOSS, MATT
CHROMA 2K HARDENER

CHROMA 2K THINNER
CHROMA EMALUX PRIMER
CHROMA EMALUX BASE COAT
CHROMA EMALUX TOP COAT
CHROMA EMALUX CLEAR
CHROMA EMALUX HARDENER
CHROMA EMALUX THINNER



THINNERS

LACQUER THINNER
GENERAL PURPOSE THINNER
EPOXY THINNER
ACRYLIC THINNER
TURPENTINE
ALKYD ENAMEL THINNER
Q.D THINNER
ROAD MARKER THINNER
FIRE RETARDANT THINNER
INTUMESCENT THINNER

THINNER FOR CLEANING
POLYURETHANE THINNER
POLYURETHANE WOOD THINNER
FLUORESCENT THINNER
STOVING THINNER
RETARDER
WASH PRIMER THINNER
HYPOLON THINNER
CHLORO RUBBER THINNER
NC THINNER


Enduring
Weather
Resistant Paints





Factory Size
12,000 SQM

Full Storage Capacity
84,000 SQM

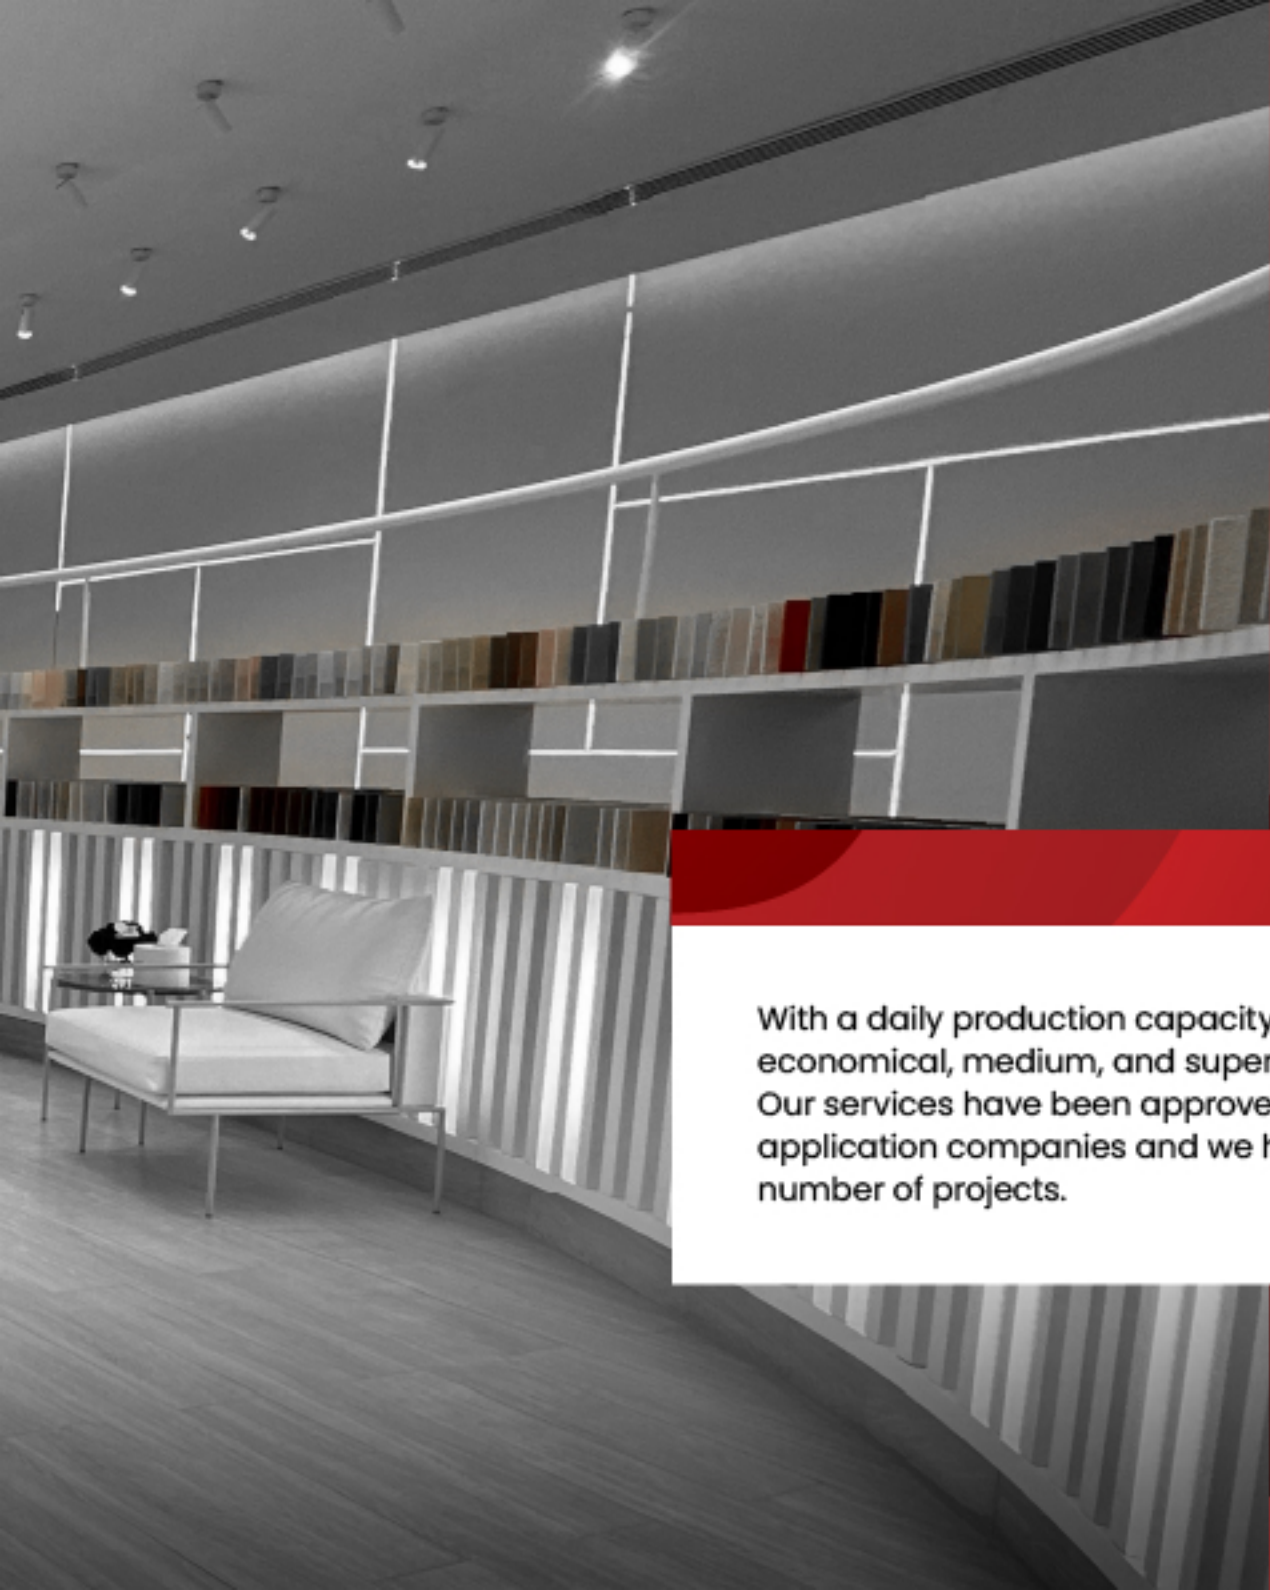A modern interior space featuring long, curved white shelving units filled with numerous small, colorful rectangular objects, possibly paint samples. A white lounge chair with a cushion is positioned in the foreground. The ceiling has recessed lighting. The right side of the image is overlaid with a red graphic containing text.

03 MANUFACTURING FACTORY PREMISES

With a daily production capacity of 300,000, we offer economical, medium, and superior paints to meet market needs. Our services have been approved by a number of well-known application companies and we have successfully completed a number of projects.

أصباغ الإمارات
EMIRATES
PAINTS

Quality Management
ISO 9001:2015

Occupational Health and
Safety Management
ISO 45001:2018

DCL Low Emitting Materials
DCL CL22020809

Environmental Management
ISO 14001:2015

Hazard Analysis and Critical
Control Points
HACCP NQU-6006

DCL Dubai Green Building
DCL CL22020809



04 CERTIFICATIONS

Emirates Paints meets international standards and regulations. We are certified for the high safety standards of our products and eco-friendly practices with top-quality formulas and professional customer support.



TEST REPORT ON DETERMINATION OF THE CLASSIFICATION OF THE SURFACE SPREAD OF FLAME ON PRODUCTS BS 476 Part 7:1997

Client	Emirates Paint L.L.C		
Sample No	WD-S-230703-0854	Report No	WD-R-230703-0980/5
Date Received	03.07.2023	Casting Date	19.07.2023
Test Completion Date	02.08.2023	Date Reported	03.08.2023

1.0 Scope

To determine the lateral spread of flame along the surface of the system oriented in vertical position under opposed flow conditions and a classification system based on the rate and extent of the spread of flame. It provides data suitable for comparing the end-use performances of essentially flat materials, composites, or assemblies, which are used primarily as the exposed surfaces of walls or ceilings (BS 476 Part 7: 1997 Clause 1.0)

2.0 Introduction

Further to the request received from M/s Emirates Paint L.L.C dated 03rd July 2023, the below mentioned sample was tested for spread of flame as per BS 476 Part 7:1997

3.0 Details of samples Received.

Name of Product
Durable Emulsion

4.0 Application Details

Application Method	Roller
Ambient Condition	23±2°C, 50±5 % RH
Curing Time	7 Days
Substrate	Cement Board
Dry Film Thickness – achieved	180 µm

ISO 9001:2015, ISO 14001:2015 & OHSAS 18001:2017 Certified



5.0 Conditioning

Specimens were conditioned to constant mass at a temperature of 23±2°C and a relative humidity of 50±5% in accordance with BS 476: Part 7: 1997 Clause 5.5. A representative from the total number of sample was selected for constant mass verification.

6.0 Test Procedure:

- The material is coated as per manufacturer provided coating system on cement boards of 885 x 270mm size.
- A minimum of 7 cement boards were used for testing
- Cure the test assembly 7 days at 23±2°C and 50±5% RH
- Specimen was carefully examined for any surface possible defects before testing
- Specimens were tested in accordance with BS 476 Part 7:1997 Clause 9.1
- At the end of each specified time, observations on a tested specimen were recorded.

7.0 Criteria for Classification

In case prefix 'D' or suffix 'R' or 'Y' is included in the classification, this indicates that the results should be treated with caution. An explanation of such prefix and suffixes is given in Appendix 2, together with the classification limits specified in the standard.

8.0 Applicability of test result

The test results relate only to the behavior of the test specimen of the product under the particular conditions of test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

9.0 Validity:

Results relate only to the item tested. This report shall not be reproduced except in full, without written approval of the laboratory.



ISO 9001:2015, ISO 14001:2015 & OHSAS 18001:2017 Certified



10.0 Test Results

Measured Density of Sample, kg/m ³	1360
---	------

10.1 Maximum distance travelled by fire after 1.5 minutes

Maximum distance travelled at 1.50 minutes (mm)	<75
---	-----

10.2 Time to reach maximum distance travelled

Distance (mm)	Time taken to travel the indicated distance (minutes: seconds)
	1
75	No Propagation of flame was observed after extinguishing the pilot flame
165	-
190	-
215	-
240	-
265	-
290	-
375	-
455	-
500	-
525	-
600	-
675	-
710	-
750	-
785	-
825	-

10.3 Maximum distance travelled by fire after 10 minutes

Maximum distance travelled at 10 minutes (mm)	<75
---	-----

ISO 9001:2015, ISO 14001:2015 & OHSAS 18001:2017 Certified



10.4 Observation

After extinguishing the pilot flame, no flame was observed on the surface of the sample.

10.5 Classification Criteria

Classification	Spread of flame at 1.5 minutes		Final spread of flame	
	Limit (mm)	Limit for one (1) specimen in sample	Limit (mm)	Limit for one (1) specimen in sample
Class 1	165	165+25	165	165+25
Class 2	215	215+25	455	455+25
Class 3	265	265+25	710	710+25
Class 4	Exceeding the limits for Class 3			

10.6 Classification - Result

Classification as per BS 476 Part 7:1997	Class 1
--	---------

Remarks: None.

Signed for and on behalf of Wimpey Laboratories LLC

S. Sarath Kumar
Head of Department

Test Results relate only to the samples tested.
This Report shall not be reproduced except in full, without the written approval of the laboratory.
*This test was done by subcontracting

End of Test



ISO 9001:2015, ISO 14001:2015 & OHSAS 18001:2017 Certified

TEST REPORT ON PRACTICAL WASHABILITY OF ORGANIC COATINGS

Client	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.	Lab Report No.	WD-R-230703-0999/1
Sample Description	Ema Shield Fine Silk	Lab Request No.	WD-Q-230703-0274
Source	Emirates Paint L.L.C	Sample No.	WD-S-230703-0865
Test Method	ASTM D4828-04(2020)	Date Received	03/07/2023
Test Temperature	23°C & 50% RH	Casting Date	26/07/2023
Tested Location	Wimpey-Dubai	Date Tested	02/08/2023
Wimpey Ref No.	23070325	Date Reported	10/08/2023
Tested By	SP		

Rating for the condition of each soil or stain in the path of the sponge

Rating	Observation
0	No change from original intensity (depth) of soil or stain,
3	Slight change from original, but readily visible
5	Moderate change from original, slightly visible,
7	Large change from original, barely visible, and
10	All soil and stain removed

Rating of washed area relative to the unwashed areas for gloss or color change and erosion

Rating	Gloss Change	Rating	Color Change	Rating	Erosion
N	None	N	None	N	None
I	Increases	SD	Slightly darker	S	Slight
II	Large Increase	CD	Considerably darker	M	Moderate
D	Decreases	SL	Slightly lighter		
DD	Large Decrease	CL	Considerably lighter		



(Page 1 of 2)

Report No: WD-R-230703-0999/1
Sample No: WD-S-230703-0865

Test Result on Stain Removal

Washing Method: Mechanical Method
Washing Medium: Tap Water

SLNo	Staining Agent	Number of washing cycles	Rating for the condition of each stain in the path of the sponge
1	Marker	100	7
2	Highlighter	100	7
3	2B pencil	100	10
4	Sketch pen	100	7
5	Black tea	100	10
6	Black coffee	100	10
7	Marmalade	100	10
8	Crayon	100	10
9	Color Pencil	100	10
10	Water Color	100	10

Test Result on change in properties

Test	Rating of washed area relative to the unwashed area
Gloss Change	I
Color Change	N
Erosion	N

Remark: None.

Test Method Variation: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Spruth Kumar
Head of Department

Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of this laboratory.



(Page 2 of 2)

TEST REPORT ON CRACK BRIDGING ABILITY

Customer Name	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.		
Project Name	N.G	Lab Report No.	WD-R-230703-0999/2
Sample Description	Ema Shield Fine Silk	Lab Request No.	WD-Q-230703-0274
Source	Emirates Paint L.L.C	Sample No.	WD-S-230703-0865
Test Specification	ASTM C836/C836M-16 (2022)	Wimpey Ref. No.	23070325
Test Method	ASTM C1305/C1305M-16(2023)	Date Received	03/07/2023
Nature of Substrate	Concrete	Casting Date	19/07/2023
Substrate Dimension(mm)	75 L x 50 W	Date Tested	09/08/2023
Test Method	Method A	Date Reported	15/08/2023
Sampling Conditioning	14 Days at room temperature followed by 7 days at 70°C	No. of coat & Method of application	N.G
Test Condition	Temperature: 23°C Relative Humidity: 50%	Tested By	SP
Dry Film Thickness	300 Microns		

Test Results

Test	Crack width (mm)	Observation
Crack Bridging Ability	1.80	No sign of cracks, loss of adhesion or any other type of failure was observed up to 1.80 mm

Remarks: None.

Signed for and on behalf of Wimpey Laboratories L.L.C

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of Wimpey Laboratories L.L.C.



TEST REPORT ON PRACTICAL WASHABILITY OF ORGANIC COATINGS

Client	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.		
Sample Description	Ema Shield Tex Silk	Lab Report No.	WD-R-230703-0997/1
Source	Emirates Paint L.L.C	Lab Request No.	WD-Q-230703-0274
Test Method	ASTM D4828-04(2020)	Sample No.	WD-S-230703-0864
Test Temperature	23°C & 50% RH	Date Received	03/07/2023
Tested Location	Wimpey-Dubai	Casting Date	26/07/2023
Wimpey Ref No.	23070325	Date Tested	02/08/2023
Tested By	SP	Date Reported	10/08/2023

Rating for the condition of each soil or stain in the path of the sponge

Rating	Observation
0	No change from original intensity (depth) of soil or stain,
3	Slight change from original, but readily visible
5	Moderate change from original, slightly visible,
7	Large change from original, barely visible, and
10	All soil and stain removed

Rating of washed area relative to the unwashed areas for gloss or color change and erosion

Rating	Gloss Change	Rating	Color Change	Rating	Erosion
N	None	N	None	N	None
I	Increases	SD	Slightly darker	S	Slight
II	Large Increase	CD	Considerably darker	M	Moderate
D	Decreases	SL	Slightly lighter		
DD	Large Decrease	CL	Considerably lighter		

(Page 1 of 2)



Report No: WD-R-230703-0997/1
Sample No: WD-S-230703-0864

Test Result on Stain Removal

Washing Method: Mechanical Method
Washing Medium: Tap Water

Sl.No	Staining Agent	Number of washing cycles	Rating for the condition of each stain in the path of the sponge
1	Marker	100	7
2	Highlighter	100	7
3	2B pencil	100	10
4	Sketch pen	100	7
5	Black tea	100	10
6	Black coffee	100	10
7	Mayonnaise	100	10
8	Crayon	100	10
9	Color Pencil	100	10
10	Water Color	100	10

Test Result on change in properties

Test	Rating of washed area relative to the unwashed area
Gloss Change	I
Color Change	N
Erosion	N

Remark: None.

Test Method Variation: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarathy Kumar
Head of Department

Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of the laboratory.



(Page 2 of 2)

TEST REPORT ON CRACK BRIDGING ABILITY

Customer Name	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.		
Project Name	N.G	Lab Report No.	WD-R-230703-0997/2
Sample Description	Ema Shield Tex Silk	Lab Request No.	WD-Q-230703-0274
Source	Emirates Paint L.L.C	Sample No.	WD-S-230703-0864
Test Specification	ASTM C836/C836M-18 (2022)	Wimpey Ref. No.	23070325
Test Method	ASTM C1305/C1305M-16(2023)	Date Received	03/07/2023
Nature of Substrate	Concrete	Casting Date	18/07/2023
Substrate Dimension(mm)	75 L x 50 W	Date Tested	08/08/2023
Test Method	Method A	Date Reported	15/08/2023
Sampling Conditioning	14 Days at room temperature followed by 7 days at 70°C	No. of coat & Method of application	N.G
Test Condition	Temperature: 23°C Relative Humidity: 50%	Tested By	SP
Dry Film Thickness	300 Microns		

Test Results

Test	Crack width (mm)	Observation
Crack Bridging Ability	2.04	No sign of cracks, loss of adhesion or any other type of failure was observed up to 2.04 mm

Remarks: None.

Signed for and on behalf of Wimpey Laboratories L.L.C

S. Sarathy Kumar
Head of Department

Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of the laboratory.



TEST REPORT ON PRACTICAL WASHABILITY OF ORGANIC COATINGS

Client	Emirates Paint L.L.C. P.O Box:1 Dubai, UAE.	Lab Report No.	WD-R-230703-0980/1
Sample Description	Durable Emulsion	Lab Request No.	WD-Q-230703-0274
Source	Emirates Paint L.L.C	Sample No.	WD-S-230703-0854
Test Method	ASTM D4828-94(2020)	Date Received	03/07/2023
Test Temperature	23°C & 50% RH	Casting Date	19/07/2023
Tested Location	Wimpey-Dubai	Date Tested	26/07/2023
Wimpey Ref No.	23070325	Date Reported	28/07/2023
Tested By	SP		

Rating for the condition of each soil or stain in the path of the sponge

Rating	Observation
0	No change from original intensity (depth) of soil or stain.
3	Slight change from original, but readily visible
5	Moderate change from original, slightly visible.
7	Large change from original, barely visible, and
10	All soil and stain removed

Rating of washed area relative to the unwashed areas for gloss or color change and erosion

Rating	Gloss Change	Rating	Color Change	Rating	Erosion
N	None	N	None	N	None
I	Increases	SD	Slightly darker	S	Slight
II	Large Increase	CD	Considerably darker	M	Moderate
D	Decreases	SL	Slightly lighter		
DD	Large Decrease	CL	Considerably lighter		



(Page 1 of 2)

Report No: WD-R-230703-0980/1
Sample No: WD-S-230703-0854

Test Result on Stain Removal

Washing Method: Mechanical Method
Washing Medium: Tap Water

Sl.No	Staining Agent	Number of washing cycles	Rating for the condition of each stain in the path of the sponge
1	Marker	100	7
2	Highlighter	100	7
3	2B pencil	100	10
4	Sketch pen	100	7
5	Black tea	100	10
6	Black coffee	100	9
7	Mayonnaise	100	10
8	Crayon	100	10
9	Color Pencil	100	10
10	Water Color	100	10

Test Result on change in properties

Test	Rating of washed area relative to the unwashed area
Gloss Change	I
Color Change	N
Erosion	N

Remark: None.

Test Method Variation: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.

This report shall not be reproduced except in full, without the written approval of the laboratory.



(Page 2 of 2)

TEST REPORT ON WATER VAPOUR TRANSMISSION

Customer Name	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.	Lab Report No.	WD-R-230703-0980/2
Sample Description	Durable Emulsion	Lab Request No.	WD-Q-230703-0274
Source	Emirates Paint L.L.C	Sample No.	WD-S-230703-0854
Test Method	ASTM E96-00	Wimpey Ref. No.	23070325
Test Method Used	Method A	Date Received	03/07/2023
Temperature in Test Chamber	23°C	Casting Date	19/07/2023
Relative Humidity in Test Chamber	50%	Date Tested	26/07/2023
Test Area	33.18cm ²	Room Temperature	23°C
Total Cycles	Continuous mode up to constant	Room Relative Humidity	50%
Specimen Thickness	200 microns	Tested By	SP
Test Duration	24 Hours		

Test Results

Test	Unit	Specimen 1	Specimen 2	Specimen 3	Average
Water Vapor Transmission	g/m ² /24hours	54.2387	49.1090	51.2456	51.5311

Remarks: None.

Method Deviation: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of the laboratory.



TEST REPORT ON WEATHERING RESISTANCE

Customer Name	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.	Lab Report No.	WD-R-230703-0980/3
Project Name	N.G	Lab Request No.	WD-Q-230703-0274
Sample Description	Durable Emulsion	Sample No.	WD-S-230703-0854
Test Method	ASTM G154-23	Date Received	03/07/2023
Test Procedure	ASTM G151-19	Casting Date	19/07/2023
Evaluation Test Method	ASTM D714-02(2017)	Date Tested	26/07/2023-16/08/2023
Device Type	Weathering Apparatus	Date Reported	17/08/2023
Light Source	UVA-340	Room Temperature & Relative Humidity	23°C & 50%
Cycle	8 hours UV at 60°C and 4 hours condensation at 50°C	Sample brought in by	Client
Exposure Duration	500 Hours	Tested By	SP
Wimpey Ref No.	23070325		

Test Results

Test	Observation
Artificial Weathering (500 Hours)	No cracking, No chalking, No flaking, No wrinkling, No blistering, color change was observed

Remarks: Sample photos attached in Annex A.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of the laboratory.





مختبرات ويمبي ش.ذ.م.
WIMPEY LABORATORIES L.L.C.



ACCREDITED
TL-564

Report Number: WD-R-230703-0080/3
Sample Number: WD-S-230703-0054

ANNEX - A TEST PHOTOS



Control Sample



After Test



مختبرات ويمبي ش.ذ.م.
WIMPEY LABORATORIES L.L.C.



ACCREDITED
TL-564

TEST REPORT ON WET SCRUB RESISTANCE

Customer Name	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.		
Sample Description	Durable Emulsion	Lab Report No.	WD-R-230703-0080/4
Source	Emirates Paint L.L.C	Lab Request No.	WD-Q-230703-0274
Test Method	ISO 11998	Sample No.	WD-S-230703-0054
Test Temperature	23°C & 50% RH	Date Received	03/07/2023
Tested Location	Wimpey-Dubai	Casting Date	19/07/2023
Client Ref.	N.G	Date Tested	20/07/2023
No. of Cycles	200 Cycles	Date Reported	29/07/2022
Wimpey Ref No.	23070325	Tested By	SP

Test Results (Wet Scrub Resistance)

Area traversed by the scrub pad: 0.013m²

Test		Result
Wet Scrub Resistance	Loss in coating mass per unit area (g/m ²)	8.12
	Assessment of wet scrub resistance	200 Cycles- Pass

Test Results (Cleanability)

Test	Result
Cleanability	Satisfactory

Remarks: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarathy Kumar
Head of Department

Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of the laboratory.



TEST REPORT ON PRACTICAL WASHABILITY OF ORGANIC COATINGS

Client	Emirates Paint L.L.C P.O Box 1 Dubai, UAE.		
Sample Description	Ema Shield Top Coat Matt	Lab Report No.	WD-R-230703-0862/1
Source	Emirates Paint L.L.C	Lab Request No.	WD-Q-230703-0274
Test Method	ASTM D4828-94(2020)	Sample No.	WD-S-230703-0856
Test Temperature	23°C & 50% RH	Date Received	03/07/2023
Tested Location	Wimpey-Dubai	Casting Date	19/07/2023
Wimpey Ref No.	23070325	Date Tested	26/07/2023
Tested By	SP	Date Reported	28/07/2023

Rating for the condition of each soil or stain in the path of the sponge

Rating	Observation
0	No change from original intensity (depth) of soil or stain.
3	Slight change from original, but readily visible
5	Moderate change from original, slightly visible,
7	Large change from original, barely visible, and
10	All soil and stain removed

Rating of washed area relative to the unwashed areas for gloss or color change and erosion

Rating	Gloss Change	Rating	Color Change	Rating	Erosion
N	None	N	None	N	None
I	Increases	SD	Slightly darker	S	Slight
II	Large increase	CD	Considerably darker	M	Moderate
D	Decreases	SL	Slightly lighter		
DD	Large Decrease	CL	Considerably lighter		



(Page 1 of 2)

Report No: WD-R-230703-082/1
Sample No: WD-S-230703-0856

Test Result on Stain Removal

Washing Method: Mechanical Method
Washing Medium: Tap Water

Sl.No	Staining Agent	Number of washing cycles	Rating for the condition of each stain in the path of the sponge
1	Marker	100	5
2	Highlighter	100	7
3	2B pencil	100	10
4	Sketch pen	100	7
5	Black tea	100	10
6	Black coffee	100	10
7	Mayonnaise	100	10
8	Crayon	100	7
9	Color Pencil	100	10
10	Water Color	100	10

Test Result on change in properties

Test	Rating of washed area relative to the unwashed area
Gloss Change	I
Color Change	N
Erosion	N

Remark: None.

Test Method Variation: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of the laboratory.



(Page 2 of 2)

TEST REPORT ON WATER VAPOUR TRANSMISSION

Customer Name	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.		
Sample Description	Emas Shield Top Coat Matt	Lab Report No.	WD-R-230703-0982/2
Source	Emirates Paint L.L.C	Lab Request No.	WD-Q-230703-0274
Test Method	ASTM E96-00	Sample No.	WD-S-230703-0856
Test Method Used	Method A	Wimpey Ref. No.	23070325
Temperature in Test Chamber	23°C	Date Received	03/07/2023
Relative Humidity in Test Chamber	50%	Casting Date	19/07/2023
Test Area	33.18cm ²	Date Tested	26/07/2023
Total Cycles	Continuous mode up to constant	Room Temperature	23°C
Specimen Thickness	300 microns	Room Relative Humidity	50%
Test Duration	24 Hours	Tested By	SP

Test Results

Test	Unit	Specimen 1	Specimen 2	Specimen 3	Average
Water Vapor Transmission	g/m ² /24hours	112.3123	106.3028	114.3458	111.6537

Remarks: None.

Method Deviation: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of the laboratory.



TEST REPORT ON LIQUID WATER PERMEABILITY

Customer Name	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.		
Project Name	N.P	Lab Report No.	WD-R-230703-0982/3
Sample Description	Emas Shield Top Coat Matt	Lab Request No.	WD-Q-230703-0274
Source	Emirates Paint L.L.C	Sample No.	WD-S-230703-0856
Room Condition	23°C & 50% R.H	Date Test completed	17/08/2023
Test Method	BS EN 1062-3:2006	Date Reported	18/08/2023
Specification Method	BS EN 1062-1:2004	Tested By	SP

Liquid Water Permeability

Sample Reference	Unit	Result	Class
WD-S-230703-0856	Kg/m ² .h ^{0.5}	0.54	W ₁

Classification in accordance with EN 1062-1:2004

Classification	Liquid water transmission value (Kg/m ² .h ^{0.5})
W ₀	No Requirement
W ₁	>0.5
W ₂	≤0.5 & >0.1
W ₃	≤0.1

Remarks: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of the laboratory.



TEST REPORT ON CRACK BRIDGING ABILITY

Customer Name	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.	Lab Report No.	WD-R-230703-0862/4
Project Name	N.G	Lab Request No.	WD-Q-230703-0274
Sample Description	Ema Shield Top Coat Matt	Sample No.	WD-S-230703-0856
Source	Emirates Paint L.L.C	Wimpey Ref. No.	23070325
Test Specification	ASTM C636/C636M-18 (2022)	Date Received	03/07/2023
Test Method	ASTM C1305/C1305M-16(2023)	Casting Date	19/07/2023
Nature of Substrate	Concrete	Date Tested	09/08/2023
Substrate Dimension(mm)	75 L x 50 W	Date Reported	10/08/2023
Test Method	Method A	No. of coat & Method of application	N.G
Sampling Conditioning	14 Days at room temperature followed by 7 days at 70°C	Tested By	SP
Test Condition	Temperature: 23°C Relative Humidity: 50%		
Dry Film Thickness	200 Microns		

Test Results

Test	Crack width (mm)	Observation
Crack Bridging Ability	1.02	No sign of cracks, loss of adhesion or any other type of failure was observed up to 1.02 mm

Remarks: None.

Signed for and on behalf of Wimpey Laboratories L.L.C

S. Senthil Kumar
Head of Department

Test results relate only to the samples tested.

This report shall not be reproduced except in full, without the written approval of the laboratory.



TEST CERTIFICATE

Client	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.	Lab Report No.	WD-R-230703-0862/5
Sample Description	Ema Shield Top Coat Matt	Lab Request No.	WD-Q-230703-0274
Source	Emirates Paint L.L.C	Sample No.	WD-S-230703-0856
Test Method	BS EN 1062-6:2002	Casting Date	19/07/2023
Room Temperature	23°C	Date Tested	18/08/2023
Room Relative Humidity	50%	Date Reported	19/08/2023
Sample Brought in by	Wimpey Lab	Tested By	VP
Wimpey Ref No.	23070325		

Carbon dioxide permeability

The determination of the carbon dioxide permeability was carried out in accordance with BS EN 1062-6:2002 Method A "Paints and varnishes - Coating materials and coating systems for exterior masonry and concrete - Part 6: Determination of Carbon dioxide permeability" via Gravimetric method (Method A). The coating system was brushed upon unglazed tile of area 100 cm², which is exposed to the measuring gas, and the diffused carbon dioxide is determined quantitatively. Three test specimens were prepared for determination. Store the test specimens in the standard atmosphere as defined in BS EN 23270 (23±2°C and 50±5%) was placed in a separate conditioning container for 7 days. Afterwards, condition the test specimen at a temperature of 70°C for 7 days and kept at standard atmosphere for 24hrs. The test specimen seals with a test cell containing an absorbent for carbon dioxide so that the cell is gas-tight to the surroundings. The test cell is kept in a dry carbon dioxide atmosphere at 23±2°C and weighed at regular intervals. The carbon dioxide permeability was calculated from the increase of mass. The determination was completed when a steady state is reached. The diffusion coefficient for carbon dioxide (DCCO₂) is calculated using Fick's law of Diffusion and Crank's equation. For control purposes, a standard reference film of known diffusion resistance number was measured in each series of determinations. The test specimens have been tested until the mass increase of the test cell remains constant during two subsequent intervals.

Test Results

Test	Method	Unit	Result
Specimen Thickness	BS EN 1062-6:2002 Method A	µm	200
Average Carbon dioxide permeability		g/m ² /d	0.924
Diffusion equivalent air layer thickness in meters (SD)		m	268
Diffusion resistance number		-	1.62 × 10 ⁶
Carbon dioxide diffusion coefficient of the coating		cm ² /s	8.21 × 10 ⁻⁸
Diffusion equivalent thickness of concrete (SC)	BS EN 1062-1:2004-08	cm	67.09
Classification of coating material and coating system for exterior masonry and concrete		-	C1

Remarks: None.

Notes

- So is calculated assuming an average grade concrete when the p-value had been estimated at 400
- Dcco for an uncoated plate is 1 X 10⁻¹⁰ cm²/s
- Carbon dioxide diffusion resistance: Class 1 (Classification in accordance with BS EN 1062-1:2004)
- Klopfer criterion for effective anti carbonation coating is SP greater than 50 meters.

Signed for and on behalf of Wimpey Laboratories L.L.C

S. Senthil Kumar
Head of Department

Test results relate only to the samples tested.

This report shall not be reproduced except in full, without the written approval of the laboratory.



TEST REPORT ON PRACTICAL WASHABILITY OF ORGANIC COATINGS

Client	Emirates Paint L.L.C P.O. Box:1 Dubai, UAE.	Lab Report No.	WD-R-230703-0995/1
Sample Description	Ema Shield Ultra Tex	Lab Request No.	WD-Q-230703-0274
Source	Emirates Paint L.L.C	Sample No.	WD-S-230703-0863
Test Method	ASTM D4828-94(2020)	Date Received	03/07/2023
Test Temperature	23°C & 50% RH	Casting Date	26/07/2023
Tested Location	Wimpey-Dubai	Date Tested	02/08/2023
Wimpey Ref No.	23070325	Date Reported	10/08/2023
Tested By	SP		

Rating for the condition of each soil or stain in the path of the sponge

Rating	Observation
0	No change from original intensity (depth) of soil or stain,
3	Slight change from original, but readily visible
5	Moderate change from original, slightly visible,
7	Large change from original, barely visible, and
10	All soil and stain removed

Rating of washed area relative to the unwashed areas for gloss or color change and erosion

Rating	Gloss Change	Rating	Color Change	Rating	Erosion
N	None	N	None	N	None
I	Increases	SD	Slightly darker	S	Slight
II	Large Increase	CD	Considerably darker	M	Moderate
D	Decreases	SL	Slightly lighter		
DD	Large Decrease	CL	Considerably lighter		



(Page 1 of 2)

Report No: WD-R-230703-0995/1
Sample No: WD-S-230703-0863

Test Result on Stain Removal

Washing Method: Mechanical Method
Washing Medium: Tap Water

Sl.No	Staining Agent	Number of washing cycles	Rating for the condition of each stain in the path of the sponge
1	Marker	100	7
2	Highlighter	100	7
3	2B pencil	100	7
4	Sketch pen	100	7
5	Black tea	100	10
6	Black coffee	100	10
7	Mayonnaise	100	10
8	Crayon	100	7
9	Color Pencil	100	10
10	Water Color	100	7

Test Result on change in properties

Test	Rating of washed area relative to the unwashed area
Gloss Change	I
Color Change	N
Erosion	N

Remark: None.

Test Method Variation: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.

This report shall not be reproduced except in full, without the written approval of the laboratory.



(Page 2 of 2)

TEST REPORT ON CRACK BRIDGING ABILITY

Customer Name	Emirates Paint L.L.C P.O. Box:1 Dubai, UAE.		
Project Name	N.G	Lab Report No.	WD-R-230703-0995/2
Sample Description	Elma Shield Ultra Tex	Lab Request No.	WD-Q-230703-0274
Source	Emirates Paint L.L.C	Sample No.	WD-S-230703-0863
Test Specification	ASTM C836/C836M-18 (2022)	Wimpey Ref. No.	23070325
Test Method	ASTM C1305/C1305M-16(2023)	Date Received	03/07/2023
Nature of Substrate	Concrete	Casting Date	19/07/2023
Substrate Dimension(mm)	75 L x 50 W	Date Tested	09/08/2023
Test Method	Method A	Date Reported	15/08/2023
Sampling Conditioning	14 Days at room temperature followed by 7 days at 70°C	No. of coat & Method of application	N.G
Test Condition	Temperature: 23°C Relative Humidity: 50%	Tested By	SP
Dry Film Thickness	600 Microns		

Test Results

Test	Crack width (mm)	Observation
Crack Bridging Ability	2.11	No sign of cracks, loss of adhesion or any other type of failure was observed up to 2.11 mm

Remarks: None.

Signed for and on behalf of Wimpey Laboratories L.L.C

S. Sathya Kumar
Head of Department

Test/Results relate only to the samples tested.

This report shall not be reproduced except in full, without the written approval of the laboratory and of test.



TEST REPORT ON PRACTICAL WASHABILITY OF ORGANIC COATINGS

Client	Emirates Paint L.L.C P.O. Box:1 Dubai, UAE.		
Sample Description	Elma Synplast	Lab Report No.	WD-R-230703-0990/1
Source	Emirates Paint L.L.C	Lab Request No.	WD-Q-230703-0274
Test Method	ASTM D4828-94(2020)	Sample No.	WD-S-230703-0860
Test Temperature	23°C & 50% RH	Date Received	03/07/2023
Tested Location	Wimpey-Dubai	Casting Date	25/07/2023
Wimpey Ref No.	23070325	Date Tested	01/08/2023
Tested By	SP	Date Reported	10/08/2023

Rating for the condition of each soil or stain in the path of the sponge

Rating	Observation
0	No change from original intensity (depth) of soil or stain.
3	Slight change from original, but readily visible
5	Moderate change from original, slightly visible.
7	Large change from original, barely visible, and
10	All soil and stain removed

Rating of washed area relative to the unwashed area for gloss or color change and erosion

Rating	Gloss Change	Rating	Color Change	Rating	Erosion
N	None	N	None	N	None
I	Increases	SD	Slightly darker	S	Slight
II	Large Increase	CD	Considerably darker	M	Moderate
D	Decreases	SL	Slightly lighter		
DD	Large Decrease	CL	Considerably lighter		



(Page 1 of 2)

Report No: WD-R-230703-990/1
Sample No: WD-S-230703-0860

Test Result on Stain Removal

Washing Method: Mechanical Method
Washing Medium: Tap Water

Sl.No	Staining Agent	Number of washing cycles	Rating for the condition of each stain in the path of the sponge
1	Marker	100	5
2	Highlighter	100	7
3	2B pencil	100	7
4	Sketch pen	100	7
5	Black tea	100	10
6	Black coffee	100	10
7	Mayonnaise	100	10
8	Crayon	100	7
9	Color Pencil	100	10
10	Water Color	100	10

Test Result on change in properties

Test	Rating of washed area relative to the unwashed area
Gloss Change	I
Color Change	N
Erosion	N

Remark: None.

Test Method Variation: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of the laboratory.
- End of test -



(Page 2 of 2)

TEST REPORT ON LIQUID WATER PERMEABILITY

Customer Name	Emirates Paint L.L.C	Lab Report No.	WD-R-230703-0990/2
Project Name	N/P	Lab Request No.	WD-Q-230703-0274
Sample Description	Emas Synplast	Sample No.	WD-S-230703-0860
Source	Emirates Paint L.L.C	Date Test completed	17/05/2023
Room Condition	23°C & 50% R.H	Date Reported	18/05/2023
Test Method	BS EN 1062-3:2006	Tested By	SP
Specification Method	BS EN 1062-1:2004		

Liquid Water Permeability

Sample Reference	Unit	Result	Class
WD-S-230703-0860	Kg/m ² .h ^{0.5}	0.13	W ₂

Classification in accordance with EN 1062-1:2004

Classification	Liquid water transmission value (Kg/m ² .h ^{0.5})
W ₀	No Requirement
W ₁	>0.5
W ₂	≤0.5 & >0.1
W ₃	≤0.1

Remarks: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of the laboratory.
- End of test -



TEST REPORT ON CRACK BRIDGING ABILITY

Customer Name	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.		
Project Name	N.G	Lab Report No.	WD-R-230703-0990/3
Sample Description	Emu Synplast	Lab Request No.	WD-Q-230703-0274
Source	Emirates Paint L.L.C	Sample No.	WD-S-230703-0860
Test Specification	ASTM C836/C836M-18 (2022)	Wimpey Ref. No.	23070325
Test Method	ASTM C1305/C1305M-16(2023)	Date Received	03/07/2023
Nature of Substrate	Concrete	Casting Date	19/07/2023
Substrate Dimension(mm)	75 L x 50 W	Date Tested	09/08/2023
Test Method	Method A	Date Reported	15/08/2023
Sampling Conditioning	14 Days at room temperature followed by 7 days at 70°C	No. of coat & Method of application	N.G
Test Condition	Temperature: 23°C Relative Humidity: 50%	Tested By	SP
Dry Film Thickness	300 Microns		

Test Results

Test	Crack width (mm)	Observation
Crack Bridging Ability	1.45	No sign of cracks, loss of adhesion or any other type of failure was observed up to 1.45 mm

Remarks: None.

Signed for and on behalf of Wimpey Laboratories L.L.C

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.

This report shall not be reproduced except in full, without the written consent of Wimpey Laboratories L.L.C.



TEST REPORT ON PRACTICAL WASHABILITY OF ORGANIC COATINGS

Client	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.		
Sample Description	Emu Syntex White	Lab Report No.	WD-R-230703-0992/1
Source	Emirates Paint L.L.C	Lab Request No.	WD-Q-230703-0274
Test Method	ASTM D4828-94(2020)	Sample No.	WD-S-230703-0861
Test Temperature	23°C & 50% RH	Date Received	03/07/2023
Tested Location	Wimpey-Dubai	Casting Date	26/07/2023
Wimpey Ref No.	23070325	Date Tested	02/08/2023
Tested By	SP	Date Reported	10/08/2023

Rating for the condition of each soil or stain in the path of the sponge

Rating	Observation
0	No change from original intensity (depth) of soil or stain,
3	Slight change from original, but readily visible
5	Moderate change from original, slightly visible,
7	Large change from original, barely visible, and
10	All soil and stain removed

Rating of washed area relative to the unwashed areas for gloss or color change and erosion

Rating	Gloss Change	Rating	Color Change	Rating	Erosion
N	None	N	None	N	None
I	Increases	SD	Slightly darker	S	Slight
II	Large Increase	CD	Considerably darker	M	Moderate
D	Decreases	SL	Slightly lighter		
DD	Large Decrease	CL	Considerably lighter		

(Page 1 of 2)



Report No: WD-R-230703-092/1
Sample No: WD-S-230703-0861

Test Result on Stain Removal

Washing Method: Mechanical Method
Washing Medium: Tap Water

Sl.No	Staining Agent	Number of washing cycles	Rating for the condition of each stain in the path of the sponge
1	Marker	100	5
2	Highlighter	100	7
3	2B pencil	100	10
4	Sketch pen	100	7
5	Black tea	100	10
6	Black coffee	100	10
7	Mayonnaise	100	10
8	Crayon	100	7
9	Color Pencil	100	10
10	Water Color	100	10

Test Result on change in properties

Test	Rating of washed area relative to the unwashed area
Gloss Change	I
Color Change	N
Erosion	N

Remark: None.

Test Method Variation: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.

This report shall not be reproduced except in full, without the written approval of the laboratory.



(Page 2 of 2)

TEST REPORT ON LIQUID WATER PERMEABILITY

Customer Name	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.		
Project Name	N.P	Lab Report No.	WD-R-230703-0992/2
Sample Description	Emu Syntex White	Lab Request No.	WD-Q-230703-0274
Source	Emirates Paint L.L.C	Sample No.	WD-S-230703-0861
Room Condition	23°C & 50% R.H	Date Test completed	17/08/2023
Test Method	BS EN 1062-3:2008	Date Reported	18/08/2023
Specification Method	BS EN 1062-1:2004	Tested By	SP

Liquid Water Permeability

Sample Reference	Unit	Result	Class
WD-S-230703-0861	Kg/m ² .h ^{0.5}	0.13	W ₂

Classification in accordance with EN 1062-1:2004

Classification	Liquid water transmission value (Kg/m ² .h ^{0.5})
W ₃	No Requirement
W ₁	>0.5
W ₂	≤0.5 & >0.1
W ₀	≤0.1

Remarks: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.

This report shall not be reproduced except in full, without the written approval of the laboratory.



TEST REPORT ON CRACK BRIDGING ABILITY

Customer Name	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.		
Project Name	N.G	Lab Report No.	WD-R-230703-0992/3
Sample Description	Ema Syntex White	Lab Request No.	WD-Q-230703-0274
Source	Emirates Paint L.L.C	Sample No.	WD-S-230703-0861
Test Specification	ASTM C836/C836M-18 (2022)	Wimpey Ref. No.	23070325
Test Method	ASTM C1305/C1305M-18(2023)	Date Received	03/07/2023
Nature of Substrate	Concrete	Casting Date	19/07/2023
Substrate Dimension(mm)	75 L x 50 W	Date Tested	09/08/2023
Test Method	Method A	Date Reported	15/08/2023
Sampling Conditioning	14 Days at room temperature followed by 7 days at 70°C	No. of coat & Method of application	N.G
Test Condition	Temperature: 23°C Relative Humidity: 50%	Tested By	SP
Dry Film Thickness	300 Microns		

Test Results

Test	Crack width (mm)	Observation
Crack Bridging Ability	1.21	No sign of cracks, loss of adhesion or any other type of failure was observed up to 1.21 mm

Remarks: None

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of the laboratory.
End of text.



TEST REPORT ON PRACTICAL WASHABILITY OF ORGANIC COATINGS

Client	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.		
Sample Description	Emasandtex	Lab Report No.	WD-R-230703-0996/1
Source	Emirates Paint L.L.C	Lab Request No.	WD-Q-230703-0274
Test Method	ASTM D4828-04(2020)	Sample No.	WD-S-230703-0858
Test Temperature	23°C & 50% RH	Date Received	03/07/2023
Tested Location	Wimpey-Dubai	Casting Date	25/07/2023
Wimpey Ref No	23070325	Date Tested	01/08/2023
Tested By	SP	Date Reported	10/08/2023

Rating for the condition of each soil or stain in the path of the sponge

Rating	Observation
0	No change from original intensity (depth) of soil or stain.
3	Slight change from original, but readily visible
5	Moderate change from original, slightly visible.
7	Large change from original, barely visible, and
10	All soil and stain removed

Rating of washed area relative to the unwashed areas for gloss or color change and erosion

Rating	Gloss Change	Rating	Color Change	Rating	Erosion
N	None	N	None	N	None
I	Increases	SD	Slightly darker	S	Slight
II	Large Increase	CD	Considerably darker	M	Moderate
D	Decreases	SL	Slightly lighter		
DD	Large Decrease	CL	Considerably lighter		

(Page 1 of 2)





مختبرات ويمبي ش.ذ.م.م.
WIMPEY LABORATORIES L.L.C.

Test Result on Stain Removal

Washing Method: Mechanical Method
Washing Medium: Tap Water

Sl.No	Staining Agent	Number of washing cycles	Rating for the condition of each stain in the path of the sponge
1	Marker	100	5
2	Highlighter	100	7
3	2B pencil	100	10
4	Sketch pen	100	7
5	Black tea	100	10
6	Black coffee	100	10
7	Mayonnaise	100	10
8	Crayon	100	7
9	Color Pencil	100	7
10	Water Color	100	10

Test Result on change in properties

Test	Rating of washed area relative to the unwashed area
Gloss Change	I
Color Change	N
Erosion	N

Remark: None.

Test Method Variation: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.

This report shall not be reproduced except in full, without the written approval of the laboratory.



(Page 2 of 2)



Report No: WD-R-230703-0858
Sample No: WD-S-230703-0858



مختبرات ويمبي ش.ذ.م.م.
WIMPEY LABORATORIES L.L.C.

TEST REPORT ON LIQUID WATER PERMEABILITY

Customer Name	Emirates Paint L.L.C	Lab Report No.	WD-R-230703-0858/2
Project Name	N.P	Lab Request No.	WD-Q-230703-0274
Sample Description	Emasandex	Sample No.	WD-S-230703-0858
Source	Emirates Paint L.L.C	Date Test completed	17/08/2023
Room Condition	23°C & 50% R.H	Date Reported	18/08/2023
Test Method	BS EN 1062-3:2008	Tested By	SP
Specification Method	BS EN 1062-1:2004		

Liquid Water Permeability

Sample Reference	Unit	Result	Class
WD-S-230703-0858	Kg/m ² .h ^{0.5}	0.15	W ₂

Classification in accordance with EN 1062-1:2004

Classification	Liquid water transmission value (Kg/m ² .h ^{0.5})
W ₀	No Requirement
W ₁	>0.5
W ₂	≤ 0.5 & >0.1
W ₃	≤ 0.1

Remarks: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.

This report shall not be reproduced except in full, without the written approval of the laboratory.



TEST REPORT ON CRACK BRIDGING ABILITY

Customer Name	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.		
Project Name	N.G	Lab Report No.	WD-R-230703-0866/3
Sample Description	Emasandex	Lab Request No.	WD-Q-230703-0274
Source	Emirates Paint L.L.C	Sample No.	WD-S-230703-0858
Test Specification	ASTM C838/C838M-18 (2022)	Wimpey Ref. No.	23070325
Test Method	ASTM C1305/C1305M-18(2023)	Date Received	03/07/2023
Nature of Substrate	Concrete	Casting Date	19/07/2023
Substrate Dimension(mm)	75 L x 50 W	Date Tested	09/08/2023
Test Method	Method A	Date Reported	15/08/2023
Sampling Conditioning	14 Days at room temperature followed by 7 days at 70°C	No. of coat & Method of application	N.G
Test Condition	Temperature: 23°C Relative Humidity: 50%	Tested By	SP
Dry Film Thickness	Microns		

Test Results

Test	Crack width (mm)	Observation
Crack Bridging Ability	1.62	No sign of cracks, loss of adhesion or any other type of failure was observed up to 1.62 mm

Remarks: None.

Signed for and on behalf of Wimpey Laboratories L.L.C

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.

This report shall not be reproduced except in full, without the written approval of Wimpey Laboratories.



TEST REPORT ON PRACTICAL WASHABILITY OF ORGANIC COATINGS

Client	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.		
Sample Description	Grooved Decor	Lab Report No.	WD-R-230703-0866/1
Source	Emirates Paint L.L.C	Lab Request No.	WD-Q-230703-0274
Test Method	ASTM D4828-94(2020)	Sample No.	WD-S-230703-0859
Test Temperature	23°C & 50% RH	Date Received	03/07/2023
Tested Location	Wimpey-Dubai	Casting Date	25/07/2023
Wimpey Ref No.	23070325	Date Tested	01/08/2023
Tested By	SP	Date Reported	10/08/2023

Rating for the condition of each soil or stain in the path of the sponge

Rating	Observation
0	No change from original intensity (depth) of soil or stain,
3	Slight change from original, but readily visible
5	Moderate change from original, slightly visible,
7	Large change from original, barely visible, and
10	All soil and stain removed

Rating of washed area relative to the unwashed areas for gloss or color change and erosion

Rating	Gloss Change	Rating	Color Change	Rating	Erosion
N	None	N	None	N	None
I	Increases	SD	Slightly darker	S	Slight
II	Large Increase	CD	Considerably darker	M	Moderate
D	Decreases	SL	Slightly lighter		
DD	Large Decrease	CL	Considerably lighter		

(Page 1 of 2)



Report No: WD-R-230703-988/1
Sample No: WD-S-230703-0859

Test Result on Stain Removal

Washing Method: Mechanical Method
Washing Medium: Tap Water

Sl.No	Staining Agent	Number of washing cycles	Rating for the condition of each stain in the path of the sponge
1	Marker	100	5
2	Highlighter	100	7
3	2B pencil	100	10
4	Sketch pen	100	7
5	Black tea	100	10
6	Black coffee	100	10
7	Mayonnaise	100	10
8	Crayon	100	7
9	Color Pencil	100	10
10	Water Color	100	10

Test Result on change in properties

Test	Rating of washed area relative to the unwashed area
Gloss Change	I
Color Change	N
Erosion	N

Remark: None.

Test Method Variation: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of the laboratory.
- End of text -



(Page 2 of 2)

TEST REPORT ON LIQUID WATER PERMEABILITY

Customer Name	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.		
Project Name	N.P	Lab Report No.	WD-R-230703-0880/2
Sample Description	Grooved Decor	Lab Request No.	WD-Q-230703-0274
Source	Emirates Paint L.L.C	Sample No.	WD-S-230703-0859
Room Condition	23°C & 50% R.H	Date Test completed	17/08/2023
Test Method	BS EN 1062-3:2006	Date Reported	18/08/2023
Specification Method	BS EN 1062-1:2004	Tested By	SP

Liquid Water Permeability

Sample Reference	Unit	Result	Class
WD-S-230703-0859	Kg/m ² .h ^{0.5}	0.22	W ₂

Classification in accordance with EN 1062-1:2004

Classification	Liquid water transmission value (Kg/m ² .h ^{0.5})
W ₀	No Requirement
W ₁	>0.5
W ₂	≤0.5 & >0.1
W ₃	≤0.1

Remarks: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of the laboratory.
- End of text -



TEST REPORT ON CRACK BRIDGING ABILITY

Customer Name	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.		
Project Name	N.G	Lab Report No.	WD-R-230703-0886/3
Sample Description	Grooved Decor	Lab Request No.	WD-Q-230703-0274
Source	Emirates Paint L.L.C	Sample No.	WD-S-230703-0856
Test Specification	ASTM C836/C836M-18 (2022)	Wimpey Ref. No.	23070325
Test Method	ASTM C1305/C1305M-16(2023)	Date Received	03/07/2023
Nature of Substrate	Concrete	Casting Date	19/07/2023
Substrate Dimension(mm)	75 L x 50 W	Date Tested	09/08/2023
Test Method	Method A	Date Reported	15/08/2023
Sampling Conditioning	14 Days at room temperature followed by 7 days at 70°C	No. of coat & Method of application	N.G
Test Condition	Temperature: 23°C Relative Humidity: 50%	Tested By	SP
Dry Film Thickness	300 Microns		

Test Results

Test	Crack width (mm)	Observation
Crack Bridging Ability	1.20	No sign of cracks, loss of adhesion or any other type of failure was observed up to 1.20 mm

Remarks: None.

Signed for and on behalf of Wimpey Laboratories L.L.C

S. Sarathy Kumar
Head of Department

Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of the laboratory.



TEST REPORT ON PRACTICAL WASHABILITY OF ORGANIC COATINGS

Client	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.		
Sample Description	Majestic Matt	Lab Report No.	WD-R-230703-0886/1
Source	Emirates Paint L.L.C	Lab Request No.	WD-Q-230703-0274
Test Method	ASTM D4828-04(2020)	Sample No.	WD-S-230703-0856
Test Temperature	23°C & 50% RH	Date Received	03/07/2023
Tested Location	Wimpey-Dubai	Casting Date	19/07/2023
Wimpey Ref No.	23070325	Date Tested	26/07/2023
Tested By	SP	Date Reported	28/07/2023

Rating for the condition of each soil or stain in the path of the sponge

Rating	Observation
0	No change from original intensity (depth) of soil or stain.
3	Slight change from original, but readily visible
5	Moderate change from original, slightly visible.
7	Large change from original, barely visible, and
10	All soil and stain removed

Rating of washed area relative to the unwashed areas for gloss or color change and erosion

Rating	Gloss Change	Rating	Color Change	Rating	Erosion
N	None	N	None	N	None
I	Increases	SD	Slightly darker	S	Slight
II	Large Increase	CD	Considerably darker	M	Moderate
D	Decreases	SL	Slightly lighter		
DD	Large Decrease	CL	Considerably lighter		



(Page 1 of 2)

Report No: WD-R-230703-081/1
Sample No: WD-S-230703-0855

Test Result on Stain Removal

Washing Method: Mechanical Method
Washing Medium: Tap Water

Sl.No	Staining Agent	Number of washing cycles	Rating for the condition of each stain in the path of the sponge
1	Marker	100	5
2	Highlighter	100	7
3	2B pencil	100	10
4	Sketch pen	100	10
5	Black tea	100	10
6	Black coffee	100	10
7	Mayonnaise	100	10
8	Crayon	100	7
9	Color Pencil	100	10
10	Water Color	100	10

Test Result on change in properties

Test	Rating of washed area relative to the unwashed area
Gloss Change	I
Color Change	N
Erosion	N

Remark: None.

Test Method Variation: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarathy Kumar
Head of Department

Test results relate only to the samples tested.

This report shall not be reproduced except in full, without the written approval of the laboratory.



(Page 2 of 2)

TEST REPORT ON WATER VAPOUR TRANSMISSION

Customer Name	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.		
Sample Description	Majestic Matt	Lab Report No.	WD-R-230703-081/2
Source	Emirates Paint L.L.C	Lab Request No.	WD-Q-230703-0274
Test Method	ASTM E96-00	Sample No.	WD-S-230703-0855
Test Method Used	Method A	Wimpey Ref. No.	23070325
Temperature in Test Chamber	23°C	Date Received	03/07/2023
Relative Humidity in Test Chamber	50%	Casting Date	19/07/2023
Test Area	33.18cm ²	Date Tested	26/07/2023
Total Cycles	Continuous mode up to constant	Room Temperature	23°C
Specimen Thickness	200 microns	Room Relative Humidity	50%
Test Duration	24 Hours	Tested By	SP

Test Results

Test	Unit	Specimen 1	Specimen 2	Specimen 3	Average
Water Vapor Transmission	g/m ² /24hours	225.283	227.415	215.651	222.783

Remarks: None.

Method Deviation: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarathy Kumar
Head of Department

Test results relate only to the samples tested.

This report shall not be reproduced except in full, without the written approval of the laboratory.



TEST REPORT ON WET SCRUB RESISTANCE

Customer Name	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.		
Sample Description	Majestic Matt	Lab Report No.	WD-R-230703-0981/3
Source	Emirates Paint L.L.C	Lab Request No.	WD-Q-230703-0274
Test Method	ISO 11998	Sample No.	WD-S-230703-0855
Test Temperature	23°C & 50% RH	Date Received	03/07/2023
Tested Location	Wimpey-Dubai	Casting Date	19/07/2023
Client Ref.	N.G	Date Tested	26/07/2023
No. of Cycles	200 Cycles	Date Reported	28/07/2023
Wimpey Ref No.	23070325	Tested By	SP

Test Results (Wet Scrub Resistance)

Area traversed by the scrub pad: 0.013m²

Test		Result
Wet Scrub Resistance	Loss in coating mass per unit area (g/m ²)	8.12
	Assessment of wet scrub resistance	200 Cycles- Pass

Test Results (Cleanability)

Test	Result
Cleanability	Satisfactory

Remarks: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.


S. Sarathy Kumar
Head of Department
Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of the laboratory.


TEST REPORT ON PRACTICAL WASHABILITY OF ORGANIC COATINGS

Client	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.		
Sample Description	Protect Shield Matt White	Lab Report No.	WD-R-230703-0983/1
Source	Emirates Paint L.L.C	Lab Request No.	WD-Q-230703-0274
Test Method	ASTM D4828-94(2020)	Sample No.	WD-S-230703-0857
Test Temperature	23°C & 50% RH	Date Received	03/07/2023
Tested Location	Wimpey-Dubai	Casting Date	25/07/2023
Wimpey Ref No.	23070325	Date Tested	01/08/2023
Tested By	SP	Date Reported	10/08/2023

Rating for the condition of each soil or stain in the path of the sponge

Rating	Observation
0	No change from original intensity (depth) of soil or stain.
3	Slight change from original, but readily visible
5	Moderate change from original, slightly visible.
7	Large change from original, barely visible, and
10	All soil and stain removed

Rating of washed area relative to the unwashed areas for gloss or color change and erosion

Rating	Gloss Change	Rating	Color Change	Rating	Erosion
N	None	N	None	N	None
I	Increases	SD	Slightly darker	S	Slight
II	Large Increase	CD	Considerably darker	M	Moderate
D	Decreases	SL	Slightly lighter		
DD	Large Decrease	CL	Considerably lighter		



مختبرات ويمبي ش.ذ.م.م.
WIMPEY LABORATORIES L.L.C.



ACCREDITED
Compliance
TL-564

Report No: WD-R-230703-083/1
Sample No: WD-S-230703-0857

Test Result on Stain Removal

Washing Method: Mechanical Method
Washing Medium: Tap Water

Sl.No	Staining Agent	Number of washing cycles	Rating for the condition of each stain in the path of the sponge
1	Marker	100	5
2	Highlighter	100	10
3	2B pencil	100	10
4	Sketch pen	100	7
5	Black tea	100	10
6	Black coffee	100	10
7	Mayonnaise	100	10
8	Crayon	100	7
9	Color Pencil	100	10
10	Water Color	100	10

Test Result on change in properties

Test	Rating of washed area relative to the unwashed area
Gloss Change	I
Color Change	N
Erosion	N

Remark: None.

Test Method Variation: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of the laboratory.
End of test.



(Page 2 of 2)



مختبرات ويمبي ش.ذ.م.م.
WIMPEY LABORATORIES L.L.C.



ACCREDITED
Compliance
TL-564

TEST REPORT ON WATER VAPOUR TRANSMISSION

Customer Name	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.		
Sample Description	Protect Shield Matt White	Lab Report No.	WD-R-230703-0883/2
Source	Emirates Paint L.L.C	Lab Request No.	WD-Q-230703-0274
Test Method	ASTM E96-00	Sample No.	WD-S-230703-0857
Test Method Used	Method A	Wimpey Ref. No.	23070325
Temperature in Test Chamber	23°C	Date Received	03/07/2023
Relative Humidity in Test Chamber	50%	Casting Date	19/07/2023
Test Area	33.16cm2	Date Tested	26/07/2023
Total Cycles	Continuous mode up to constant	Room Temperature	23°C
Specimen Thickness	300 microns	Room Relative Humidity	50%
Test Duration	24 Hours	Tested By	SP

Test Results

Test	Unit	Specimen 1	Specimen 2	Specimen 3	Average
Water Vapor Transmission	g/m ² /24hours	94.5462	97.2390	95.2039	95.6630

Remarks: None.

Method Deviation: None.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarath Kumar
Head of Department

Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of the laboratory.
End of test.



TEST REPORT ON LIQUID WATER PERMEABILITY

Customer Name	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.	Lab Report No.	WD-R-230703-0853/3
Project Name	N.P	Lab Request No.	WD-Q-230703-0274
Sample Description	Protect Shield Matt White	Sample No.	WD-S-230703-0857
Source	Emirates Paint L.L.C	Date Test completed	17/08/2023
Room Condition	23°C & 50% R.H	Date Reported	18/08/2023
Test Method	BS EN 1062-3:2006	Tested By	SP
Specification Method	BS EN 1062-1:2004		

Liquid Water Permeability

Sample Reference	Unit	Result	Class
WD-S-230703-0857	Kg/m ² ·h ^{0.5}	0.08	W ₂

Classification in accordance with EN 1062-1:2004

Classification	Liquid water transmission value (Kg/m ² ·h ^{0.5})
W ₀	No Requirement
W ₁	>0.5
W ₂	≤ 0.5 & >0.1
W ₃	≤ 0.1

Remarks: None.

Signed for and on behalf of Wimpey Laboratories L.L.C

S. Sarathy Kumar
Head of Department

Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of the laboratory.
Endorsed



TEST REPORT ON CRACK BRIDGING ABILITY

Customer Name	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.	Lab Report No.	WD-R-230703-0853/4
Project Name	N.G	Lab Request No.	WD-Q-230703-0274
Sample Description	Protect Shield Matt White	Sample No.	WD-S-230703-0857
Source	Emirates Paint L.L.C	Wimpey Ref. No.	23070325
Test Specification	ASTM C830/C830M-18 (2022)	Date Received	03/07/2023
Test Method	ASTM C1305/C1305M-10(2023)	Casting Date	18/07/2023
Nature of Substrate	Concrete	Date Tested	09/08/2023
Substrate Dimension(mm)	75 L x 50 W	Date Reported	15/08/2023
Test Method	Method A	No. of coat & Method of application	N.G
Sampling Conditioning	14 Days at room temperature followed by 7 days at 70°C	Tested By	SP
Test Condition	Temperature: 23°C Relative Humidity: 50%		
Dry Film Thickness	200 Microns		

Test Results

Test	Crack width (mm)	Observation
Crack Bridging Ability	1.60	No sign of cracks, loss of adhesion or any other type of failure was observed up to 1.60 mm

Remarks: None.

Signed for and on behalf of Wimpey Laboratories L.L.C

S. Sarathy Kumar
Head of Department

Test results relate only to the samples tested.
This report shall not be reproduced except in full, without the written approval of the laboratory.
End of test



TEST CERTIFICATE

Client	Emirates Paint L.L.C P.O Box:1 Dubai, UAE.	Lab Report No.	WD-R-230703-0983/5
Sample Description	Protect Shield Matt White	Lab Request No.	WD-Q-230703-0274
Source	Emirates Paint L.L.C	Sample No.	WD-S-230703-0857
Test Method	BS EN 1062-6:2002	Date Received	03/07/2023
Room Temperature	23°C	Date Tested	20/08/2023
Room Relative Humidity	50%	Date Reported	22/08/2023
Sample Brought in by	Wimpey Lab	Tested By	VP
Wimpey Ref No.	23070325		

Carbon dioxide permeability

The determination of the carbon dioxide permeability was carried out in accordance with BS EN 1062-6:2002 Method A 'Paints and varnishes - Coating materials and coating systems for exterior masonry and concrete - Part 6: Determination of Carbon dioxide permeability' via Gravimetric method (Method A). The coating system was brushed upon unglazed tile of area 100 cm², which is exposed to the measuring gas, and the diffused carbon dioxide is determined quantitatively. Three test specimens were prepared for determination. Store the test specimens in the standard atmosphere as defined in BS EN 23270 (23±2°C and 50±5%) was placed in a separate conditioning container for 7 days. Afterwards, condition the test specimen at a temperature of 70°C for 7 days and kept at standard atmosphere for 24hrs. The test specimen seals with a test cell containing an absorbent for carbon dioxide so that the cell is gas-tight to the surroundings. The test cell is kept in a dry carbon dioxide atmosphere at 23±2°C and weighed at regular intervals. The carbon dioxide permeability was calculated from the increase of mass. The determination was completed when a steady state is reached. The diffusion coefficient for carbon dioxide (D_{CO₂}) is calculated using Fick's law of Diffusion and Crank's equation. For control purposes, a standard reference film of known diffusion resistance number was measured in each series of determinations. The test specimens have been tested until the mass increase of the test cell remains constant during two subsequent intervals.

Test Results

Test	Method	Unit	Result
Specimen Thickness		µm	210
Average Carbon dioxide permeability		g/m ² d	0.924
Diffusion equivalent air layer thickness in meters (SD)	BS EN 1062-6:2002	m	268
Diffusion resistance number	Method A	-	1.28 × 10 ⁶
Carbon dioxide diffusion coefficient of the coating		cm ² s ⁻¹	1.17 × 10 ⁻¹²
Diffusion equivalent thickness of concrete (SC)		cm	67.0
Classification of coating material and coating system for exterior masonry and concrete	BS EN 1062-1:2004-08	-	C1

Remarks: None.

Notes

- Sc is calculated assuming an average grade concrete where the μ -value had been estimated at 400
- D_{CO₂} for an uncoated plate is 1 X 10⁻¹² cm²s⁻¹
- Carbon dioxide diffusion resistance: Class 1 (Classification in accordance with BS EN 1062-1:2004)
- Klopfer criterion for effective anti carbonation coating is SD greater than 50 meters.

Signed for and on behalf of Wimpey Laboratories L.L.C.

S. Sarathi Kumar

Head of Department

Test results relate only to the samples tested.

This report shall not be reproduced except in full, without the written approval of the laboratory.



The following are the test that we have conducted to verify the capabilities of our products according to our Emirates Paints standard testing process. Our diligent testing process ensures the safety, performance, and compliance of our offerings. Here is a brief overview of the key tests and their results:

VOC - ISO 11890-4: Our products comply with permissible VOC limits.

Scrub Resistance - ASTM D2486: Our products exhibit excellent resistance to abrasion and cleaning.

Free Lime Content - IHP 138: Our products meet specified limits for free lime content.

Crack Bridging Ability - ASTM C826: Our products demonstrate exceptional crack bridging properties.

Chloride Ion Permeability - ASTM C1202: Our products exhibit low chloride ion permeability.

Liquid Vapor Permeability - BS EN 1062-3:2008: Our products possess effective liquid vapor barrier properties.

Water Vapor Transmission - ISO 7783/BS EN 1062-1: Our products offer excellent water vapor resistance.

QUV Exposure - ASTM G154: Our products show resistance to UV degradation.

Pull-Off Adhesion Strength - ASTM D4541: Our products exhibit strong adhesion properties.

Anti-Bacterial Activity - ISO 22196:2011: Our products demonstrate significant anti-bacterial efficacy.

Resistance to Growth of Mold - ASTM D3273-16: Our products exhibit excellent resistance to Mold growth.

Spread of Flame - BS 476: Part 7:1997: Our products meet fire safety requirements.

These tests confirm the capabilities and compliance of our products with governmental regulations. We remain committed to delivering high-quality and compliant solutions.

+971 4 256 5474

+971 4 271 3214

emiratespaints.com

info@emiratespaints.com

P.O Box 1, 9th st, Umm Ramool
Dubai, United Arab Emirates

CERTIFICATE OF PRODUCT CONFORMITY

Dubai Central Laboratory Department (DCLD) of Dubai Municipality
hereby attests that the product(s)

Low Emitting Materials

(Details as per the attached Scope of Certification)

Manufactured by:

Emirates Paints L.L.C

P.O.Box 1 , 9th street ,Umm Ramool - Dubai

have been assessed in accordance with DCLD Document Ref. No. DM-DCLD-RD-DP21-2001 (IC) "General Rules for DM third party product certification system through factory assessment" and the relevant Specific Rules, and were found in conformity with the standard specification:

2023 AL SA'FAT DUBAI GREEN BUILDING SYSTEM

Accordingly, DCLD hereby authorizes the above manufacturer
to affix the DCL Product Conformity Mark on the above-mentioned product(s).



ARIF AL MARZOOQI

■ Certification and Quality Control of Products Section Manager
Dubai Central Laboratory Department-Dubai Municipality



Certificate No: CL22020809
Valid Until: 08/08/2024



Current Issue Date: 09/08/2023
Original Issue Date: 09/08/2022



The attached Scope of Certification bearing the same Certificate Number forms an integral part of this Certificate.

This Certificate is an electronic document subject to the Terms and Conditions of the Product Certification System and shall not be reproduced except in full.

OPEN-DATA

DM-DCLD-F-IC-2021 Rev 22

DUBAI CENTRAL LABORATORY DEPARTMENT DCLD-GQPS PRODUCT CONFORMITY CERTIFICATION SCHEME

SCOPE OF CERTIFICATION FOR CERTIFICATE NO. CL22020809

Certificate Issued To:	Emirates Paints LLC
Applicable Standard Specification:	P.O.Box 1 – 09th Street , UmRamool – Dubai 2023 Al Sa'fat Dubai Green Building System-2 nd edition clauses [404.01] and/or [404.02], [304.01], [304.04] [304.07], [701.04] and related clauses in 2021- Dubai Building Code.
Applicable Specific Rules:	DM-DCLD-RD-DP21-2180 (IC) Specific Rules for FA Certification of Low Emitting Materials (Paints, Coating, Adhesives Sealants) as per the 2023 Al Sa'fat Dubai Green Building System-2 nd edition.

S/N	PRODUCT DESCRIPTION	BRAND NAME	PRODUCT DETAILS
1	Interior Matt Walls and Ceilings Paints Gloss < 25 @ 60° (Category: I)	EMIRATES PLASTICEMULSION EMIRATES EGGSHELLANTIGUINAL EMULSION EMIRATES PROTECTSEAL; EMIRATES FINETEX EMIRATES FUNGALWASH; EMIRATES NICEEMULSION EMIRATES TRUSTHYGIENICEMIRATES LATEX EMULSION EMIRATES MATTEMULSION;EMIRATES SUPER MATTEMULSION EMIRATES SUPER ACRYLICEMULSION;EMIRATES EGGSHELLEMULSION(MATT);EMIRATES EGGSHELLEMULSION(SILK);EMIRATES EGGSHELLEMULSIONGLOSS;EMIRATES GLOSSEMULSION; EMIRATES ACRYLICEGGSHELLGOLD	Water Base Paint for Interior Application VOC (AL SAFAT-DGBS limit is max.30 g/l) Heavy metals: Cadmium and Chromium VI (AL SAFAT-DGBS limit < 500 mg/Kg), Arsenic, Mercury and Lead (AL SAFAT-DGBS limit <100 mg/Kg) Formaldehyde ≤ 10 mg/kg
2	Exterior Walls of Mineral Substrate (Category: II)	EMIRATES TEXOCOMPOUND EMIRATES MATTEMULSION	Water Based Paint for Exterior Application only

DUBAI CENTRAL LABORATORY DEPARTMENT DCLD-GQPS PRODUCT CONFORMITY CERTIFICATION SCHEME

SCOPE OF CERTIFICATION FOR CERTIFICATE NO. CL22020809

		EMIRATES SUPER MATTEMULSION EMIRATES SUPER ACRYLICEMULSION EMIRATES ACRYLICEGGSHELLGOLD EMIRATES WEATHER RESIT(MATT) EMIRATES WEATHER RESIT(SILK) EMIRATES ACRYLICWEATHER RESIT(MATT) EMIRATES ACRYLICWEATHER RESIT(SILK) EMIRATES ACRYLICEMULSIONI EMIRATES SILICONEEMULSION(MATT) EMIRATES SILICONEEMULSION(SILK) EMIRATES SHIELDTOPCOATMATT EMIRATES SHIELDTOPCOATSILK EMIRATES TENNIS COURTTOPCOAT EMIRATES MINITEX(TEXTURED COATING) EMIRATES SANDTEX(TEXTURED COATING) EMIRATES TEX(TEXTURED COATING) EMIRATES TEX WITHOUTMARBLECHIPS(TEXTURED COATING) EMIRATES GROVEDDECOR(TEXTURED COATING) EMIRATES GROVED(TEXTURED COATING) EMIRATES SYMPLAST(TEXTURED COATING) EMIRATES SYNTAX(TEXTURED COATING) EMIRATES SHIELDANTIQUETEX H.B EMIRATES SHIELD ULTRA SILK EMIRATES SHIELD FINE SILK(TEXTURED COATING) EMIRATES SHIELD TEX FINE(TEXTURED COATING) EMIRATES SHIELD TEX MEDIUM(TEXTURED COATING) EMIRATES SHIELD LONG LIFE EMIRATES TRADITIONAL TEX(TEXTURE COATING) EMIRATES SHIELD LONG LIFE TRADITIONAL TEX(TEXTURE COATING) EMIRATES SHIELD LONG LIFE CLASSIC TEX (TEXTURE COATING) EMIRATES NATURAL ACRYLIC STONE FINISH (BASE COAT) EMIRATES NATURAL ACRYLIC STONE FINISH EMIRATES ACRYLIC CLEAR GLAZE COAT EMIRATES GLAZE COAT EMIRATES NUTEX (SPRAY TEXTURE)	VOC (AL SAFAT-DGBS limit is max.40 g/l) Heavy metals: Cadmium and Chromium VI (AL SAFAT-DGBS limit < 500 mg/Kg), Arsenic, Mercury and Lead (AL SAFAT-DGBS limit <100 mg/Kg) Formaldehyde ≤ 10 mg/kg FOR SRI (See Note 2)
3	Interior/Exterior tiles varnishes and wood stains ,	EMIRATES POLYDEX	Water Based Roof Coating

**DUBAI CENTRAL LABORATORY DEPARTMENT
DCLD-GQPS PRODUCT CONFORMITY CERTIFICATION SCHEME**

**SCOPE OF CERTIFICATION
FOR CERTIFICATE NO. CL22020809**

	Including opaque wood stains (Category 5)		Water Based Paints for Exterior Application only VOC (AL SAYAT-DGBS limit is max:150 g/l) Formaldehyde ≤ 10 mg/kg For SRI (See Note 3)
4	Interior / Exterior Minimal Build Wood Stains (Category 6)	EMIRATES SYNTHETIC VARNISH GLOSS I EMIRATES WOOD STAIN	Solvent Base Paints for Interior Application VOC (AL SAYAT-DGBS limit is max:700 g/l) Heavy metals: Cadmium and Chromium VI (AL SAYAT-DGBS limit < 500 mg/kg), Arsenic, Mercury and Lead (AL SAYAT-DGBS limit <100 mg/kg)
5	Primers (Category 7)	EMIRATES RED OXIDE PRIMER EMIRATES WOOD PRIMER EMIRATES SYNTHETIC UNDERCOAT EMIRATES EPOXY FILLER SF	Solvent based Primers for Interior/Exterior Application VOC (AL SAYAT-DGBS limit is max:250 g/l) Heavy metals: Cadmium and Chromium VI (AL SAYAT-DGBS limit < 500 mg/kg), Arsenic, Mercury and Lead (AL SAYAT-DGBS limit <500 mg/kg) Formaldehyde ≤ 10 mg/kg
6	One Pack Performance Coatings (Category 9)	EMIRATES SHIELD TOP COAT GLOSS EMIRATES ALUMINUM PAINT EMIRATES ACRYLIC TOP COAT EMIRATES SYNTHETIC FLAT/MATT ENAMEL EMIRATES SYNTHETIC ENAMEL GLOSS I EMIRATES SYNTHETIC ENAMEL GLOSS II EMIRATES ECO ENAMEL EMIRATES BLACK BOARD PAINT EMIRATES GREEN BOARD PAINT	Solvent Base Paints for Interior and Exterior Application VOC (AL SAYAT-DGBS limit is max:500g/l) Heavy metals: Cadmium and Chromium VI (AL SAYAT-DGBS limit < 500 mg/kg), Arsenic, Mercury and Lead

**DUBAI CENTRAL LABORATORY DEPARTMENT
DCLD-GQPS PRODUCT CONFORMITY CERTIFICATION SCHEME**

**SCOPE OF CERTIFICATION
FOR CERTIFICATE NO. CL22020809**

		EMIRATES CAMOUFLAGE PAINT	(AL SAYAT-DGBS limit <100 mg/kg) Formaldehyde ≤ 10 mg/kg For SRI (See Note 3)
7	Two Pack Reactive Performance Coatings For Specific End Use Such As Floors (Category 10)	EMIRATES GUARD EPOXY FLOORING PRIMER SF EMIRATES GUARD EPOXY FLOORING TOP COAT SF EMIRATES HEAVY DUTY FLOOR SCREED EMIRATES FLEXIBLE EPOXY FLOORING TOP COAT SF EMIRATES POLYURETHANE FLOORING H.B EMIRATES ALIPHATIC POLYURETHANE H.B EMIRATES POLYURETHANE TOP COAT EMIRATES INTERGUARD H.B EMIRATES GUARD EPOXY PRIMER CLEAR	Solvent Base coating for Interior and Exterior Application VOC (AL SAYAT-DGBS limit is max:500 g/l) For SRI (See Note 3)
8	WATER BASED PAINT FOR INTERIOR / EXTERIOR APPLICATION PRIMERS (SUB-CATEGORY 7)	EMIRATES ACRYLIC PRIMER ; EMIRATES PVA PRIMER SEALER FOR MASONRY; EMIRATES TEX PRIMER; EMIRATES ACRYLIC TEX PRIMER; EMIRATES SHIELD TEX PRIMER; EMIRATES PVA PRIMER WHITE FOR MASONRY; EMIRATES STONE ACRYLIC PRIMER; EMIRATES AQUA ACRYLIC PRIMER; EMIRATES SHIELD ALKALI RESISTANT PRIMER; EMIRATES SHIELD THERMAL PRIMER; EMIRATES EXPRESSION ACRYLIC PRIMER; EMIRATES STUCCO FILLER; EMIRATES BLOCK FILLER; EMIRATES SHIELD EXTERIOR FILLER	VOC (AL Sayat-DGBS limit is max: 40 g/l) Heavy metals: Cadmium (Cd) and Chromium (Cr) (AL Sayat-DGBS limit max: 500 mg/kg) Arsenic (As), Mercury (Hg) and Lead (Pb) (AL Sayat-DGBS limit max: 100 mg/kg) Formaldehyde max: 10 mg/kg

NOTE 1: This document forms part of the Certificate of Product Conformity bearing the same certificate number.

NOTE 2: The above product shall bear the DCL Conformity Mark.

NOTE 3: The above SRI value is just for information. The user (owner, contractor and/or consultant) shall be fully responsible for ensuring that the correct SRI value is followed according to the requirements of the applicable clause in the standard specification. Acceptance limit shall be as per these values for each application of the product.

**DUBAI CENTRAL LABORATORY DEPARTMENT
DGLD-GQPS PRODUCT CONFORMITY CERTIFICATION SCHEME**

**SCOPE OF CERTIFICATION
FOR CERTIFICATE NO. CL22020809**

Original Issue Date : 09 Aug 2022
Current Issue Date : 09 Aug 2023
Valid Until : 08 Aug 2024



MANAGER

CERTIFICATION AND QUALITY CONTROL OF PRODUCTS SECTION



**شهادة تسجيل
Registration Certificate**

Registration Fields	Supplier	مجال التسجيل
Registration ID	EQ_59198	رقم التسجيل
Company Name	EMIRATES PAINTS LLC	الاسم التجاري
Emirate	Dubai	الإمارة
Phone Number	043565434	الهاتف
Email	shahab@emiratespaints.com	البريد الإلكتروني
Registration Type		نوع التسجيل
في مجال نوع التسجيل مورد		
1. Product Name: Decorative Emulsion Paint - Brand: Emiratex Paints - Country: United Arab Emirates2. Product Name: Textured Coating (Grained Decor/Emulsion) - Brand: Emiratex Paints - Country: United Arab Emirates3. Product Name: Epoxy - Brand: Emiratex Paints - Country: United Arab Emirates4. Product Name: Alloy Wood Stain - Brand: Emiratex Paints - Country: United Arab Emirates		
Registration Category	استيراد المواد	فئة التسجيل
Date Of Issue	08-08-2023	تاريخ الإصدار
Expiry Date	08-08-2024	تاريخ الانتهاء
Receipt number & date	143265024128080119 27-07-2023	رقم receipt و تاريخه
Print Date	08-08-2023	تاريخ الطباعة

Attention: This certificate is valid for 3 days from the date of printing. Any modification or scraping on the certificate cancels it.

تنبيه : هذه الشهادة صالحة لمدة 3 أيام من تاريخ الطباعة. أي تغيير أو كشط في الشهادة يلغيها.

This is a digitally generated certificate and doesn't require a signature

هذه الشهادة تم إنشاؤها رقمياً ولا تتطلب أي توقيع

Enter the Service
ادخل الخدمة



خدماتي
رقمية
GO DIGITAL



Certificate Of Registration

Awarded to

EMIRATES PAINTS LLC

at

P.O. BOX: 01, 9th STREET, UMM RAMOOL, DUBAI, UAE

Quality Registrar Systems certify that the management system of the above organization has been audited and found to be in compliance with the QRS requirements for registration of the management system standard detailed below:

ISO 45001:2018

Occupational Health and Safety Management Systems

Scope of work

MANUFACTURING OF ALL KIND OF PAINTS

IAF 12

Certificate No: ADU-3746

Originally Registered: 30 MAR 2022

Latest Issue: 30 MAR 2022

Valid up-to: 29 MAR 2025



MANAGING OFFICE ADDRESS:
QRS (INTL)
Abu Dhabi
United Arab Emirates



WORLD WIDE CERTIFICATION

Tel: +971 2 671 2160
Fax: +971 2 671 3448
www.qrs-intl.com

Quality Registrar Systems



This is an accredited certificate authorized for issue by Accreditation Service for Certifying Bodies (Europe) Limited who have assessed QRS (Int'l.) as a Certifying Body for compliance with ISO 17021:2015 'Conformity Assessment - Requirements for bodies providing audit and certification of management systems'. This certificate is only valid when confirmed by the registrar listed in the QRS (Int'l.) (qrs-intl.com)



Certificate Of Registration

Awarded to

EMIRATES PAINTS LLC

at

P.O. BOX: 01, 9th STREET, UMM RAMOOL, DUBAI, UAE

Quality Registrar Systems certify that the management system of the above organization has been audited and found to be in compliance with the QRS requirements for registration of the management system standard detailed below:

HACCP

HAZARD ANALYSIS AND CRITICAL CONTROL POINT

Scope of work

MANUFACTURING OF ALL KIND OF PAINTS

Certificate No: NQU-60066

Originally Registered: 30 MAR 2022

Latest Issue: 30 MAR 2022

Valid up-to: 29 MAR 2025



MANAGING OFFICE ADDRESS:
Quality Registrar Systems
P.O. Box: 26826
United Arab Emirates



WORLD WIDE CERTIFICATION

Quality Registrar Systems



Tel: +971 2 671 4302
Fax: +971 2 671 4399
www.qrs-intl.com



Certificate Of Registration

Awarded to

EMIRATES PAINTS LLC

at

P.O. BOX: 01, 9th STREET, UMM RAMOOL, DUBAI, UAE

Quality Registrar Systems verify that the management system of the above organization has been audited and found to be in compliance with the QRS requirements for registration of the management system standard detailed below:

ISO 9001:2015

Quality Management Systems

Scope of work

MANUFACTURING OF ALL KIND OF PAINTS

IAF 12

Certificate No: ADU-1975

Originally Registered: 30 MAR 2022

Latest Issue: 30 MAR 2022

Valid up-to: 29 MAR 2025

Quality Registrar Systems



MANAGING OFFICE ADDRESS:
QRS (INTL)
Abu Dhabi
United Arab Emirates



WORLD WIDE CERTIFICATION

Tel: +971 2 671 2161
Fax: +971 2 674 1449
www.qrs-intl.com

This is an accredited certificate authorized for issue by Accreditation Service for Certifying Bodies (Europe) Limited who have assessed QRS (Int.) as a Certifying Body for compliance with ISO 17021:2015 'Conformity Assessment - Requirements for bodies providing audit and certification of management systems'. This certificate is only valid when confirmed by the register listed in the QRS (Int.) (qrs-intl.com)



Certificate Of Registration

Awarded to

EMIRATES PAINTS LLC

at

P.O. BOX: 01, 9th STREET, UMM RAMOOL, DUBAI, UAE

Quality Registrar Systems certify that the management system of the above organization has been audited and found to be in compliance with the QRS requirements for registration of the management system standard detailed below:

ISO 14001:2015

Environmental Management Systems

Scope of work

MANUFACTURING OF ALL KIND OF PAINTS

IAF 12

Certificate No: ADU-5463

Originally Registered: 30 MAR 2022

Latest Issue: 30 MAR 2022

Valid up-to: 29 MAR 2025

Quality Registrar Systems



MANAGING OFFICE ADDRESS:
QRS (INTL)
Abu Dhabi
United Arab Emirates



WORLD WIDE CERTIFICATION

Tel: +971 2 671 2161
Fax: +971 2 674 1449
www.qrs-intl.com

This is an accredited certificate authorized for issue by Accreditation Service for Certifying Bodies (Europe) Limited who have assessed QRS (Int.) as a Certifying Body for compliance with ISO 17021:2015 'Conformity Assessment - Requirements for bodies providing audit and certification of management systems'. This certificate is only valid when confirmed by the register listed in the QRS (Int.) (qrs-intl.com)



رخصة صناعية Industrial License

ملخص الرخصة / License Details			
License No.	948949	رقم الرخصة	
Company Name	EMIRATES PAINTS L.L.C	اسم الشركة	الصباغ الاكرات قرينم
Trade Name	EMIRATES PAINTS L.L.C	الاسم التجاري	الصباغ الاكرات قرينم
Legal Type	Limited Liability Company(LLC)	نوع الشركة	شركة ذات مسؤولية محدودة
Expiry Date	18/04/2024	تاريخ الانتهاء	Issue Date 18/04/2024
D&B D-U-N-S ®	0	الرقم العالمي	Main License No. 948949
Register No.	1009110	رقم السجل التجاري	DDI No. 309872

الاعضاء / License Members			
Share / الحصص	Role / الوظيفة	Nationality / الجنسية	Name / الاسم
	Manager / مدير	United Arab Emirates / الامارات	محمد سيف احمد القرين
			MOHAMMAD SAIF AHMAD ALGHURAIR

Varnish Manufacturing
Ink and Printing Materials Manufacturing
Paint Manufacturing
Paints & Coating Materials Trading
Import
Export
Painting Contracting

نشاطات الرخصة التجارية / License Activities

صناعة الطلاءات
صناعة الحبر ومواد الطباعة
صناعة الدهانات والطلاءات
تجارة الصباغ ومواد الطلاء
استيراد
تصدير
اصناف الصباغ والدهانات

العنوان / Address			
Phone No	971-4-2844777	هاتف	P.O. Box 1
Fax No	971-4-2855332	فاكس	Parcel ID 215-299
Mobile No	971-50-8740940	هاتف محمول	Email / البريد الإلكتروني

مستودع رقم 15 بناية طوارق القرين د.م ح.م - لم.م.م.م.

ملاحظات / Remarks

Print Date 18/04/2023 12:21 تاريخ الطباعة Receipt No. 14250905 رقم الإيصال



الإمارات
THE EMIRATES

يمكنك الآن تجديد رخصة التجارة من خلال إرسال رسالة نصية قصيرة (SMS) إلى 6699 (دبي/الإمارات) للحصول على إيصال الدفع.
Now you can renew your trade license by sending a text message (SMS). Send your trade license number to 6699 (Dh/ Emirates) to receive payment voucher.

Get FREE access to Zoho One for the first year
الحصول على زو.وا.ون مجاناً لمدة سنة الأولى
Zoho one

وثيقة إلكترونية معتمدة ومصدرة بدون توقيع من دائرة الاقتصاد والسياحة في دبي. إسرائيلية معتمدة الوثائق الواردة في الرخصة يرجى منح رمز الاستجابة الفورية
this is a certified e-document issued without signature by the department of Economy and Tourism. Kindly Scan the QR Code to Verify the certificate

ملحق الشركاء Partners

ملخص الرخصة / License Details			
D&B D-U-N-S ®	0	الرقم العالمي	License No. 948949
No.			
الشركاء / License Partners			
Share / الحصص	St. No. / المسجلين	Nationality / الجنسية	Name / الاسم
99.0000000%	20813	الامارات / United Arab Emirates	محمد سيف احمد القرين / Mohammed Saif Ahmed Alghurair
1.0000000%	690403	الامارات / United Arab Emirates	عبدالله محمد سيف احمد القرين / Abdulla Mohammed Saif Ahmed Alghurair

Print Date 18/04/2023 12:21 تاريخ الطباعة Receipt No. 14250905 رقم الإيصال



الإمارات
THE EMIRATES

يمكنك الآن تجديد رخصة التجارة من خلال إرسال رسالة نصية قصيرة (SMS) إلى 6699 (دبي/الإمارات) للحصول على إيصال الدفع.
Now you can renew your trade license by sending a text message (SMS). Send your trade license number to 6699 (Dh/ Emirates) to receive payment voucher.

Get FREE access to Zoho One for the first year
الحصول على زو.وا.ون مجاناً لمدة سنة الأولى
Zoho one

وثيقة إلكترونية معتمدة ومصدرة بدون توقيع من دائرة الاقتصاد والسياحة في دبي. إسرائيلية معتمدة الوثائق الواردة في الرخصة يرجى منح رمز الاستجابة الفورية
this is a certified e-document issued without signature by the department of Economy and Tourism. Kindly Scan the QR Code to Verify the certificate



الرقم: HMW0000260407-2022

التاريخ: 24-08-2022

شهادة استيفاء اشتراطات السلامة الوقائية
وفقاً لأحكام النظام رقم (2) لسنة 2009م
[اعتماد مستودعات تخزين المواد الخطرة]

المصدر: الإدارة العامة للدفاع المدني

اسم المستودع:

بناء على الكشف الذي تم لمستودع / 15

رقصة رقم 946949

الكان بمنطقة umm ramool

أعمال الأصباغ والدهانات، صناعة الألياف ومواد الطياعة، إستيراد، تصدير،
صناعة الملصقات، صناعة الأصباغ والدهانات، تجارة الأصباغ والملصقات

نشاط المنشأة

Hazardous Material

تتم استيفاءها لاشتراطات السلامة الوقائية لمستودعات تخزين

تاريخ الانتهاء: 23-08-2023

تاريخ الإصدار: 24-08-2022

الشهادة صالحة لمدة سنة إعتباراً من تاريخ المعاملة

ملازم/ سعيد محمد الفلاسي

رئيس قسم التفتيش والتراخيص



رؤيتنا: أن نعمل بفعالية لتصبح دولة الإمارات العربية المتحدة إحدى أفضل دول العالم أمناً وسلاماً

Tel.: 009714 2611111 Fax: 009714 2612449 P.O. Box 11377
www.dcd.gov.ae



Venue Technical Facilities Management

APPRECIATION LETTER

TO,
EMIRATES PAINTS
Umm Ramool, Dubai.

Dear Emirates Paints,

We would like to express our sincere appreciation for your products and service to us as one of our most reliable regular suppliers. You have provided the highest quality products with even better customer service. Deliveries are often received earlier than expected, and you are quick to resolve any issues that arise. All your specialized coating products both for interior and exterior are of superior quality, your vibrant color ranges and excellent coverage with durability always meet our quality and cost standards.

We also recommend Emirates paints to other vendors who ever looking for quality products and services with excellent customer support. We look forward to extending our purchase with you for years to come and hope you will continue to provide such excellent service to us. We could not conduct our business without you! Thank you for a favorable business together, and we look forward to many more.

Warm regards,

VENUS TECHNICAL FACILITIES MANAGEMENT.



TEL: +971 2 309 3308, FAX: +971 2 309 3308
Abu Dhabi - UAE, EMAIL: venustechnical.fm@gmail.com



TOLOU AL SHAMS
TECHNICAL & CLEANING SERVICES



Date: 20/12/2022

TO WHOM IT MAY CONCERN

We the management of Tolou Al Shams Technical & Cleaning Services confirms that Emirates Paints LLC have carried out the renovation work in our branch located in Dubai , UAE.

M/s. Emirates Paints LLC have completed the work in accordance with the contract specification and within the time period, we are pleased be informed that the paints applied in our factory are approved for all our divisions in UAE as its ecofriendly, long lasting and reliable.

During the renovation work we found the team of Emirates Paints llc are really supportive and friendly which is really appreciate.

Thanking you

Tolou Al Shams Technical & Cleaning Services.

Tel: +971 42822222, Email: toloualshams@gmail.com



BIN HILAL GROUP

Dear Emirates Paints,

Greetings From Bin Hilal Group

We are writing to express our utmost satisfaction with your exceptional service and product quality. As a loyal customer, I consistently rely on your paints for various projects and the results have been outstanding. The colors are vibrant, the coverage is excellent and the durability surpasses my expectations. Emirates Paints consistently delivers superior interior, exterior, and specialized coating products. The attention to detail and commitment to excellence is evident in every can of paint. Furthermore, the customer service and support from your expert team have been commendable. I proudly recommend Emirates Paints to others, knowing they will experience the same level of satisfaction. Thank you for consistently delivering exceptional products.

We look forward to future projects with you.

Sincerely,



Bin Hilal Group.

Emirates Paint Testimonials

Dear Emirates Paints,

I am writing to express my utmost satisfaction with your exceptional service and product quality. As a loyal customer, I consistently rely on your paints for various projects, and the results have been outstanding. The colors are vibrant, the coverage is excellent, and the durability surpasses my expectations. Emirates Paints consistently delivers superior interior, exterior, and specialized coatings products. The attention to detail and commitment to excellence is evident in every can of paint. Furthermore, the customer service and support from your expert team have been commendable. I proudly recommend Emirates Paints to others, knowing they will experience the same level of satisfaction. Thank you for consistently delivering exceptional products.

I look forward to future projects with you.

Sincerely,



Faha

TO WHOM IT MAY CONCERN

We the management of AL RESALAH BLDG . CONT SOLE PROPRIETORSHIP. L L C . confirms that Emirates Paints LLC have carried out the renovation work in our branch located in Sharjah, Khorfaldkan , UAE.

M/s. Emirates Paints LLC have completed the work in accordance with the contract specification and within the time period, we are pleased be informed that the paints applied in our factory are approved for all our divisions in UAE as its ecofriendly, long lasting and reliable.

During the renovation work we found the team of Emirates Paints llc are really supportive and friendly which is really appreciate.

Thanking you



e mail: resalagro@gmail.com

Khorfakan - Sharjah Charity bldg. Mezzanine Floor Office No. M7
Tel: +971 9 2383320 Fax: +971 9 2386787 B.O Box: 9953 KHR



Date: 07/02/2023

TO WHOM IT MAY CONCERN

We the management of **BELREMAITHA CLUB** confirms that Emirates Paints LLC have carried out the renovation work in our branch located in Naad AL Hmmar, UAE.

M/s **Emirates Paints LLC** have completed the work in accordance with the contract specification and within the time period, we are pleased be informed that the paints applied in our factory are approved for all our divisions in UAE as its ecofriendly, long lasting and reliable.

During the renovation work we found the team of Emirates Paints llc are really supportive and friendly which is really appreciate.

Thanking you



نادي. ند. الحمر. شارع الريادة، بجوار بنك دبي الإسلامي ع.ب. ، 61880 دبي ، الإمارات العربية المتحدة هاتف: +97142899844 فاكس: +97142899881
Al Rebat st, Nad Al-Hamar, Dubai, United Emirates P.O. Box : 61880 Dubai Tel: +971 4 28 99 844 Fax: +971 4 28 99 831
belremaitha

www.belremaitha.com



GULF SAIL
CONTRACTING L.L.C

TRN : 100512601400003



جلف سيل
المقاولات ذ.م.م

Date: 14/02/2022

Testimonial

The management of **Gulf Sail Contracting LLC** confirms that Emirates Paints has carried out the renovation work at **Reef Mall, Deira, Dubai, UAE**.

Emirates Paints LLC has completed the work in accordance with the contract specifications and within the time period.

We are extremely happy that the paint applied in our factory is ecofriendly, long lasting and reliable, and as a result, it is approved for all our divisions in UAE.

During the renovation work we found the team of Emirates Paints to be supportive and friendly and we highly appreciate their professionalism.

Thank you



Ajman, Abu Dhabi, Dubai - U.A.E P.O. Box-30200 Tel: +971 6 747 7222
gulfsail@gulfsailuae.com | mail@gulfsailaluminumglass.com
gulfsailaluminumglass.com | www.gulfsailuae.ae



ليينا ستار للخدمات الفنية.ش.م.م
Leena Star Technical Services LLC

Date: 08/02/2023

TO WHOM IT MAY CONCERN

We the management of LEENA STAR TECHNICAL SERVICES LLC confirms that Emirates Paints LLC have carried out the renovation work in our branch located in Dubai, UAE.

M/s. Emirates Paints LLC have completed the work in accordance with the contract specification and within the time period, we are pleased be informed that the paints applied in our factory are approved for all our divisions in UAE as its ecofriendly, long lasting and reliable.

During the renovation work we found the team of Emirates Paints llc are really supportive and friendly which is really appreciate.

Thanking you



Abdul Kader

Manager

LEENA STAR TECHNICAL SERVICES LLC.



Premium Quality Paints

MADE IN UAE







META CLINIC


BOUTIQUE
FALSAFAH
120-124 A1
124-126 A1
126-128 A1

FALSAFAH

Now Open

NOW OPEN

24 HOURS

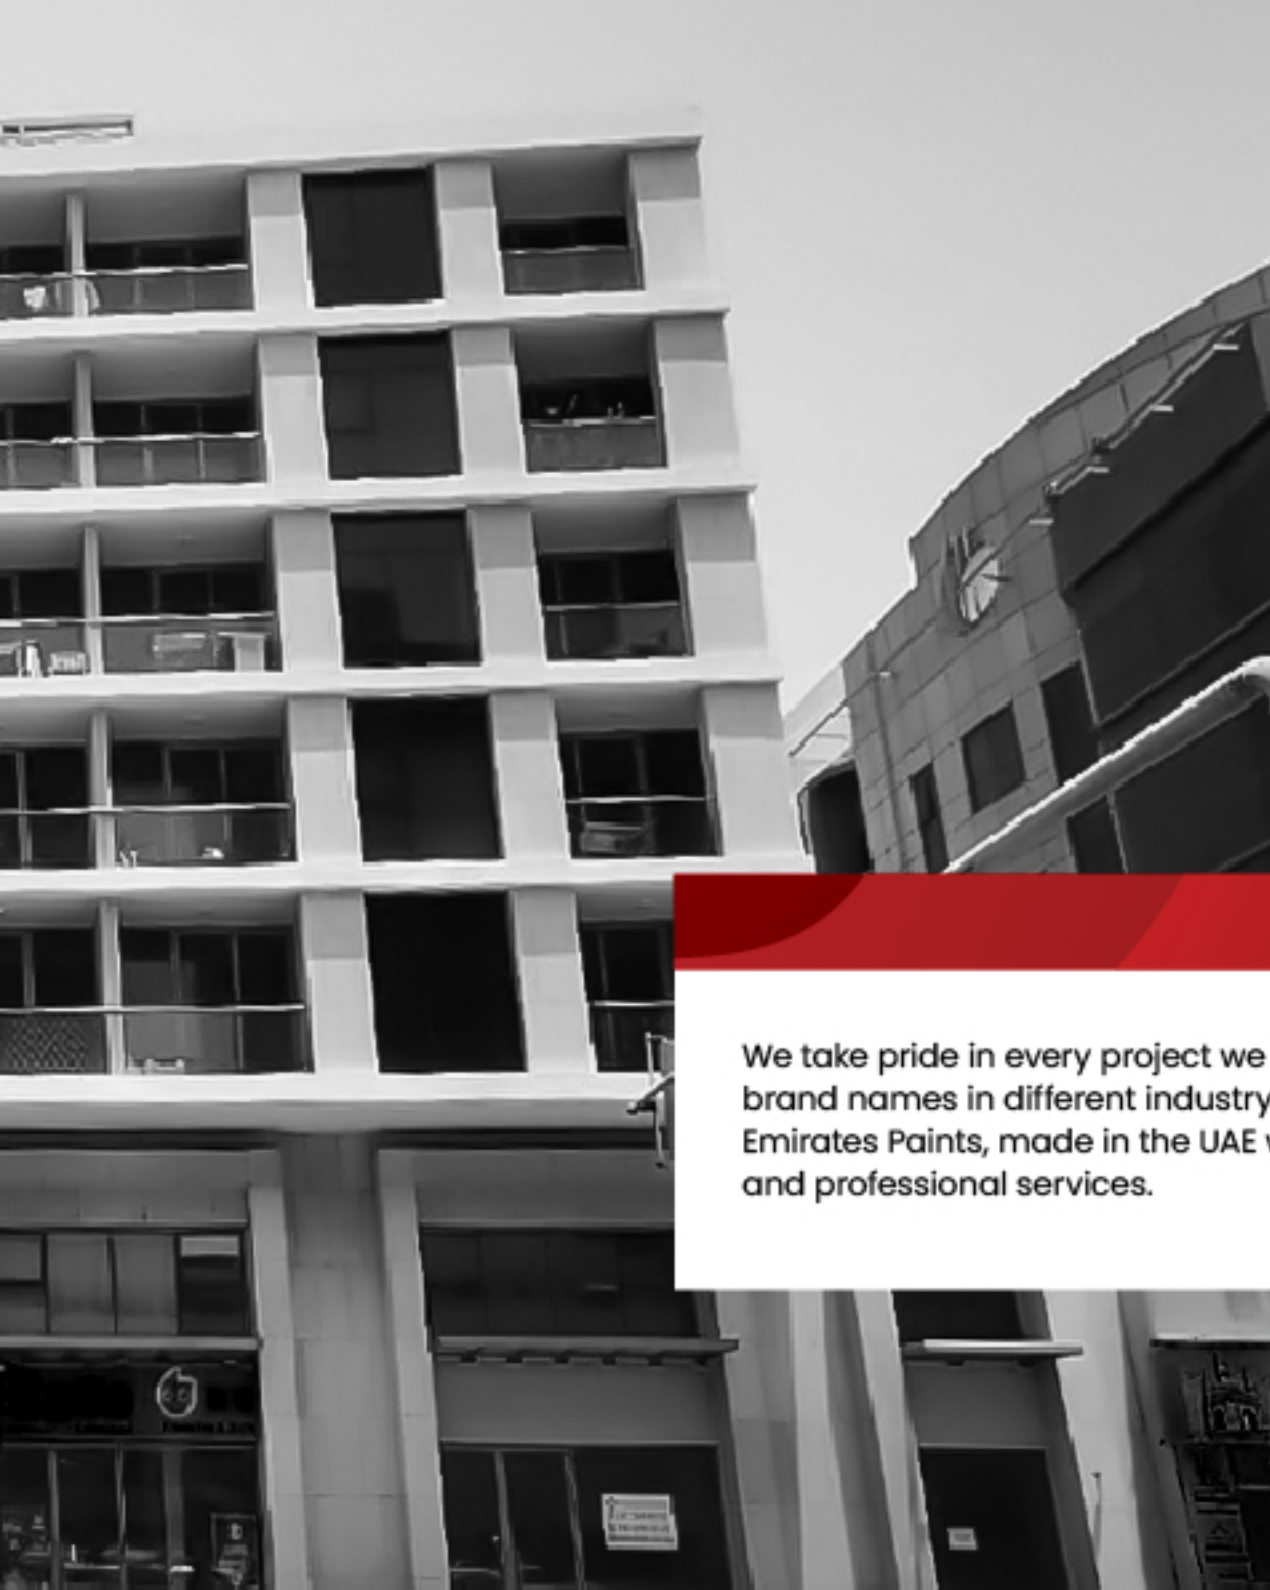

**05 COMPLETED AND
ONGOING PROJECTS**

We take pride in every project we have worked on for well-known brand names in different industry sectors. Emirates Paints, made in the UAE with premium quality, innovation and professional services.

Al Ghurair Building

📍 Al Karama



Ministry of Transport

📍 Al Garhoud





JVC 003

📍 JVC Dubai




Abdul Aziz Al Majid Building

📍 Sharjah



Bel Remaitha Club

📍 Nad Al Hamar

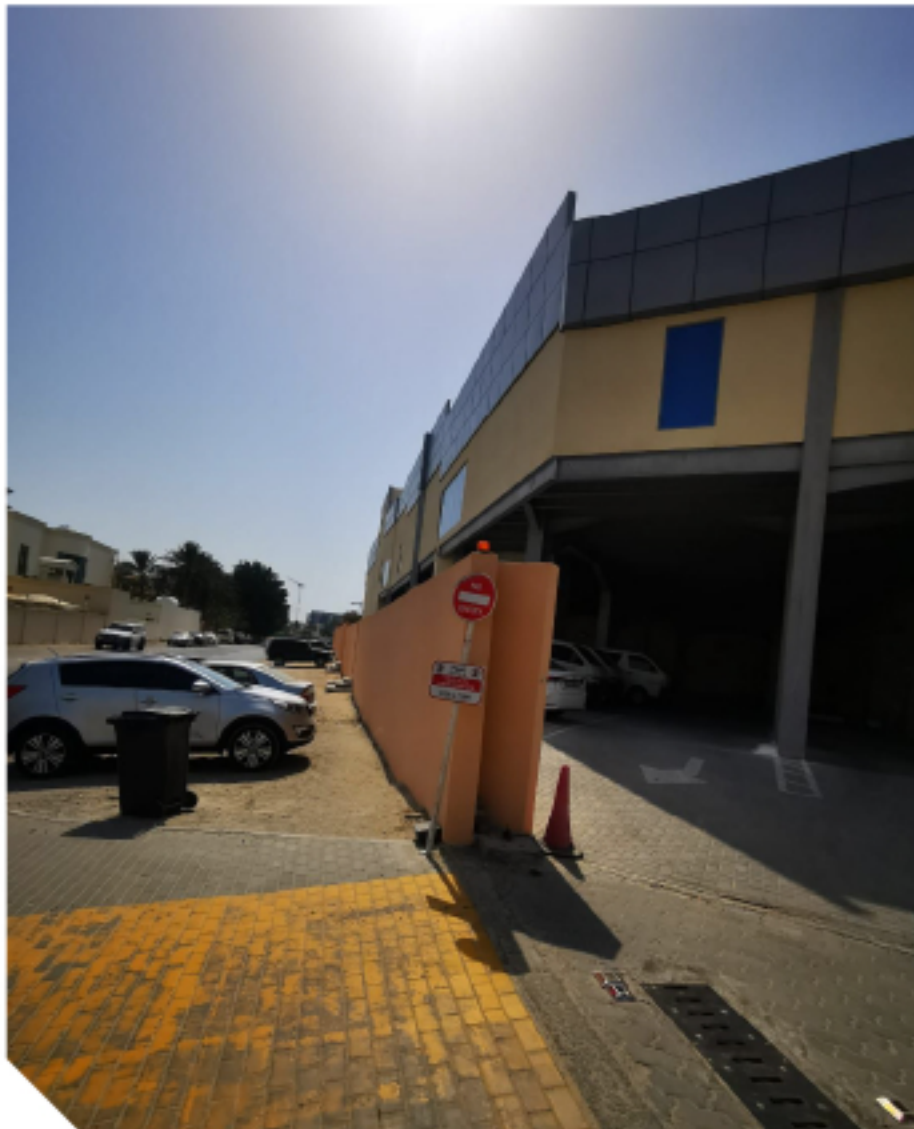

Rainbow Building

📍 Al Qusais



Silicon Oasis Project

📍 Silicon Oasis



Al Nassir

📍 Al Nassir



Al Serkal Building

📍 Al Mankhool



Abdul Aziz Al Majid Building

📍 Al Nadha 3



Aqaar Labour Accommodation

📍 Jurf Ajman



Al Awir Villa



أطلس باغ الإمارات
EMIRATES
PAINTS

Book Professional
PAINTERS
+971 50 114 6116

06 Contact

Emirates Paints is a community of professionals who are eager to expand and grow, appreciating every feedback we get to provide our customers with the ideal services and ultimate support.

Together, we paint your own story.

+971 4 256 5474

+971 4 271 3214

emiratespaints.com

info@emiratespaints.com

14a st, Umm Ramool, Dubai, UAE





emiratespaints.com