


OBC PCB

View looking from the BOTTOM of the satellite UP stacked on top of EPS PCB

Satellite +X Face

Satellite +Y Face


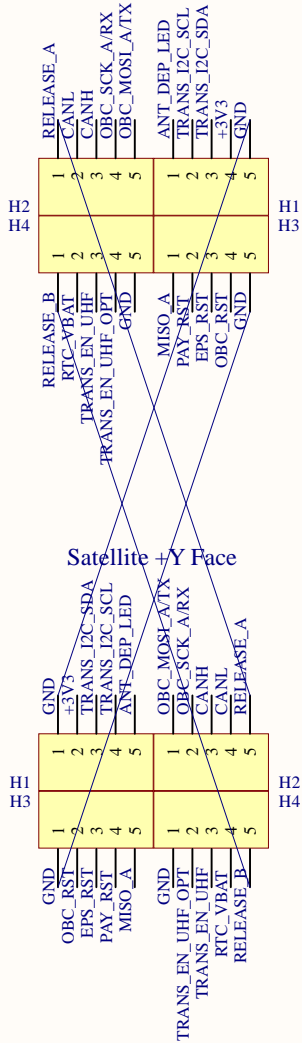


EPS PCB

View looking from the TOP of the satellite DOWN


Satellite +X Face

Satellite +Y Face

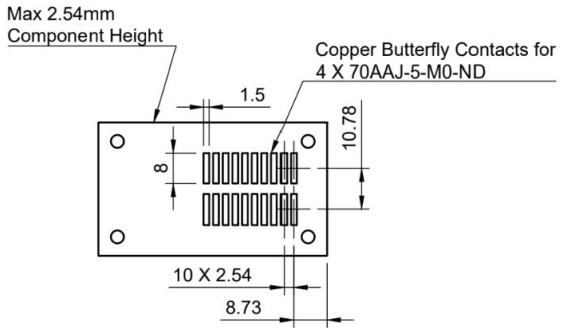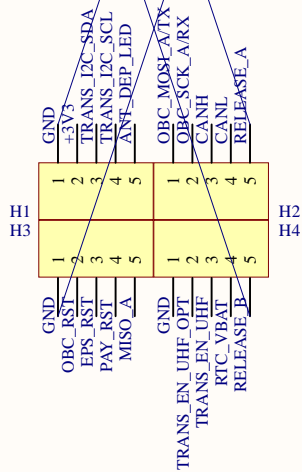

OBC (BOTTOM VIEW)

Butterfly Connector (70AAJ-5-M0-ND)  
5x1 pins per connector, 2x2 connectors, 10x2 pins total  
Note use of the 5-pin variant (4-pin is shown in datasheet)

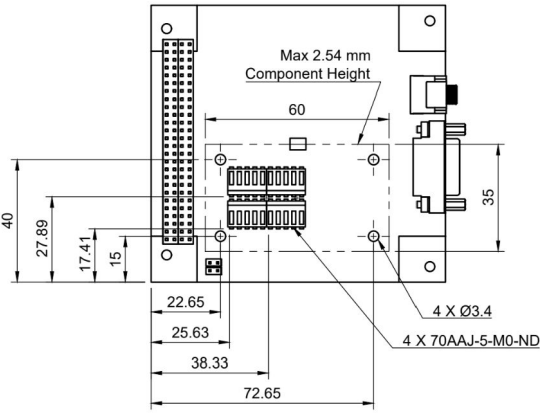

OBC Interfacing (TOP VIEW)

Title			
EPS-OBC Interface			
Size	Number	Revision	
A4	1	v1.0	
Date:	2019-07-10	Sheet	1 of 8
File:	C:\Users\...\eps-obc.SchDoc	Drawn By:	Jaden Reimer

A


B

C

D

EPS PCB

Hirose DF13 15-Pin Header:  
<https://www.digikey.ca/product-detail/en/hirose-electric-co-ltd/DF13A-15P-1.25H-21/H125988CT-ND/948972>  
 6

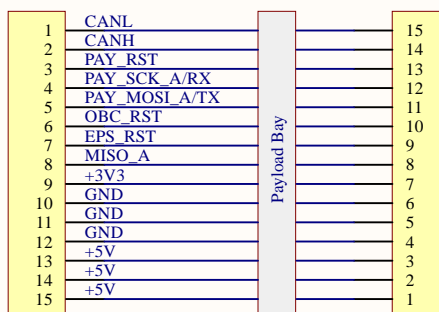

## PAY-SSM PCB

Hermetic connector (15 pins, Glenair 177-705H or 177-706H)  
<https://www.datasheets360.com/pdf/2123725778547446062>

Premade wires (15 pins, 28 AWG)  
Similar to <https://www.digikey.ca/short/j037h5>  
Connections not flipped within cable's wires  
Needs to be hand-crimped on the payload bay side for the hermic connector

Title		
EPS-PAY Interface		
Size	Number	Revision
A4	2	v1.0
Date:	2019-07-10	Sheet 2 of 8
File:	C:\Users\...eps-pay.SchDoc	Drawn By: Jaden Reimer

EPS PCB

### Mini DSUB-25 Connector

1	GND	1
2	MISO_A	2
3	EPS_MOSI_A/TX	3
4	EPS_SCK_A/RX	4
5	EPS_RST	5
6	OBC_MOSI_A/TX	6
7	OBC_SCK_A/RX	7
8	OBC_RST	8
9	PAY_MOSI_A/TX	9
10	PAY_SCK_A/RX	10
11	PAY_RST	11
12	CANH	12
13	CANL	13
14	TRANS_I2C_SDA	14
15	TRANS_I2C_SCL	15
16	C_GATE	16
17	D_GATE	17
18	GND	18
19	+3V3	19
20	GND	20
21	+5V	21
22	GND	22
23	GND	23
24	+PACK	24
25	RTC_VBAT	25

## Systems PCB

Outside of satellite  
Only for testing/debugging

### DSUB-25 Connector

**Spliced Cable**  
Connections are flipped within the cable's wires,  
so the pin numbers match on both ends

Title EPS-SYS Interface		
Size A4	Number 3	Revision v1.0
Date: File:	2019-07-10 C:\Users\...\eps-sys.SchDoc	Sheet 3 of 8 Drawn By: Jaden Reimer

Transceiver stacked on top of  
EPS PCB using header pins

Transceiver customized to use +5V supply,  
not +3.3V

Comms signals routed from OBC through EPS board

WARNING: In UHF Manual and Protocol Rev. 2, the connector pinout  
diagram on p. 11, for each of H1 and H2, rows 1 and 2 are flipped  
i.e. H1 and H2 are placed correctly, but the bottom left in the image  
should be H1, pin 1, and the top left should be H2, pin 2


Header layout based on UHF\_UTAT\_Conn\_Pinout.pdf  
(add En UHF Opt. and En UHF just in case)

RxD and TxD are the UART lines with respect to the transceiver  
(i.e. transceiver receives UART on RxD and transmits UART on TxD)




RELEASE\_A and RELEASE\_B can be used as Antenna Deployment  
GPIO from OBC

Modified version of PC104-Plus connector  
dimensions (notably 2mm pitch)


Use thick traces and all available header  
pins for +5V and GND



OBC UART - Transceiver Connection  
To use the transceiver permanently,  
short pin 1 to pin 2, short pin 3 to pin 4

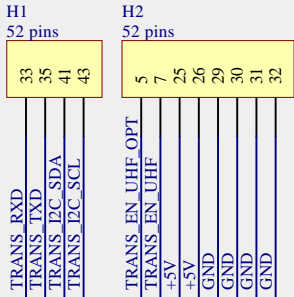


C1  
MCX Right Angle Connector  
MMCX Connector (coax)



C2  
6-pin Molex  
Pico-Lock Connector

Title			
Communications			
Size	Number		Revision
A4	4		v1.0
Date:	2019-07-10		Sheet 4 of 8
File:	C:\Users\...\com.SchDoc		Drawn By: Jaden Reimer

OBC and EPS are on the "ends" of the bus, so they have the 120 ohm terminations  
PAY and SYS are in the "middle" of the bus, so no resistor terminations

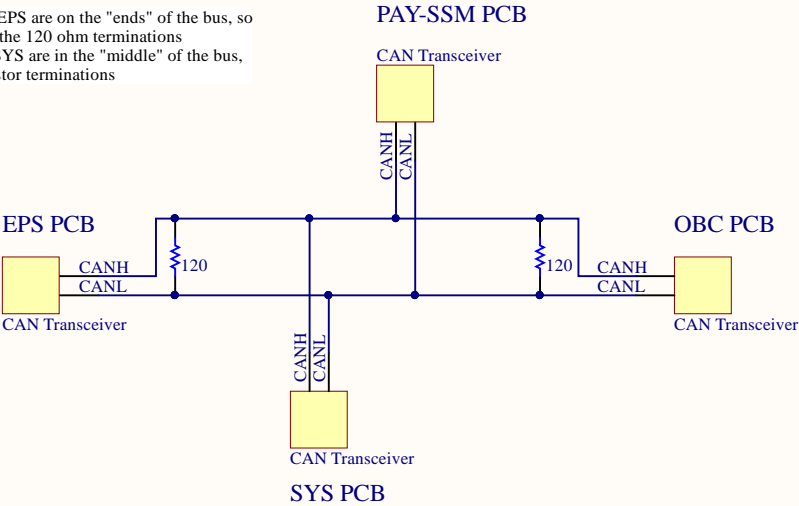

Title		
CAN Bus		
Size	Number	Revision
A4	5	v1.0
Date:	2019-07-10	Sheet 5 of 8
File:	C:\Users\...\can.SchDoc	Drawn By: Jaden Reimer

A

B

C

D

A

B

C

D

1

2

3

4

1

2

3

4

Deployment switches need update once load switches are selected

2-Pos Right Angle Battery Connector  
Samtec SAM9552-ND:  
<https://www.digikey.ca/products/en?keywords=sam9552-nd>

Flight model connectors should have gold mating finish

+BATT is the raw voltage across the battery pack (ignoring connection to EPS)


+PACK is the voltage from the battery pack to the EPS board (after deployment switches and RBF pin)

If the battery pack is connected to the EPS electronics (i.e. DS1, DS2, RBF all connected), +PACK = +BATT

If the battery pack is disconnected from the EPS electronics (i.e. one or more of DS1, DS2, RBF disconnected), +PACK = 0

Protection Circuit Limits:  
Max charge = 4.190V, Charge release = 4.090V  
Max discharge = 2.70V, Discharge release = 3.00V


Absolute Maximum Battery Voltage Range: 2.5V-4.2V

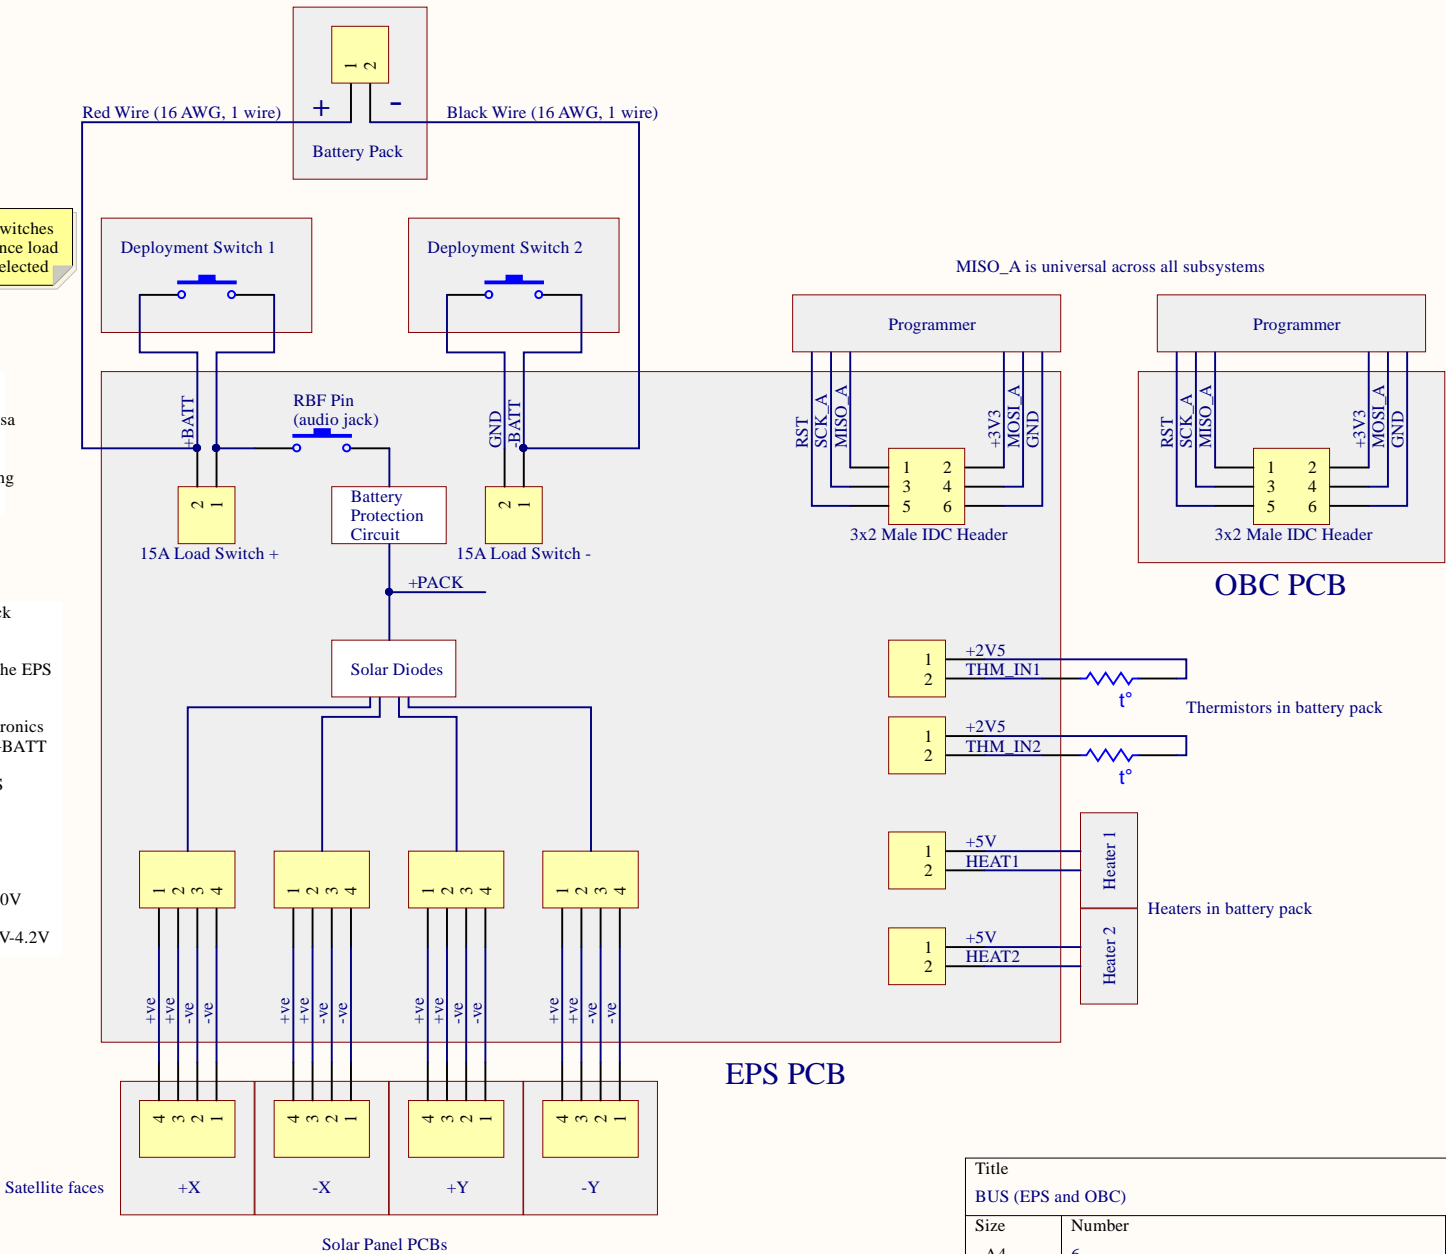

Title			
BUS (EPS and OBC)			
Size	Number	Revision	
A4	6	v1.0	
Date:	2019-07-10	Sheet	6 of 8
File:	C:\Users\...\bus.SchDoc	Drawn By:	Jaden Reimer



## PAY-Optical PCB

(stacked on top of PAY-SSM)

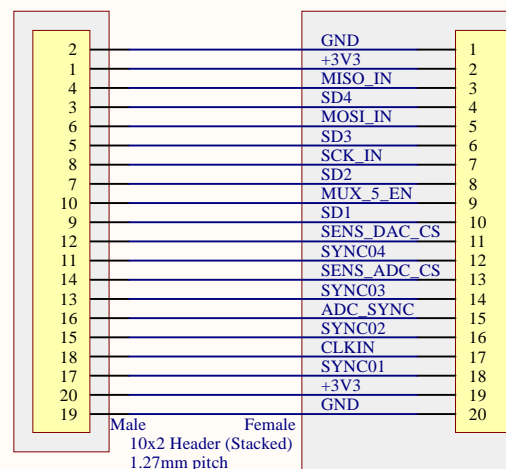


Start thermistor numbering from 0 to match ADC channel numbering




### Thermistors (in microfluidics chips)

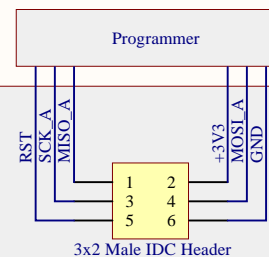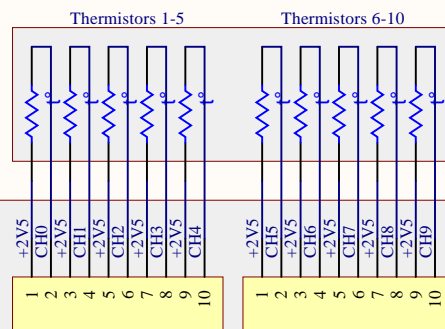

## PAY-LED PCB (x2)

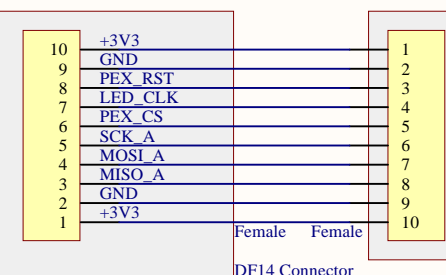

## PAY-SSM PCB

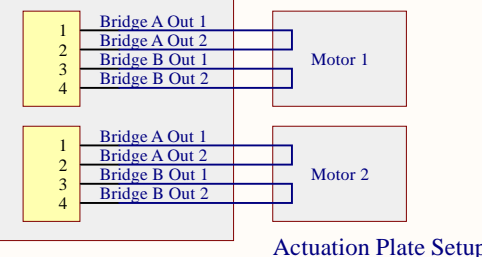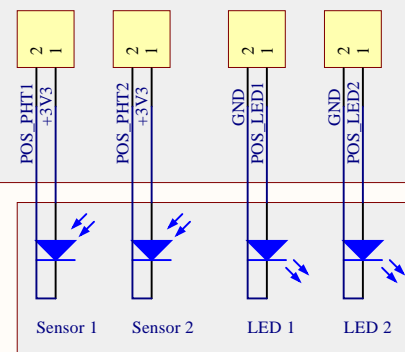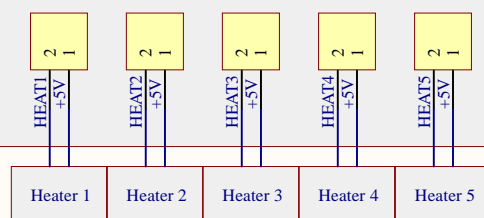

2-pin DF13 connector:  
<https://www.digikey.ca/product-detail/en/hirose-electric-co-ltd/DF13A-2P-1.25H-21/H125743CT-ND/8594822>


Flight model connectors should have gold mating finish

Title			
Payload			
Size	Number		Revision
A4	7		v1.0
Date:	2019-07-10		Sheet 7 of 8
File:	C:\Users\...\pay.SchDoc		Drawn By: Jaden Reimer

DF13 Connector: DF13A-4P-1.25H(21)  
<https://www.digikey.ca/product-detail/en/hirose-electric-co-ltd/DF13A-4P-1.25H-21/H125082-CT-ND/5638961>

Flight model connectors should have gold mating finish

Screw terminal connector: 732-2028-ND  
<https://www.digikey.ca/product-detail/en/wurth-electronics-inc/691102710002/732-2028-ND/2060524>

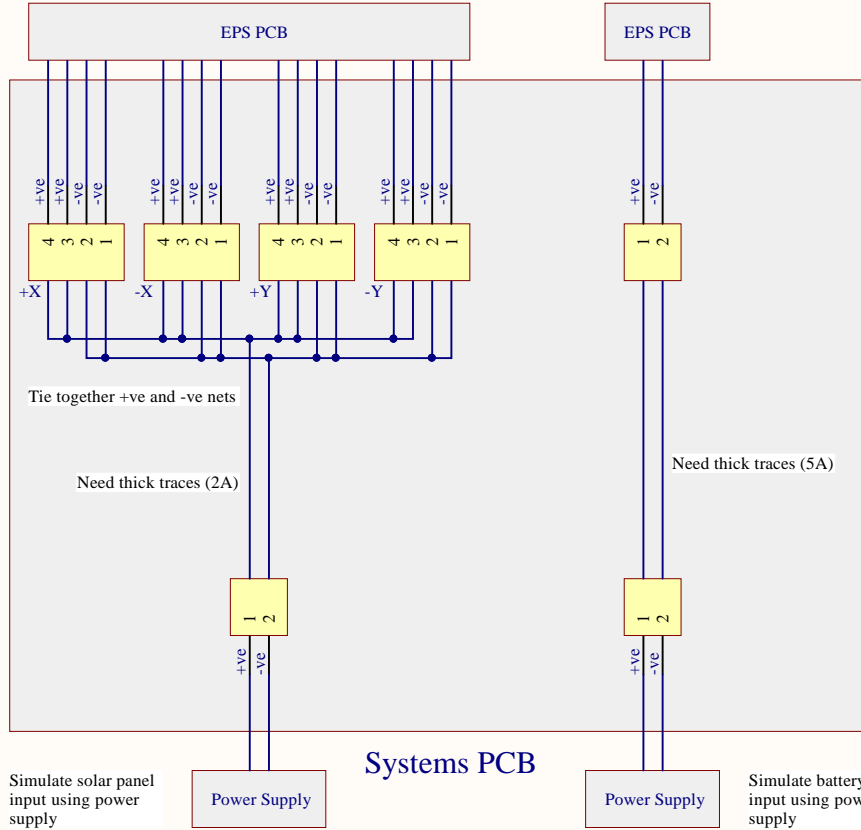

Samtec IPBT Power Mate (16AWG power connector)  
<https://www.digikey.ca/product-detail/en/samtec-inc/IPBT-102-H1-T-S-RA-K/SAM9552-ND/6678289>

Flight model connectors should have gold mating finish

Screw terminal connector: 732-2028-ND  
<https://www.digikey.ca/product-detail/en/wurth-electronics-inc/691102710002/732-2028-ND/2060524>

Title			
Systems (Debugging)			
Size	Number		Revision
A4	8		v1.0
Date:	2019-07-10		Sheet 8 of 8
File:	C:\Users\...\sys.SchDoc		Drawn By: Jaden Reimer